FED. SUP CLASS
4115

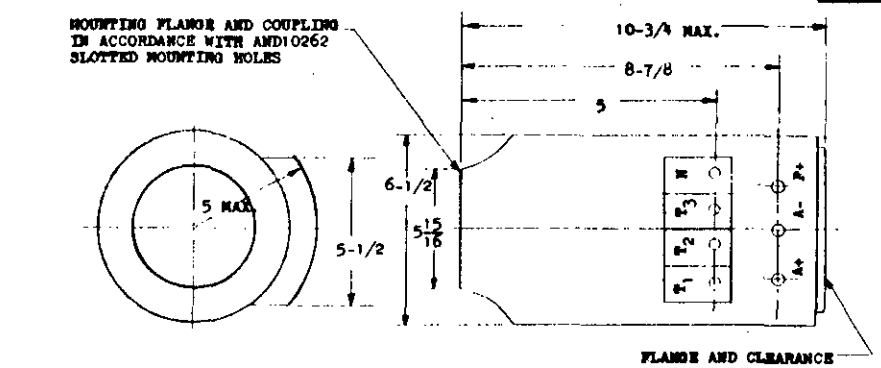

GENERATOR

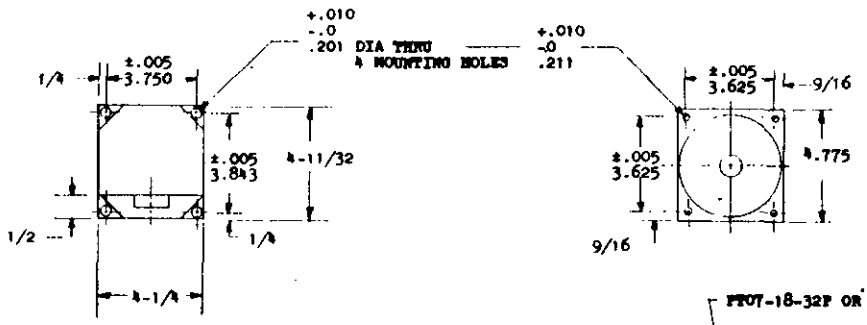

NOTE:
DIMENSIONS IN INCHES.
TOLERANCES: ±1/32 INCH
UNLESS OTHERWISE SPECIFIED.

REGULATOR

(A) CANCELLED AFTER 26 Dec 1973 NO SUPERSEDING STANDARD.

GENERATOR DATA		REGULATOR DATA	
RATED VOLTAGE	120/208	REGULATOR WEIGHT - - MAXIMUM	3 LB
RATED OUTPUT	10 KVA	MS-28118-2	
PHASE	3	SUPERVISORY PANEL	
SPEED RANGE	7600/8400 RPM	SUPERVISORY PANEL WEIGHT - - MAXIMUM	2 LB
MAX SPEED FOR REGULATION	10,000 RPM	MS-28118-3	
OVERSPEED	12,000 RPM		
RATED POWER FACTOR	.75 LAGGING TO 1.0		
EFFICIENCY MIN AT RATED LOAD	78%		
MAX WEIGHT	32 (ADD SPOUT)		
OVERHUNG MOMENT, MAX	140 IN. LB		
FREQUENCY	380/420 CPS		
CLASS	C		
SHEAR	600 IN. LB ±20%		
MS-28118-1			

APPROVED 26 Dec 1973 REVISED (A)

P.A. Bu Weps
Other Cost

TITLE
GENERATOR SYSTEM, ALTERNATING CURRENT, INTEGRALLY EXCITED, 10KVA (HU2.K)

MILITARY STANDARD
MS28118 (WEP)

PROCUREMENT SPECIFICATION
MIL-G-21480 (AER)

SUPERSEDES:

SHEET 1 OF 2

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.