INCH-POUND
MS28754D
6 August 2010
SUPERSEDING
MS28754C
2 November 1999

DETAIL SPECIFICATION SHEET

FITTING END, SELF-SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, 45°

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

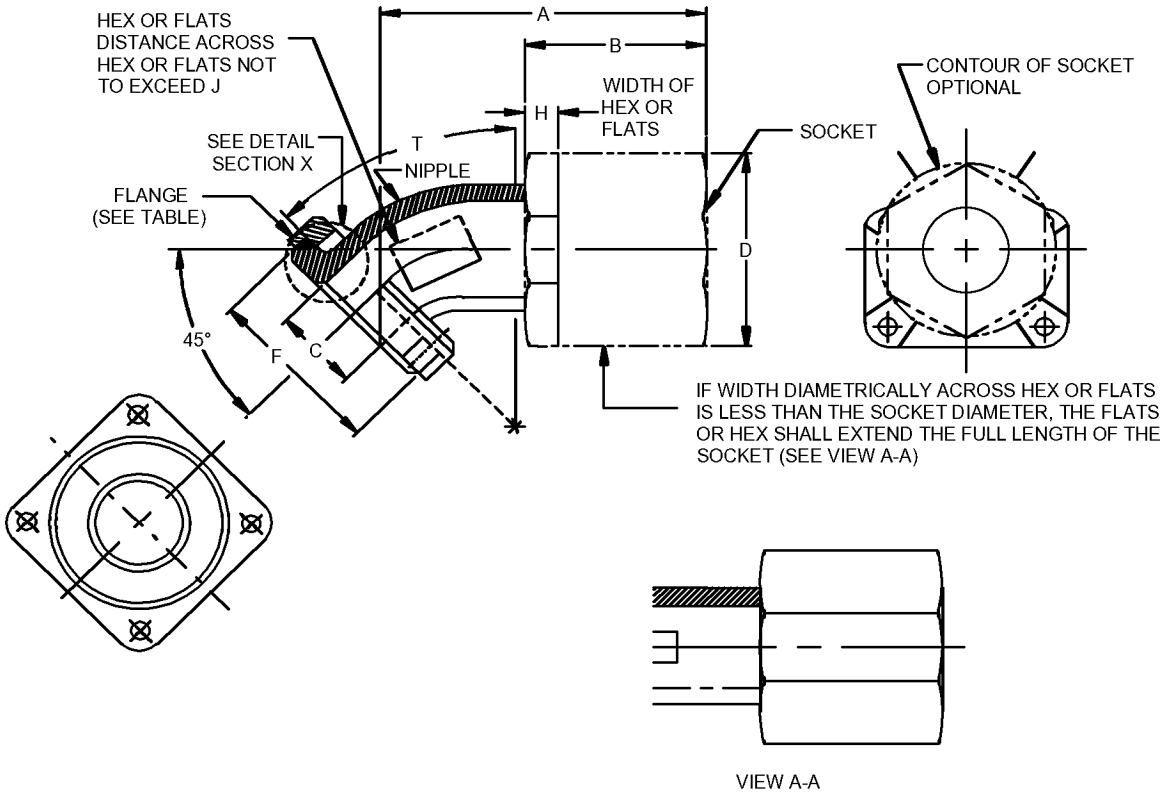

FIGURE 1. 45° fuel hose fitting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

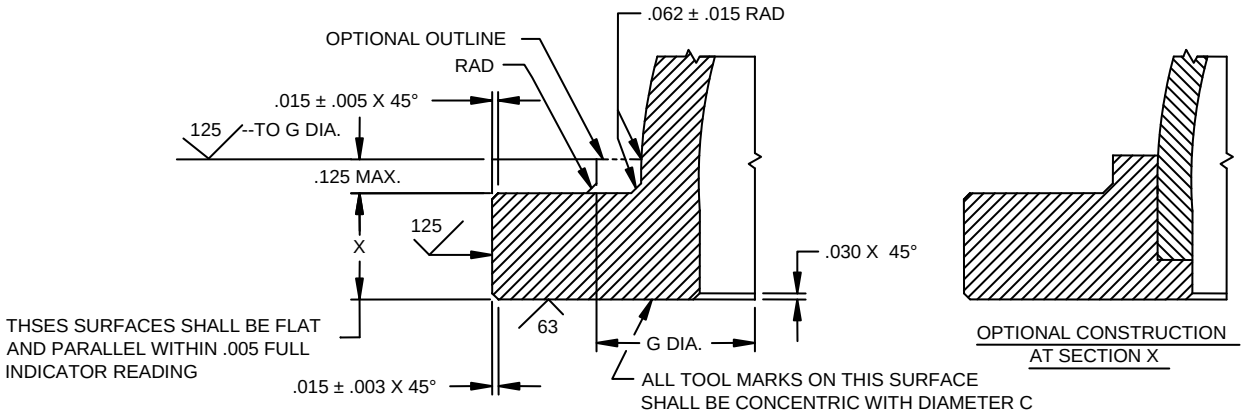

DETAIL SECTION X

PIN (see note 4)	Nominal tubing and hose size (REF)	Flange PIN	A Max	B Max	C Min Dia.	D Max	E +.000 -.005
MS28754D16	I (1.000)	MS20756D16	3.672	2.000	.813	1.953	.156
MS28754D20	1 ¼ (1.250)	MS20756D20	3.797	2.000	1.047	2.313	.156
MS28754D24	1 ½ (1.500)	MS20756D24	4.219	2.000	1.281	2.563	.188
MS28754D32	2 (2.000)	MS20756D32	4.875	2.250	1.750	3.125	.188
MS28754D40	2 ½ (2.500)	MS20756D40	5.438	2.500	2.203	3.625	.188
MS28754D48	3 (3.000)	MS20756D48	5.969	2.500	2.828	4.438	.188

PIN	F +.000 -.005	G Max Dia.	H Min	J Min	K Max	Weight lb (Approx)
MS28754D16	1.500	.188	.375	1.343	.656	.735
MS28754D20	1.844	.500	.500	1.656	.656	.830
MS28754D24	2.125	.750	.500	1.906	.813	.840
MS28754D32	2.750	2.375	.625	2.531	.953	1.064
MS28754D40	3.281	2.875	1.000	3.031	1.031	1.300
MS28754D48	3.781	3.375	1.250	3.250	1.391	1.650

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.156	3.962	1.000	25.400	1.750	44.450	2.375	60.325	3.125	79.375	4.438	112.725
.188	4.775	1.031	26.187	1.844	46.838	2.500	63.500	3.250	82.550	4.875	123.825
.375	9.525	1.047	26.594	1.906	48.412	2.531	64.287	3.281	83.337	5.438	138.125
.500	12.700	1.250	31.750	1.953	49.606	2.563	65.100	3.375	85.725	5.969	151.613
.625	15.875	1.281	32.537	2.000	50.800	2.750	69.850	3.625	92.075		
.656	16.662	1.343	34.112	2.125	53.975	2.828	71.831	3.672	93.269		
.750	19.050	1.391	35.331	2.203	55.956	2.875	73.025	3.781	96.037		
.813	20.650	1.500	38.100	2.250	57.150	3.000	76.200	3.797	96.444		
.953	24.206	1.656	42.062	2.313	58.750	3.031	76.987	4.219	107.163		

FIGURE 1. 45° fuel hose fitting – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ± .010; angles ± .01°.
2. Metric equivalents are given for information only.
3. Hex flange, see MS20756.
4. Part or Identifying Number (PIN).

FIGURE 1. 45° fuel hose fitting – Continued.

REQUIREMENTS:

Material: Aluminum alloy, see SAE-AS4841.

Fittings must swivel through 360° with sufficient clearance to allow use of standard wrenches on the nut when the axis of the hose is aligned over the stud or capscrew.

Hex or flats shall fit standard wrench openings.

The true circular cross section is not required within angle Y, however, a ball .031 smaller than C must pass through. Nipple ID within angle Y shall not exceed C.

Diameters C, F and G shall be concentric within .010 full indicator reading.

Surface roughness shall be in accordance with ASME-B46.1.

Fittings shall be permanently marked with the applicable MS PIN on an unfinished surface of the nipple.

Remove all burrs and sharp edges. The interior surface of the fitting shall be smooth and free from projections.

Example of PIN: MS28754D16

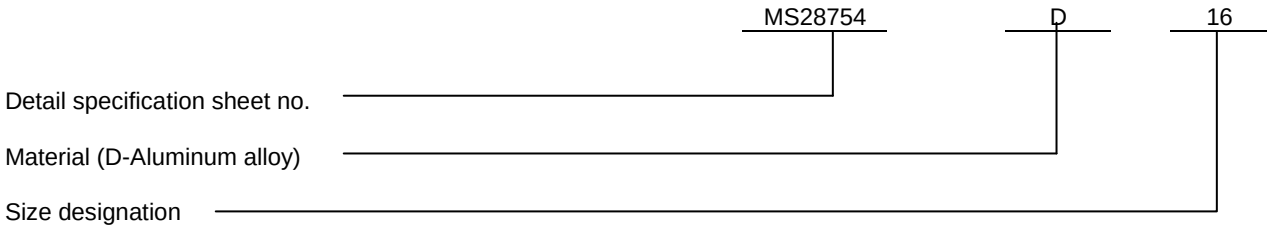

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. This document references the following:

MS20756
ASME-B46.1
SAE-AS4841

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 4730-2010-066)

Review activity:
Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.