INCH-POUND
MS28755D
6 August 2010
SUPERSEDING
MS28755C
2 November 1999

DETAIL SPECIFICATION SHEET

FITTING END, SELF-SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, 90°

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

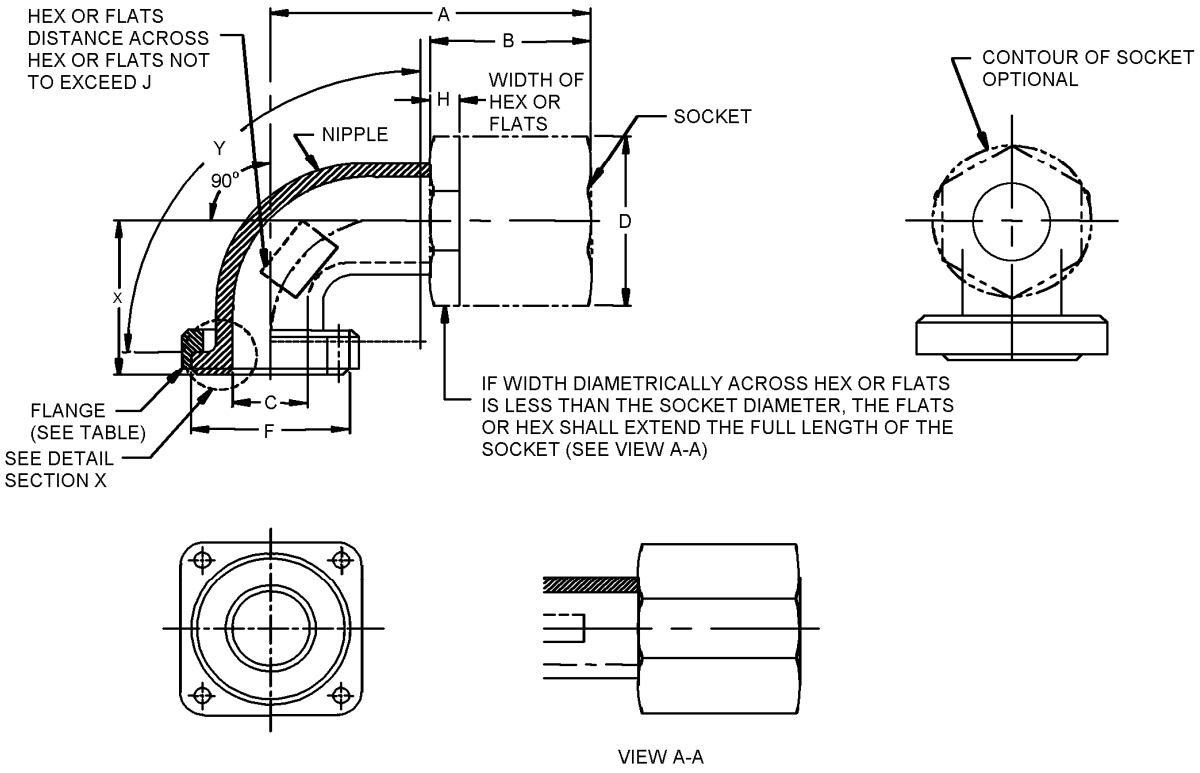

FIGURE 1. 90° fuel hose fitting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

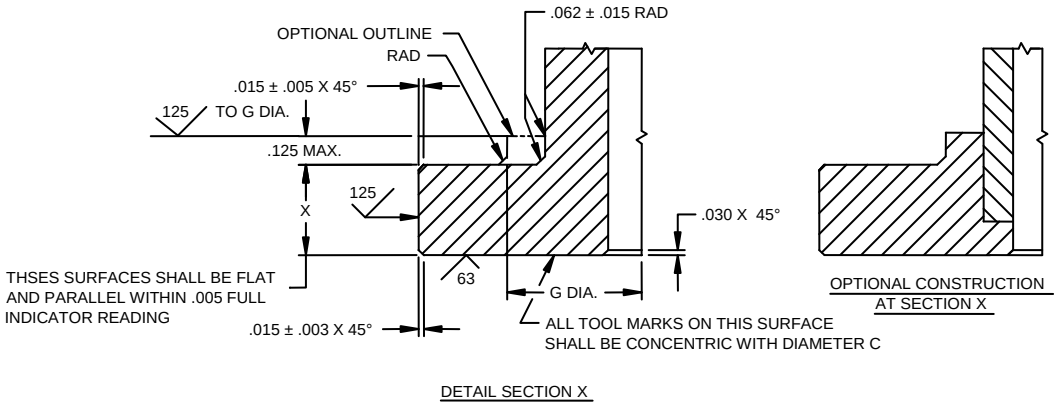

PIN (see note 4)	Nominal tubing and hose size (REF)	Flange PIN	A Max	B Max	C Min	D Max	E +.000 -.005
MS28755D16	I (1.000)	MS20756D16	3.891	2.000	813	1.953	.156
MS28755D20	1 ¼ (1.250)	MS20756D20	4.016	2.000	1.047	2.313	.156
MS28755D24	1 ½ (1.500)	MS20756D24	4.578	2.000	1.281	2.563	.188
MS28755D32	2 (2.000)	MS20756D32	5.391	2.250	1.750	3.125	.188
MS28755D40	2 ½ (2.500)	MS20756D40	6.016	2.500	2.219	3.625	.188
MS28755D48	3 (3.000)	MS20756D48	7.281	2.500	2.828	4.438	.188

PIN	F +.000 -.005	G Max	H Min	J Min	K Max	Weight lb (Approx)
MS28755D16	1.500	1.188	.375	1.343	1.813	.371
MS28755D20	1.844	1.500	.500	1.656	1.813	.514
MS28755D24	2.125	1.750	.500	1.906	2.313	.848
MS28755D32	2.750	2.375	.625	2.531	2.813	.947
MS28755D40	3.281	2.875	1.000	3.031	3.063	1.466
MS28755D48	3.781	3.375	1.250	3.250	4.313	2.000

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.156	3.962	1.250	31.750	1.953	49.606	2.563	65.100	3.250	82.550	4.438	112.725
.188	4.775	1.281	32.537	2.000	50.800	2.750	69.850	3.281	83.337	4.578	116.281
.375	9.525	1.343	34.112	2.125	53.975	2.813	71.450	3.375	85.725	5.391	136.931
.500	12.700	1.500	38.100	2.219	56.363	2.828	71.831	3.625	92.075	6.016	152.806
.625	15.875	1.656	42.062	2.250	57.150	2.875	73.025	3.781	96.037	7.281	184.937
.813	20.650	1.750	44.450	2.313	58.750	3.000	76.200	3.781	96.037		
1.000	25.400	1.813	46.050	2.375	60.325	3.031	76.987	3.891	98.831		
1.047	26.594	1.844	46.838	2.500	63.500	3.063	77.800	4.016	102.006		
1.188	30.175	1.906	48.412	2.531	64.287	3.125	79.375	4.313	109.550		

FIGURE 1. 90° fuel hose fitting – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ± .010; angles ± .01°.
2. Metric equivalents are given for information only.
3. Hex flange, see MS20756.
4. Part or Identifying Number (PIN).

FIGURE 1. 90° fuel hose fitting – Continued.

REQUIREMENTS:

Material: Aluminum alloy, see SAE-AS4841.

Fittings must swivel through 360° with sufficient clearance to allow use of standard wrenches on the nut when the axis of the hose is aligned over the stud or capscrew.

Hex or flats shall fit standard wrench openings.

The true circular cross section is not required within angle Y, however, a ball .031 smaller in diameter than C must pass through. Nipple ID within angle V shall not exceed C.

Diameters C, F and G shall be concentric within .010 full indicator reading.

Surface roughness shall be in accordance with ASME-B46.I.

Fittings shall be permanently marked with the applicable MS PIN on an unfinished surface of the nipple.

Remove all burrs and sharp edges. The interior surface of the fitting shall be smooth and free from projections.

Example of PIN: MS28755D16

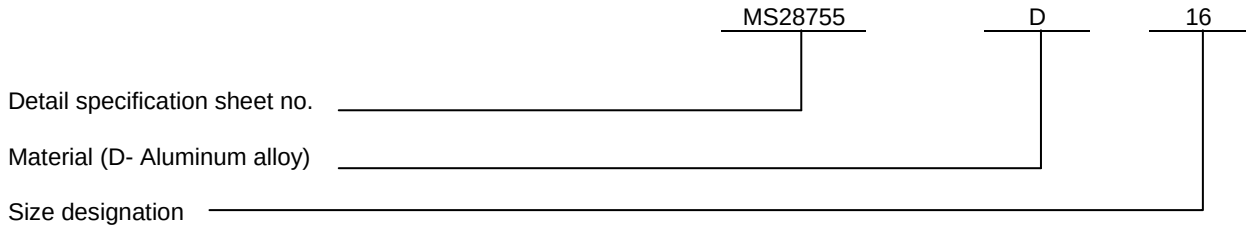

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. This document references the following:

MS20756
ASME-B46.1
SAE-AS4841

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 4730-2010-067)

Review activity:
Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.