When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government th... are no responsibility or any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implica... otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS. 4820

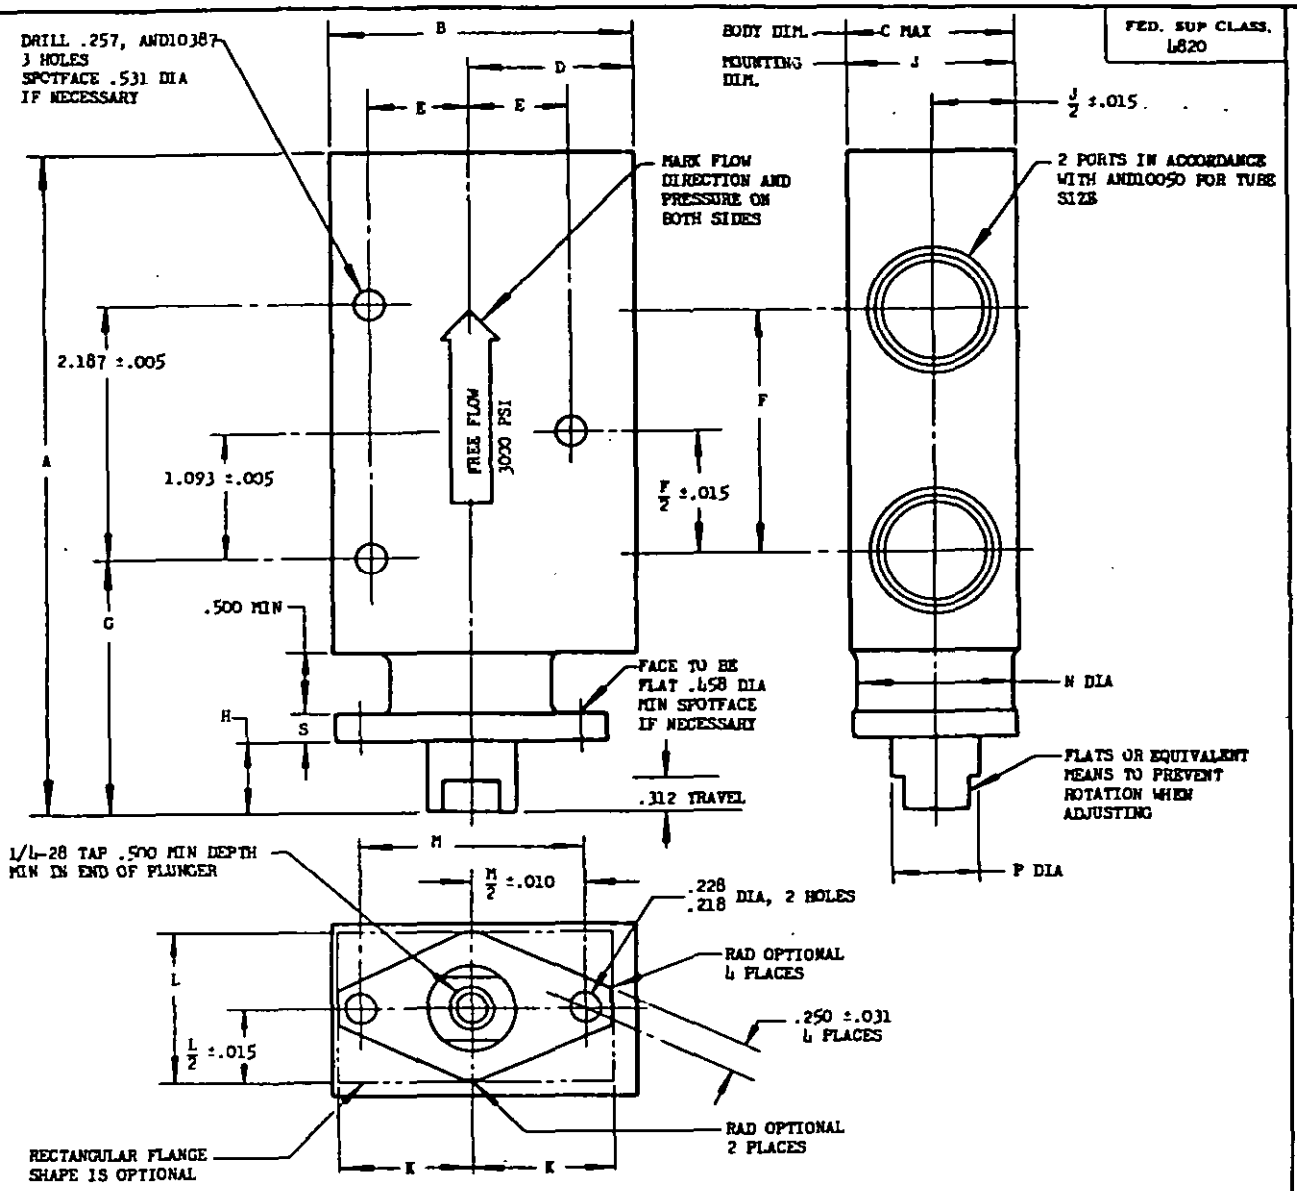

DASH NO.	FIIN	TUBE SIZE	A MAX	B MAX	C MAX	D	E ±.005	F	G ±.010	H	J	K MAX	L ±.031	M ±.005	N MAX DIA	P MAX DIA	S
4B		1/4	4.562	2.156	1.125	1.188	.656	1.500	1.594	.594	1.125	.938	1.000	1.375	.875	.438	.188
6B		3/8															
8B		1/2	5.750	2.562	1.500	1.375	.844	2.125	2.219	.625	1.500	1.188	1.344	1.875	1.325	.750	.250
10B		5/8															

PRESSURE DROP TAKEN AT .188-INCH TRAVEL.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) MS28759(AER) CONVERTED TO MS28758(ASG).

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 13 Sep 55 REVISED (A) 3 May 57

CUSTODIANS	OTHER INT.
Navy - BuAer Air Force	A - N - AF -

MILITARY STANDARD

VALVE, CHECK, CONTROLLABLE, PLUNGER-TYPE, HYDRAULIC, 3,000 PSI, TYPE II SYSTEMS

MS28768 (ASG)

PROCUREMENT SPECIFICATION MIL-V-19067

SUPERSEDES:

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.