Proj. No. 3110-0442

FED. SUP CLASS 3110

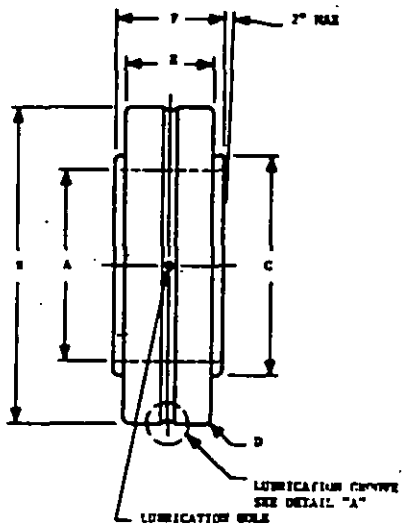

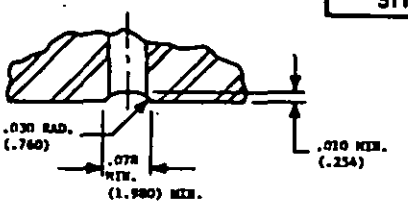

DETAIL "A"

DASH NO.	WT. MAX. LB.	STATIC LIMIT LOAD-POUNDS		DYNAMIC LOAD RATING-POUNDS	
		RADIAL	AXIAL	RADIAL	AXIAL
-16C	.16	3510	440	1700	213
-20C	.19	4300	490	2230	254
-25C	.41	6000	540	2750	248
-28C	.49	9000	890	4320	427
-33C	.54	10200	950	5250	489
-37C	.58	10900	980	5850	526
-47C	.79	12800	1070	8210	686
-49C	.78	11700	1150	8980	754

DASH NO.	A +.0000 (.000) -.0011 (.028) BORE IN.	A (MM)	B +.0000 (.000) -.0011 (.028) O.D. IN.	B (MM)	C +.005 (.127) +.005 (.127) DIA. IN.	C (MM)	D +.020 (.508) -.000 (.000) RAD. IN.	D (MM)	E +.000 (.000) -.005 (.127) WIDTH OUTER RING IN.	E (MM)	F +.000 (.000) -.005 (.127) WIDTH INNER RING IN.	F (MM)	LUBRICATION HOLE SIZE IN.	LUBRICATION HOLE SIZE (MM)	NUMBER OF LUBRICATION HOLES
-16C	1.0000	(25.400)	1.6250	(41.275)	1.120	(28.450)	.020	(.508)	.450	(11.430)	.500	(12.700)	.060	(1.524)	2
-20C	1.2500	(31.750)	1.7750	(47.625)	1.390	(35.310)									
-25C	1.5360	(39.014)	2.5000	(63.500)	1.800	(45.720)			.580	(14.730)	.670	(17.020)			
-28C	1.7500	(44.450)	2.4400	(60.275)	1.980	(50.290)									
-33C	2.0630	(52.400)	3.0000	(76.200)	2.300	(58.420)			.580	(14.730)	.670	(17.020)			3
-37C	2.3130	(58.750)	3.2500	(82.550)	2.560	(65.020)									
-47C	2.9380	(74.625)	3.8750	(98.425)	3.200	(81.280)									
-49C	3.0630	(77.800)	4.0000	(101.600)	3.330	(84.580)									

BASIC (NOMINAL) DIAMETER OVER	INCL	BEARING ROUGHNESS LIMITS: BORE ACCEPTANCE LIMITS MEAN DIAMETER A MIN	LOW	HIGH	A MAX	O.D. ACCEPTANCE LIMITS MEAN DIAMETER D MIN	LOW	HIGH	D MAX
.0000 (.000)	1.0000 (25.400)	-.0008(.020)	-.0005(.011)	+.0000(.000)	+.0003(.008)	- - - - -	- - - - -	- - - - -	- - - - -
1.0000(25.400)	2.0000 (50.800)	-.0011(.028)	-.0008(.020)	+.0000(.000)	+.0003(.008)	-.0020(.051)	-.0010(.025)	+.0000(.000)	+.0010(.025)
2.0000(50.800)	4.0000 (101.600)	-.0014(.036)	-.0011(.028)	+.0000(.000)	+.0003(.008)	-.0021(.054)	-.0011(.028)	+.0000(.000)	+.0010(.025)

▲TOLERANCE ON -16 BORE, IS +.0000 (.000) TO -.0005 (.013)
*TOLERANCE ON -20, -25 AND -28 BORE, IS +.0000 (.000) TO -.0008 (.021)
■TOLERANCE ON -16 AND -20 O.D., IS +.0000 (.000) TO -.0010 (.025)
●TOLERANCE ON -33, -37, -47 AND -49 OUTER RING WIDTH AND INNER-RING WIDTH, IS +.000 (.000) TO -.008 (.203)

MATERIAL: RETAINERS: STEEL, MIL-S-5626
COPPER, BERYLLIUM PER QQ-C-390
RINGS AND ROLLERS: STEEL, MIL-S-7420 PER FED. STD. NO. 66
FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 2
SURFACE ROUGHNESS: RACEWAYS 8 RMS, ROLLERS 4RMS, IN ACCORDANCE WITH ANSI B46.1. ALL OTHER SURFACES 32 RMS.
REMOVE BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES (MILLIMETERS) UNLESS OTHERWISE SPECIFIED
TOLERANCES: DECIMALS +.010 (.250) TO -.000 (.000)
DIMENSIONS TO BE SET AFTER PLATING

(C) INTERNAL CLEARANCE: TOTAL PLAY, RADIAL .0004 (.010) TO .0010 (.025)
ENTIRE STANDARD REVISED.
LUBRICATION: MIL-G-81322
FOR DESIGN FEATURE PURPOSE, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 8 Nov 62 REVISED (A) 20 Dec 66 (B) 24 June 70 (C) 15 Nov 73

User activities: Navy - MC, OS
Review activities: Army - AV, ME, MI
Air Force - 84
DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	TITLE	MILITARY STANDARD
USAF -11 Other Cust ARMY -AT NAVY -AS	BEARING, ROLLER, SELF-ALIGNING, DOUBLE ROW, TORRINGTON, AIRFRAME, ANTI-FRICTION, SEALED, TYPE IV	MS28915
PROCUREMENT SPECIFICATION MIL-B-8914	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.