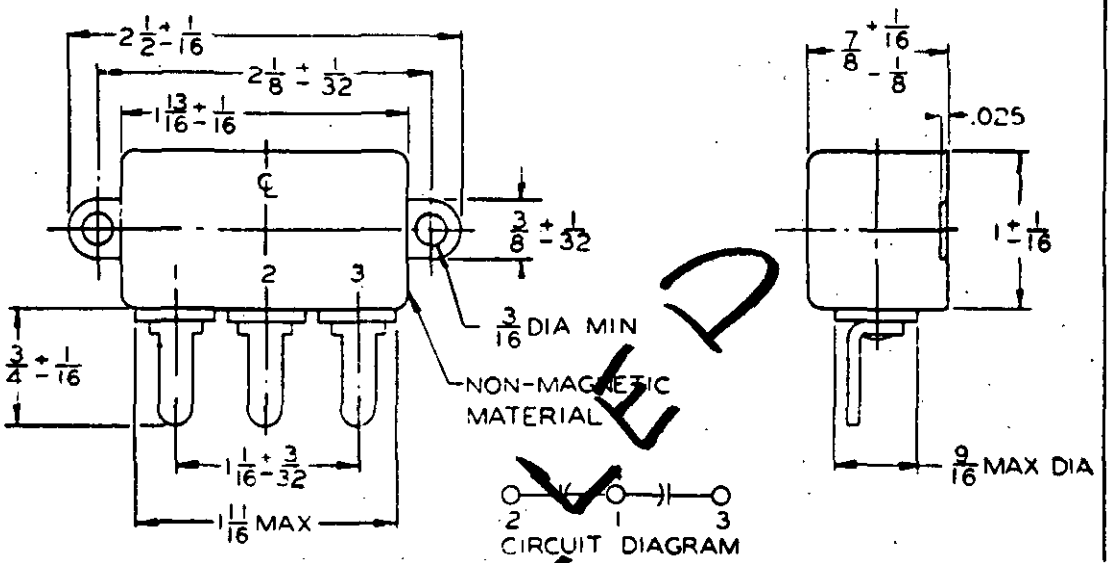

CAPACITANCE	VDCW	TOL
[illegible] - 2 MF	200	±20%

CANCELLED

NOTES:

1. OPERATING TEMPERATURE RANGE -55°C TO +65°C.
2. CAPACITORS ARE HERMETICALLY SEALED AND ARE RESISTANT TO HUMIDITY.
3. METALLIZED PAPER CAPACITORS RATED AT 200 VDCW SHOULD NOT BE USED AT A VOLTAGE ABOVE 120 VDCW.
4. METALLIZED PAPER CAPACITORS SHOULD BE USED ONLY FOR BY-PASS, FILTER OR SIMILAR APPLICATIONS WHERE LOW INSULATION RESISTANCE AND/OR AN OCCASIONAL SPARK OR MOMENTARY BREAKDOWN OF THE CAPACITOR DIELECTRIC CAN BE TOLERATED IN THE END EQUIPMENT.

TEST PROCEDURE FOR METALLIZED PAPER CAPACITORS

A. *PRODUCTION TESTS ON ALL CAPACITORS*

1. CAPACITANCE

THE CAPACITANCE MEASURED AT 25C ± 5C AT A FREQUENCY OF 60 CYCLES SHALL BE WITHIN THE SPECIFIED TOLERANCE.

2. DIELECTRIC STRENGTH

a. TERMINAL TO TERMINAL - EACH CAPACITOR SHALL WITHSTAND A DC POTENTIAL EQUAL TO RATED VOLTAGE FOR AT LEAST ONE (1) SECOND AND NOT EXCEEDING FIVE (5) SECONDS WITHOUT DAMAGE. THE CHARGE AND DISCHARGE CURRENTS SHALL NOT EXCEED ONE (1) AMPERE. THIS TEST NEED NOT BE PERFORMED IF THE INSULATION RESISTANCE IS MEASURED AT RATED VOLTAGE. (SEE PARAGRAPH A-3-a.)

b. TERMINAL TO CASE - EACH CAPACITOR, NO TERMINAL OF WHICH IS CONNECTED TO THE CASE, SHALL WITHSTAND, FOR AT LEAST ONE (1) SECOND AND NOT EXCEEDING FIVE (5) SECONDS, A DC POTENTIAL EQUAL TO FOUR (4) TIMES RATED VOLTAGE BETWEEN ALL TERMINALS CONNECTED TOGETHER AND CASE OR BETWEEN EACH TERMINAL AND CASE WITHOUT BREAKDOWN.

APPROVED 24 JULY, 1951 REVISED A 25 November 1964

ALL DIMENSIONS IN INCHES

Source: https://assist.dla.mil -- Downloaded: 20240-23T17:08Z
Check the source to verify that this is the current version before use.