
MILITARY SPECIFICATION SHEET

TERMINI, FIBER OPTIC, ENVIRONMENT RESISTING, PIN TERMINUS CLASS 1, TYPE II, STYLE A (FOR MIL-C-28876 and MIL-C-83526 CONNECTORS)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the termini described herein shall consist of this specification and the latest issue of MIL-T-29504.

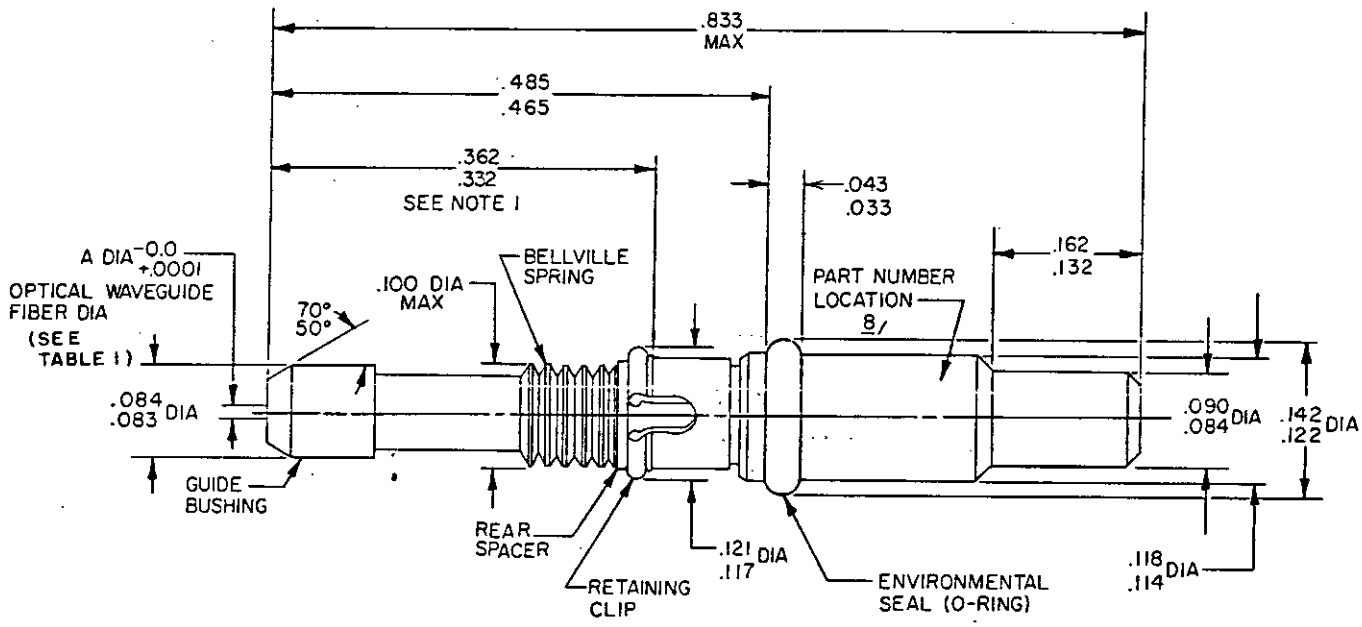


Inches	mm	Inches	mm
.0001	0.00	.121	3.07
.033	0.83	.122	3.09
.043	1.09	.132	3.35
.083	2.10	.142	3.60
.084	2.13	.162	4.11
.090	2.28	.332	8.43
.100	2.54	.362	9.19
.114	2.89	.465	11.81
.117	2.97	.485	12.31
.118	2.99	.833	21.15

NOTES:
1. These are unmated dimensions and will decrease .040 maximum as Belleville Springs compress during mating.
2. Dimensions are in inches.
3. Metric equivalents are given for general information only, except for guide bushing "A" diameter which is based upon 1.00 inch = 25400.0 µm or 1.0 µm = .00003937 inches.
4. All diameters to be concentric within .002 (0.05 mm).
5. Dimensions apply after plating.
6. (O-Ring) shall be a fluorosilicone material.
7. For internal configuration and dimensions of terminus rear, see figure 2.
8. The TICC bands shall be at the rear of the pin terminus.

FIGURE 1. Pin terminus.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-0-20123:252
Check the source to verify that this is the current version before use.

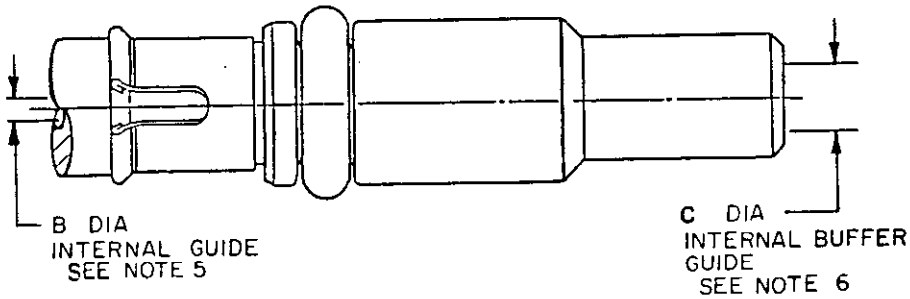

B dia (internal guide)		C dia (internal buffer guide)	
Inches	mm	Inches	mm
.011 .009	0.30 0.23	.029 .025	0.74 0.64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric within .002 (0.05 mm).
4. Dimensions shown after plating.
5. The "B" dia of the internal guide is used to center coated optical waveguide fiber.
6. The "C" dia of the internal buffer is used to center coated optical waveguide fiber buffer.

FIGURE 2. Terminus internal guide and buffer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction:

Dimensions and configuration: See figures 1 and 2 and table I.

Adhesives: Use Trabond F230 Eccobond 144B, EPOTEK 330/353 series or an equivalent as approved by the qualifying activity. Mixing and curing instructions shall be supplied with the assembly instructions provided with each termini or applicable connector.

Tools: See table II.

Mating termini: MIL-T-29504/2.

TABLE I. TICC numbers and dimensions for guide bushing.

TICC	A diameter	
	Inches	µm
4000	.0047	119.5
4001	.0048	122.0
4002	.0049	124.5
4003	.0050	127.0
4004	.0051	129.5
4005	.0052	132.0
4006	.0053	134.5
4007	.0054	137.0
4008	.0055	139.5
4009	.0056	142.0
4010	.0057	145.0
4011	.0076	193.0
4012	.0077	195.5
4013	.0078	198.0
4014	.0079	200.5
4015	.0080	203.0
4016	.0081	205.5
4017	.0082	208.0
4018	.0083	211.0

TABLE II. Tools.

End size	Insertion tool	Removal tool	Polishing fixture tool
16	M81969/46-01 or M81969/49-01	M81969/47-01	M83523/6-01

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:29Z
Check the source to verify that this is the current version before use.

Military part number: See table III.

Supersession data: See table III.

TABLE III. Military part numbers and supersession data.

TICC	Military part number M29504/01	Superseded military part number M28876/16	Superseded manufacturer's part number	CAGE
-4000 1/	-4000	-048XXX 2/	44970016048 0110	91662
			1093201-048FXXXS 2/	53669
-4001	-4001	-049XXX	1093201-049FXXXS	53669
-4002	-4002	-050XXX	1093201-050FXXXS	53669
-4003	-4003	-051XXX	1093201-051FXXXS	53669
-4004 1/	-4004	-052XXX	1093201-052FXXXS	53669
-4005 1/	-4005	-053XXX	1093201-053FXXXS	53669
-4006 1/	-4006	-054XXX	1093201-054FXXXS	53669
-4007	-4007	-055XXX	1093201-055FXXXS	53669
-4008	-4008	-056XXX	1093201-056FXXXS	53669
-4009	-4009	-057XXX	44970015057 7000	91662
			1093201-057FXXXS	53669
-4010 1/	-4010	-058XXX	1093201-058FXXXS	53669
-4011 1/	-4011	-077XXX	1093201-077FXXXS	53669
-4012 1/	-4012	-078XXX	1093201-078FXXXS	53669
-4013 1/	-4013	-079XXX	1093201-079FXXXS	53669
-4014 1/	-4014	-080XXX	1093201-080FXXXS	53669
-4015 1/	-4015	-081XXX	1093201-081FXXXS	53669
-4016 1/	-4016	-082XXX	1093201-082FXXXS	53669
-4017 1/	-4017	-083XXX	1093201-083FXXXS	53669
-4018 1/	-4018	-084XXX	1093201-084FXXXS	53669

1/ Inactive for new design.

2/ X indicates all numerical combinations possible.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:29Z
Check the source to verify that this is the current version before use.

Patent notice: The Government does not have royalty-free license under the following patents for the benefit of manufacturers of the item, either for the Government or for use in equipment to be delivered to the Government:

US patent application number
(65,032)
(260,660)
(376,866)
(403,446)

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - MC, SH
Air Force - 11, 17, 19, 70, 80, 90, 99
DLA - ES

User activities:
Army - AV
Navy - OS, YD
Air Force - 13, 14, 84

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6060-0026-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:29Z
Check the source to verify that this is the current version before use.