INCH-POUND

MIL-PRF-29504/3B
12 November 2002
SUPERSEDING
MIL-T-29504/3A
19 December 1989

PERFORMANCE SPECIFICATION SHEET

TERMINI, FIBER OPTIC, CONNECTOR, REMOVABLE, ENVIRONMENT RESISTING, DUMMY TERMINUS, (FOR MIL-C-28876 AND MIL-C-83526 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-29504.

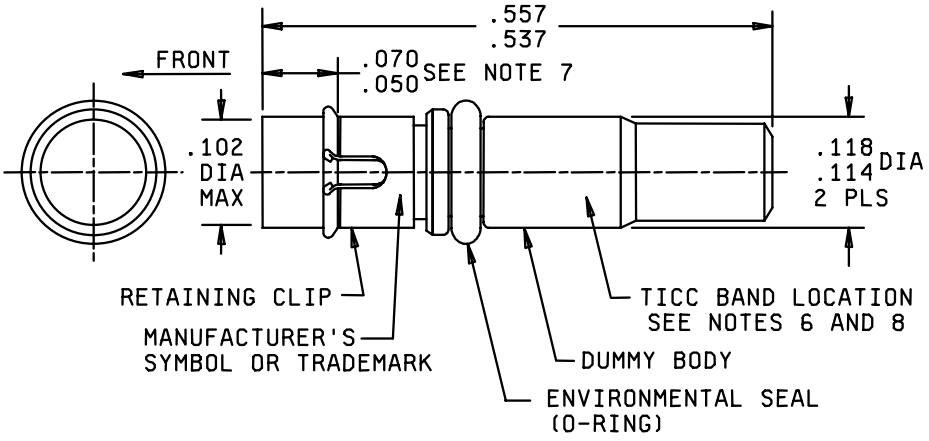

FIGURE 1. Dummy terminus

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:30Z
Check the source to verify that this is the current version before use.

Inches	mm
.050	1.27
.070	1.78
.102	2.59
.114	2.90
.118	3.00
.537	13.64
.557	14.15

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric within 0.002 inch (0.05 mm).
4. Dimensions apply to plated/finished part.
5. Dummy termini to be used to fill unused cavities.
6. The TICC bands shall be at the rear of the dummy terminus.
7. Dimensions to be measured with terminus installed in connector insert or equivalent gauge fixture.
8. The dimension shown is effective prior to the application of the TICC marking.

FIGURE 1. Dummy terminus - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:30Z
Check the source to verify that this is the current version before use.

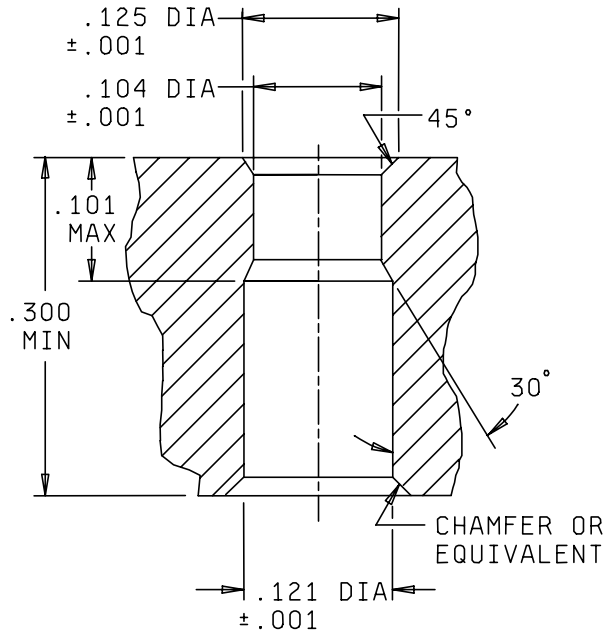

Inches	mm
.001	0.03
.101	2.57
.104	2.64
.121	3.07
.125	3.18
.300	7.62

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric within 0.002 inch (0.05 mm).
4. Dimensions apply after to plated/finished part.
5. Tolerance on all angles is ±1°, unless otherwise noted.

FIGURE 2. Insert equivalent fixture for terminus measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figures 1 and 2 and table II.

Weight: 1.0 gram maximum.

Adhesives: Not applicable.

Tools: See table I.

Insertion loss: Not applicable.

Optical discontinuity: Not applicable.

Circular runout: Not applicable.

Return loss: Not applicable.

Change in optical transmittance: Not applicable.

Terminus engagement and separation force: Not applicable.

Fiber pullout: Not applicable.

Cable pull out: Not applicable.

Environmental/mechanical: Termini shall be tested to the following MIL-PRF-28876 environmental and mechanical requirements. Change in optical transmittance and optical discontinuity requirements are not applicable.

Impact
Vibration
Shock
Thermal shock
Temperature/humidity cycling
Temperature cycling
Temperature life
Flammability
Ozone exposure

Qualification connector: The qualification connector for this terminus shall be a qualified MIL-PRF-28876 connector.

Part or identifying number (PIN): See table II and 6.6 of MIL-PRF-29504.

M29504/3	-XXXX
Basic specification and specification sheet	TICC Code (see table I)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:30Z
Check the source to verify that this is the current version before use.

Usage: Termini compliant with this specification sheet may be used in connectors other than MIL-PRF-28876 at the discretion of the acquiring activity.

Qualification by similarity: Manufacturers who are qualified under MIL-PRF-29504/14 or /15, and whose terminus passes Size, Weight, Identification marking, and Workmanship specified herein, are qualified under this specification sheet. This qualification by similarity is valid only if the same materials are used in the construction of this terminus as are used in the construction of the qualified /14 or /15 terminus.

TABLE I. Tools

Tool	Part number
Insertion tool	NAVSEA DWG 6872813-2 (NSN 5120-01-144-5338)
Removal tool	NAVSEA DWG 6872813-6 (NSN 5120-01-419-2942)

TABLE II. The PIN and supersession data.

TICC	PIN	Superseded PIN	Superseded manufacturer's PIN	CAGE
-4038	M29504/03-4038	M28876/18-16	1143274S	53669

Custodians:
Army - CR
Navy - SH
Air Force - 11
DLA - CC

Review activities:
Navy - AS
Air Force - 03, 13, 19, 93, 99
NASA - NA
DIA - DI

Preparing activity:
Navy - SH

Agent:
DLA - CC

(Project 6060-0132-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:30Z
Check the source to verify that this is the current version before use.