MILITARY SPECIFICATION SHEET

TERMINI, FIBER OPTIC, ENVIRONMENT RESISTING, PIN TERMINUS, SIZE 16, REAR RELEASE

MIL-C-38999, SERIES I, III, AND IV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the termini described herein consist of this specification and the latest issue of MIL-T-29504.

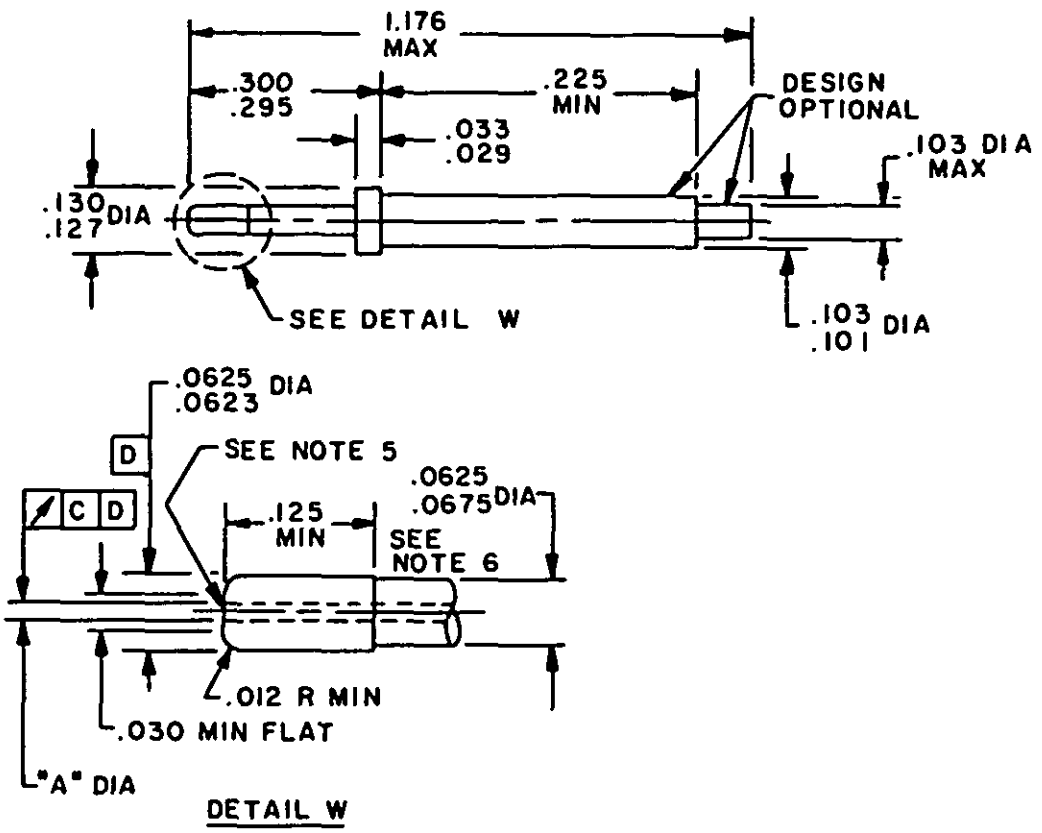


FIGURE 1. Pin terminus.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20123:322
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.002	0.05	.101	2.57
.012	0.30	.103	2.62
.029	0.74	.125	3.18
.030	0.76	.127	3.23
.033	0.84	.130	3.30
.0575	1.461	.225	5.72
.0623	1.582	.295	7.49
.0625	1.588	.300	7.62
.084	2.13	.525	13.39
		1.176	29.87

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric within .003 unless otherwise indicated.
4. Dimensions apply after plating.
5. Polished fiber face may be flat to concave and flush to recess.
6. No portion of this diameter shall protrude above the .0625/.0623 diameter.
7. "A" dia hole tolerance is ±B. See table I.

FIGURE 1. Pin terminus - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Tools: See table II.

Mating termini: MIL-T-29504/5.

Part number: See figure 1 and table I. Part number M29504/4- (dash number from table I.)

Marking: Part number shall be marked on barrel of the termini.

TABLE I. "A" diameter hole for optical waveguide fiber and part number designation.

TICC	Military part number	"A" diameter		Tolerance		Fiber size	Terminus
		µ	(inch) 1/	Circular runout 2/	Max 1/ B + C (inch)µ	Core/clad µ	Size
4039	M29504/04-4039	124.5±B	(.0049±B)	C			16
4040	M29504/04-4040	127.0±B	(.0050±B)	C	(.00059) 15	50/125	16
4041	M29504/04-4041	129.5±B	(.0051±B)	C			16
4042	M29504/04-4042	139.5±B	(.0055±B)	C			16
4043	M29504/04-4043	142.0±B	(.0056±B)	C	(.00059) 15	100/140	16
4044	M29504/04-4044	145.0±B	(.0057±B)	C			16

1/ Dimensions in parentheses are inches.
2/ As defined by ANSI/ASME Y 14.5M - 1982.

TABLE II. Tools.

End size	Insertion tool	Removal tool
16	M81969/14-03	M81969/14-03

Custodians:
Navy - EC
Air Force - 85
Army - CR

Review activities:
Navy - MC, SH
DLA - ES

User activities:
Navy - OS, YD

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6060-0026-4)

☆U.S. GOVERNMENT PRINTING OFFICE: 1987 - 704-036-75249

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:32Z
Check the source to verify that this is the current version before use.