INCH-POUND

MIL-T-29504/4A
23 April 1990
SUPERSEDING
MIL-T-29504/4
25 August 1987

MILITARY SPECIFICATION SHEET

TERMINI, FIBER OPTIC, CONNECTOR, REMOVABLE, ENVIRONMENT RESISTING, CLASS 5, TYPE II, STYLE A, PIN TERMINUS, SIZE 16, REAR RELEASE MIL-C-38999, SERIES I, III, and IV

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-29504.

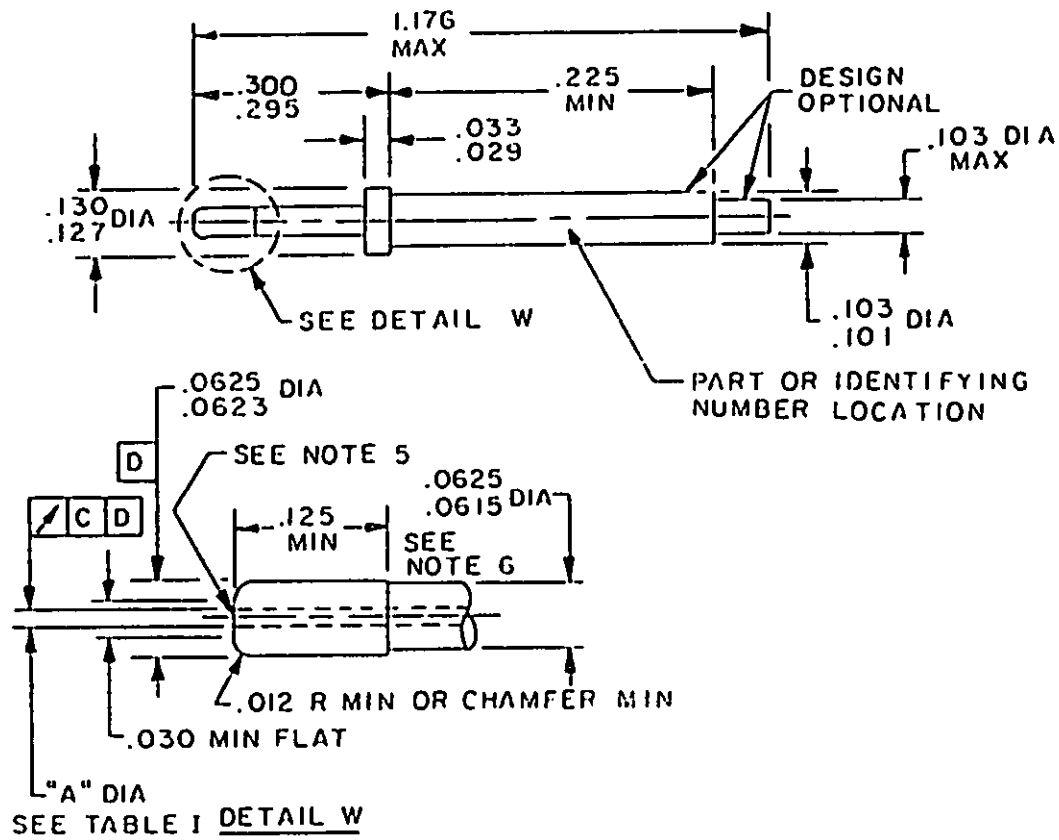


FIGURE 1. Pin terminus.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:32Z
Check the source to verify that this is the current version before use.

Inches	mm		Inches	mm
.002	0.05		.101	2.57
.012	0.30		.103	2.62
.029	0.74		.125	3.18
.030	0.76		.127	3.23
.033	0.84		.130	3.30
.0575	1.461		.225	5.72
.0615	1.56		.295	7.49
.0623	1.582		.310	7.87
.0625	1.588		.525	13.39
.084	2.13		1.176	29.87

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric within .003 unless otherwise indicated.
4. Dimensions shown after plating.
5. Polished fiber face may be flat to concave and flush to recess.
6. No portion of this diameter shall protrude above the .0625/.0623 diameter.
7. "A" diameter hole tolerance is ±B. See table I.

FIGURE 1. Pin terminus - Continued.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Ⓐ Weight: 1 gram maximum.

Adhesives: Not applicable.

Tools: See table II.

Mating termini: MIL-T-29504/5.

Part or Identifying Number (PIN): See figure 1 and table I. The PIN M29504/4- (dash number from table I.)

Marking: The PIN shall be marked on barrel of the termini.

Terminus engagement and separation force: Minimum separation force shall be 2 ounces. Maximum average engagement force shall be 24 ounces. Maximum engagement force shall be 30 ounces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:32Z
Check the source to verify that this is the current version before use.

TABLE I. "A" diameter hole for optical waveguide fiber and PIN designation.

TICC	PIN	"A" diameter μ	"A" diameter 1/ (inch)	Tolerance Circular runout 2/	Tolerance Max 1/ $\frac{B + C}{2}$ $(inch)_\mu$	Fiber size Core/clad μ	Terminus Size
4039	M29504/04-4039	124.5 +B -0	(.0049+B)	C			16
4040	M29504/04-4040	127.0 +B -0	(.0050+B)	C	(.00059) 15	50/125	16
4041	M29504/04-4041	129.5 +B -0	(.0051+B)	C			16
4042	M29504/04-4042	139.5 +B -0	(.0055+B)	C			16
4043	M29504/04-4043	142.0 +B -0	(.0056+B)	C	(.00059) 15	100/140	16
4044	M29504/04-4044	145.0 +B -0	(.0057+B)	C			16

1/ Dimensions in parentheses are inches.
2/ As defined by ANSI Y14.5M - 1982.

TABLE II. Tools.

End size	Insertion tool	Removal tool
16	M81969/14-03	M81969/14-03

Patent notice. The Government does not have a royalty-free license under the following listed patents for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government.

Patent number	Patent expiration date
3,947,182	3/30/1993
4,351,586	9/28/1997
4,747,658	5/31/2005

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, MC, SH
Air Force - 11, 17, 19, 70, 80, 90, 99
DLA - ES

User activities:
Army - AV
Navy - CG, MC, OS, YD
Air Force - 13, 14, 84

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0078-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:32Z
Check the source to verify that this is the current version before use.