INCH-POUND

MIL-T-29504/10
W/AMENDMENT 1
27 August 2024
SUPERSEDING
MIL-T-29504/10
31 January 1989


DETAIL SPECIFICATION SHEET

TERMINI, FIBER OPTIC, ENVIRONMENT RESISTING, CLASS 5, TYPE II, STYLE A, PIN TERMINUS, SIZE 16, REAR RELEASE, MIL-DTL-83723, SERIES III, MIL-DTL-83733, MIL-DTL-26482, SERIES II

Inactive for new design after 17 August 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-29504.

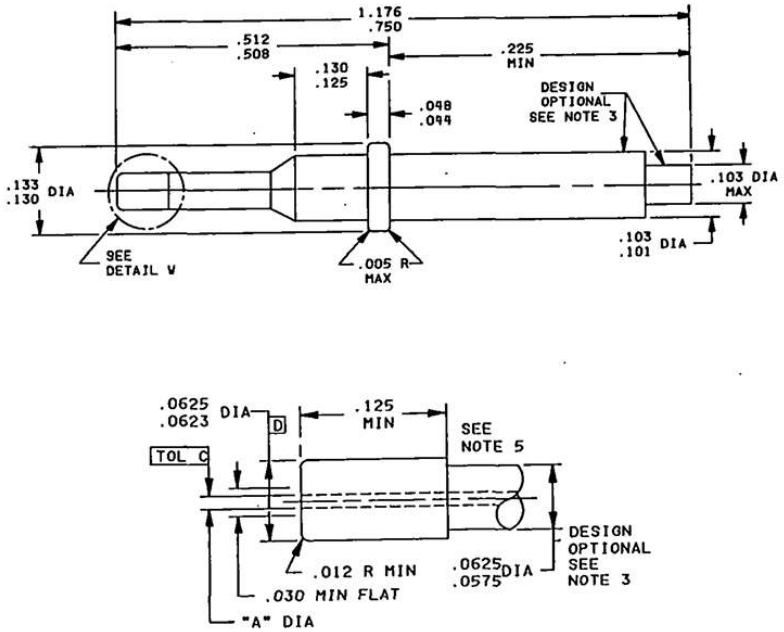

DETAIL W DESIGN OPTIONAL

FIGURE 1. PIN terminus

AMSC N/A FSC 6060

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.103	2.62
.012	0.30	.125	3.18
.030	0.76	.130	3.30
.044	1.12	.133	3.38
.048	1.22	.225	5.72
.0575	1.461	.508	12.90
.0623	1.582	.512	13.00
.0625	2.34	.750	19.05
.101	2.57	1.176	29.87

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric within 0.003 inch unless otherwise indicated.
4. Dimensions apply after plating.
5. “B” is defined as the tolerance on the “A” diameter hole.

FIGURE 1. Pin terminus - Continued.

REQUIREMENTS:

Design and construction:


Dimensions and configuration: See figure 1 and table I.

Weight: 100 grams.

Tools: See table II.

Mating termini: MIL-T-29504/11

Part or identifying number (PIN): See figure 1 and table I, MIL-T-29504/10-(dash number from table I).

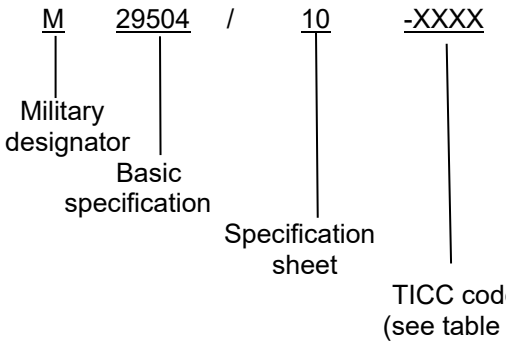

Marking: Part number or TICC designation shall be marked on the barrel of termini.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.

TABLE I. "A" diameter hole for optical waveguide fiber and part number designation.

TICC M29504/10	"A" diameter		Tolerance		Fiber size	Terminus
	μ	Inch (reference)	Circular runout *	Max $(B+C)/2$ (inch) μ	Core/clad μ	Size
4075	124.5+B -0	(.0049+B) -0	C	(.00059) 15	50/125	16
4076	127.0+B -0	(.0050+B) -0	C			16
4077	129.5+B -0	(.0051+B) -0	C			16
4078	139.5+B -0	(.0055+B) -0	C	(.00059) 15	100/140	16
4079	142.0+B -0	(.0056+B) -0	C			16
4080	145.0+B -0	(.0057+B) -0	C			16

Dimensions in () are inches. * as defined by ASME-Y14.5

TABLE II. Tools.

End size	Insertion tool	Removal tool
16	M81969/14-03	M81969/14-03

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-29504, this specification references the following:

ASME-Y14.5 MIL-T-29504/11

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6060-2024-013)

Review activities:
Navy - AS
Air Force - 03, 19, 33, 93
DIA - DI
NASA - NA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.