

MILITARY SPECIFICATION SHEET

TERMINI, FIBER OPTIC, ENVIRONMENT RESISTING, CLASS 5, TYPE II, STYLE A, PIN TERMINUS, SIZE 16, FRONT RELEASE
MIL-C-28840

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the termini described herein shall consist of this specification and the latest issue of MIL-T-29504.

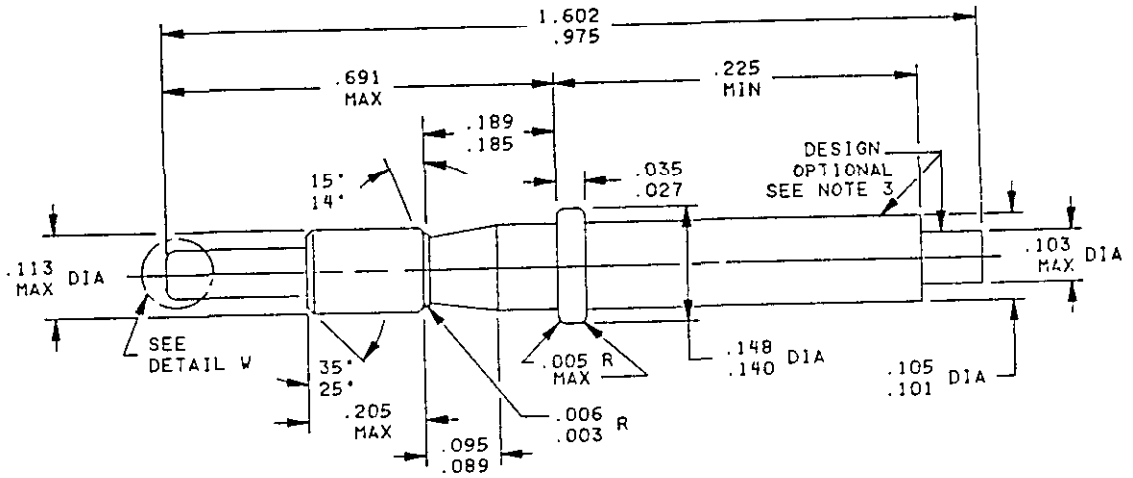

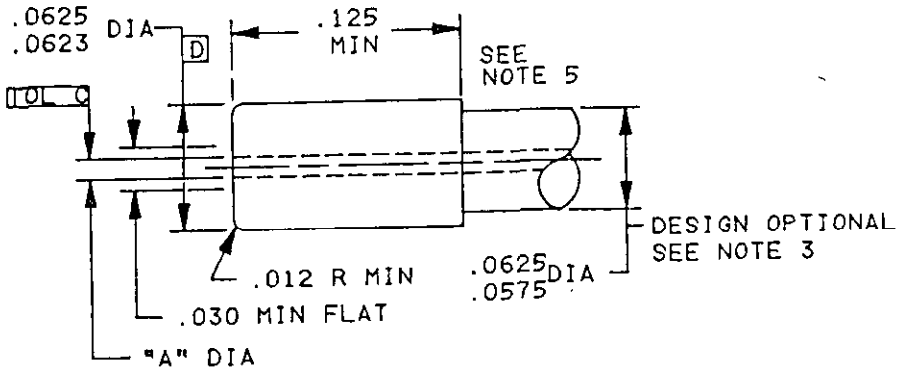

DETAIL W

FIGURE 1. Pin terminus.

AMSC N/A
FSC 6060

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check this source to ensure that this is the current version before use.

Inches	mm	Inches	mm
.003	0.08	.103	2.62
.005	0.13	.105	2.67
.006	0.15	.113	2.87
.012	0.30	.125	3.18
.027	0.69	.140	3.57
.030	0.76	.148	3.76
.035	0.89	.185	4.70
.0575	1.461	.189	4.80
.0623	1.582	.205	5.21
.0625	1.588	.225	5.72
.089	2.26	.691	17.55
.095	2.41	.975	24.77
.101	2.57	1.602	40.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric within 0.003 inch unless otherwise indicated.
4. Dimensions apply after plating.
5. "B" is defined as the tolerance on the "A" diameter hole.

FIGURE 1. Pin terminus - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Weight: 100 grams.

Tools: See table II.

Mating termini: MIL-T-29504/9.

Part number: See figure 1 and table I. Part number M29504/8- (dash number from table I.)

Marking: Part number or TICC designation shall be marked on the barrel of termini.

TABLE I. "A" diameter hole for optical waveguide fiber and part number designation.

TICC M29504/8	"A" diameter		Tolerance		Fiber size	Terminus
	μ	Inch (reference)	Circular runout *	Max $\frac{B + C}{2}$ (inch)μ	Core/clad μ	Size
4063	124.5+B -0	(.0049+B -0)	C			16
4064	127.0+B -0	(.0050+B -0)	C	(.00059) 15	50/125	16
4065	129.5+B -0	(.0051+B -0)	C			16
4066	139.5+B -0	(.0055+B -0)	C			16
4067	142.0+B -0	(.0056+B -0)	C	(.00059) 15	100/140	16
4068	145.0+B -0	(.0057+B -0)	C			16

Dimensions in ( ) are inches. * as defined by ANSI/ASME Y 14.5 M - 1982.

TABLE II. Tools.

End size	Insertion tool	Removal tool
16	M81969/17-01	M81969/19-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC, SH

User activities:
Navy - OS, YD

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6060-0068-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.