

MILITARY SPECIFICATION SHEET

TERMINI, FIBER OPTIC, ENVIRONMENT RESISTING, CLASS 5, TYPE II,
STYLE A, SOCKET TERMINUS, SIZE 16, FRONT RELEASE
MIL-C-28840

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the termini described herein shall consist of this specification and the latest issue of MIL-T-29504.

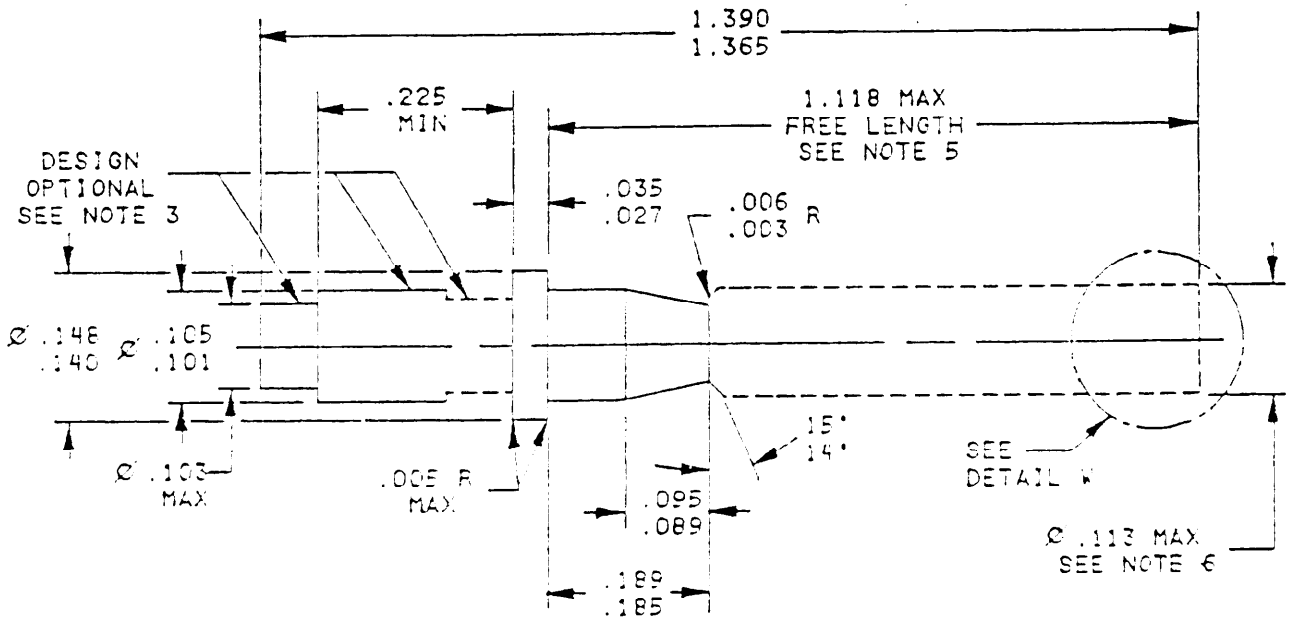

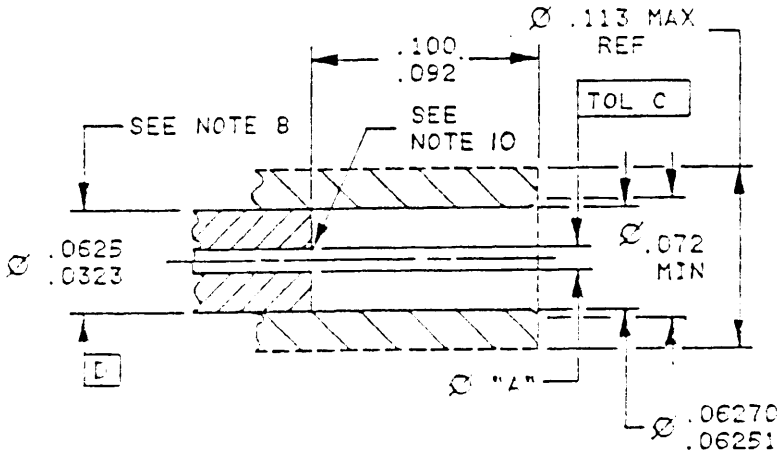

DETAIL W DESIGN OPTIONAL
SEE NOTE 7

FIGURE 1. Socket terminus.

AMSC N/A FSC 6060

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.003	0.08	.100	2.54
.005	0.13	.101	2.57
.006	0.15	.103	2.62
.027	0.69	.105	2.67
.0323	0.820	.113	2.87
.035	0.89	.134	3.40
.0623	1.582	.140	3.56
.06251	1.5878	.148	3.76
.06270	1.5925	.185	4.70
.072	1.83	.189	4.80
.084	2.13	.225	5.72
.089	2.26	1.118	28.40
.092	2.34	1.365	34.67
.095	2.41	1.390	35.31

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric within 0.003 inch unless otherwise indicated.
4. Dimensions apply after plating when applicable.
5. Free length prior to installation in the connector.
6. Alignment sleeve and body design optional, not to exceed maximum envelope dimensions.
7. For alternate split sleeve design, engaging force shall be less than preload spring force (I.D.) tolerance does not apply.
8. Alignment surface O.D. shall be concentric with "A" diameter in accordance with table I.
9. This measurement should be taken only after the complete termination procedure is completed and the alignment sleeve properly assembled.
10. "B" is defined as the tolerance on the "A" diameter hole.

FIGURE 1. Socket terminus - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.

s of the modulation envelope. Difference shall be determined from the bias distortion procedure for receiver

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Weight: 100 grams.

Tools: See table II.

Mating termini: MIL-T-29504/8.

Part number: See figure 1 and table I. Part number M29504/9- (dash number from table I.)

Marking: Part number or TICC designation shall be marked on the barrel of termini.

TABLE I. "A" diameter hole for optical waveguide fiber and part number designation.

TICC M29504/9	"A" diameter		Tolerance		Fiber size	Terminus
	μ	Inch (reference)	Circular runout *	Max $\frac{B+C}{2}$ (inch)μ	Core/clad μ	Size
4069	124.5+B -0	(.0049+B) -0	C			16
4070	127.0+B -0	(.0050+B) -0	C	(.00059) 15	50/125	16
4071	129.5+B -0	(.0051+B) -0	C			16
4072	139.5+B -0	(.0055+B) -0	C			16
4073	142.0+B -0	(.0056+B) -0	C	(.00059) 15	100/140	16
4074	145.0+B -0	(.0057+B) -0	C			16

Dimensions in ( ) are inches. * as defined by ANSI/ASME Y 14.5 M - 1982.

TABLE II. Tools.

End size	Insertion tool	Removal tool
16	M81969/17-01	M81969/19-01

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:35Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC, SH

User activities:
Navy - OS, YD

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6060-0068-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:35Z
Check the source to verify that this is the current version before use.