[INCH-POUND]

A-A-2679
May 1, 1991

COMMERCIAL ITEM DESCRIPTION
SAW, CIRCULAR, PNEUMATIC, PORTABLE

The General Services Administration has authorized the use of this Commercial Item Description for use in preference to Type II, Class 2 of Federal Specification GGG-S-63C.

Scope and Classification. This commercial item description covers 12-inch, portable, pneumatic circular saws, primarily intended for cutting steel, stone, masonry, ceramics, plastics, and other ferrous and nonferrous materials.

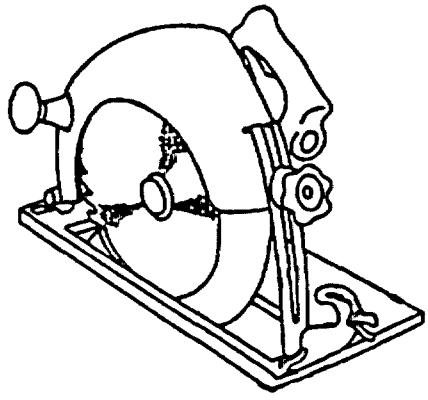


Figure 1

Table I

National Stock Number	Specified Torque	Speed at Specified Torque	Speed at No Load	Air Consumption	Vertical Depth of Cut	45 degree Depth of Cut
	ft.-lbs. (min.)	RPM (min.)	RPM (max.)	scfm/hp (max.)	inches (min.)	inches (min.)
5130-00-239-5813	10	1800	2400	38	3-7/8	2-3/4

Salient Characteristics.

Design: Circular saws supplied in accordance with this description shall be of the manufacturer's current design and similar to figure 1. The saw shall be of the 12 inch size with a safety lock-off throttle. The saw shall operate properly at pressures between 80-100 psig.

FSC 5130

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

Motor: The motor shall be the rotary-vane type.

Lubrication: Parts requiring lubrication shall be protected from the entrance of foreign matter and loss of lubricant. The saw shall provide for the delivery of lubricant in a manner that will assure proper operation.

Materials: The materials used in the construction of all components shall be capable of completing the examination and tests specified herein. All components shall be new and unused. Repaired or reconditioned components shall not be acceptable. Housing shall be metal. Cadmium is not an acceptable plating.

Handle: The saw shall have a closed pistol-grip type handle with an integral throttle valve. The throttle valve shall have a positive safety lock and shall be located within the closed pistol-grip handle to prevent accidental starting of the saw. An auxiliary handle or knob shall be provided and located in such a manner as to make the saw suitable for two-handed operation.

Bearings: All rotating parts of the saw shall be provided with ball or roller bearings. Ball and roller bearings, which are primarily designed for radial loads, shall not be used to absorb axial thrust. Open-type bearings shall be suitably housed and adequately sealed to prevent leakage of lubricant and entrance of dirt and dust. Sleeve bearings are not acceptable.

Arbor: The arbor shall be 1.00 inch in diameter. Means shall be provided to preclude the saw blade turning on the arbor in the event the stalled torque of the saw is reached.

Rotation: The saw-blade rotation shall be such that the material being cut will be held against the saw base by the cutting action of the saw-blade.

Saw blade: Unless otherwise specified a 12-inch diameter rip and crosscut saw blade shall be furnished. The blade shall conform to type III, class I of Federal Specification GGG-B-440, have 18 style S teeth and arbor hole of size compatible with arbor specified.

Throttle: Saws shall be provided with a nonleaking manual throttle for admitting air supply, gradually regulating the speed of the tool, and automatically shutting off the supply of compressed air when throttle is released. Saws shall be equipped with a safety lock-off throttle which requires two operations by the same hand as used to turn on tool. Lock-off device shall automatically and positively lock throttle in the off postion when throttle is released. Lock-off device shall be integral with the tool so it cannot be removed from the tool without modification to the tool and shall operate in such a manner as to prevent the throttle from starting the tool until lock-off device has been activated.

Saw-Blade guards: The saw shall be provided with guards above and below the base. The guards above and below the base shall cover the saw-blade to the depth of teeth. The guard below the base, except for the minimum arch of the saw-blade required to enter the work shall be automatic, self-closing telescoping type, which shall instantly return to covering the saw-blade when the saw is withdrawn from the work.

Base: The base shall support the saw against the material being cut, and shall be securely fastened to the saw housing. The saw shall be provided with means for mounting an adjustable rip-fence on either side of the base. The rip-fence furnished shall provide a minimum rip width of 6 inches.

Source: https://assist.dla.mil -; Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

Position indicator: Lines, grooves, or pointer shall be located at the leading edge of the base to clearly indicate exactly where the saw blade is going to enter the work when the blade setting is at zero angle and 45 degrees; lines, grooves, or pointer shall be visible from user's operating position.

Angle adjustment: Means shall be provided for adjusting the base from 0 to 45 degrees. A graduated scale shall be provided to clearly indicate angle setting in increments of not more than 5 degrees from 0 to 45 degrees angle. Angle adjustment and fastening devices shall be accomplished without the use of tools.

Depth adjustment: The base shall be readily adjustable to control the depth of cut within the minimum vertical and 45 degree depth specified in Table I. Depth adjustment and fastening devices shall be accomplished without the use of tools.

Air inlet connection: The air inlet connection shall consist of a 1/2 inch diameter well-secured brass or ferrous fitting. The fitting shall be threaded with internal American Standard taper pipe threads and fitted with an air strainer or screen (20 mesh or finer). The screen or air strainer shall be effective in retaining solid particles in the compressed air supply. The strainer or screen shall be of such design that it can be easily removed for cleaning.

Manual: One copy of a technical manual consisting of the manufacturer's standard commercial instruction and parts list, shall be furnished with each tool.

Carrying Case: Each nutrunner and screwdriver shall be furnished in a metal or plastic carrying case. The case shall be large enough to contain the tool and with a minimum of 10 cubic inches of space for accesories. The case shall not open when carried by the handle. The case, if metal, shall be made of 0.032 inch (minimum) thick steel with formed welded corners, a heavy duty snap latch, and a suitable carrying handle of formed metal secured by welding, screws, or rivets. All surfaces of the metal case shall be painted.

Workmanship: Workmanship of the tools shall be such that the items shall be free of defects which would adversely affect the operation, efficiency, serviceability, and life expectancy of the tools. All components shall be machined to tolerances which insure ease of interchangeability.

Regulatory Requirements: In accordance with section 23.403 of the Federal Acquistion Regulations, the government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing supplier's employees to undue hazards from the recovered materials.

Preservation, packaging, packing, and marking: Tools shall be preserved, packaged, packed, and marked as specified in the contract or purchase order.

Identification markings: Each tool shall have permanent, legible markings indicating the manufacturer's name or identifying symbol, state or country of manufacture, and model.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

Metric product: Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Quality assurance provisions.

Test conditions: All tests shall be conducted with an air supply of 90 psig measured at the tool air inlet. The air supply line shall be equipped with a filter and an air regulator. An in-line lubricator shall be used as recommended by the supplier.

First article: First article tests shall consist of the Service test and Examination after service test.

Production lot inspection and testing: Production lot testing shall consist of the Inspection, Sound pressure level test and Air consumption test. A sample lot shall consist of all items of same NSN offered for delivery at one time. Sampling procedures shall be in accordance with MIL-STD-105 at an Inspection Level of S-3. The acceptable quality level (AQL) shall be 1.5 defects per 100 units tested. A sample unit shall consist of one completely fabricated tool and accessories.

Inspection: It shall be determined that the sample units meet all salient and performance characteristics stated in the requirements section of this document. Any sample containing one or more defects shall be rejected, and if the number of rejected units exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Responsibility for inspection: Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services adhere to prescribed requirements.

Air consumption test: Air consumption shall be measured with either a certified liquid displacement meter or a flowmeter.

Air leakage test: Each sample tool shall be tested for air leaking at or around the throttle in the closed position. The tool shall be pressurized with air to 150 psi with the throttle in the closed position and isolated for a period of 15 minutes. At the end of 15 minutes maximum pressure drop permitted shall be no more than 50 psi.

Sound pressure level test: The sound pressure level test shall be conducted in accordance with the applicable provisions of the Compressed Air and Gas Institute's, "CAGI-PNEUROP Test Code for the Measurement of Sound from Pneumatic Equipment". The sound pressure level shall not exceed 95 decibels on the A weighted scale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

Service test: A simulated service test shall be conducted for 150 hours. Test sample shall be installed in a fixture in a manner that the tool can be loaded and automatically actuated for 150 hours. Each cycle shall be 10 seconds on and 30 seconds off. The load applied shall be to the specified torque. After completion of simulated service test, the tool shall be given a 4 hour practical service test to determine ease of operation.

Examination after service test: Tools satisfactorily completing the service test shall again be subjected to the Sound pressure level test, Air consumption test, and the Air leakage test, and shall conform to the applicable requirements of these tests. Upon completion of the service test, the tool shall be disassembled and the parts examined. Any tool having broken, cracked, or deformed parts shall be rejected.

Notes.

The issue of referenced documents in effect on date of invitation for bids or request for proposal shall be used to determine compliance with the stated requirements. Sources for obtaining referenced documents may be determined by contacting the Contracting Officer.

Military standards are available from Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5094.

The "CAGI-PNEUROP Test Code for the Measurement of Sound from Pneumatic Equipment", is available from the Compressed Air and Gas Institute, 122 East 42nd Street, New York, N.Y. 10017.

Military Coordinating Activity

Army - GL

Custodians

Air Force - 99
Army - GL

Review Activity

Air Force - 84

User Activity

Navy - MC

Preparing Activity

GSA-FSS

Project Number

5130-0332

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.