A-A-50988
23 August 1985

COMMERCIAL ITEM DESCRIPTION

HOLDER, NAPKIN, DENTAL

The General Services Administration has authorized the use of this commercial item description in preference to Interim Federal Specification GG-H-00575C.

This commercial item description covers a napkin holder suitable to hold linen or disposable paper towels in place.

Salient characteristics:

The holder shall consist of a chain with a clasp attached at each end and protected by a plastic sleeve. The chain shall consist of a series of balls connected by "dumbbell type" links. Clasps shall be the alligator-jaw type, activated by a coated steel spring, and shall be attached to the chain by crimping the end of the clasp. Spring tension shall be such that the jaws can be separated by hand pressure and in such a manner that the jaws hold a napkin when no pressure is exerted. The teeth of the jaws shall intermesh uniformly in the closed position and shall have a minimum of five teeth in each jaw. The spring and pin of each clasp shall tie the jaws together and maintain the pressure to hold the jaws together securely in a closed position. The spring shall be wound to give a spring tension of 10 $\pm$ 3 pounds when tested as specified herein. The junction of chain and clasp shall be covered by a hard-durable plastic sleeve. The chain shall be securely crimped in the clasp to avoid slippages and the plastic sleeve shall be permanently fixed to the clasp which secures the chain. Marking of holder with the name or registered trademark of the manufacturer is optional. The chain shall be made of plated brass, or stainless steel. The clasp jaws shall be made of plated brass or plated steel. The clasp pin and spring shall be plated or coated steel wire to protect against corrosion. Holder components shall be smoothly finished, free of burrs or flash to prevent injury. The holder shall be in accordance with figure 1.

Material. The napkin holder chain shall be made of brass, chrome or nickel plated, or AISI 300 series corrosion-resistant steel. The clasp jaws shall be made of chrome-plated brass or carbon steel, chrome or nickel plated. The clasp pin and spring shall be made of steel spring wire suitably plated to protect against corrosion. The clasp sleeves shall be made of rigid, durable, plastic mate?r?rial. Color of clasp sleeves shall be at the option of the manufacturer.

Workmanship. Holder shall be free of defects which detract from its appearance or may impair its serviceability, proper functioning, or intended use.

Unit. Each (EA). One napkin holder, as specified, constitutes one unit.

FSC 6520

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Tests.

Spring tension test. A spring type, platform scale, having a minimum range of 10 pounds and graduations of 2 ounces or less, shall be used to test the spring tension of the alligator jaw clasp. The clasp shall be placed in the center of the scale platform. The clasp shall be held firmly in the position shown on the right hand side of Figure 1. Pressure shall be slowly applied to the clasp finger rest until the upper jaw is parallel to the lower jaw. The scale pointer registration shall then be recorded. The test shall be repeated three times and an average of the results shall represent the spring tension of the clasp.

Inspections. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means and chemical properties) of the item. Inspection shall be conducted to determine compliance with specification requirements.

Sampling for inspection. Sampling for inspection shall be conducted in accordance with MIL-STD-105. Where feasible, the same sample shall be used for the determination of two or more inspection characteristics. The unit of product for inspection purposes shall be one holder. Unless otherwise specified, sampling for examination shall be conducted at inspection level II, AQL 2.5, and sampling for tests (when applicable) shall be conducted at inspection level S-1, AQL 1.0.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U. S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

NOTE: The following National Stock Number is covered by this document:

6520-00-536-0000 HOLDER, NAPKIN, DENTAL

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be as specified in the contract and/or order.

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD-MB

Agent:


DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA - OSS

Project No. 6520-1823

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

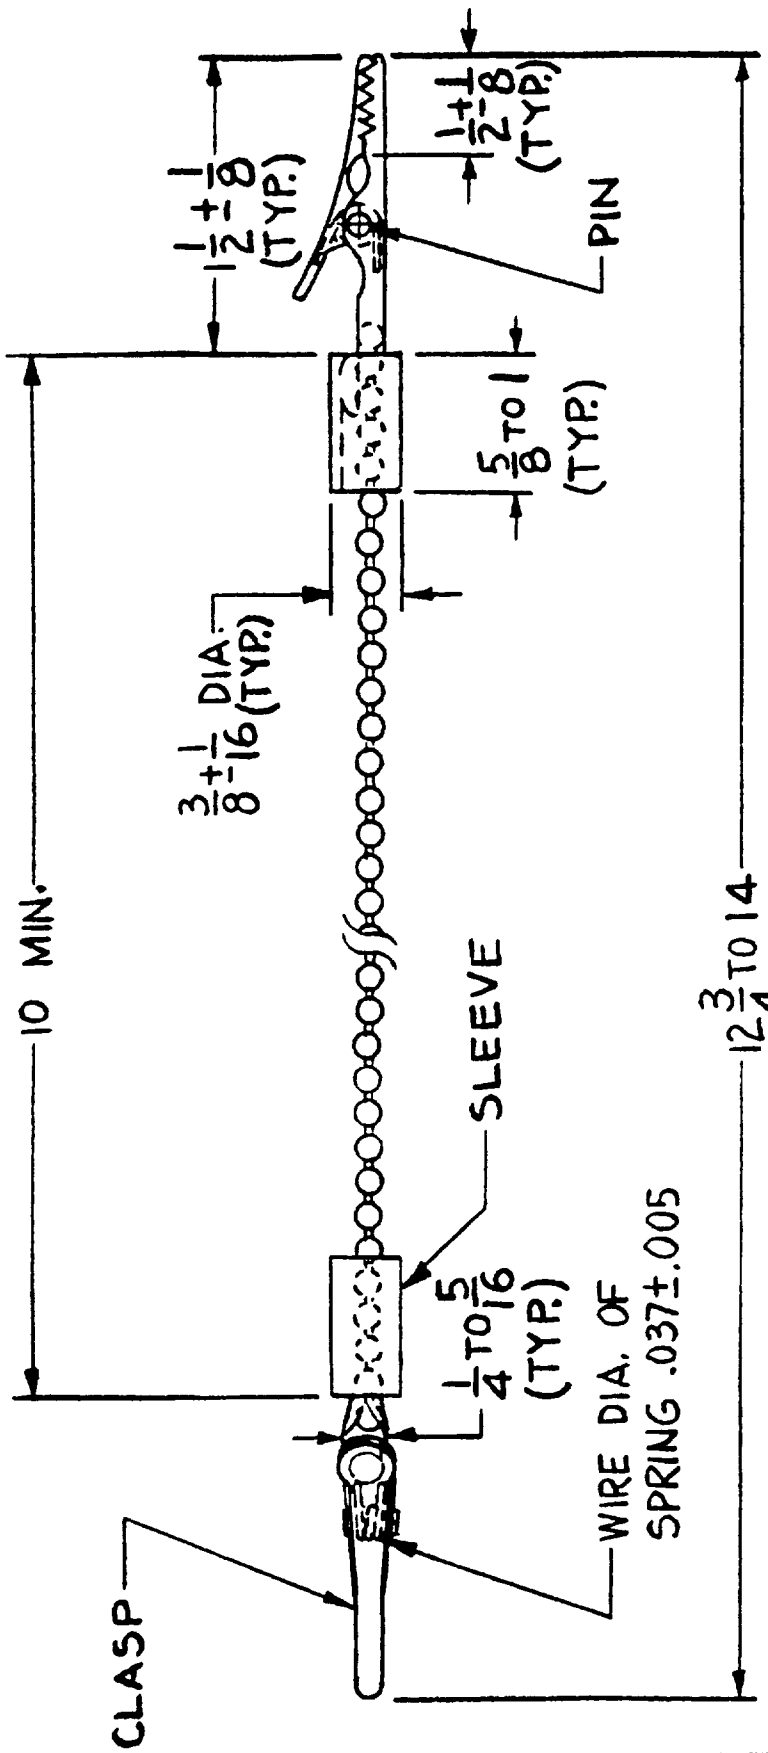

NOTE:
ALL DIMENSIONS IN INCHES.

FIGURE 1. HOLDER, NAPKIN, DENTAL

The napkin holder shown is typical in style and design and is not intended to restrict or preclude the purchase of napkin holders which are otherwise in accordance with the requirements of this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.