AA-C-0010b(GSA-FSS
January 14, 1963
Interim Revision of
Fed.Spec. AA-C-10a
November 28, 1958

INTERIM FEDERAL SPECIFICATION

CABINET, BEDSIDE, METAL, HOSPITAL TYPE

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Services Administration has authorized Federal agencies to use this Interim Federal Specification as a valid exception to Federal Specification AA-C-10a, Cabinet, Bedside, Metal, Hospital, Type, dated November 28, 1958.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers metal bedside cabinets for hospital use.

1.2 Classification. Bedside cabinets shall be of the following styles as specified (see 6.1):

Style 1 - Enameled steel cabinet with removable molded rubber top. One drawer and single door with continuous hinge. Hinge on left side of cabinet.

Style 2 - Enameled steel cabinet with corrosion-resisting steel top, one drawer and single door, with concealed hinge. Hinge on right side of cabinet.

When purchased separately, the molded rubber top for style 1 cabinets shall be as specified in 3.7.1.4.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

Federal Specifications:

FF-C-82 - Casters; Swivel-Chair.
QQ-S-698 - Steel, Sheet And Strip, Low-Carbon.
QQ-S-766 - Steel Plates, Sheets, And Strip-Corrosion-Resisting.
TT-C-490 - Cleaning Methods And Pretreatment of Ferrous Surfaces For Organic Coatings.
TT-E-491 - Enamel; Gloss, Synthetic (for Metal and Wood Hospital Furniture).
TT-P-659 - Primer-Surfacer; Synthetic, Tints and White (for Metal and Wood Hospital Furniture).
UU-P-271 - Paper, Wrapping, Water-proofed, Kraft.
ZZ-T-301 - Title; Floor, Rubber.
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.

Federal Standards:

Fed.Std.No. 102 - Preservation, Packaging and Packing Levels.
Fed.Std.No. 123 - Marking for Domestic Shipment(Civilian Agencies).
Fed.Std.No. 595 - Colors.

(FOR INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS, SEE LAST PAGE).

Military Specifications:

MIL-L-10547 - Liners, Case, Water-Proof.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Cold-rolled steel. The cold-rolled steel shall conform to the requirements of QQ-S-698, commercial quality. The gages shown herein are the manufacturer's standard gage for sheet steel. The decimal equivalent shown for the steel sheet thickness are subject to the established standard tolerances.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

3.1.2 Corrosion-resisting steel. The corrosion-resisting steel shall conform to requirements of QQ-S-766, class 302, NO.4 finish.

3.1.3 Rubber. The rubber shall conform to the requirements of ZZ-T-301, except that the stress at 10 percent elongation shall be 400-700 pounds per square inch, and Shore durometer hardness shall be 90-95.

3.1.4 Gloss enamel. The gloss enamel shall conform to the requirements of TT-E-491, class B.

3.1.5 Primer. The primer shall conform to the requirements of TT-P-659.

3.1.6 Other materials. All other materials shall be of high commercial quality throughout and shall be suitable in every respect for the purpose intended.

3.2 Design.

3.2.1 Style 1. The style 1 bedside cabinet shall be of the design shown in figure 1, and shall consist of a steel subtop, bottom, four pressed steel legs, drawer, and enclosed body section. The steel subtop shall be fitted with a removable, molded rubber top. The drawer shall be located at the top of the body section. The lower body section shall be fitted with a door, one removable shelf, and a lower fixed shelf which shall form a sub-compartment suitable for storing a bedpan. The back shall be provided with ventilating louvers and a towel bar. The bottom of each leg shall be fitted with a glide as specified in 3.7.1.5.

3.2.2 Style 2. The style 2 bedside cabinet shall be of the design shown in figure 2, and shall consist of a steel subtop, bottom, four pressed steel legs, drawer, and enclosed body section. The steel subtop shall be fitted with a removable corrosion-resistant steel top. The drawer shall be located at the top of the body section. The lower body section shall be fitted with a door, and a removable shelf. The bottom of each leg shall be fitted with casters. The back shall be provided with ventilating holes and each side with a towel bar.

3.3 Dimensions and tolerances.

3.3.1 Dimensions. The cabinet shall conform to the following outside measurements. A tolerance of plus or minus 1/8 inch will be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.3.1 Dimensions. The cabinet shall conform to the following outside measurements. A tolerance of plus or minus 1/8 inch will be permitted.

Style 1:

	Inches
Height, over-all	35
Body Section:	
Width	19-3/4
Depth	15-3/4
Height	29-1/2
Length of leg without glides	5

Style 2:

	Inches
Height, over-all	34-1/2
Body sections:	
Width body section	19-15/16
Depth body section	15-15/16
Height (of enclosed lower section)	28
Length of leg without casters	5-3/8

3.4 Finish

3.4.1 Cleaning. Cleaning and pretreatment shall be accomplished as specified in TT-C-490, Method 1, type 1.). All welds shall be ground flush and thoroughly and completely cleaned of flux, scales, etc., prior to application of primer.

3.4.2 Primer. After cleaning, the parts shall be given one coat of a synthetic primer conforming to TT-P-659. The primer shall be baked on for not less than 45 minutes at a temperature of 250 degree Fahrenheit(F.), or for an equivalent baking period at a higher or lower temperature, as recommended by the paint supplier. The primer shall be applied so as to level out and produce a uniform surface free from pebbles or wrinkles.

3.4.3 Enamel. After the primer has been allowed to cool, all surfaces shall be covered with two coats of synthetic gloss enamel conforming to class B of TT-E-491. Each coat shall be baked on separately for not less than 45 minutes at a temperature of 250 degree F., or for an equivalent baking period at a higher or lower temperature, as recommended by the paint supplier. The enamel coats shall be applied so as to level out and produce a final, smooth, uniform surface without runs, wrinkles, orangepeel or gri and without areas of thin or no film. The total dry-film thickness shall b not less than 0.003 inch at any point.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the currentversion before use.

3.4.4 Color. Unless otherwise specified, the color of the cabinets shall be green, conforming to color 14241 (see 6.5) of Fed.Std. No.595 (see 6.1).

3.5 Identification marking. Each bedside cabinet shall be indented or embossed with the name or registered trade-mark of the manufacturer, or identified by a metal name plate bearing the indented or embossed name or registered trade-mark of the manufacturer permanently attached in an inconspicuous place.

3.5.1 Rubber cabinet top covering. The underside of each rubber cabinet top covering (see 3.7.1.4), shall have the name or registered trade-mark of the manufacturer molded in raised letters.

3.6 Construction. The cabinet shall be fabricated of cold-rolled steel (see 3.1.1). The cabinet shall be substantially and rigidly constructed. It shall be suitably reinforced and assembled with all parts in proper alignment and all doors, latches, and drawers, shall function properly. All seams and joints shall be welded, ground smooth, and filled without ridge or crevice. The corners and edges shall be rounded.

3.6.1 Assembly. The joining of all members shall result in a unit of sufficient strength and rigidity that it will not be buckled or deformed to the extent that the door or drawer will not function properly nor shall the leg be torn loose or deformed when tested as specified in 4.4.1.

3.7 Details of components.

3.7.1 Style 1. (See Fig.1).

3.7.1.1 Body. The body shall consist of two sides and a back fabricated of No.18 gage (00478-inch)steel. A one piece or a three piece construction may be employed. If a separate back panel is used, the sides shall be provided with 1-inch flanges for spot welding on the back. At the front, the sides shall be formed into a 1-1/4-inch wide corner post or stile and a 9/16-by 5/16-inch rabbeted section with a hemmed edge. The body shall be divided into a drawer section and a compartment by means of an intermediate rail (3.7.1.9). The rabbeted section shall receive a hinge as hereinafter specified (3.7.1.8), and shall be reinforced with a metal strip where the hinge is attached to the rabbet by means of screws. Body vertical corners shall be rounded on an approximately 1/2-inch radius.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the currentversion before use.

3.7.1.2 Bottom. The bottom of the lower compartment shall be formed from one piece of No. 19 gage (0.0478 inch) sheet steel, having side and back edges flanged downward not less than 1-inch. The sides of the bottom and back shall be flush with the side and back of the cabinet. The front edge of the bottom shall be rabbeted, or a rabbet shall be formed by welding a rabbeted fascia strip to the front turned-down edge of the bottom. The front edge of the bottom rabbet shall be fully hemmed. Additional stiffening shall be accomplished by welding the end of the front flange of the bottom at the points where the hem of the flange stops and meets the edge of the leg, as shown in section A-A of figure 1.

3.7.1.3 Subtop. Subtop shall be of one piece steel No. 18 gage (0.0478 inch). It shall be 20 inches long by 16 inches wide, finished dimensions, and shall be flanged downward approximately 3/4 inch on all sides, with front having a 9/16- by 5/16- inch rabbeted section with hemmed edge. As an alternate, the front edge may be spot welded to a separate, rabbeted, fascia strip, brazed and blended to the stiles. The corners shall be rounded on an approximately 1/2-inch radius. The subtop shall fit snugly over the sides and back of the cabinet and be electrically spot-welded thereto and shall provide a smooth, level base for the rubber top.

3.7.1.4 Removable rubber top. The super-imposed top shall be a removable, molded rubber top, flat on the inside and having a slightly depressed top surface to prevent small objects from rolling therefrom, and a continuous turned-down apron on all four sides which shall completely cover the subtop. The rubber top shall follow the contour of the subtop, fit snugly, and shall be self-retaining thereto. The rubber top shall be not less than 1/8 inch thick and of all new materials. Unless otherwise specified, the color shall be marbelized with three colors, the predominating color of which shall be black, and the marbelizing effected by an uneven distribution of white and green throughout the matrix of the cover. Sufficient white and green shall be employed in the mix to result in the finished tops presenting a good distribution of color. The percentage of green and white on the mix shall be such that the mathematical possibility will favor a pronounced mottling of green and white to result in a colored surface. Rubber top shall be in accordance with figure 3.

3.7.1.5 Legs. Each cabinet shall be supported on four angle-shaped-pressed or die-formed legs, 5 inches in height, constructed of not less than No. 12 gage (0.1046 inch) steel. The legs shall be suitably shouldered to support the cabinet in a straight-line assembly, and shall be fitted with a welded socket, or integral device formed at the leg base, for attachment of a glide. Four corrosion-resisting steel glides shall be supplied with each cabinet. Each glide shall be not less than 1-1/16 inches in diameter and shall be made from corrosion-resisting steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.7.1.6 Drawer. The drawer body shall be not less than No. 21 gage (0.0329 inch) steel and shall be reinforced on all edges. It shall be approximately 15 inches long by 14 inches wide by 3-3/4 inches deep. The drawer heads shall be not less than No.12 gage(0.1046 inch) steel plate and shall fit neatly into the rabbeted recesses of the body. The upper edges of the sides and back of the body shall be formed into a 3/8- inch-wide by 3/8-inch triangular reinforcement. The drawer shall slide smoothly and freely, but not loosely, on suitable telescoping steel channels not less than 1-1/4 inches by 7/16 inch No. 18 gage (0.0478 inch) and shall be provided with concealed rubber-bumpered drawer stops to prevent inadvertent removal of the drawer, but shall permit easy removal of the drawer if desired. The drawer shall close against rubber bumpers for silent operation. The drawer assembly shall be accomplished by spot welding. The drawer pull (3.7.1.15), shall be securely attached to the center of the drawer front. Telescoping channels shall be zinc-plated prior to assembly.

3.7.1.7 Alternate drawer. The alternate drawer shall be constructed as specified in 3.4.8, except for the following in connection with the drawer slides. The drawer shall ride smoothly and freely, but not loosely, on suitable telescoping channeled slides. The interior channel slide shall be dieformed integral with the drawer side and shall be approximately 5/8 inch high by 1/2 inch deep. The exterior channel slide shall have flanged sides and shall be constructed of not less than No. 18 gage (0.0478 inch) steel. The exterior channels shall be zinc plated following complete fabrication.

3.7.1.8 Door. The door shall be a single sheet of not less than No.12 gage (0.1046 inch) steel, hung on a single, full-length, continuous-type hinge. The butt of the hinge shall be butted against the edge of the door and one leaf of the hinge shall be spot-welded thereto with welds not over 2 inches apart. The other leaf shall be fitted into the rabbeted body frame and securely fastened thereto with not less than six chromium-plated steel screws, lock washers, and nuts. The hinge shall be constructed of two flaps, each not less than 1/2 inch wide and not less than No. 18 gage (0.0478 inch) steel, connected with a fast pin. When the door is closed only the full-length hinge butt shall show from the outside and it shall be tightly fitted between the rabbeted body post and the door edge. The rabbeted section at the hinge assembly shall be reinforced as described in 3.7.1.1 to prevent door sag. The hinge shall be heavily chromium-plated over nickel with an undercoat of copper, with the minimum thickness of each coat of plating as follows:

	Inch
Chromium	0.00002
Nickel	.0008
Copper	.0002

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

After plating, the butt shall be polished to a mirror luster to match the drawer and the door pulls. The door shall fit closely and uniformly in the rabbeted frame, and shall be in true flush position when closed. The door shall fit neatly without binding into the rabbeted recess of the corner posts, intermediate rail, and bottom to form a straight-line, flush-type construction.

3.7.1.9 Intermediate rail. The intermediate rail between the drawer and door compartment shall be of No. 18 gage (0.0478 inch) steel, not less than 1 inch wide, having top and bottom edges flanged and rabbeted (9/16 by 5/16 inch) to form the bottom rail for the drawer strike and the top rail for the door strike. The intermediate rail shall be notched and securely welded or brazed to the door stiles to form a flush construction. A channel-shaped fascia strip, not less than 1 inch wide of No. 18 gage (0.0478 inch) steel shall be spot-welded to the outside of the intermediate rail, to form a surface flush with the door stile. The ends of the fascia strip shall be frazed to the door stiles. A one piece intermediate rail notched and welded to the door stiles to form a flush construction may be substituted for the construction specified.

3.7.1.10 Louvers. The back shall be provided with two sets of four ventilating louvers without shutters, having openings facing downward. One set of louvers shall be located in the center of the back of the fixed compartment and one set midway between the removable shelf and the bottom of the drawer section. The openings shall be approximately 5 inches long and approximately 3/4 inch wide, and extend out approximately 1/4 inch from the surface.

3.7.1.11 Shelf brackets. The lower compartment shall be provided with two full-length angle-formed brackets for supporting the removable shelf. The brackets shall be of No. 18 gage (0.0478 inch) steel and shall be not less than 1 inch by 1/2 inch in size. They shall be located midway from top to the fixed shelf in the compartment and shall be spot-welded to the sides.

3.7.1.12 Shelves. The shelves shall be made of No. 20 gage (0.0359 inch) steel with all sides flanged downward not less than 3/4 inch. The front side shall also be hemmed. The fixed shelf shall be located at approximately one-third of the body height and shall be suitably spot welded to the sides and back. The removable shelf shall rest on the angle formed shelf brackets.

3.7.1.13 Door handle and latch. Doors shall be fitted with a handle of either the mechanical or magnetic type.

3.7.1.13.1 Mechanical type. The door pull and latch shall be a combination door-pull and spring latch assembly. It shall be comprised of a trigger, approximately 3-1/2 inches high by 3/8 inch wide by 1-1/8 inches deep at the deepest point with an integral self-contained, positive-acting spring-latching mechanism. The spring-latching tongue shall be manually operated by a push-button type of shaft working through the trigger for unlatching and shall latch automatically upon closing the door. The unit shall be securely attached to the door with screws, effective lock washers and nuts. The door-pull and latch assembly shall be made of sheet steel, chromium-plated over nickel.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

3.7.1.13.2 Magnetic type. Door latch shall be a permanent magnet type having a minimum pull of 8 pounds. Latch shall be attached to the rabbeted section of the corner post or stile, reinforced with an additional steel strip, by means of screws, lock washers, and nuts. A round, button-type knob shall be added by means of screws, lock washers, and nut to the outside of the door to serve as a door pull.

3.7.1.14 Drawer pull. Drawer pull shall be of matching design to the door pull and latch. It shall consist of a steel, chromium over nickel-plated handle approximately 4-1/4 inches long, 1/2 inch high by 1 inch deep at the center. The pull shall be securely attached by means of two screws, lock-washers, and nuts.

3.7.1.15 Towel bar. The towel bar shall be a 1/2-inch, minimum, square or hexagonal U-shaped bar of brass or steel, and shall be approximately 14 inches in length. The arms shall be of sufficient length to hold the finished bar from 2 to 2-1/2 inches from the back of the cabinet. The ends of the bar shall be turned to approximately 1/2 inch in diameter and drilled and tapped. The bar shall be attached through holes located 2 inches from the top edge, 14 inches on center, and equally spaced from the side edges by means of lock washers and two 5/16-inch steel bolts on the inner surface of the back. A washer not less than 1 inch in diameter shall be placed between the towel bar shoulder and the outside of the body at each end of the towel bar. The interior of the body shall be reinforced by a welded plate not less than 2 inches square with a hole in the center to receive each turned end of towel bar. The bolts shall extend through the reinforcing plate and back into the ends of the towel bar, and shall secure the towel bar to the cabinet. Towel bar of carbon steel, shall be chrome over nickel over copper plated. Towel bar, of brass, shall be chrome over nickel plated.

3.7.2 Style 2 (see Fig. 2

3.7.2.1 Body. The body shall be of No. 18 gage (0.0478 inch) sheet steel, formed so that the back, sides, front corner posts, and upright door and drawer rabbets are made from one continuous sheet, the radius curve on corners to be approximately 9/16-inch. The front corner posts shall be approximately 1-21/32 inches wide, with rabbeted sections approximately 1/2 inch deep by 5/16 inch wide. The rabbeted section for the door shall receive a hinge as hereinafter specified and shall be properly reinforced to prevent door-sag.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

3.7.2.2 Subtop. There shall be spot-welded in the top of the body and welded to the outside walls an inverted pan made of not less than No. 18 gage (0.0478 inch) sheet steel. The top surface of the pan shall be not less than 3/8 inch below the under surface of the sheet steel top.

3.7.2.3 Top. The top shall be of not less than No. 22, gage (0.0313 inch) corrosion-resisting steel (see 3.1.2) formed from one piece with turned down flange approximately 3/4 inch on all sides. The top shall be of the raised-edge type. The top shall have a flat portion, approximately 1 inch wide, running around top side at edges and an ogee curve running down to the depressed center, the curve taking up a space approximately 1/4 inch wide. The depressed surface of the top shall be approximately 3/16 inch below level of edges. The top shall be removably fastened to the body; the fastening means shall not be exposed.

3.7.2.4 Sound deadening. Between the top and the subtop shall be inserted to capacity an acoustic material having standard absorbing qualities to deaden the sound of objects being placed on the cabinet.

3.7.2.5 Bottom. The bottom of the body of the cabinet shall be formed from one piece of sheet steel No. 18 gage (0.0478 inch) having side and back edges flanged down approximately 1-1/2 inches flush with the sides and back of cabinet. The front edge shall be flanged down approximately 1-1/2 inches and fully hemmed to form the bottom horizontal rail. Bottom of lower compartment shall be spot-welded to the body.

3.7.2.6 Legs. Each cabinet shall be supported on four angle-shaped pressed or die-formed legs, approximately 5-3/8 inches in height, 1-1/2 inches of which is offset and spot-welded to the body, and shall be constructed of No. 12 gage (0.1046 inch) steel. The legs shall be suitably shouldered to support the cabinet in a straight line assembly. The legs shall be fitted with a welded socket or integral device formed at the leg base, for attachment of the caster. Four casters shall be supplied with each cabinet. Casters shall conform to FF-C-82 for type 1, class 2, style A, size B, material 1.

3.7.2.7 Top rail. The top rail shall be of No. 18 gage (0.0478 inch) steel approximately 1-1/2 inches wide, with rabbet at bottom approximately 1/2 inch deep with 5/16 inch turned down for reception of drawer. The exposed part of top rail, with steel top of cabinet applied, shall be approximately 3/4 inch. Ends of rail shall be spot-welded to corner posts to form a flush construction.

3.7.2.8 Intermediate rail. The intermediate rail between the drawer and lower compartment shall be of No. 18 gage (0.0478 inch) steel approximately 1-1/4 inches wide with rabbeted section 1/2 inch deep by 5/16 inch wide on top and bottom for reception of drawer and door. Ends of rail shall be spot-welded to corner posts to form a flush construction.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

3.7.2.9 Drawer. The drawer body shall be No. 20 gage (0.0359 inch) steel and shall be approximately 15 inches long by 14 inches wide by 4-5/8 inches deep. The upper edges of the sides and back shall be formed into a channel reinforcement approximately 7/16 inch wide by 5/16 inch deep. The drawer head shall be made of not less than No. 20 gage (0.0359 inch) steel formed with two pans telescoped to make a double-wall section. The back pan shall go into the front pan and the two pans shall be spot-welded at points to hold them in place and not allow any visible seams on the front. The inner pan shall be indented to contact front pan at point where drawer pull is attached, to accommodate nut and bolt. The drawer head shall recess into the rabbeted body, making the front flush with the body. The drawer shall slide smoothly and freely, but not loosely, on suitable No. 16 gage (0.0598 inch) steel channel slides, assuring a smooth and noiseless operating drawer. The drawer shall be equipped with No.18 gage (0.0478 inch) automatic drawer stops, riveted on each side of the drawer. The drawer assembly shall be accomplished by spot-welding on not more than 3-inch centers.

3.7.2.10 Door. The door shall be of not less than No.20 gage (0.0359 inch) steel formed with two pans telescoped to make a double-wall section. The back pan shall go into the front pan, and the two pans shall be spot-welded at points holding them in place and not allow any visible seams on the front. The door shall recess into the rabbeted body, making the front flush with the body. The door shall be reinforced with box stiffener of not less than No. 22 gage (0.030 inch) sheet steel between the two pans. The door shall be hung on two steel, sleeve-type hinges. The hinges shall be entirely concealed and hung to swing the door a maximum of approximately 120 degrees. The hinges shall be reinforced with a rib running the entire length of same. One leaf of the hinge shall be welded to the body of the cabinet, the other leaf to be fastened with two screws passing through the inner thickness of the door to nuts encased in a drawn steel shield. The shield shall be welded to the inside pan of the door without touching the outside pan of the door.

3.7.2.11 Ventilation. The body of the cabinet shall have six 3/4-inch-diameter holes in back and approximately 3 inches from the bottom and 2-3/4 inches apart on centers for ventilation.

3.7.2.12 Shelf-brackets. The lower compartment shall be provided with two full-length angle-formed brackets for supporting the removable shelf. The brackets shall be of No. 18 gage (0.0478 inch) steel and not less than 1 inch by 1/2 inch in size. They shall be located midway from top to bottom in the compartment and shall be spot-welded to the sides on not more than 3-inch centers.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

3.7.2.13 Shelf. The shelf shall be made of No. 20 gage (0.0359 inch) steel with all sides flanged downward not less than 3/5 inch. The front side shall also be hemmed. The shelf shall be removable and shall rest on the angle-formed shelf brackets.

3.7.2.14 Door handle and latch. Doors shall be fitted with a handle and latch of either the mechanical or magnetic type.

3.7.2.14.1 Mechanical type. Where a mechanical type door handle and latch is furnished, it shall be of the design and dimensions shown in figure 2, and shall be either corrosion-resisting metal or carbon steel, heavily chromium-plated. The handle shall be polished to a mirror luster. It shall be of durable construction, turning easily to open or close the door and capable of holding the door tightly closed.

3.7.2.14.2 Magnetic type. Where a magnetic type door latch is furnished, it shall be a permanent magnet type latch having a minimum pull of 8 pounds. It shall be attached to the rabbeted section of the corner post or stile, and shall be reinforced with an additional steel strip by means of screws, lock washers, and nuts. The handle shall be either of carbon steel, heavily chromium-plated over nickel, or of nonferrous metal chromium-plated, and shall be polished to a mirror luster. It shall be 5/8 inch by 1/8 inch in cross section, and the inside width of the handle (finger space) shall be not less than 1 inch by 3 inches.

3.7.2.15 Drawer pull. The drawer pull shall be either of carbon steel, heavily chromium-plated over nickel, or of nonferrous metal chromium-plated, and shall be polished to a mirror luster. It shall be 5/8 inch by 1/8 inch in cross section, and the inside width of the handle (finger space) shall be not less than 1 inch by 3 inches.

3.7.2.16 Towel bars. The cabinet shall have two U-shaped towel bars, measuring 12-1/4 inches between centers of the "U", one on each side. The bars shall be made of approximately 7/16-inch-diameter cold-rolled steel heavily chromium-plated, with an approximately 1/16-inch shoulder threaded 1/4 by 20 at each end. The threaded portion shall enter through the body and through a steel reinforcement plate approximately 1-1/2 inches by approximately 3 inches welded to the inside of the body. The bars shall be fastened on the inside of the body with nickel plated machine-screw nuts and lock washers. The rod shall be approximately 1-1/2 inches from the body.

3.8 Welding and brazing. Welding and brazing shall be durable and sound in every detail. Weld or braze shall extend the full length of the seam joined. The component parts of the cabinets shall be carefully and properly aligned prior to welding into permanent position so as to provide a straight, rigid, level assembly. Welds shall show good fusion and shall be free from cracks, porosity, and gas pockets. Exposed welds

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:38Z
Check the source to verify that this is the currentversion before use.

shall be ground smooth to eliminate traces of pitmarks and seams. Spot welds shall be spaced not more than 3 inches on centers and shall be tightly fused. Spot welds on exposed surfaces shall not show objectionable pits or extrusions; and when the surface metal is thus defaced in fabrication, it shall be filed or ground smooth, and when necessary shall be filled to prevent unsightly blemishes on the finished surfaces. Where brazing is specified, it shall be continuous, free from defects and finished off smoothly.

3.9 Workmanship. The cabinets shall be rigidly constructed for strength and durability. All exposed edges, if not hemmed, beaded, or flanged, shall be smoothly finished to remove all sharp edges. No bolts or rivets shall be used in the construction of any part of the cabinets, except the hardware. The finished cabinets shall be clean, well made, and free from defects which affect their appearance or which may impair their serviceability. All exposed joints shall be blended and smoothed so no joint is visible after finishing.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Supplier responsibilities for inspection. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and test shall be kept complete and available to the Government, as specified in the contract or order (6.1). The Government reserves the right to perform any of the inspections set forth in this specification when deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling procedures

4.2.1 Sampling size. Sample size shall be as indicated for inspection level II, table IIIA, in MIL-STD-105 (Single sampling).

4.2.2 Lot size. Normally, the inspection lot size shall consist of all units submitted for inspection at one time. (See table IV-A of MIL-STD-105 (For Acceptance Quality Level).

4.3 Inspection. Samples shall be inspected for the attributes listed in the classification of defects.

4.3.1 Classification of defects.

Major	Catagories and Defects: AQL 2.5 percent defective
101	Sheet steel less than specified gage
102	Height not within specified tolerance
103	Color does not match standard color chip
104	Finish surface not smooth and uniform

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:38Z
Check the source to verify that this is the current version before use.

4.3.1 Classification of defects (cont'd)
Categories and defects

Major	AQL 2.5 percent defective
105	Surface finish less than .003 inch thick
106	Parts not neatly aligned
107	Welded or brazed joints not smooth
108	Burrs or sharp edges not removed
109	Drawer not smooth and free in operation
110	Latch does not hold door securely
111	Ventilation openings omitted
112	Cabinet fails drop test
113	Cracks or fractures on outside of bends
114	Corrosion resistant top not No.4 finish or better (style 2)
115	Towel bars improperly plated
116	Rubber top less than 1/8 inch thick (style 1)

Minor	AQL 4.0 percent defective
201	Width not within specified dimensions
202	Depth not within specified dimensions
203	Cabinet not properly marked
204	Rubber top not properly marked (style 1)
205	Drawer bumpers missing
206	Rubber top coloring poorly marblized (style 1)

4.4 Test procedures

4.4.1 Drop test. The balance axis of the cabinet shall be determined by balancing the cabinet on one of its front legs. With the cabinet in this position, it shall be raised 6 inches off the concrete floor and be allowed to drop on this leg. This test shall be repeated on the other front leg.

4.5 Final inspection. Final inspection of the finished article shall be made either at point of production or point of delivery as specified (see 6.1). In case of factory inspection, every facility shall be afforded inspectors by the manufacturer, for the prosecution of their work. Samples shall be inspected in accordance with procedures set forth in this specification.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, Fed.Std. 102 shall be referred to for definitions and applications of the various levels of packaging and packing protection for supplies and equipment).

5.1 Packaging. Packaging shall be level A,B, or C as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the currentversion before use.

5.1.1 Towel bars shall be removed and wrapped in kraft paper. Nuts and washers shall be packaged in a cloth bag. Disassembled parts shall be packaged and secured within the cabinet. All doors, drawers, and removable shelves shall be secured to prevent shifting or damage. Exterior finished surfaces and rubber top shall be wrapped in kraft paper or other suitable materials and secured. Points of contact between the unit and interior faces of the shipping container, or braces, shall be cushioned with flexible corrugated fiberboard or other suitable materials. The work shall be accomplished in such a manner as to prevent marring or scratching of finished surfaces.

5.1.2 Level C. Each cabinet shall be packaged in accordance with the supplier's commercial practice.

5.2 Packing.

5.2.1 Level A. Each cabinet (1 unit) shall be packed in a container conforming to PPP-B-585, class 3, or to PPP-B-601, overseas type, or to PPP-B-621, class 2. Closure shall conform to requirements of appendix of applicable specification. The unit shall be adequately secured within the exterior container by means of bolts, wood braces, blocks, or other suitable devices, to insure against shifting or damage, or marring of surfaces. A clearance of approximately 1-1/2 inches shall be maintained between the front, back, and side faces of cabinet and the adjacent faces of the container. Each shipping container shall be lined with a waterproof shroud made in accordance with MIL-L-10547.

5.2.2 Level B. Each cabinet packaged as described in 5.1, shall be packed in a shipping container conforming to PPP-B-636, type I, class 1. Each shipping container shall be adequately secured to prevent accidental opening. The interior of each fiber carton shall be fitted with corrugated die-cut and air-cell pads, so designed as to distribute the weight of the cabinet evenly over all surfaces of the container. Care shall be exercised to see that the cabinet is suspended in such a manner that the weight is not carried directly by the legs, or that door and drawer handles do not come in direct contact with the side walls of the carton.

5.2.3 Level C. Each cabinet packaged as described in 5.1 shall be packed in a shipping container in such a manner as to be acceptable to common carriers for safe transportation to point of destination specified in shipping instructions at the lowest transportation rate for such supplies.

5.3 Marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

5.3.1 Civil agencies. Unless otherwise specified, in the contract or order, shipping containers shall be marked in accordance with Fed.Std. No. 123.

5.3.2 Military agencies. Shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Style desired (1.2).
(c) Color (3.4.4).
(d) Administrative provisions for inspection records (4.1).
(e) Levels of packaging and packing required (5.1).
(f) Special marking, if required (5.3).

6.3 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine conformance with the requirements of this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

6.3 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of the specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured for Federal Government requirements.

6.4 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Cabinets, steel, without glass
Carload minimum weights:

In cars 40'9" or less in length, inside measurements, 10,000; 12,000; 15,000; 18,000; 22,000 and 30,000 pounds.
In cars exceeding 40'9" in length, inside measurements, 16,000; 18,000; 21,000; 24,000; 30,000 and 40,000 pounds.

Motor:

Cabinets, steel, without glass
Truckload minimum weights:
10,000; 12,000; 15,000; 18,000,22,000 and 30,000 pounds, subject to Rule 34.

Source: https://apps.dtic.mil -- Downloaded: 2026-02-26T14:38Z
Check the source to verify that this is the current version before use.

6.5 Availability of color chips. The individual 3- by 5-inch chips of the color referenced in 3.4.4 are available from General Services Administration, Business Service Center, Region 3, Seventh and D Streets, S.W., Washington 25, D.C. Price 5 cents.

Notice- (See last page)


MILITARY INTEREST:

Army - MO

Navy - Md


Air Force -

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

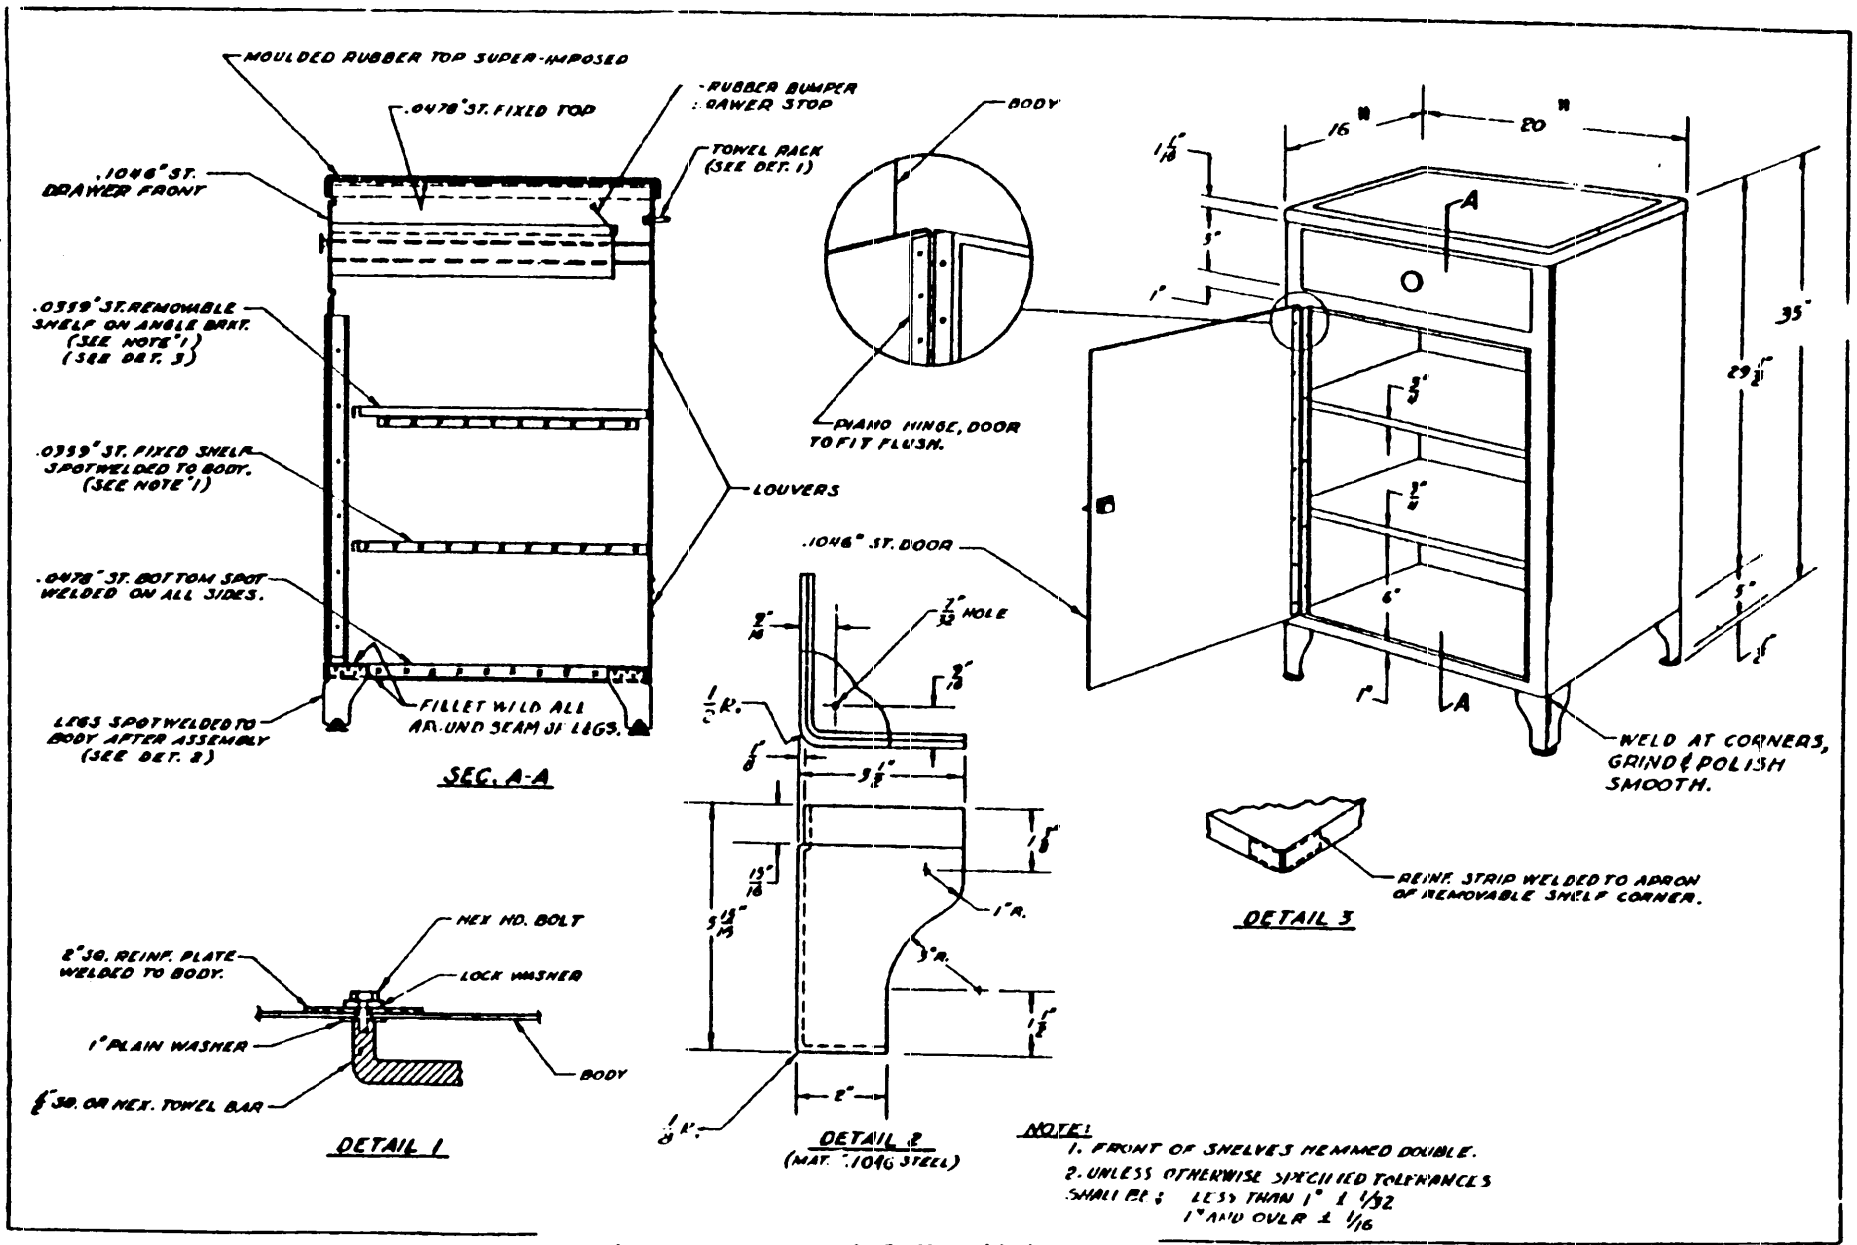

Cabinet, Bedside, Metal, Hospital
Figure 1- Style 1

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:38Z
Check the source to verify that this is the current version before use.

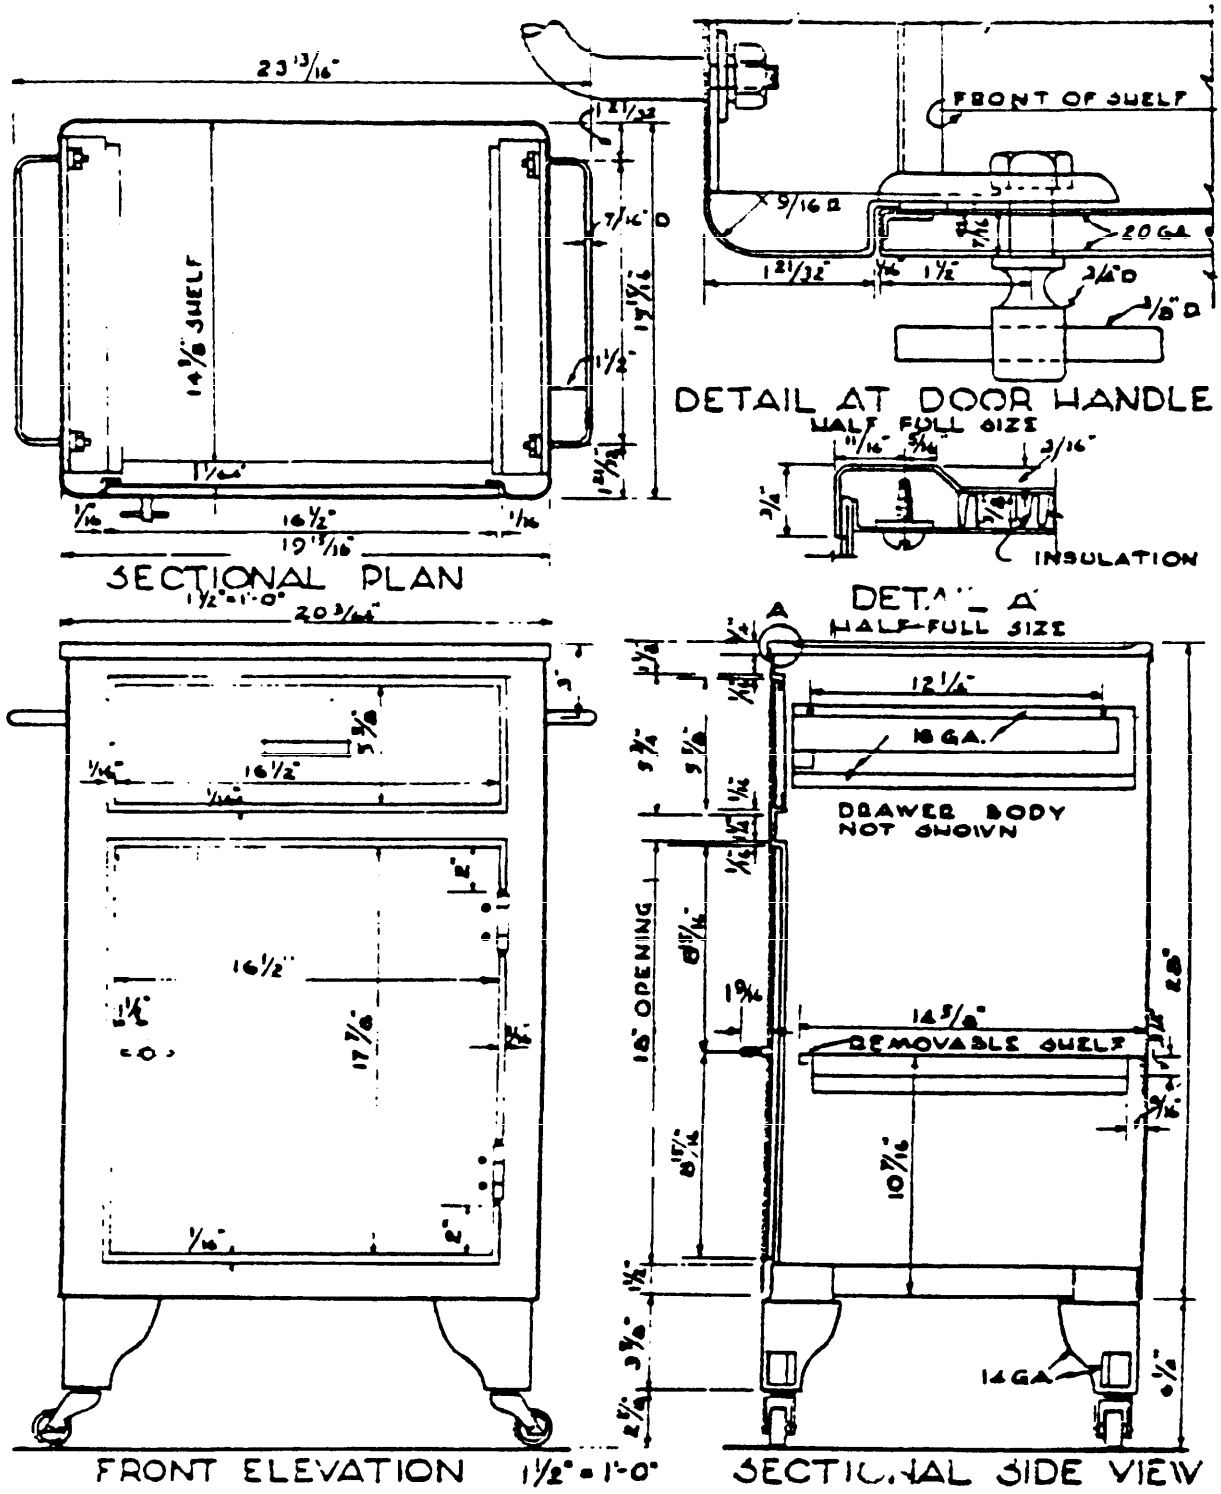

Cabinet.; Bedside, Metal, Hospital

FIGURE 2.—*Style 2.*

Note:

1. Front of shelf hemmed double.
2. Unless otherwise specified, tolerances shall be:
   Less than 1 inch plus or minus 1/32 inch.
   One inch and over plus or minus 1/16 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the currentversion before use.

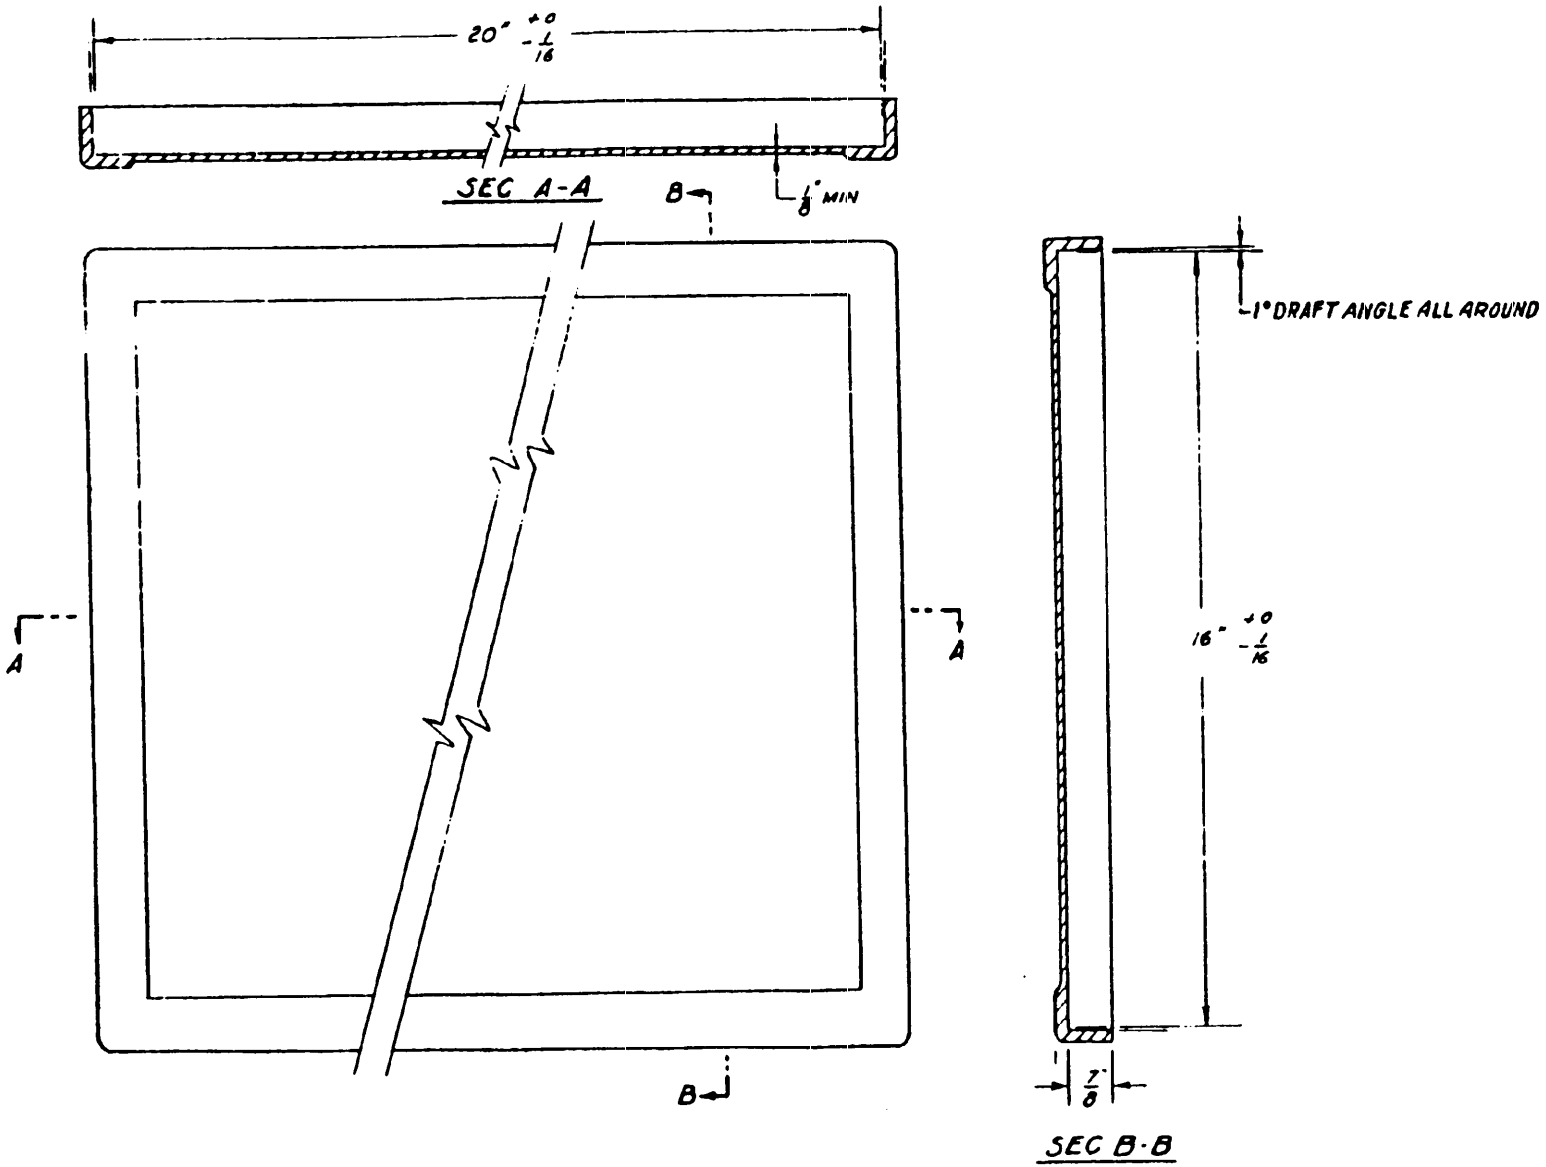


Figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26 11:38Z
Check the source to verify that this is the current version before use.

ADDENDUM

INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards and Handbooks from established distribution points in their agencies.)

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.