AA-0-00240/1C(GSA-FSS)
September 8, 1970
SUPERSEDING
Int. Fed. Spec. AA-0-00240/1b(GSA-FSS)
April 7, 1967
INTERIM REVISION OF
Fed. Spec. AA-0-240
February 2, 1961

# INTERIM FEDERAL SPECIFICATION

FOR

# DESKS, L-UNIT, STEEL, UNITIZED

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-0-240, dated February 2, 1961.

## 1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for steel unitized L-unit desks; the general requirements and other information pertaining to the L-unit desks will be found in AA-0-00240, Office Furniture, Steel, Unitized (General Specification). The L-unit desks are designed for use with L-unit desk attachments (see 6.1).

1.2 Classification.

1.2.1 Styles, classes and sizes. The L-unit desks shall be of the following styles, classes and sizes as specified: (see 6.2).

Style A - Pedestal containing 1 letter drawer and 1 storage drawer.

Class 1 - Single right pedestal.
Class 2 - Single left pedestal.

Size 1 - 40 inches wide, 30 inches deep.
Size 2 - 50 inches wide, 30 inches deep.

Style B - Pedestal containing 2 letter drawers.

Class 1 - Single right pedestal.
Class 2 - Single left pedestal.

Size 2 - 50 inches wide, 30 inches deep.

Style C - Pedestal containing 1 storage drawer, 1 letter drawer, with recessed back panel and knee-space brace.

Class 1 - Single right pedestal.
Class 2 - Single left pedestal.

Size 2 - 50 inches wide, 30 inches deep.

Style D - Pedestal containing 2 letter drawers and sliding shelf, without legs, with recessed back panel and knee-space brace.

Class 1 - Single right pedestal.
Class 2 - Single left pedestal.

Size 1 - 40 inches wide, 30 inches deep.



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

| | | |
|---|---|---|
| AA-O-00240 | - | Office Furniture, Steel, Unitized, General Specification. |
| QQ-S-781 | - | Strapping, Flat, Steel. |
| UU-P-271 | - | Paper, Wrapping, Water-Proofed Kraft. |
| MMM-A-260 | - | Adhesive, Water-Resistant, (for Sealing Waterproofed Paper). |
| PPP-B-566 | - | Boxes, Folding, Paperboard. |
| PPP-B-591 | - | Boxes, Fiberboard, Wood-Cleated. |
| PPP-B-601 | - | Boxes, Wood, Cleated-Plywood. |
| PPP-B-621 | - | Boxes, Wood, Nailed and Lock-Corner. |
| PPP-B-636 | - | Box, Fiberboard. |
| PPP-B-676 | - | Boxes, Set-Up, Paperboard. |
| PPP-C-843 | - | Cushioning Material, Cellulosic. |
| PPP-F-320 | - | Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes. |
| PPP-S-760 | - | Strapping, Non-metallic. |
| PPP-T-97 | - | Tape, Pressure-Sensitive Adhesive, Filament Reinforced. |
| PPP-T-76 | - | Tape, Pressure-Sensitive Adhesive Paper (For Carton Sealing). |

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cummulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C., 20402.)

**(Single copies of this specification and other Federal Specifications required activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles and Seattle, Washington.**

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

| | | |
|---|---|---|
| MIL-A-140 | - | Adhesive, Water-Resistant, Waterproof Barrier-Material. |
| MIL-T-6841 | - | Tape, Adhesive, Rubber and Cork Composition. |

Military Standards:

| | | |
|---|---|---|
| MIL-STD-105 | - | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-129 | - | Marking for Shipment and Storage. |

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)



Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS.

3.1 Preproduction sample. Unless otherwise specified in the invitation for bids, the requirements of 3.1 of AA-0-00240 shall apply.

3.2 Material. The material used in the construction of the L-unit desks shall be of the kind and quality specified in 3.2 of AA-0-00240 and as specified herein. The paragraph numbers of the materials used in the L-unit desk construction are listed in Table I.

Table I - Material references

| AA-0-00240 Paragraph Numbers | Material |
|---|---|
| 3.2.1 | Steel |
| 3.2.2 | Linoleum |
| 3.2.3 | Plastic laminate sheet |
| 3.2.4 | Finishing materials |
| 3.2.4.1 | Primer |
| 3.2.4.2 | Enamel |
| 3.2.4.3 | Zinc coating |
| 3.2.4.4 | Cadmium plating |
| 3.2.4.5 | Chromium plating |

3.2.5 Face hardware. The face hardware shall be constructed of satin finished anodized aluminum; type 302 corrosion-resistant steel; satin finished chromium on steel, die-cast zinc, brass or bronze in accordance with 3.2.4.5 of AA-0-00240. Tensile strength of die-cast zinc shall be not less than 40,000 p.s.i. The exposed surfaces of drawer pulls and sliding shelf pulls used on a single furniture unit shall be of the same material and finish.

3.3 Construction. The construction details of the L-unit desks shall be as specified in the applicable paragraphs of AA-0-00240 and as specified herein. The paragraph numbers of the construction details are listed in Table II.

Table II - Construction references

| AA-0-00240 Paragraph Numbers | Construction |
|---|---|
| 3.3.1 | Spot welding |
| 3.3.2 | Brazing |
| 3.3.2.1 | Fabricating terms |
| 3.3.4 | Color |
| 3.3.4.1 | Metal finish |
| 3.3.4.2 | Linoleum |
| 3.3.4.3 | Plastic laminate sheet |
| 3.3.5 | Tolerances, top size and height |
| 3.3.6 | Assembly |
| 3.3.7 | Top construction |
| 3.3.7.1 | Top plate and edge molding |
| 3.3.7.2 | Binding strip |
| 3.3.7.3 | Linoleum top covering |
| 3.3.7.4 | Plastic laminate top covering. When specified in the invitation for bids. |
| 3.3.7.4.1 | Control samples for plastic covered tops |



Source: https://assist.dla.mil -- Downloaded: 2026l0-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.8 Design. The design and dimensions of the desks shall be as shown in Figures 1, 2, 3, 4 and 5. The desks shall be adjustable in height continuously from 29 inches to 30-1/2 inches. The desks shall have a recessed end panel support which will allow a minimum of 11 inches for user's knees to swing in the "L" shaped arrangement formed when the desk is attached to an L-unit desk attachment covered by AA-O-00240/2. The desks shall withstand the test specified in 4.4 of this specification.

3.3.9 Relocation of pedestal from right to left hand position or left to right hand position. The desks shall be as shown in Figures 1, 2, 3, 4 and 5, however, pedestals and end panels shall be attached to the top by a method which permits repositioning at a later date, without the use of special tools. Holes corresponding to holes used for attachment of back panel and knee-space shelf or knee-space brace or center drawer case tracks shall be provided in the end panels and pedestals as specified herein, and additional holes shall be provided in the top reinforcing members. Relocation of center drawer suspensions and locking mechanism when required, shall be provided for as specified herein. Instructions covering method of relocation of pedestal and end panel shall be provided as specified in 3.7.

3.3.9.1 Alternate location of pedestal and end panel, style B, class 1 and class 2, size 2. When specified in the invitation for bids, the desks shall have the pedestal and end panel located as shown in Figure 6 and the center drawer dimensions shall be as shown in Figure 6. The pedestal shall be located at side edge of top with no more than 3/8 inch of overhang at the side and back. The end panel shall be located at opposite end of top with no more than 1-1/4 inches of overhang at the end. The knee-space back panel and the knee-space shelf shall extend the full width from pedestal side to end panel.

3.3.10 Clamping. The desks shall be so constructed as to permit clamping to L-unit desk attachments specified in AA-O-00240/2 by means of the C-Clamp specified in 3.3.10.1. The clamp is to be attached to the underside of the L-unit desk attachment and the desk edge and shall be inserted and tightened from the desk side as shown in Figure 7. The underside of the desk edge shall require no more than 1/2 inch of the clamp opening. There shall be a minimum of 3-3/4 inches clearance for application of clamp from the outer edge of the center drawer to the outer edge of the desk top and back to the recessed end panel. The fit and clamping shall meet the test specified in 4.5.6 of AA-O-00240.

3.3.10.1 C-Clamp. The design and dimensions of the C-Clamp shall be as shown in Figure 8. The C-Clamp shall be constructed of cold-rolled commercial steel and shall be bright zinc plated.

3.3.11 Drawer pulls. The design and dimensions of the drawer pulls shall be as shown in Figure 9. The drawer pulls shall be of the materials specified in 3.2.5. Stamped drawer pulls will not be permitted. All surfaces and edges shall be smooth and free from roughness and sharp edges. The pulls shall have 1/4 inch diameter threaded studs and shall be secured with solid nuts and lockwashers. The end of the stud and the nuts and lockwashers shall be recessed and no part of the attachment shall project beyond the inside drawer front. The exposed surfaces of all drawer pulls used on a single unit shall be of the same material and finish.

3.3.12 Sliding shelf pulls. The sliding shelf pulls shall be similar to either of the designs shown in Figure 10. The dimensions shall be as shown in Figure 10. The pulls shall be of the material specified in 3.2.5. Stamped pulls will not be permitted. All surfaces and edges shall be smooth and free from roughness and sharp edges. The pulls shall be securely attached.

3.3.13 Locks. When specified in the Invitation for Bids, the desk shall be equipped with a lock (see 6.2). The lock shall be a disc tumbler type operated by a grooved key. The face of the lock shall be of the material specified in 3.2.5, or alternatively, shall be dull nickel finish on die-cast zinc. The cam shall be not less than 3/32 (0.0937) inch thick and shall have ample length to securely engage the provision in the desk top. The cam shall be attached to the back of the bolt by machine screw or rivet. The key shall be removable from the lock in both the locked and unlocked positions. The contractor shall certify that he has ordered each lot of 200 locks with 200 key changes. Two keys shall be furnished with each lock. It is not required that desks ordered without locks have provisions for installing locks at a later date.

3.3.14 Leg. The configuration shall be similar to that shown in Figure 11. The leg shall consist of a cover which conceals the height adjustment mechanism. The cover shall be constructed of not less than 18 gage (0.0478 inch) steel and shall be made corrosion resistant by chromium plating in accordance with 3.2.4.5 of AA-O-00240 or by enameling in accordance with 3.4 of AA-O-00240. Alternatively, the cover may be molded of non-woven fiber-glass-mat-filled polyester in a color which matches the enamel color specified in 3.3.4.1 of AA-O-00240. The cover shall be securely attached to the height adjustment mechanism.



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currenversion before use.

3.3.15 Height adjustment mechanism. The height adjustment mechanism shall permit continuous height adjustment over a range of 1-1/2 inches minimum and shall be entirely operable by hand. The height adjustment mechanism shall consist of a metal tube having a diameter of not less than 1-1/2 inches with a 3/8 inch 16-threaded stem. The bearing surface of the tube shall be fully closed and free from roughness and sharp edges. The tube and stem shall operate with a threaded solid nut incorporated in a support constructed of not less than 18 gage (0.0478 inch) steel. The threaded stem shall not be visible when the mechanism is adjusted to the highest setting. The stem and tube shall operate in a manner to prevent the leg cover from contacting the floor when the mechanism is adjusted to the lowest setting. The tube and threaded stem shall be made corrosion resistant by cadmium plating in accordance with 3.2.4.4. The support may be zinc or cadmium plated in accordance with 3.2.4.3 or 3.2.4.4, or enameled in accordance with 3.4 of AA-0-00240. The height adjustment mechanism shall be constructed and attached to the pedestal and end panel in a manner to prevent loosening or instability.

3.3.15.1 Height adjustment mechanism, three-quarter inch diameter type. The height adjustment mechanism shall permit continuous height adjustment over a range of 1-1/2 inches minimum and shall be entirely operable by hand. The height adjustment mechanism shall consist of a metal collar having a diameter of not less than 3/4 inch with a 3/8 inch threaded stem. The collar and stem shall operate with a threaded solid nut incorporated in a support constructed of not less than 18 gage (0.0478 inch) steel. The collar shall have a metal footing not less than 1-1/4 inches in diameter. The bearing surface of the footing shall be fully closed and free from roughness or sharp edges. The threaded stem shall not be visible when the mechanism is adjusted to the highest setting. The collar, metal foot and threaded stem shall be made corrosion resistant by cadmium plating in accordance with 3.2.4.4. The support may be zinc or cadmium plated in accordance with 3.2.4.3 or 3.2.4.4, or enameled in accordance with 3.4, of AA-0-00240. The height adjustment mechanism shall be constructed and attached to the pedestal in a manner to prevent loosening or instability.

3.3.16 Drawer construction. The number, kind and minimum inside clear dimensions of the drawers shall be as shown in Figures 1, 2, 3, 4, 5, and 6. The drawer fronts shall fit square in the drawer opening, horizontally and vertically, and shall show equal opening between the drawer front and pedestal frame, on the sides and top when the drawer is closed. In the closed position, the drawer fronts shall be flush with the face of the pedestals, or alternatively, shall inset the face of the pedestals not more than 1/16 inch. The drawer fronts shall not touch when drawers are equally extended or during the full course of travel when adjoining drawers are opened or closed at the same time. Storage drawers, when fully opened, shall extend not less than 20 inches from the inside front of the drawer to the front of the pedestal. The letter drawer shall extend, when fully opened, not less than 20-3/4 inches from the inside front of the drawer to the front of the pedestal.

3.3.16.1 Drawer fronts. The drawer front shall be of double wall construction. The outside drawer front shall be not less than 20 gage (0.0359 inch) steel. The top of the outside front shall be formed in a return flange to receive the inside drawer front. The side and bottom edges shall be formed in a return flange and an additional 90 degree flange to provide for welding to the drawer body by not less than 2 spot welds to each side and 4 spot welds to the bottom. (See Figure 12). The return flange above the drawer side shall be flush with the inside drawer front. The inside drawer front shall be not less than 26 gage (0.0179 inch) steel. The four edges of the inside drawer front shall be formed in a flange or offset formation to fit into the outside drawer front and shall be held in place by spot welding or by the drawer pull fastenings. The bolt fastenings shall be recessed. The recessing may be in the form of a continuous channel across the inside drawer front. Alternatively, the side flanges may be omitted from the inside drawer front provided the latter has a channel formation, not less than 1-1/4 inch wide, extending the full length of the inside drawer front and centered on the attaching point. All corners of the outside drawer front shall be neatly closed and free of sharpness and burrs with the top corners brazed and ground smooth along the entire seam where the top and side flanges meet. The brazing shall be continued along the rear joints on the inside of the drawer for 1/2 inch.

3.3.16.2 Storage drawer body and back. The storage drawer body shall be not less than 24 gage (0.0239 inch) steel. The height of the drawer sides shall be not less than 4 inches. The sides and bottom shall be formed in one piece. The upper edges of the sides shall be formed in a bead or return flange. The back shall be not less than 22 gage (0.0299 inch) steel and the upper edge shall be folded over or formed inward in a 90 degree flange. Alternatively, the drawer back may be not less than 18 gage (0.0478 inch) steel and the upper edge shall be smooth. The back shall be securely welded to the sides and bottom of the drawer body. The back shall be the same height as the drawer sides, or not more than 1/8 inch less height. To provide for the insertion of adjustable



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currenversion before use.

partitions specified in 3.3.17.2, the sides of the storage drawer are to be slotted or formed and slotted on centers not less than 1 inch or more than 1-1/32 inch from front to back. Partitions shall be secured at the sides by two slots or at the sides and bottom by slots and a formation in the drawer bottom. The slots may begin not more than 5-1/4 inches from inside drawer front.

3.3.16.3 Letter drawer body and back. The letter drawer body shall be not less than 24 gage (0.0239 inch) steel. The sides and bottom shall be formed in one piece. The upper edges of the sides of the drawer body shall be formed in a bead or return flange. Alternatively, the upper edges of the sides may be formed in a flat fold if the upper part of the drawer side is formed in a channel shape. The letter drawer back shall be of not less than 22 gage (0.0299 inch) steel and the top shall be formed in a flat fold. Alternatively, the drawer back may be not less than 18 gage (0.0478 inch) steel and the upper edge shall be smooth. The back shall be securely welded to the sides and bottom of the drawer body. The back shall be the same height as the drawer sides, plus or minus 1/8 inch. The inside height of the drawer sides shall be not less than 5-3/4 inches. The letter drawer body construction shall provide for the proper operation of the compressor specified in 3.3.17.1. Two openings will be permitted in the rear corners of the drawer body for the purpose of providing drainage for finishing materials. The openings permitted for this purpose shall not exceed 1/2 square inch or 1/2 inch in diameter.

3.3.16.3.1 Provisions for hanging file supports. When specified, the letter drawer shall be furnished with sides which are not less than 9-3/8 inches in height and shall provide for proper use if hanging files specified in 3.3.17.3.

3.3.16.4 Center drawer. The center drawer body shall be not less than 24 gage (0.0239 inch) steel. The top edge of the drawer side shall be not more than 1/2 inch below the top edge of the drawer front. The sides and bottom shall be formed in one piece or alternatively, when the 16 gage combination channel and "Z" formation center drawer case tracks specified in 3.3.16.5.6 is used, the center drawer bottom shall be 24 gage (0.0239 inch) steel and the drawer sides shall be 20 gage (0.0259 inch) steel spot welded to the center drawer front, bottom and back. The upper edges of the sides shall be formed in a bead or return flange or 90 degree flange with an additional end formation. The back shall be not less than 24 gage (0.0239 inch) steel and shall be the same height as the drawer sides, plus or minus 1/8 inch. The back shall have a hood formed from the drawer back in a 90 degree flange, or alternatively from a separate piece of 24 gage (0.0239 inch) steel attached as as a 90 degree flange. The hood shall be not less than 1-1/2 inches wide. The sides of the hood shall be spot welded to the drawer sides. The front edge of the hood shall be formed in a flat fold. The center drawer shall be equipped with a convenience tray which shall be not less than 1 inch high and 3 inches wide and shall be divided into not less than 3 compartments. Two of the compartments shall be 3 inches wide, plus or minus 3/8 inch, and one compartment shall be not less than 8-1/2 inches wide. Provision shall be made to hold the convenience tray firmly in place in the front of the drawer. The tray shall extend the full inside width of the drawer. The inside drawer front may be a part of the convenience tray. When specified the center drawer shall be equipped with a lock specified in 3.3.13.

3.3.16.5 Drawer suspensions. The storage and center drawers shall operate on slide suspensions of the type specified in 3.3.16.5.1. The letter drawer shall operate on a progressive side-arm suspension or on a progressive cradle suspension of the types specified in 3.3.16.5.2 or 3.3.16.5.3. The drawer suspensions shall withstand the tests specified in 4.5.2 and 4.5.3 of AA-O-00240.

3.3.16.5.1 Drawer and case tracks, slide suspension. The case track shall be of not less than 16 gage (0.0598 inch) steel formed channel shape. Case tracks shall be secured to the pedestal inside vertical reinforcements as specified in 3.3.16.5.4. The drawer track shall be of not less than 16 gage (0.0598 inch) steel formed channel or "Z" shape with the bends so located as to provide maximum strength to the bearing surface. The drawer tracks shall be secured to the sides of the drawer by two rows of spot welds on not more than 4 inch centers, or alternatively, by one row of staggered spot welds on not more than 3 inch centers diagonally measured. Alternatively, the drawer tracks shall be of not less than 18 gage (0.0478 inch) steel formed channel shape with an additional flange. The upper flange shall be spot welded to the drawer side and the bottom horizontal flange of the channel shall be spot welded to the drawer bottom. Alternatively, the drawer track may be formed as an integral part of the drawer body provided the total metal thickness of the bearing surface is equal to or exceeds 16 gage (0.0598 inch) steel in thickness and a channel or Zee formation in structural rigidity. There shall be nylon glides on each suspension, positioned to eliminate metal-to-metal contact between drawer and case tracks and to meet the pull test specified in 4.5.3 of AA-O-00240. The glide shall be designed to insure against the head shearing off during operation of the drawer or while removing and inserting the drawers. The glide design shall also insure against loosening or falling out. The center drawer case tracks shall be attached to a flanged support in accordance with 3.3.16.5.6.



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

3.3.16.5.2 Progressive suspension, side arm type. The steel used in the construction of the neutral members shall be not less than 16 gage (0.0598 inch) and shall be cadmium or zinc plated in accordance with 3.2.4.3 and 3.2.4.4, except for areas burned during the welding process. Alternatively, black oxide coating may be used provided the entire member is then coated with a clear organic finish which dries to a hard film. The slides shall travel easily, quietly and smoothly with the drawer. Each neutral member shall have at least three main bearing rollers which are fixed journal ball bearing rollers and at least one solid stud bearing roller. Alternatively, each neutral member may operate on free solid rollers or solid balls. There shall be not less then five balls or rollers to each neutral member. If the design of the suspension is such that a separate housing is required for rollers or balls, the housing shall be not less than 16 gage (0.0598 inch) cold rolled steel, welded to the neutral member at each end by not less than two spot welds. Balls or rollers shall be incapable of dislocation or removal unless the suspension is dismantled.

3.3.16.5.3 Progressive suspension, cradle-type. There shall be two neutral members and not less than two tie members, all of which shall be not less than 16 gage (0.0598 inch) steel. The neutral members and tie members shall be joined by not less than two spot welds at each connection. All members shall be cadmium or zinc plated in accordance with 3.2.4.3 and 3.2.4.4, except for areas burned during the welding process. Alternatively, black oxide coating may be used provided the entire member is then coated with a clear organic finish which dries to a hard film. The slides shall travel easily, quietly and smoothly with the drawer. Each neutral member shall have at least three main bearing rollers which are fixed journal ball bearing rollers and at least one solid stud bearing roller.

3.3.16.5.4 Drawer and case tracks, progressive suspension. The drawer and case tracks shall be hot or cold rolled 14 gage (0.0747 inch) steel. After forming to shape, the drawer and case tracks shall have a Rockwell hardness of not less than 70 nor more than 85 on the "B" scale, or equivalent hardness on a comparable scale. The drawer and case tracks shall be finished in accordance with 3.2.4 and 3.4 of AA-O-00240. The case tracks shall be secured to at least the front and rear pedestal interior reinforcing members by inter-locking of lugs on the case tracks into appropriate openings in the interior reinforcing members or by welding or bolting. Any of these attachments shall provide secure connections without vertical or horizontal movement. The drawer tracks shall be attached to the drawer sides by two rows of spot welds on not more than 4 inch centers, or alternatively, by one row of staggered spot welds on not more than 3 inch centers diagonally measured.

3.3.16.5.5 Rollers and ball bearings. Fixed journal ball bearing rollers shall be accurately turned from cold rolled steel and case hardened and shall be not less than 7/8 inch in diameter and not less than 1/4 inch thick and both edges shall be chamfered. Alternatively, fixed journal ball bearing rollers may be cold formed from cold rolled steel and case hardened. Cold formed rollers shall be not less than 7/8 inch in diameter and not less than 1/4 inch wide axially. Cold formed rollers shall be of the unitary type, consisting of a one piece outer and one piece inner race, with an unbroken smooth surface in the raceway, and a smooth unbroken rolling surface on the outer race, with the edges of the outer race chamfered, or formed with a radius, or a combination of both. The outer and inner races shall be concentric to within plus or minus 0.0025 inch, and the entire outer rolling surface shall be parallel to the axis of the bearing to within plus or minus 0.0025 inch. Free rolling solid balls shall be not less than 3/8 inch diameter, hardened and polished.

3.3.16.5.6 Center drawer support. The center drawer case tracks shall be attached by spot welding to a flanged support constructed of not less than 14 gage (0.0747 inch) steel which shall be secured to the reinforcing members of the top. Alternatively, the center drawer case track and flanged support may be of one piece construction of 14 gage (0.0747 inch) steel and shall be securely attached to the pedestal top flange, and shall be held in position by a slot immediately below the end panel flange and shall be attached to the front reinforcing member of the top. In addition, when this alternate construction is used, the case tracks shall be secured to the side of the pedestal and end panel by means of two No. 7 or No. 8 sheet metal screws. A brace constructed of round edge strip steel 1-1/2 inches wide and 1/16 inch thick shall be spot welded to each of the center drawer flanged supports or case tracks. The brace or braces shall be located in such a manner that regardless of how the tracks are reversed or repositioned by the user, there will always be a brace within 4 inches of the front of the case tracks. The brace shall not touch the bottom of the center drawer or interfere with drawer operation when fully loaded, nor shall it be a distance greater than 1/4 inch from the bottom of the drawer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.16.6 Drawer stops. Each drawer shall be equipped with a positive stop which will prevent the drawer from falling out when fully extended but will permit easy removal of the drawer when desired without prior removal of any other drawer. The file and storage drawers shall contact bumpers of rubber or other durable energy absorbing material on the inward movement.

3.3.17 Drawer accessories.

3.3.17.1 Compressor. Required for all letter drawers. The compressor shall operate within the letter drawer to support front-to-back filing. The compressor shall be of the friction locking type controlled by spring tension and shall operate easily within the drawer when released and be held firmly when engaged. The clearance between the compressor and its track or guide shall be kept to a minimum, so as to prevent the compressor from facing off at an angle and out of square with the drawer sides when in operation, and from seating out of square when engaged. The compressor plate shall be not less than 18 gage (0.0478 inch) steel and shall have a roll or bead formation across the top edge, or shall have the top edge free of burrs and finished so as to prevent any sharp metal edges. The tension release lever shall be not less than 20 gage (0.0359 inch) steel, shall be smoothly formed and reinforced for strength and for convenience of releasing.

3.3.17.2 Drawer partition. A minimum of two partitions shall be furnished for each storage drawer. Partition may be double wall or single wall construction. Double wall partitions shall be made of not less than 24 gage (0.0239 inch) steel with a rounded top edge and shall have not less than 2 reinforcing dimples for spot welding the two walls together. Single wall partitions shall be made of not less than 20 gage (0.0359 inch) steel and the top edge shall be folded or beaded. In order to secure to the drawer sides, the partition shall have two integral lugs on each side which engage slots in the drawer sides, or by one integral lug on the partition side and not less than 1 integral lug on the partition bottom which engages a formation in the drawer bottom. The partitions shall remain firmly engaged and in a vertical position at all times.

3.3.17.3 Hanging file supports. When specified in the invitation for bids, hanging file supports shall be provided for letter drawers. The hanging file supports shall accommodate across the drawer filing of both letter size and legal size hanging folders. Letter size folders are 11-3/4 inches wide by 9-7/8 inches high and legal size hanging folders are 14-3/4 inches wide by 9-7/8 inches high. (The 9-7/8 inch height of both sizes includes 5/8 inch high tabs). The folders are hung by means of arms which end in hooks and which extend 5/8 inch beyond each side edge of the folder. The hanging file supports shall consist of two removable supports and one removable partition. The supports shall be located across the drawer. One support shall be attached not more than 1-1/8 inch from the inside drawer front. The other support shall be capable of being attached at either of two positions; 12 inches, plus or minus 1/8 inch, or 15 inches, plus or minus 1/8 inch, back of the first support. The back support shall be capable of repositioning in the field without the use of special tools. The removable partition shall be located a sufficient distance from the back support to provide clearance for the folder arm and hook to rest and slide easily on the second support. The partition shall be constructed of not less than 20 gage (0.0359 inch) steel. The upper edges of the file supports shall be the same height as the inside height of the drawer side (9-3/8 inches). The upper edge of the partition shall be not more than one inch below the drawer sides. The edges of the supports and the partition shall be formed in a bead or fold to prevent rough or sharp edges. Any bends in the design for the purpose of attachment to the drawer sides shall not interfere with insertion or withdrawal of hanging files. The partition shall be held in a vertical position at all times. The supports shall have sufficient strength and rigidity to hold the full capacity of hanging folders and filing material without sagging.

3.3.17.4 Card tray. When specified in the invitation for bids a card tray shall be furnished. The design and dimensions of the card tray shall be as shown in Figure 13. The tray shall fit into the letter drawer and shall accommodate cards which are 5 inches high and 8 inches wide. The tray shall be constructed of not less than 24 gage (0.0239 inch) steel. The tray front and back shall be spot welded to the tray body through flanges in either the tray body or the front and back. The flanges shall not lap over the outside of the tray front and back. A tolerance of plus or minus 1/32 inch is permitted for all dimensions except that a tolerance of plus 1/2 inch and minus 1/32 inch is permitted for width. The tray shall fit across either the storage drawer or the letter drawer and shall have a flange 1/2 inch wide along the top of the tray front



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

and back which will fit over the drawer sides to hold the tray in an even position. The flange shall be formed in a flat fold to provide a double thickness which continues for one inch down the tray front and back. The top edges of the sides shall be formed in a flat fold. The tray shall be equipped with a compressor which shall operate within the tray to support front-to-back filing. The compressor shall be of the friction locking type controlled by spring tension and shall operate easily within the tray when released and held firmly when engaged. The compressor plate shall have a roll or bead formation across the top edge, or shall have the top edge free of burrs and finished so as to prevent any sharp metal edges. The tension release lever shall be smoothly formed for convenience of releasing. The follower block and locking system shall not extend above the tray sides or reduce inside height of tray. The tray shall have not less than 3 continuous strips, 1 inch wide and 1/32 inch thick, or cork and rubber cushioning material in accordance with MIL-T-6841 which shall have pressure sensitive adhesive backing. The strips shall run the full width of the tray. Alternatively, the tray shall be equipped with 4 securely attached rubber feet.

3.3.18 Desk pedestal construction. (Styles A, B, C desk). The pedestal sides and back shall be formed from one piece of not less than 20 gage (0.0359 inch) steel. The front of the side panels shall be formed inward in a return flange. The top and bottom edges of the sides and back shall be formed in a 90 degree flange. The pedestal shall have not less than 1/4 inch or more than 3/4 inch radius along the four back and front vertical edges. The pedestal bottom plate shall be not less than 20 gage (0.0359 inch) steel and shall be attached by spot welding on maximum of 4 inch centers to the bottom flanges of the sides and back. The front edge of the bottom plate shall be formed upward in a return flange to form the bottom part of the pedestal front section. Alternatively, the front edge of the bottom plate may be spot welded to a channel formation to form the pedestal front section. The front face of this formation shall be flush with and securely welded to the front return flange of the side panel. The exposed joints in the front section shall be brazed and ground smooth. The front section and front part of bottom panel shall be reinforced by an 18 gage (0.0478 inch) steel member combining a "Z" and hat section formation as shown in Figure 14. Alternatively, the front section may be formed in a channel and 90 degree flange formation. The front section and front part of bottom panel shall then be reinforced by an 18 gage (0.0478 inch) steel hat section formation. Provision shall be made in the reinforcing member for attachment of legs, specified in 3.3.14 and 3.3.15. This reinforcement shall be placed in across-the-pedestal position, extending the full inside width of the pedestal and shall be spot welded on maximum 4 inch centers to the pedestal bottom through the areas indicated in Figure 14. The ends of the return flange or channel formation shall be brazed to the return flanges of the front edges of the pedestal. Alternatively, the top return flange of the front section may be spot welded on maximum 4 inch centers to the reinforcing member. To provide for attachment of rear legs, the bottom plate shall be reinforced by means of an 18 gage (0.0478 inch) steel hat section placed in across-the-pedestal position extending the full inside width of the pedestal. The flanges of the hat section shall be spot welded to the bottom plate. Alternatively, the pedestal bottom plate shall be not less than 16 gage (0.0598 inch) steel and shall be attached by spot welding on maximum of 4 inch centers to the bottom flanges of the sides and back. The front edge of the bottom plate shall be formed upward in a return flange. The front face of this formation shall be flush with the face of the side panel and the joint in the front section shall be brazed and ground smooth. The front section and the front part of the bottom panel shall be reinforced by a 16 gage (0.0598 inch) steel reinforcement in not less than a "Z" formation. The reinforcement shall be placed in across- the-pedestal position, extending the full inside width of the pedestal and shall be spot welded on maximum 4 inch centers to the pedestal bottom and to the return flange of the front formation of the pedestal bottom. The ends of the "Z" reinforcement shall be brazed to the return flange in the side panel formation and to the front vertical reinforcing member. The rear portion of the pedestal bottom shall be reinforced by a 16 gage (0.0598 inch) steel hat section which shall extend under the rear vertical reinforcing members and to within 3/8 inch of each side of the pedestal. The flanges of the hat section shall be spot welded to the pedestal bottom and the ends of the hat section shall be fusion welded or brazed to the vertical reinforcing members. The front and rear legs shall be welded through top flanges to a 16 gage (0.0598 inch) steel hat section. The hat section shall be attached to the bottom panel by welding. In order to permit repositioning of the pedestal, holes corresponding to the holes used for attachment of back panel and knee-space shelf, or knee-space brace, and center drawer case tracks shall be provided in the opposite, exposed side of the pedestal. The holes shall not exceed 1/8 inch in diameter. Size numbers 7 or 8 sheet metal screws shall be used to attach members through the 1/8 inch diameter holes. The number of holes shall be limited to the number necessary to properly assemble the item initially. All holes in the unattached side of the pedestal shall be filled with plug buttons which shall be finished to match the pedestal finish. The pedestal shall be securely attached to the top through the front and rear reinforcing



Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

members with bolts, nuts, and lockwashers or by clips designed for this purpose, or by tapping screws in extruded holes in the reinforcing members of the top. Any attachment method shall be easily removable and capable of reassembly without the use of special tools. Additional bolt holes shall be provided in the top reinforcing members to accomplish repositioning of pedestal and end panel as shown herein. An area not less than 10 inches by 14 inches on the inside of each side panel shall be permanently covered with a felt composition sound-deadening material .080 inch thick.

3.3.18.1 Pedestal interior reinforcing members (Styles A, B, C desks). Each pedestal side shall be reinforced by not less than two vertical reinforcing members constructed of not less than 18 gage (0.0478 inch) steel. The front reinforcing member shall have a minimum of 4 bends (an offset formation shall be equal to 2 bends) and the rear reinforcing member shall be formed in a "Z" shape. The bottom end of the front and rear reinforcing members shall rest on top of the front and rear leg reinforcement members and shall extend as close as practical to the full height of the pedestal. The front and rear vertical reinforcing members shall be connected at top and bottom by horizontal braces constructed of not less than 20 gage (0.0359 inch) steel formed with not less than 2 bends. The back vertical reinforcing members shall be joined at the top by a horizontal brace of not less than 20 gage (0.0478 inch) steel, formed for strength. The front vertical reinforcing members shall be joined by a horizontal reinforcing member of not less than 18 gage (0.0478 inch) steel, formed with no fewer than 5 bends. This member shall form the top rail of the pedestal front. The vertical reinforcing members shall be spot welded on a maximum of 4 inch centers to the pedestal sides. Alternatively, when the combined formed width of the front and rear vertical reinforcing members is not less than 9 inches, the front and rear vertical reinforcing members may be spot welded to the top and bottom flanges of the pedestal sides and back. The vertical reinforcing members shall be punched and slotted for attachment of drawer suspension members.

3.3.18.2 Alternate construction of pedestal interior reinforcing members. Each pedestal side shall be reinforced by not less than three vertical reinforcing members constructed of not less than 18 gage (0.0478 inch) steel. Each reinforcement shall have a minimum of 2 bends. The bottom end of the front and rear reinforcing members shall rest on top of the front and rear pedestal bottom reinforcing members and shall extend as close as practical to the full height of the pedestal. The vertical reinforcing members shall be spaced between the front and back of the pedestal and shall be spot welded to the side panels on not more than 6 inch centers. The front of the pedestal shall be connected at the top by a horizontal brace constructed of not less than 18 gage (0.0478 inch) steel formed with not less than 3 bends which shall form the top rail of the pedestal front.

3.3.19 Desk pedestal construction, (Style D desk). The pedestal sides and back shall be formed from one piece of not less than 20 gage (0.0359 inch) steel. The front of the side panels shall be formed inward in a return flange. The top and bottom edges of the sides and back shall be formed in a 90 degree flange. The pedestal shall have not less than 1/4 inch or more than a 3/4 inch radius along the four back and front vertical edges. The pedestal bottom plate shall be not less than 20 gage (0.0359 inch) steel and shall be attached by spot welding on 4 inch (maximum) centers to the bottom flanges of the sides and back. The front edge of the bottom plate shall be formed upward in a return flange to form the bottom part of the pedestal front section. Alternatively, the front edge of the bottom plate may be spot welded to a channel formation to form the pedestal front section. The front face of this formation shall be flush with and securely welded to the front return flange of the side panels. The front part and the rear part of the bottom panel shall be reinforced by two 18 gage (0.0478 inch) steel flanged reinforcing members spot welded on 4 inch (maximum) centers to the bottom panel in an across-the-pedestal position extending the full width of the pedestal. The reinforcing members shall be welded to the interior vertical reinforcing members. Provision shall be made in the four bottom corners for secure attachment of the height adjustment mechanisms specified in 3.3.15.1. In order to permit repositioning of the pedestal, holes corresponding to the holes used for attachment of back panel and knee-space brace and center drawer case tracks shall be provided in the opposite, exposed side of the pedestal. The holes shall not exceed 1/8 inch in diameter. The number of holes shall be limited to the number necessary to properly assemble the item initially. All holes in the unattached side of the pedestal shall be filled with plug buttons which shall be finished to match the pedestal finish. The pedestal shall be securely attached to the top through the front and rear reinforcing members with bolts, nuts and lockwashers or by clips designed for this purpose. Any attachment method shall be easily removable and capable of reassembly without the use of special tools. An area, not less than 10 inches by 14 inches, on the inside of each side panel shall be permanently covered with a felt composition sound-deadening material not less than 0.080 inch thick.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.19.1 Pedestal interior reinforcing member, (Style D desk). Each pedestal side shall be reinforced by not less than two vertical reinforcing members constructed of not less than 18 gage (0.0478 inch) steel. The front reinforcing member shall have a minimum of 4 bends and the rear reinforcing member shall be formed in a "Z" shape. The front and rear vertical reinforcing members shall be connected at top and bottom by horizontal braces constructed of not less than 20 gage (0.0359 inch) steel formed with not less than 2 bends. The back vertical reinforcing members shall be joined at the top by a horizontal brace of not less than 20 gage (0.0359 inch) steel, formed for strength. The front vertical reinforcing members shall be joined by a horizontal reinforcing member of not less than 18 gage (0.0478 inch) steel, formed with no fewer than 5 bends. This member shall form the top rail of the pedestal front. The vertical reinforcing members shall be spot welded on a maximum of 4 inch centers to the pedestal sides. The vertical reinforcing members shall be punched and slotted for attachment of drawer suspension members. Pedestal interior reinforcing members may be in accordance with 3.3.18.2.

3.3.20 End panel (All desk types). The overall width of the end panel shall be 17 inches. The end panel shall be constructed of one piece of 22 gage (0.0299 inch) steel with the ends joined in the center of the knee-space side of the panel. The edges to be joined shall be formed to provide an integral stiffener and securely welded together. Alternatively, a separate stiffener may be applied to the inside of the panel and securely welded to the edges of the panel. The joinings shall be smooth and even. The top edges of the panel shall be flanged outward. A flat plate constructed of not less than 18 gage (0.0478 inch) steel shall be spot welded to the two flanges for attachment to the reinforcing members in the top by means of bolts, nuts and lockwashers, or by clamps designed for the purpose. Any attachment method used shall be removable easily and capable of reassembly without the use of special tools. Additional bolt holes shall be provided in the top reinforcing members to accomplish repositioning shown herein. The panel thickness shall be 2-1/2 inches. The four vertical edges shall have a 3/4 inch radius. The bottom edge of the end panel shall be flanged inward and shall have a formed spacer of not less than 20 gage (0.0359 inch) steel securely welded to the inside bottom of the p anel. The formed spacer shall cover the entire open bottom of the end panel including the radii at each end of the end panel. The formed spacer shall be located not more than 1 metal thickness from the bottom edge of the end panel. Alternatively, the bottom edge of the end panel shall be flanged around its entire perimeter and the formed spacer shall cover the entire open bottom of the end panel except for the radii at the four corners of the end panel, and may be located above the bottom edge of the end panel. The height adjustment support shall incorporate a threaded nut and shall be constructed of not less than 18 gage (0.0478 inch) steel and shall be spot welded to the inside of the end panel. Alternatively, the gage of the formed spacer may be not less than 16 gage (0.0598 inch) steel formed, located and attached as specified herein and shall have provisions for attaching the height adjustment mechanism. The end panels shall be equipped with height adjustment mechanism in accordance with 3.3.15. The height adjustment mechanism shall be located within 1/2 inch of the extreme outer edge of the end panel. Holes corresponding to the holes used for attachment of the back panel, knee-space shelf or knee-space brace and center drawer case tracks shall be provided in the knee-space side of the end panel for attachment of back panel, knee-space shelf or knee-space brace and center drawer case tracks in right and left-hand position. The holes shall not exceed 1/8 inch in diameter. Size numbers 7 or 8 sheet metal screws shall be used to attach members through the 1/8 inch diameter holes. The number of holes shall be limited to the number necessary to properly assemble the item initially. All holes in the unattached side of the panel shall be filled with plug buttons which shall be finished to match the panel finish. The end panel shall be located 1-1/4 inches, plus or minus 1-1/16 inch, from the side edge of top unless otherwise specified herein. The edge of the end panel at the back of the desk shall be even with the pedestal in relation to the desk top. When specified in the invitation for bids, Style B, Class 1 and Class 2, Size 2, desks shall have the end panel located as shown in Figure 6.

3.3.21 Back panel (Styles A, B desks). The back panel shall be constructed of not less than 20 gage (0.0359 inch) steel. The side edges and the top edge shall be formed in a 90 degree flange. The bottom edge shall be formed in a return flange. The side flanges of the back panel shall be attached to the end panel or pedestal side by not less than 3 attachments. The back panel shall extend from the top of the pedestal to the tangent line of the radius along the bottom edge of the pedestal. The back panel shall be located 1-1/4 inches in from the back of the pedestal. Alternatively, the back panel shall be located flush, but within the tangent line of the bottom and back radii.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.21.1 Back panel, (Styles C and D desks). The back panel shall be constructed of not less than 20 gage (0.0359 inch) steel. The side edges and top edge shall be formed in a 90 degree flange. The bottom edge shall be formed in a return flange. The side flanges of the back panel shall be attached to the end panel or pedestal side by not less than 3 attachments. The back panel shall extend the full height of the pedestal. The back panel shall be generally "Z" shaped in cross-section, and the top part shall inset the back of the pedestal 1-1/4 inches and the bottom part shall inset the back of the pedestal 7-7/8 inches. The bend at the bottom of the top section of this back panel shall have a 3/4 inch radius. It shall clear the nearest moving part (s) of the center drawer or its suspension by not less than 1/8 inch, nor more than 1/2 inch.

3.3.22 Locking mechanism (All type desks). The locking mechanism shall be activated by the lock specified in 3.3.13. When the locking drawer is locked, it shall control a positive locking device capable of locking all drawers in one operation, and also permit closing and locking any drawer after the control drawer is locked, without distroting the locking mechanism. Unlocking the control drawer shall automatically unlock all other drawers, permitting the opening of any drawer without opening the unlocked control drawer beyond the overhand of the desk top. The locking mechanism shall permit repositioning of tops or relocation of pedestals. If auxiliary members are required to accomplish repositioning of locking mechanism, the parts shall be contained within the structure of the pedestal and top. Printed instructions for reversal of locking mechanism shall be adhered to the inside of pedestal back.

3.3.23 Knee-space shelf, (Styles A and B desks). The knee space shall be braced by means of a shelf. The knee-space shelf shall be not less than 20 gage (0.0359 inch) steel, formed downward in a return flange on the front and rear edges. The face of the return flange shall be 3/4 inch high. The ends shall be flanged and attached to the side of the pedestal and the end panel. The four corners of the shelf shall be neatly closed and shall be secured by a 1 inch by 1 inch, 22 gage (0.0299 inch) steel corner angle spot welded to the shelf flanges. The shelf shall be 9 inches wide, plus or minus 1/2 inch. The shelf shall be located even with the bottom edge of the back panel and approximately 1/16 inch from the return flange in bottom edge of the back panel to prevent vibration.

3.3.23.1 Knee-space brace, (Style C and Style D desks). Style C and Style D desks shall have a knee-space brace. The knee-space brace shall be not less than 18 gage (0.0478 inch) steel, formed downward in a return flange (3/4 inch high) at the front, and formed downward in a 90 degree flange at the sides and back. The four corners shall be neatly closed and secured with corner angles as specified in 3.3.22. The shelf shall be 2-1/2 inches wide, (plus or minus 1/4 inch). It shall be attached at 2 points each to the side of the pedestal and the end panel, and shall be located as specified in 3.3.23.

3.3.24 Sliding shelf. Required for all Style A, Style C and Style D desks. Not required for Style B desks. The sliding shelf shall be constructed as specified in alternates (a) or (b). The two front corners of the sliding shelf shall be brazed and ground smooth along the seam where the front and side flanges meet. The shelf shall extend horizontally not less than 14-3/4 inches from the front edge of the desk top.

(a) The sliding shelf shall be not less than 18 gage (0.0478 inch) steel. The side edges shall be formed in a return flange and the front edge shall be formed in a flange and flat fold or other formation consisting of not less than two bends.

(b) The sliding shelf shall be not less than 20 gage (0.0359 inch) steel. The side edges shall be flanged and reinforced with not less than 16 gage (0.0598 inch) steel channels inset and spot welded to the side flanges of the top plate of the shelf.

The sliding shelf shall operate on two runners as specified in alternates (c), (d) or (e). The runners shall be securely attached to the pedestal.

(c) The runners shall be not less than 16 gage (0.0598 inch) steel and shall be formed in a return flange and "Z" formation.

(d) The runners shall be not less than 18 gage (0.0478 inch) steel and shall be formed in a return flange and "Z" formation, and shall be incorporated into a one-piece formed assembly consisting of the pedestal front horizontal reinforcing member, necessary reinforcing gussets and stops.

(e) The runners shall be not less than 16 gage (0.0598 inch) steel and shall be formed in a channel shape. The bottom flange of the channel shall have a rib of similar formation extending the full length of the runner.



Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

Rubber or felt bumpers or coil or leaf springs shall be provided as a noise reducing stop when the shelf is fully extended or pushed into the pedestal. The shelf may also incorporate a convenience tray with a sliding plastic or metal cover. The sliding shelf shall be equipped with a drawer pull specified in 3.3.12 or shall have a spring arrangement activated when the shelf is pushed inward. An area not less than 10 inches by 14 inches on the underside of the sliding shelf shall be covered with a felt composition sound-deadening material 1/8 inch thick, permanently adhered to the area with a suitable adhesive. Alternatively, an equivalent sound-deadening material on pressure sensitive tape is permissible. In the closed position, the face of the shelf shall be flush with, or inset not more than 1/16 inch, the face of the pedestal.

3.3.25 Desk edge cushioning. In order to provide protective cushioning below the projecting binding strip of the top, two discs shall be applied to the outside surface of the top edge molding on the side which accommodates the clamp. The discs shall be located 3 inches from the front and back edges of the desk top edge molding. The discs shall be made of cork and rubber cushioning material in accordance with MIL-T-6841 and shall have pressure sensitive adhesive backing. The disc shall have a minimum diameter of 1-1/4 inches and shall be 1/8 inch thick.

3.4 Pretreatment and finishing. Shall be in accordance with 3.4, 3.4.1, 3.4.2, 3.4.3 and 3.4.4 of AA-O-00240.

3.5 Identification marking. Shall be in accordance with 3.5 of AA-O-00240.

3.6 Workmanship. Shall be in accordance with 3.6 of AA-O-00240.

3.7 Top and pedestal repositioning instructions. The supplier shall furnish with each desk printed instructions which indicate clearly the method to follow in relocating and repositioning pedestals, end panels and tops. (See 3.3.9). The text of the instructions shall be submitted for approval of the contracting officer.

4. QUALITY ASSURANCE PROVISIONS. The requirements of Section 4 of AA-O-00240 and as specified herein shall apply.

4.2.2.1 Visual examination. Examination of the desks shall be in accordance with the classification of defects and acceptable quality levels (AQL's) for general requirements shown in Table II of AA-O-00240 and for specific requirements in Table III shown herein. The lot size shall be expressed in units of desks for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for the examination shall be one complete desk.



Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III - Classification of Defects

| Examine | Defect | Classification Major | Classification Minor |
|---|---|---|---|
| C-Clamp | Not according to design | | X |
| | Not zinc plated | | |
| Drawer and sliding shelf pulls | Not according to design | | X |
| | Not secured as specified | | |
| | Rough or sharp edges that may cause injury | X | |
| Lock | Wrong type | | X |
| Leg | Less than minimum gage specified | X | |
| | Not configuration shown in drawing | | X |
| | Not finished as specified | | |
| Height adjustment mechanism | Not continuous adjustment over full range | X | |
| | Not finished as specified | | X |
| | Not operable by hand | | |
| | Not closed tube | | |
| Drawers | Drawer front does not fit square in opening | X | |
| | Components less than minimum gages specified | | |
| | Not flanged, channeled, folded or beaded as specified | | X |
| | Storage drawer does not provide for adjustable partitions on one inch centers | X | |
| | Letter drawer does not provide for hanging file when so specified | | |
| | Center drawer tray not as specified | | X |
| Drawer suspensions | Less than minimum gages specified | X | |
| | Has rough or sharp edges affecting serviceability | | |
| | Not finished as specified | | X |
| | Suspension not rigidly secured to drawer side or pedestal | X | |
| | Roller and ball bearings not as specified | | |
| Drawer stops | Do not prevent drawer from falling out | X | |
| | Not equipped with bumpers | | X |
| Compressor | Will not hold firmly in place | | X |
| | Does not operate smoothly | | |
| | Rough or sharp edges that may cause injury | X | |
| Partitions | Do not lock securely in place | | X |
| | Top edge not formed or rounded | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III - Classification of Defects (Continued)

| Examine | Defect | Classification Major | Classification Minor |
|---|---|---|---|
| Hanging file supports | Will not accommodate hanging folders | X | |
| | Not located as specified<br>Partition not maintained in vertical position | | X |
| Card tray | Not equipped with follower block | X | |
| | Not provided with cushioning material or legs | | X |
| Pedestal | Components less than minimum gages specified | X | |
| | Top and bottom edges not flanged<br>Interior frame not as specified<br>Bottom not reinforced as specified | | X |
| | Holes for attachment of back panel and knee-space shelf not properly aligned | | X |
| | Holes not size specified<br>Excessive number of holes<br>Holes for self-tapping screws not extruded<br>No sound deadening material | | X |
| End panel | Components less than minimum gages specified<br>Sharp edges at bottom | X | |
| | Height adjustment wrong type<br>Holes for attachment of back panel and knee-space shelf not properly aligned | | X |
| Back panel | Edges not properly formed<br>Not full height of pedestal | | X |
| Locking mechanism | Will not operate as specified<br>Does not provide for proper operation after relocation | X | |
| Knee-space shelf and brace | Edges not properly formed<br>Not located and attached as specified | | X |
| Sliding shelf | No sound deadening material on underside<br>Not properly secured | | X |
| | Has sharp or unprotected edges affecting safety | X | |
| | Not reinforced<br>Not provided with noise reducing stop<br>Not horizontal when extended | | X |
| Desk edge cushioning | Cushioning discs not provided<br>Not properly located | | X |
| Workmanship | Legs not securely attached<br>Pedestal not securely attached to top<br>End panel not securely attached to top | | X |



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

4.2.2.2 Dimensional examination. Inspection will be made of desks for compliance with dimensions specified including thickness of metal and film thickness of enamel. Any dimension not within tolerance specified shall be classified as a defect.

4.2.2.3 Inspection levels and AQL's. The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units, shall be in accordance with MIL-STD-105, and shall be as follows:

| | Inspection Levels | AQL's |
|---|---|---|
| For examination in Table III Major | I | 4.0 |
| For examination in Table III Total | I | 10.0 |
| For examination in 4.2.2.2 (One class) | I | 4.0 |

4.3 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing and marking comply with the requirements in Section 5 of this specification. Defects shall be scored in accordance with Table IV. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed in Table IV shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be I of MIL-STD-105 and the acceptable quality level (AQL) shall be 4.0 defects per hundred units.

TABLE IV - Classification of Defects

| Examine | Defect |
|---|---|
| Marking | Omitted; incorrect; illegible, improper size, location, sequence or method of application. |
| Material | Any nonconforming components, component missing, damaged or otherwise defective affecting serviceability. |
| Workmanship | Inadequate securing of drawers, contents and padding of perimeter edges, incomplete closure of container flaps, loose strapping, distortion of container. |

4.4 Tests. Tests specified in 4.5.1, 4.5.2, 4.5.3, 4.5.4, 4.5.5, 4.5.6, 4.5.7, 4.5.8, 4.5.9, 4.5.10, 4.5.11, 4.5.14 and 4.5.15 of AA-O-00240 shall apply.

5. PREPARATION FOR DELIVERY

5.1 Setting of height adjustment. Prior to packaging, desks shall have all height adjustments set at 29 inch height.

5.1.1 Cellulose wadding. Where the term cellulose wadding, or equivalent, is used in this specification, it shall be interpreted to mean any material meeting the requirements of PPP-C-843.

5.2 Packaging. Packaging shall be level A, B or C as specified (see 6.2).

5.2.1 Levels A and B.

5.2.1.1 L-unit desks.



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

5.2.1.1.1 Sliding shelves, drawers. Exposed finished edge surfaces of sliding reference shelves, and the top edges of drawers, shall be covered by 0.120 inch thick embossed cellulose wadding strips (or strips of equivalent material), or 30 pound oil-impregnated kraft paper having sufficient width to overlap inside and outside top edges, and length sufficient to fold down over the vertical end edges to approximately the handle position. Strips shall be positioned in such a manner that will insure their remaining in place when the shelves or drawers are secured in closed position. Drawers shall be secured in closed position by either (a) closing all pedestal drawers, then closing and locking center drawer; or, (b) closing all pedestal drawers, then inserting a steel packing clip in the center drawer closing the drawer, and securing by bending the clip downward. (When metal clip is used there shall be a strip of cellulose wadding, or equivalent nonmarring material, approximately 6-by 4-by .120-inch, placed underneath to prevent abrasion). When closure is by locking of center drawer, the keys shall be placed in an envelope, or bag, of cloth or heavy kraft paper, and secured to a drawer handle. When the steel clip method of locking drawers is used, the keys shall be securely fastened within the top center drawer prior to closing. On desks furnished without drawer locking device, each drawer and shelf must be secured prior to packing to prevent opening during handling and transit. This may be accomplished by use of steel packing clips (protected as above); or, by pressure sensitive tape (minimum one-half-inch width), filament reinforced, conforming to PPP-T-97.

5.2.1.1.2 Partitions, trays, compressors. Partitions, trays, and compressors shall be secured in place within appropriate drawers in such manner as to prevent vibration or movement during handling or shipment. When specified, the card trays shall be wrapped separately in kraft paper having a minimum bursting strength of 30 pounds (24 by 36-500), secured with pressure sensitive adhesive tape.

5.2.1.1.3 Body and legs. Finished surface of body or legs, which will come in contact with any part of the shipping container, or interior fittings, shall be protected by blankets or pads of nonmarring cushioning material as specified in 5.1.1. Drawer handles shall be protected by built-up pads of corrugated fiberboard not less than one-inch in width, and at least one-inch longer than the handle length, nor less than one-fourth inch greater thickness than the depth of the handle, slotted to fit over the handle, and secured in place. Surface of pad in contact with finished surface of desk shall be lined with a nonmarring material. Each leg shall be protected by a tube of corrugated fiberboard, lined with cushioning material as specified in 5.1.1, slipped over the leg and secured in place prior to packing. Alternatively, the legs may be protected by either of the following methods: Completely wrap the legs with cushioning material, as specified above, and taping securely in place, or scored and folded double-wall wax impregnated fiberboard pads, folded in a manner to produce 3 panel square tubes, with a 3/4 inch (minimum) shoulder at the top, assembled in the leg cut-outs of the skid. Each pad shall be secured in place by means of 3 staples (one in each section of the shoulder portion of the pad) in accordance with FF-N-105, Type III, 16 Gage, with a minimum leg length of 7/8 inches. The staples shall run across the flutes of the fiberboard, as shown. See Figure 18, for details.

5.2.1.1.4 Desk top surface and edges. Top surface and edges of top shall be protected by a sheet of corrugated or solid fiberboard, having the contact surface lined with a nonmarring material. This protective sheet shall be not less than .125-inch in thickness, if of corrugated, nor not less than .050-inch in thickness, if of solid fiberboard, and shall comply with the requirements of PPP-F-320, grade NT. The fiberboard sheet shall completely cover the top surface of the desk and extend down over edges of top on all four sides for a distance equal to the thickness of the edges. This sheet shall be secured in place by use of two strips of tape, conforming to PPP-T-76, approximately 3 inches wide by 8 inches in length, placed one on each end at approximately the center position, in a manner to fasten the sheet to the end desk panel.

5.2.1.1.5 C-clamp. Each C-clamp shall be closed to the minimum size and packaged in a sung-fitting folding or setup paperboard box conforming to Style III, Type B, Class A of PPP-B-566 or Type I, Class A, Style 2, of PPP-B-676, respectively. Box closure shall be in accordance with the appendix of PPP-B-676.



Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

5.2.2 Level C. The L-unit desks, and clamps, shall be packaged in accordance with the manufacturer's commercial practice.

5.3 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.3.1 Level A.

5.3.1.1 L-unit desk. Each desk, packaged as specified in 5.2 including clamp, shall be packed in a shipping container conforming to overseas type of PPP-B-601, or class 2, style 2 or 4 of PPP-B-621. The desk shall be braced, blocked, bolted or strapped within the shipping container to prevent movement and subsequent damage to the desk. Surfaces of the desk in contact with blocks, braces or straps shall be cushioned to prevent damage to the desk. End grain nailing shall not be used to hold blocking in place. Strapping used for anchoring shall conform to type I, class A or B of QQ-S-781. Each desk shall be covered with a full length shroud made of waterproof barrier-material conforming to class E-2, H-1, H-5, or M of UU-P-271. All seams of the shroud shall be sealed with a minimum 3/4 inch width continuous seam of water-resistant adhesive conforming to MMM-A-260. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.3.2 Level B. The L-unit desks shall be packed for shipment, legs down, mounted on a wood-frame base constructed in accordance with figure 15 for size 1, and figure 16 for size 2, except that a tolerance in the given dimensions will be allowed to accommodate the particular desk. Desks so packed shall be suitable for handling by conventional forklifts for the entire handling operation. The desks shall be prepared as specified in 5.2 except that after placement of the fiberboard sheet, collars, or filler pads, of corrugated fiberboard (folded or built-up), minimum thickness of 5/16 inch, die-cut to fold and fit, shall be placed on the edges of the top extending not less than 3 inches on both top surface and down over the side edges of the top (see figure 15 and figure 17). Each collar shall be of sufficient length to encompass the front or rear edges of the top and extend on both ends of the top for a distance of 12 inches on the desk. The shipping container, or cover box, shall be constructed of fiberboard conforming to PPP-F-320, type CF, class domestic, variety SW, grade 275. The container, or box may be of either the side-slotted blank or the RSC half-slotted-box type, with depth sufficient to extend down on all sides for stapling to the deckboards of the wood-frame base. Bottom edges of the container or box shall be stapled to the deckboards of the wood-frame base along the stapling lines as shown in figures 14 and 16. The mounted and covered desk shall be further secured to the wood-frame base by two steel straps (minimum 1/2 x 0.020) encircling the desk and top deckboards girthwise, but not in contact with the leg assembly of the desk (see above drawings). Preformed corner edge protectors, plastic or metal, shall be used beneath strapping over corrugated fiberboard. Metal strapping shall conform to QQ-S-781. Nonmetallic strapping of equivalent tensile strength, conforming to PPP-S-760, is an acceptable alternate.

5.3.2.1 Level B - C-Clamp. C-clamps packaged as specified in 5.2.1.1.5 shall be packed in a snug fitting shipping container conforming to Type I or Type II, Class 1 of PPP-B-636. The weight limitations of the container specification shall not be exceeded. All flaps of the fiberboard shipping containers shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps, or by a combination of metal-stitching the bottom flaps and sealing the top flaps with adhesive. In addition, Style FPF shipping containers shall be tape banded in accordance with the appendix of the container specification.

5.3.2.2 Level B - Card trays. Card trays packaged separately as specified in 5.2.1.1.2, shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. Closure shall be in accordance with the appendix of the box specification.



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

5.3.3 Level C. Desks shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or Regulations of other carriers applicable to the mode of transportation.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military requirements. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.4.3 General. In addition to the marking specified above, each shipping container shall be marked with arrows pointing to the top of the container and the word UP under or over each arrow in letters at least 2 inches in height, placed on all four sides of the pack at a point approximately 4 to 8 inches down from top of pack. Additionally, the top panel of the container shall be marked in letters 2 inches high with the wording:

TOP

THIS SIDE UP

FRAGILE HANDLE WITH CARE

and on at least one side and one end with the wording:

FURNITURE

FRAGILE HANDLE WITH CARE

5.4.3.1 On single-pedestal desks, the end containing desk drawers shall be plainly identified, for example "PEDESTAL END."

6. NOTES

6.1 Intended use. The L-unit desks are not intended to be used alone, but are designed for use with L-unit attachments. Any of the L-unit desks, with any of the L-unit desk attachments placed at right angles to the desk, form a "L" shaped work station. The desks and desk attachments are all "free standing," however the tables should be clamped to the desk to prevent creeping of the tables. The C-Clamp is provided for this purpose. The height of the L-unit desks and desk attachments is adjustable from 29 inches to 30-1/2 inches. The position of end panels and pedestals can be reversed in the field. Additional holes are provided in the end panels and pedestals for this purpose. Additional information concerning the effective use of the unitized furniture line is contained in 6.1 of Spec. AA-O-00240. Paragraph 6.3 of that specification lists the full line of unitized furniture items and the appropriate specification symbol.


6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, symbol and date of this specification.
(b) Styles, classes and sizes required (see 1.2.1).
(c) Whether preproduction sample is required (see 3.1).
(d) Whether plastic tops are required (see Table II, 3.3.8.4).
(e) Whether or not repositioning to Style A, Classes 1 and 2, Size 2 tops is required (see 3.3.9.2).
(f) Whether or not alternate location of Style B, Classes 1 and 2, Size 2 pedestals is required (see 3.3.9.3 and 3.3.19).
(g) Whether or not additional C-Clamps are required (see 3.3.10).
(h) Whether locks are required (see 3.3.13).
(i) Whether hanging file supports are required (see 3.3.17.3).
(j) Whether stationery trays are required (see 3.3.17.4).
(k) Whether card trays are required and the number required (see 3.3.17.5).
(l) Selection of applicable levels of packaging (see 5.2).
(m) Selection of applicable levels of packing (see 5.3).
(n) Marking requirements (see 5.4).




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

| Desk Contains: | Minimum Inside Clear Dimensions |
|---|---|
| 1 Storage Drawer | 12" W x 5-19/32" H x 24-1/8" D |
| 1 Center Drawer | 15-7/8" W x 1-5/16" H x 18-1/16" D |
| 1 Letter Drawer | 12" W x 10-27/32" H x 23-15/16" D |

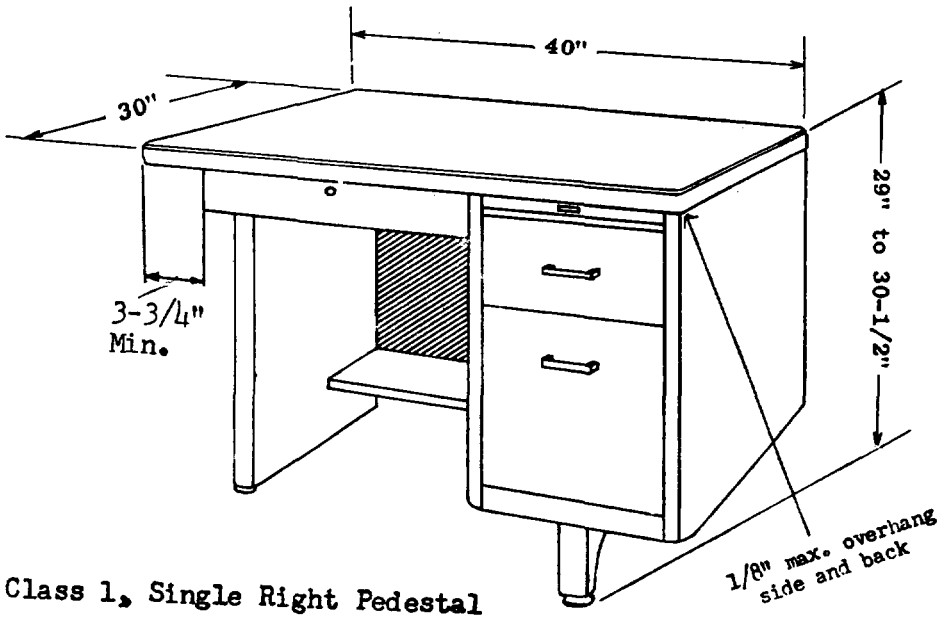


Class 1, Single Right Pedestal

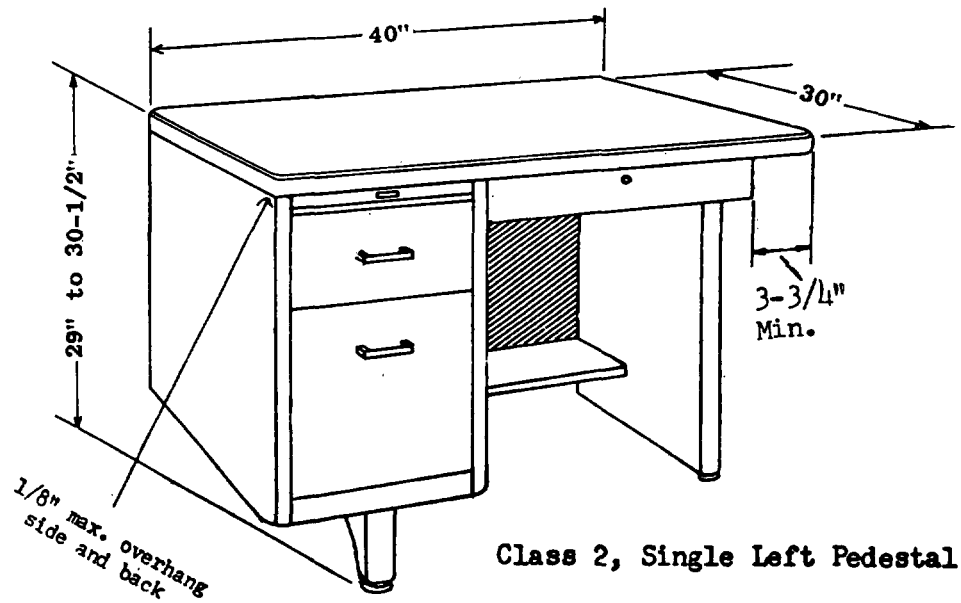



Class 2, Single Left Pedestal

Figure 1 - L-Unit Desk
Style A - Pedestal containing 1 letter and 1 storage drawer
Size 1 - 40 inches wide, 30 inches deep




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

| Desk Contains: | Minimum Inside Clear Dimensions |
|---|---|
| 1 Storage Drawer | 12" W x 5-19/32" H x 24-1/8" D |
| 1 Center Drawer | 15-7/8" W x 1-5/16" H x 18-1/16" D |
| 1 Letter Drawer | 12" W x 10-27/32" H x 23-15/16" D |

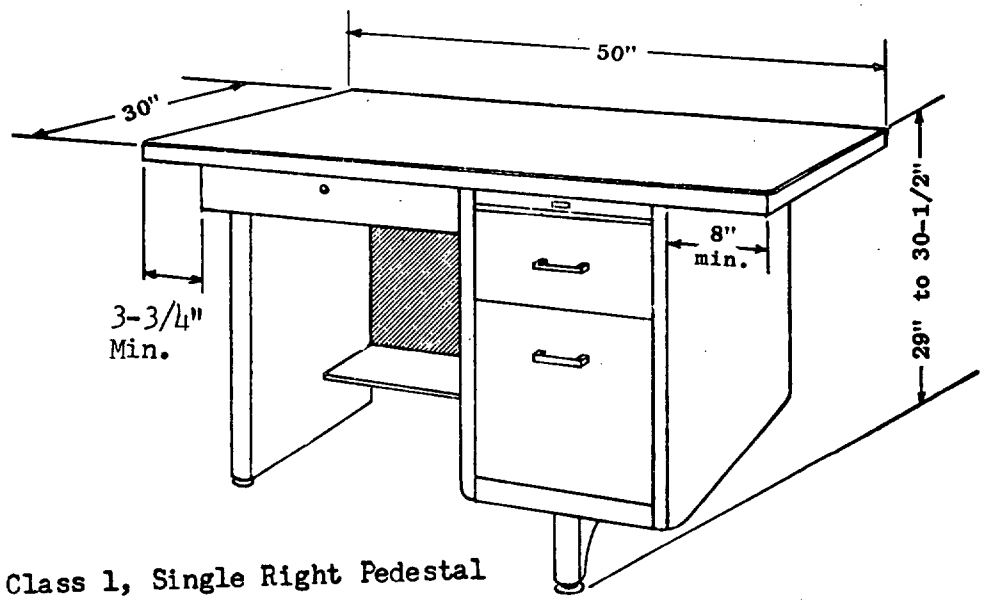


Class 1, Single Right Pedestal

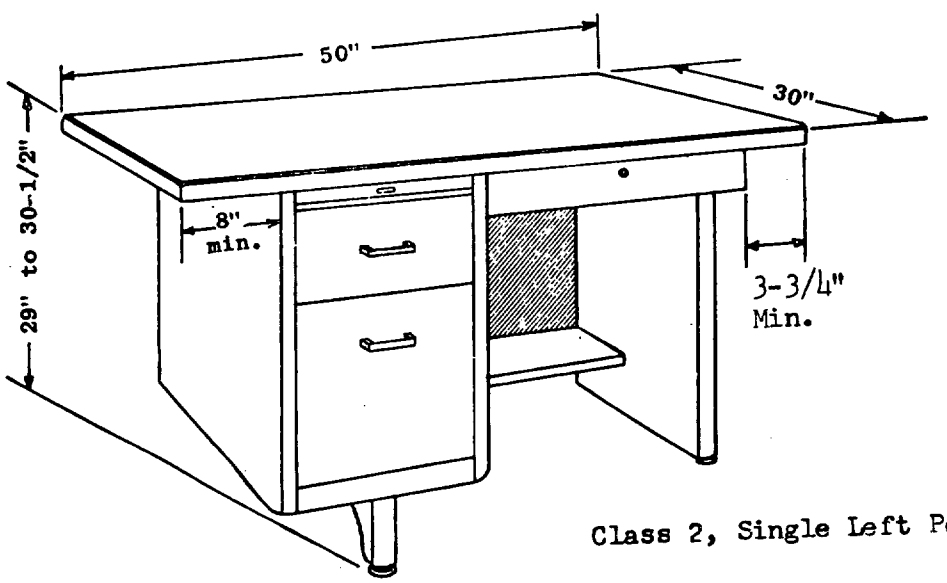



Class 2, Single Left Pedestal

Figure 2 - L-Unit Desk
Style A - Pedestal containing 1 letter and 1 storage drawer
Size 2 - 50 inches wide, 30 inches deep




Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

| Desk Contains: | Minimum Inside Clear Dimensions |
|---|---|
| 1 Center Drawer | 15-7/8" W x 1-5/16" H x 18-1/16"D |
| 2 Letter Drawers | 12-1/4" W x 10-1/2" H x 25-1/4" D |

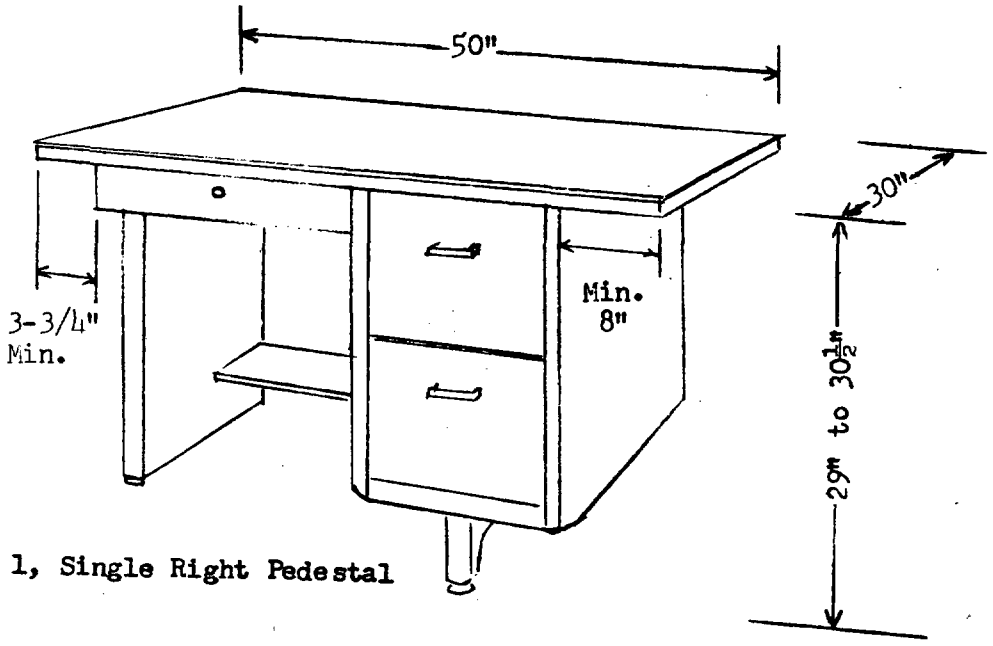


Class 1, Single Right Pedestal

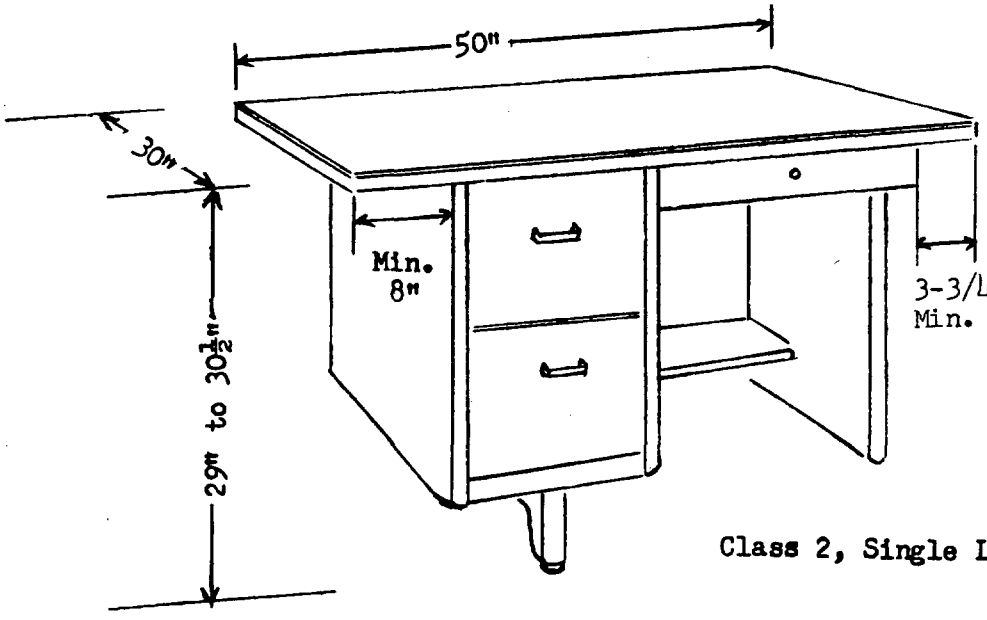


Class 2, Single Left Pedestal


Figure 3 - L-Unit Desk
Style B - Pedestal containing 2 letter drawers
(Sliding shelf omitted)
Size 2 - 50 inches wide, 30 inches deep




Source: https://assist.dla.mil - Downloaded: 2025-Dec-26 11:39Z
Check the source to verify that this is the current version before use.

Desk contains:

| | Minimum inside clear dimensions: |
|---|---|
| 1 storage drawer | 12" W x 5-19/32" H x 24-1/8" D |
| 1 center drawer | 15-7/8" W x 1-5/16" H x 18-1/16" D |
| 1 letter drawer | 12" W x 10-27/32" H x 23-15/16" D |

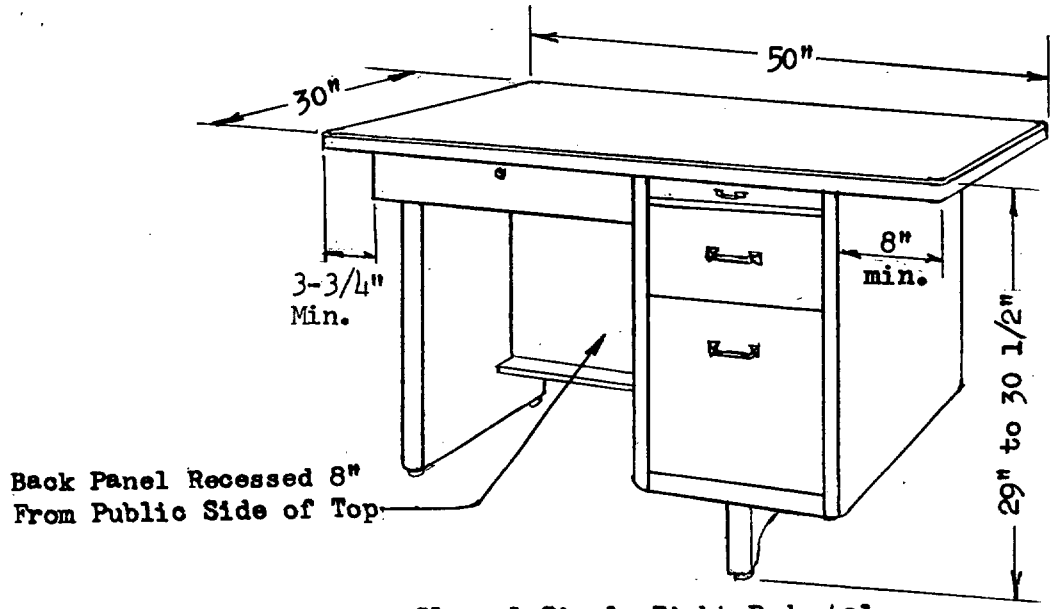


Class 1, Single Right Pedestal

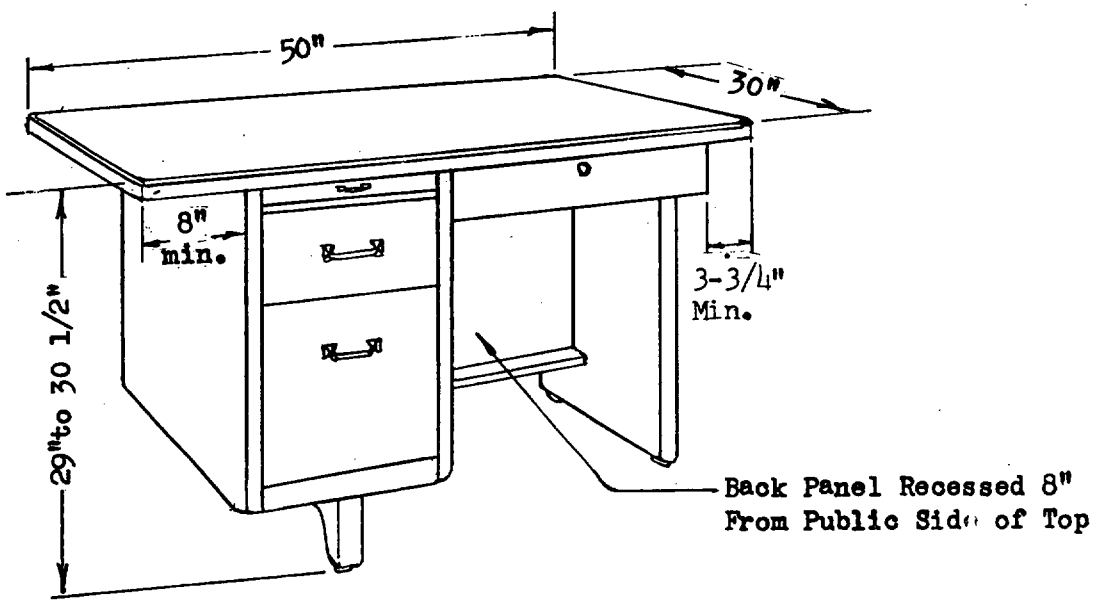


Class 2, Single Left Pedestal


Figure 4 - L-Unit Desk
Style C - Pedestal containing 1 storage drawer
1 letter drawer, recessed back panel
Size 2 - 50 inches wide, 30 inches deep

Source: https://assist.dla.mil - Downloaded: 2026-02-26T11:09Z
Check the source to verify that this is the current version before use.


Desk Contains:

Minimum Inside Clear Dimensions

1 Center drawer 15-7/8" W x 1-5/16" H x 18-1/16" D
2 Letter drawers 12" W x 10-27/32" H x 23-15/16" D

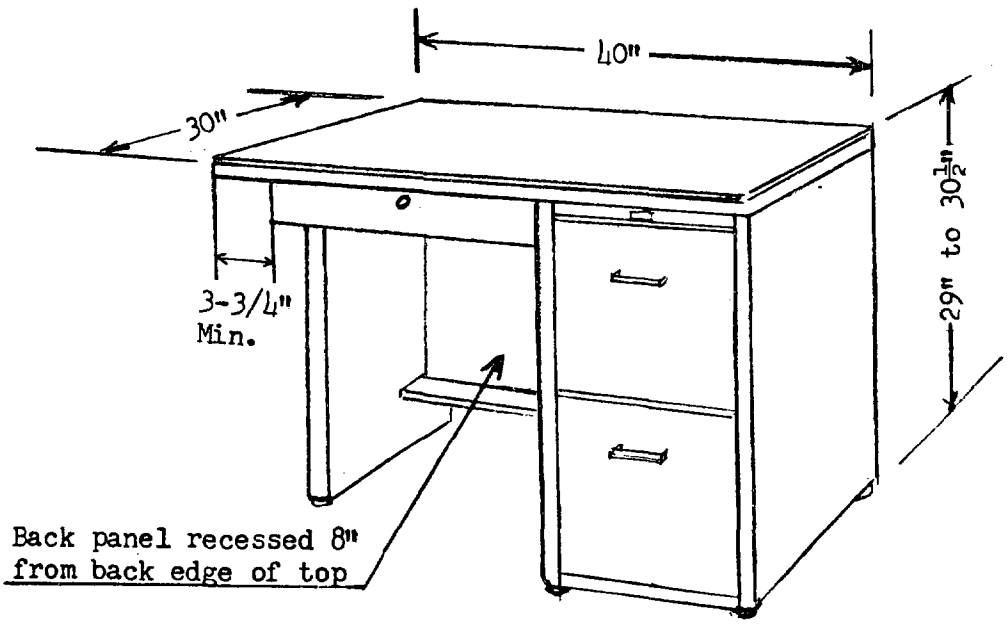


Class 1 - Single Right Pedestal

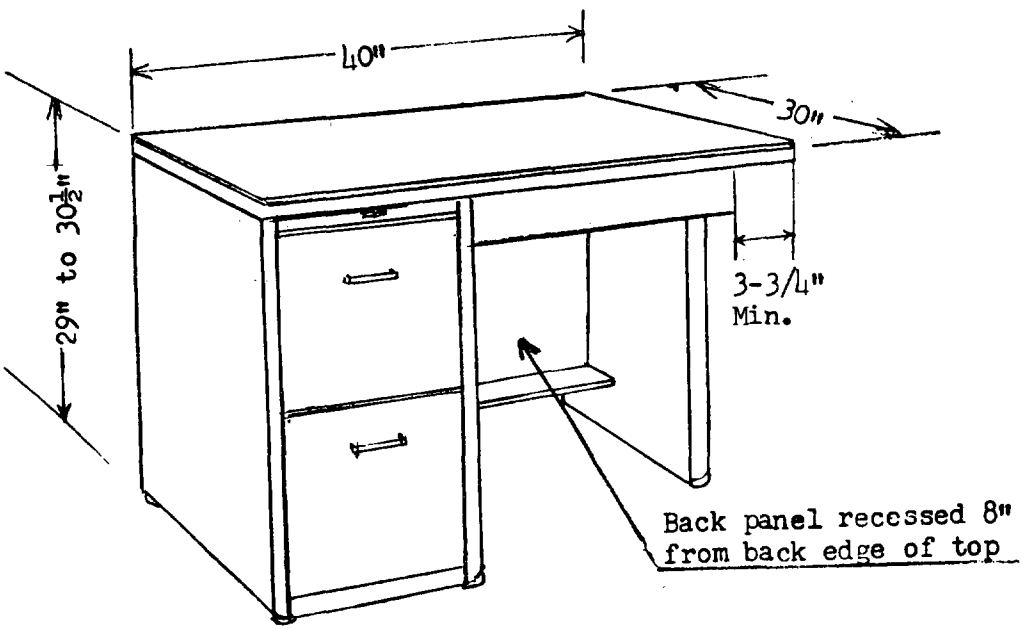


Class 2 - Single Left Pedestal


Figure 5 - L-Unit Desk
Style D - Pedestal containing 2 letter drawers and sliding shelf, without legs, recessed back panel
Size 1 - 40 inches wide, 30 inches deep




Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Desk Contains:

| | Minimum Inside Clear Dimensions |
|---|---|
| 1 Center Drawer | 25-1/8" W, 2-3/4" H, 21-5/8" D |
| 2 Letter Drawers | 12-1/4" W, 10-1/2" H, 25-1/4" D |

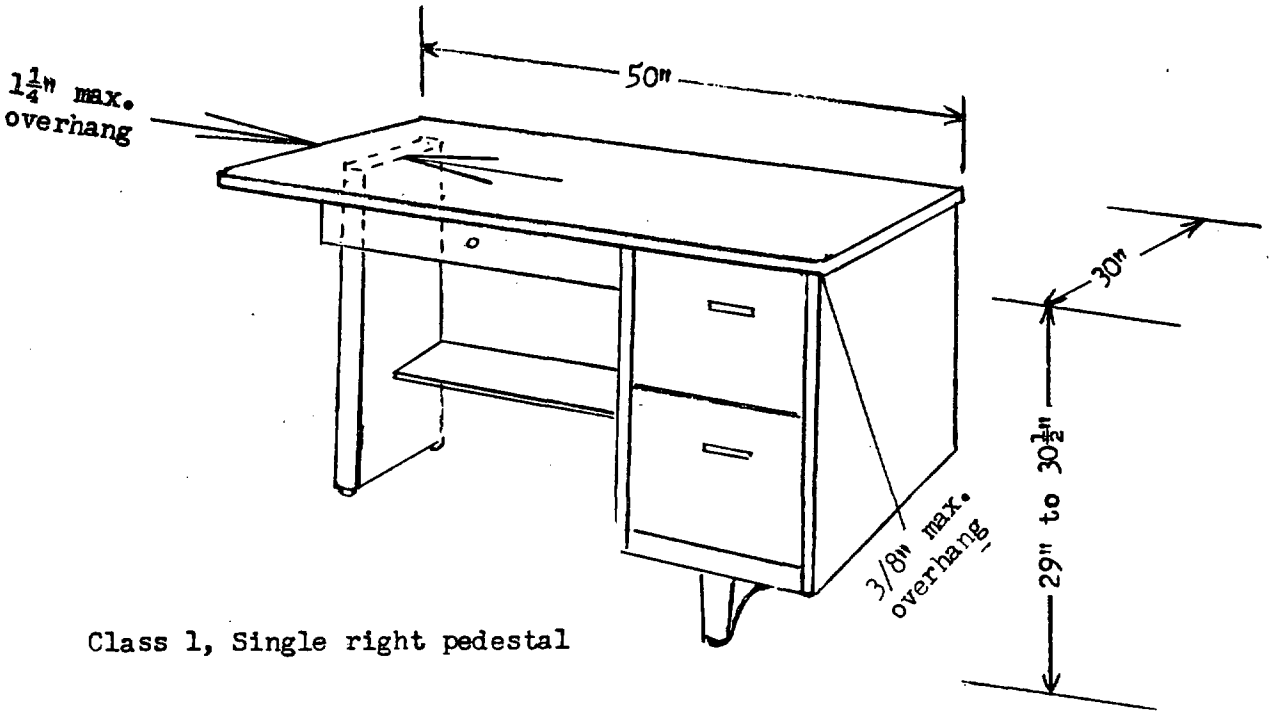


Class 1, Single right pedestal

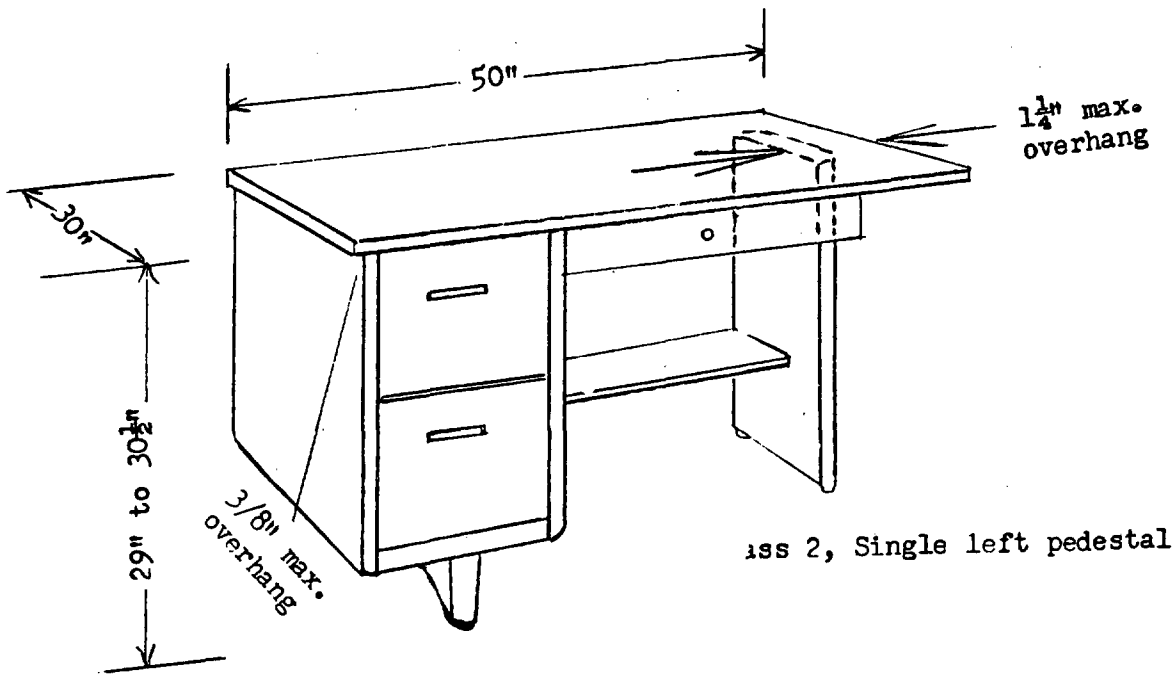


ıss 2, Single left pedestal

Figure 6 - Alternate location of pedestal and end panel
Style B - Pedestal containing 2 letter drawers
(Sliding shelf omitted)
Size 2 - 50 inches wide, 30 inches deep

Source: https://assist.dla.mil - Downloaded: 2026-02-26 11:26Z
Check the source to verify that this is the current version before use.

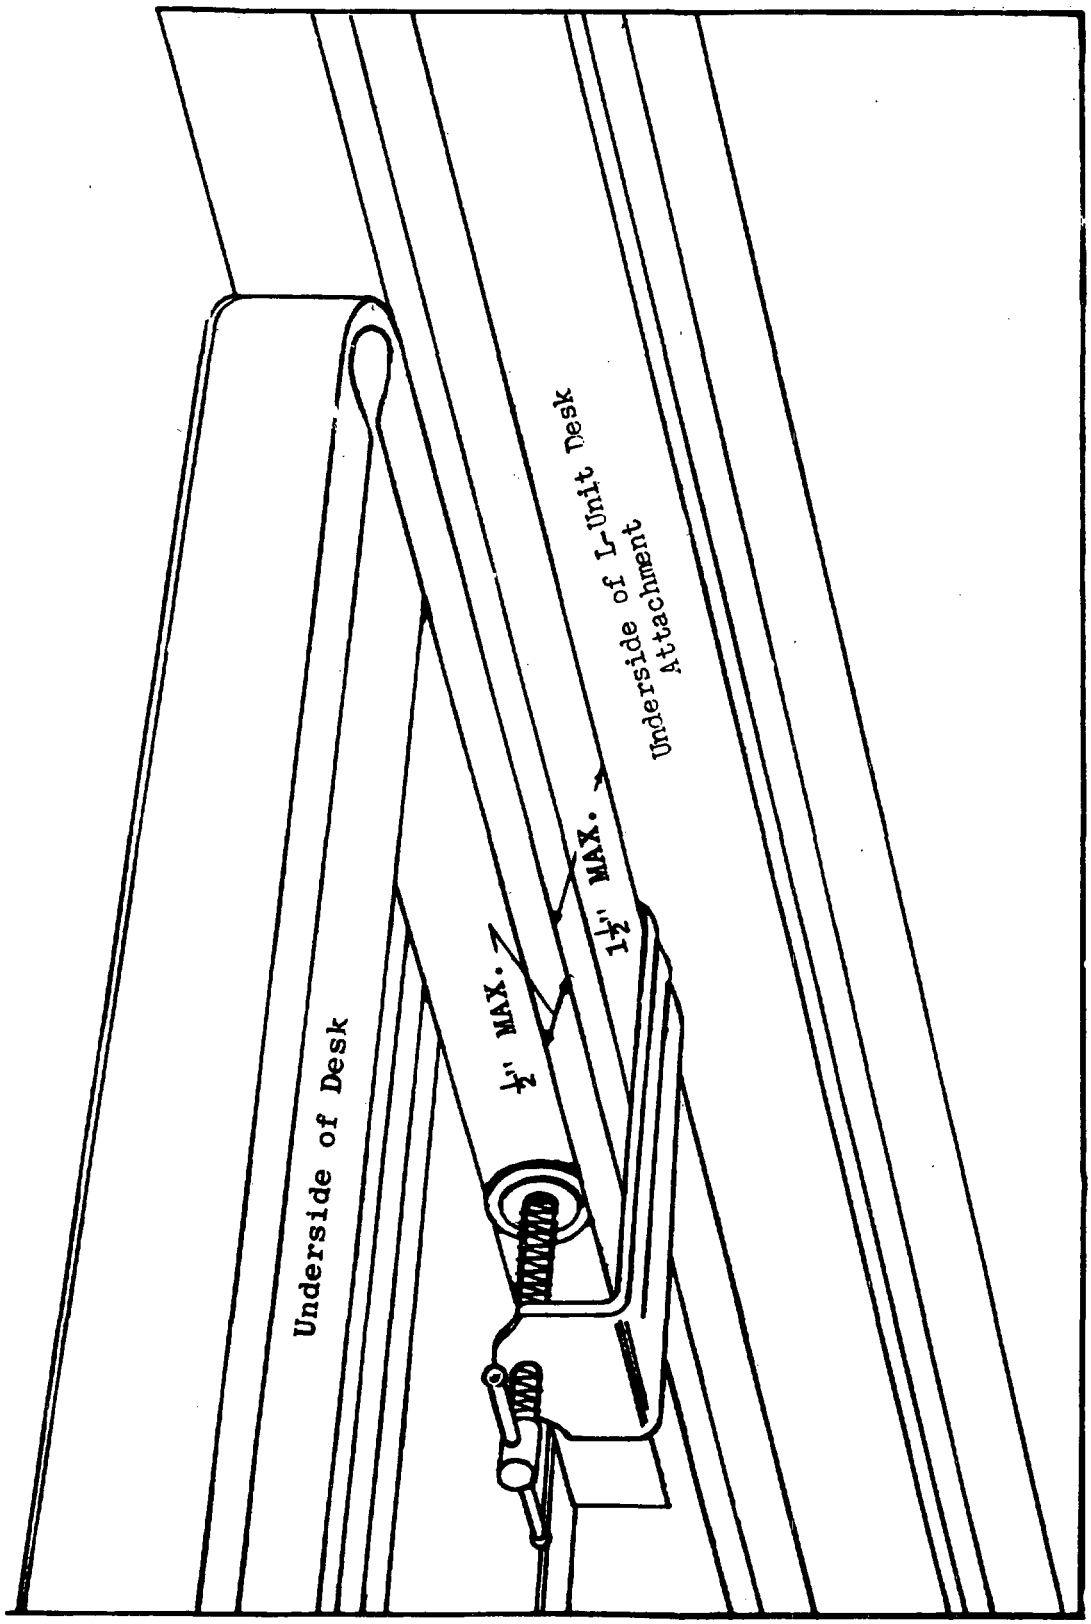



Figure 7 - Position of C-Clamp



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

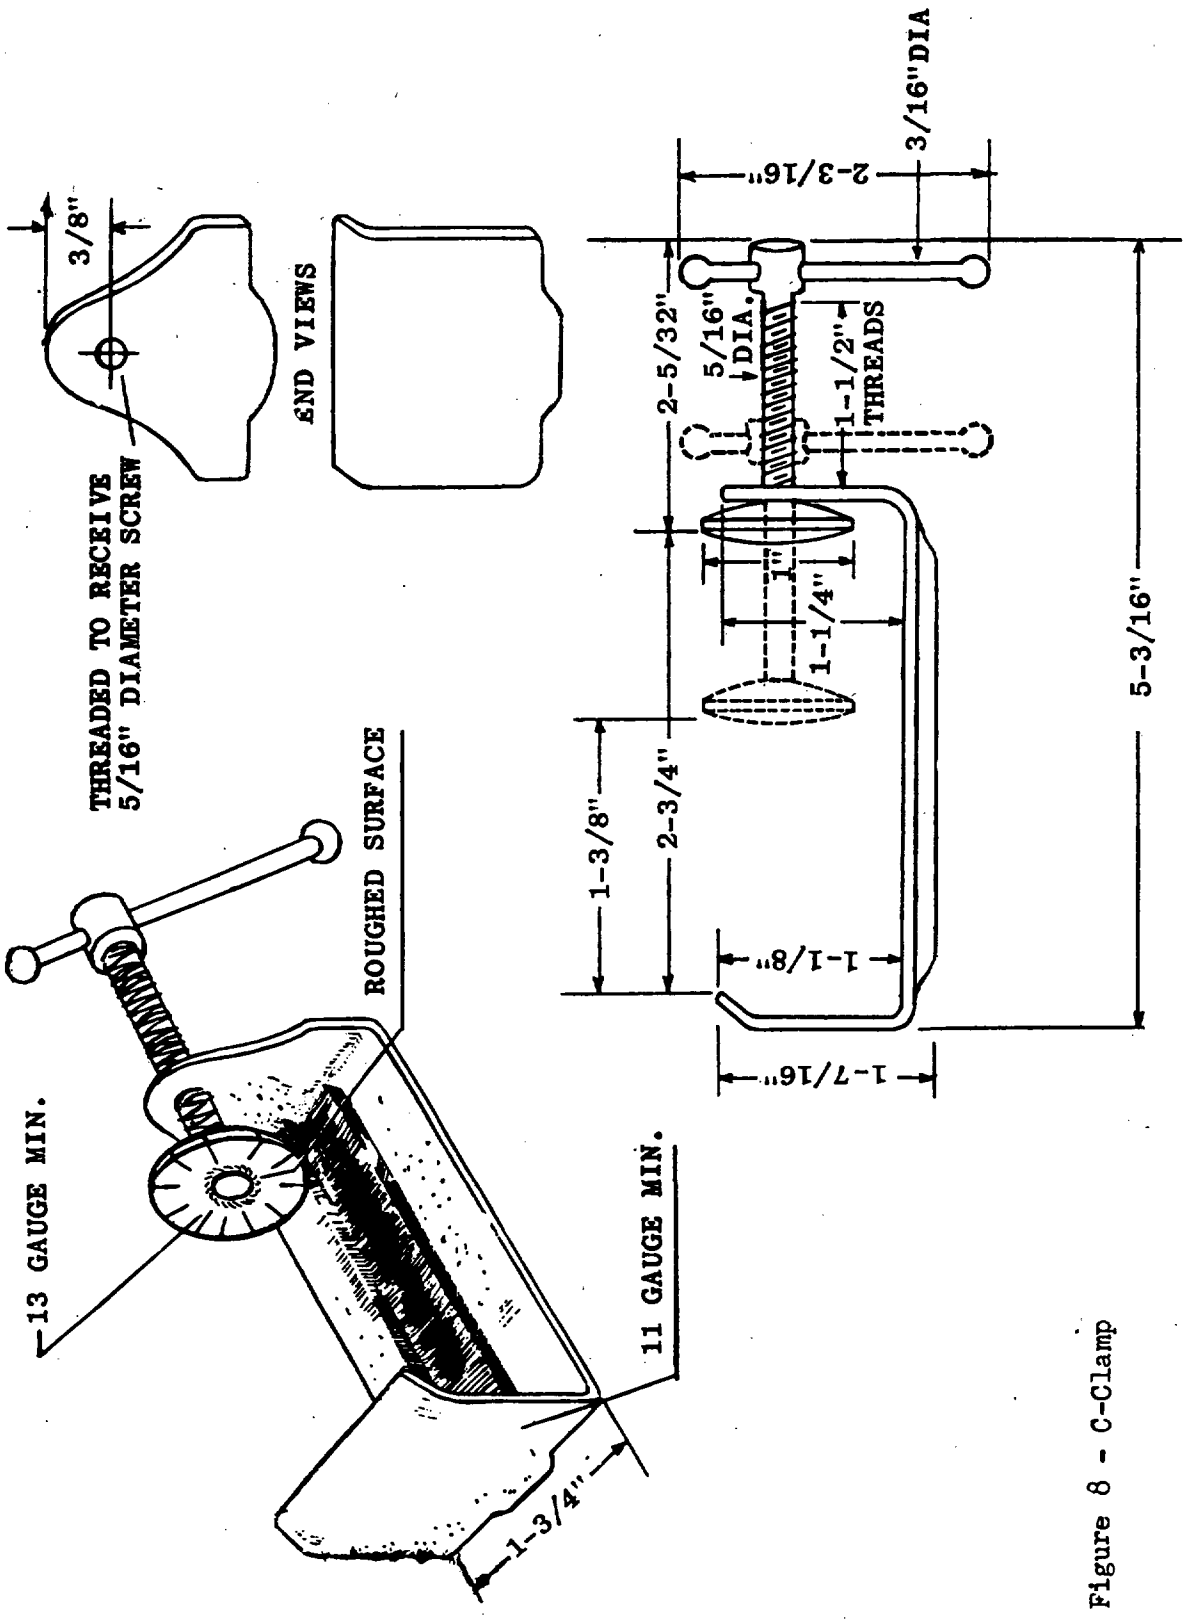



Figure 8 - C-Clamp

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

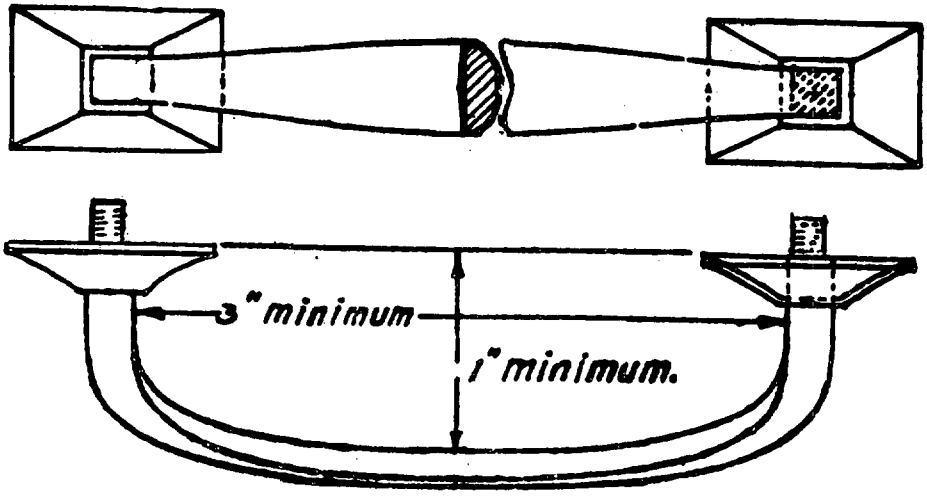



Figure 9 - Drawer Pull

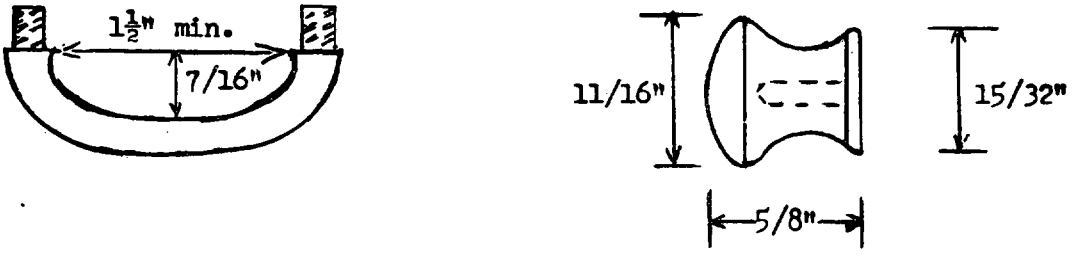



Figure 10 - Sliding Shelf Pull
(Alternate designs)



Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

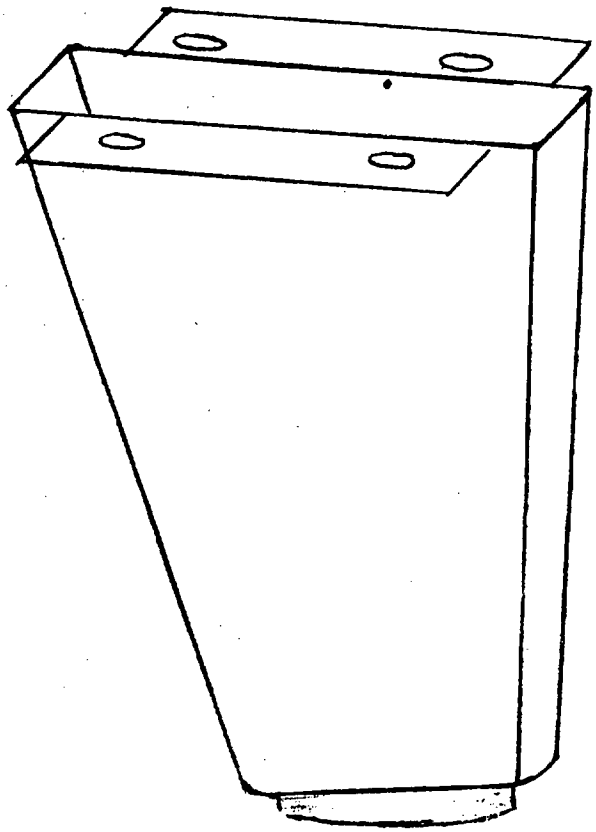


Figure 11 - Leg

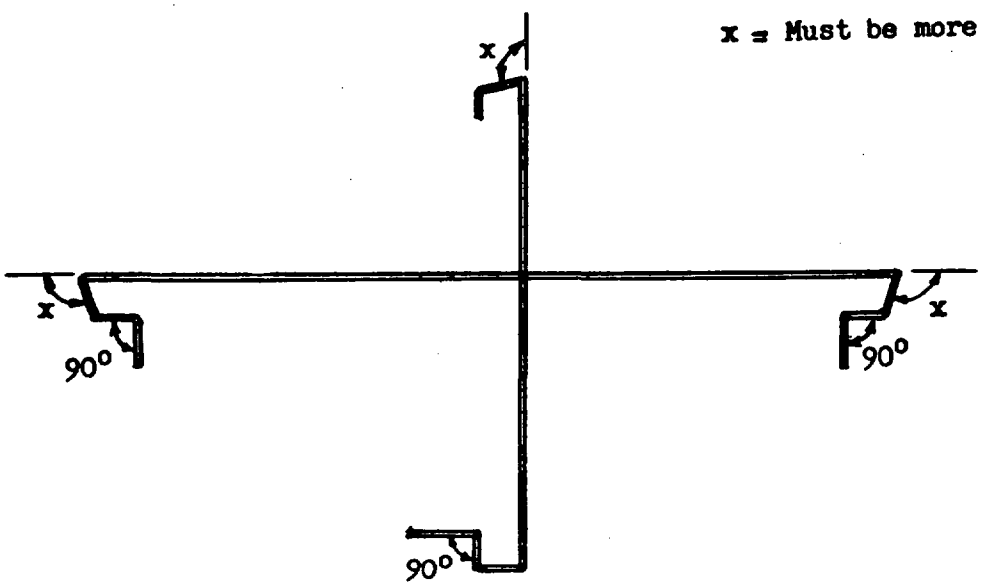



Figure 12 - Outside Drawer Front
(horizontal and vertical sections)

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

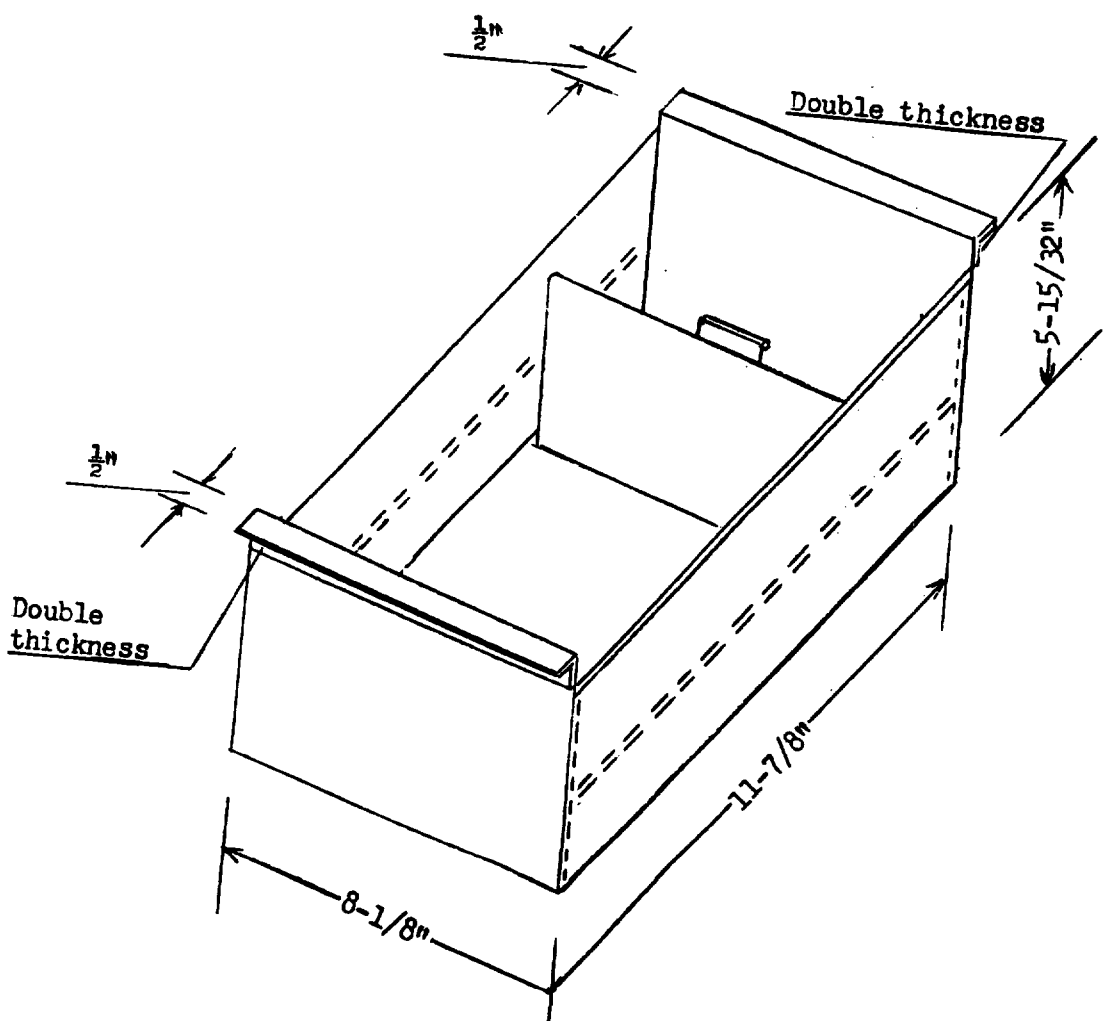



Figure 13 - Card tray



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.


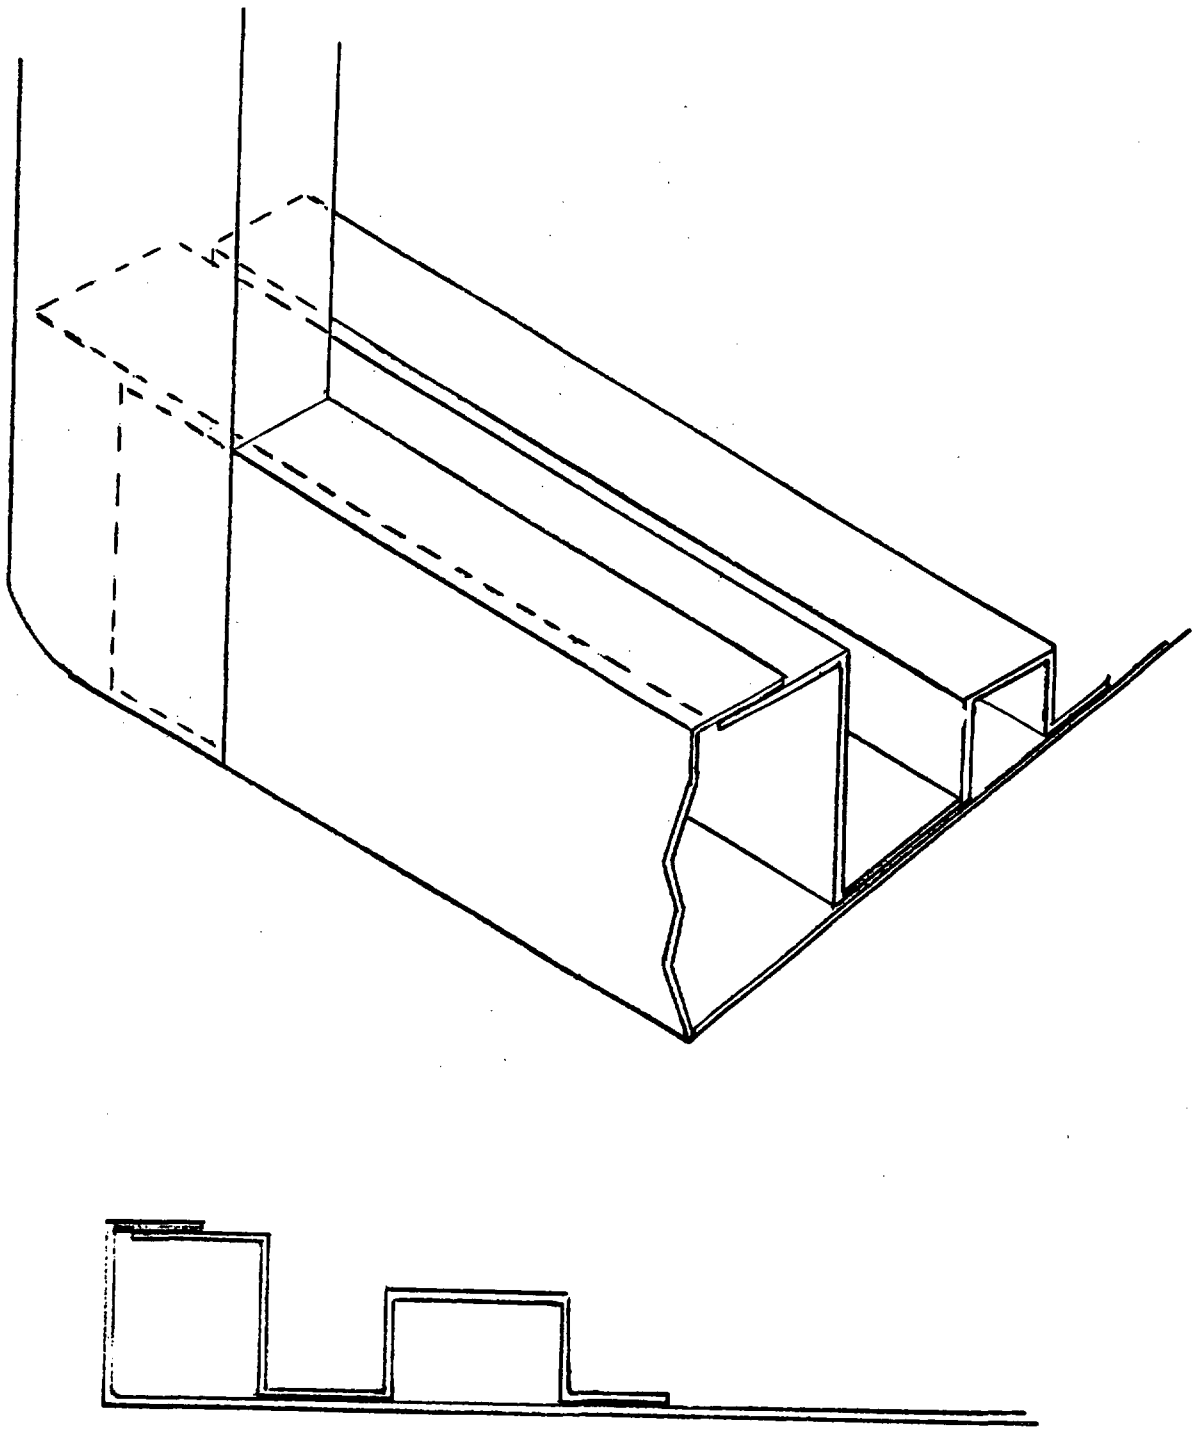


Figure 14 - Front Section Reinforcement



Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

| ITEM | DESCRIPTION | REQ'D. |
|---|---|---|
| 1 | SKID | 1 |
| 2 | LEG PROTECTORS | 2 |
| | | |
| 4 | HANDLE PROTECTORS | 2 |
| 5 | FIBERBOARD PAD | 1 |
| 6 | TOP FRONT FILLER D.W. | 1 |
| 7 | TOP REAR FILLER D.W. | 1 |
| 8 | CARTON | 1 |
| 9 | STRAPPING | 2 |
| 10 | CORK DISK | 4 |
| | | |
| | | |

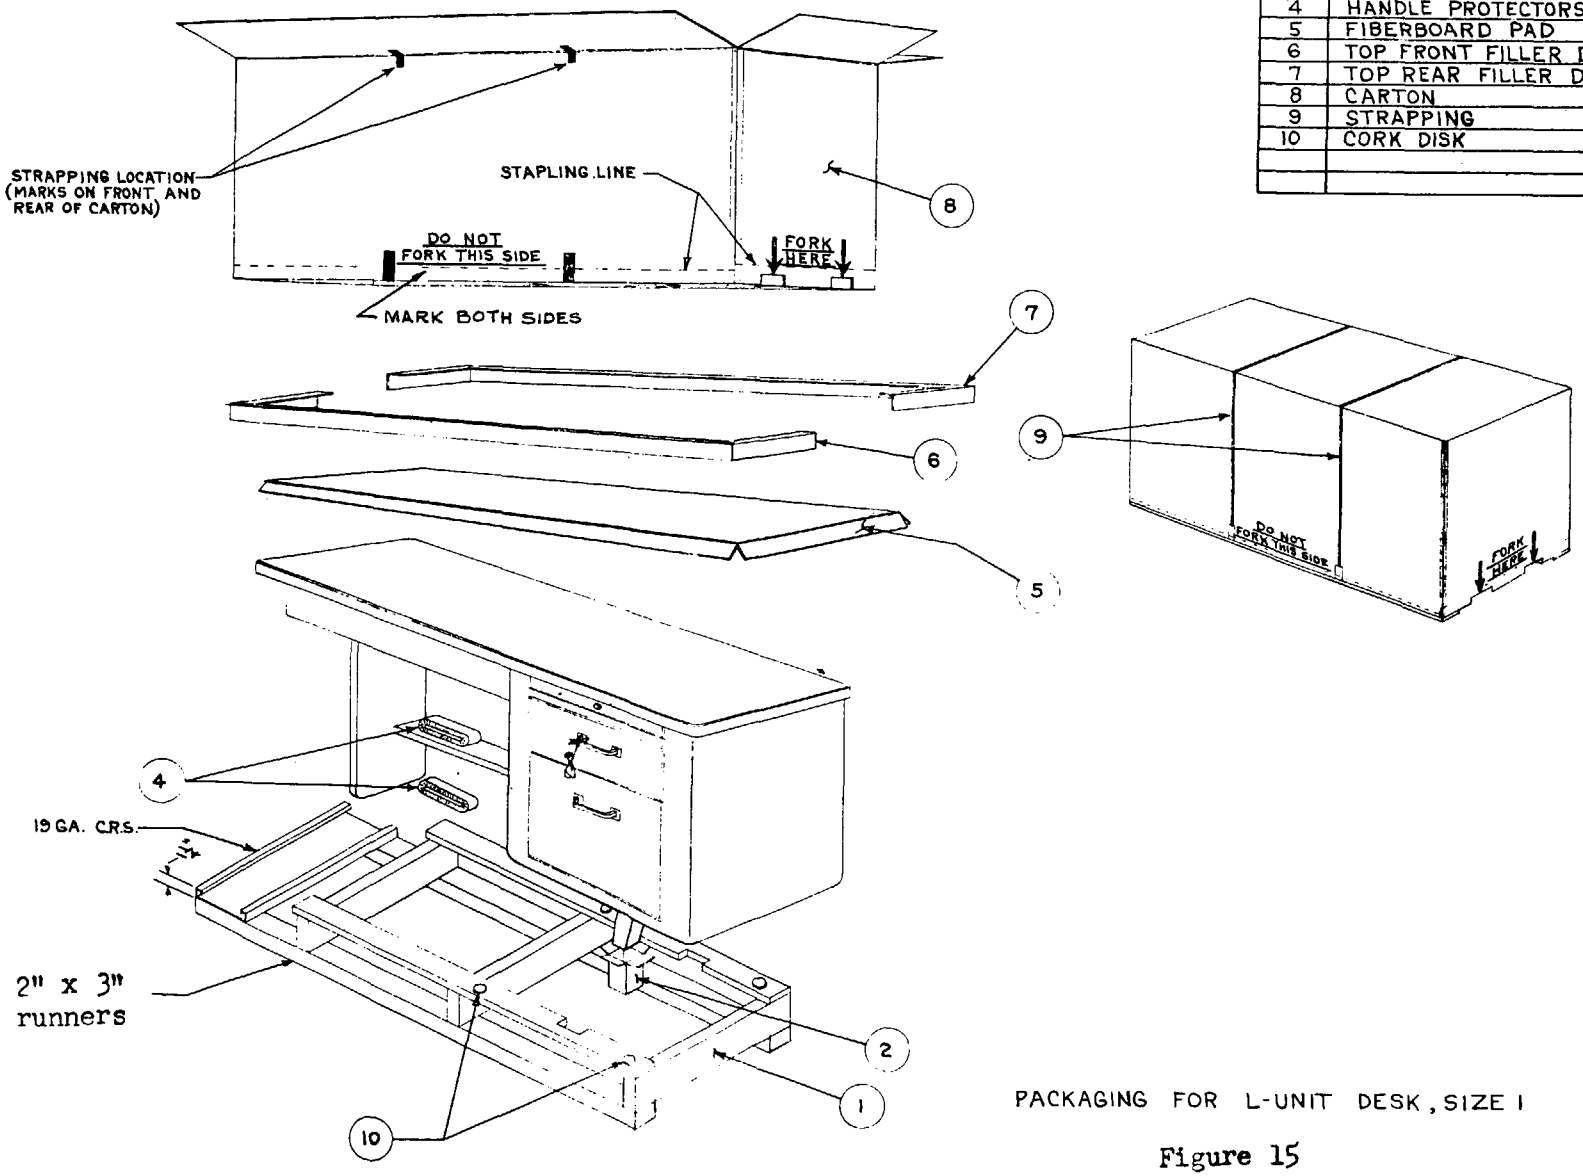



PACKAGING FOR L-UNIT DESK, SIZE I

Figure 15

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:39Z
Check the source to verify that this is the current version before use.


| ITEM | SIZE | REQ. |
|---|---|---|
| A | 2 x 4 x 32 | 4 |
| B | 2 x 3 x 51 5/8 | 2 |
| C | 1 x 5 x 40 | 2 |

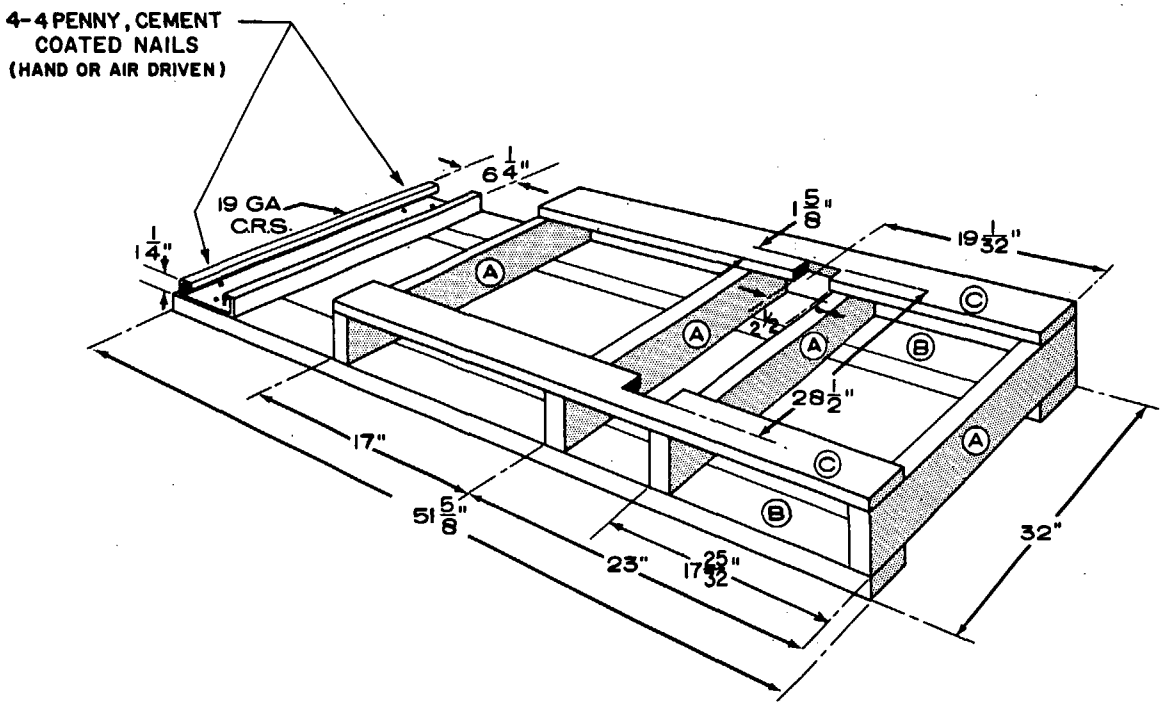



SKID FOR L-UNIT DESK, SIZE 2

Figure 16

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T11:39Z
Check the source to verify that this is the current version before use.

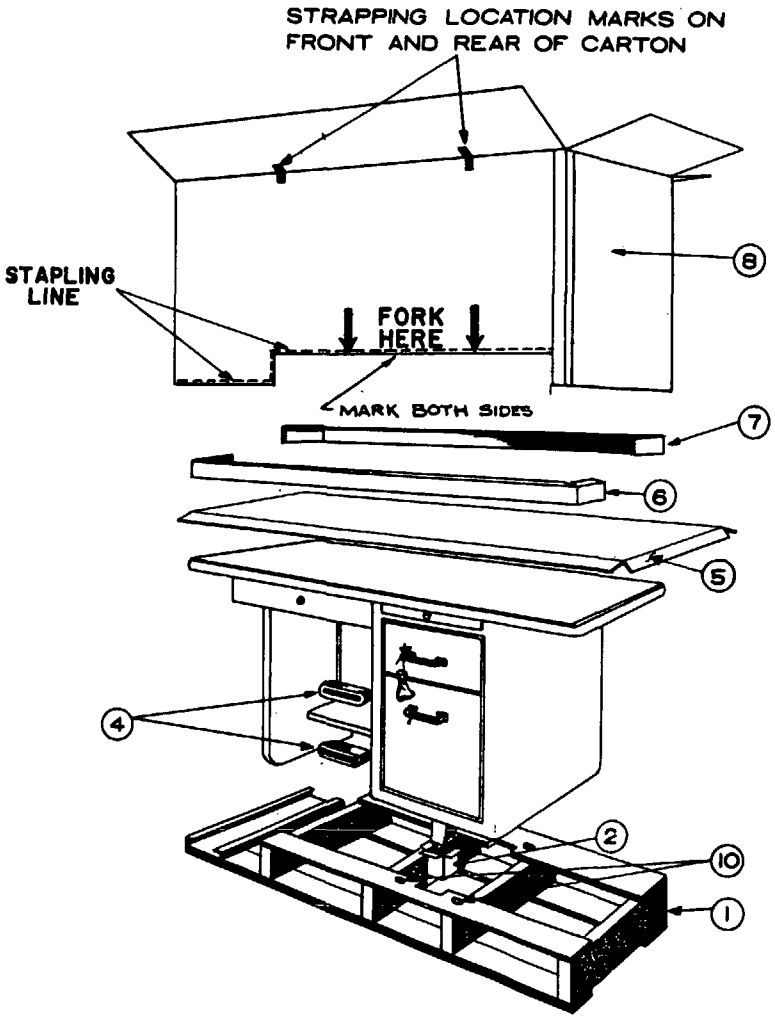


| ITEM | DESCRIPTION | REQ. |
|---|---|---|
| 1 | SKID | 1 |
| 2 | LEG PROTECTORS | 2 |
| | | |
| 4 | HANDLE PROTECTORS | 2 |
| 5 | FIBERBOARD PAD | 1 |
| 6 | TOP FRONT FILLER D.W. | 1 |
| 7 | TOP REAR FILLER D.W. | 1 |
| 8 | CARTON | 1 |
| 9 | STRAPPING | 2 |
| 10 | CORK DISKS | 4 |




PACKAGING FOR L-UNIT DESK, SIZE 2

**Figure 17**

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

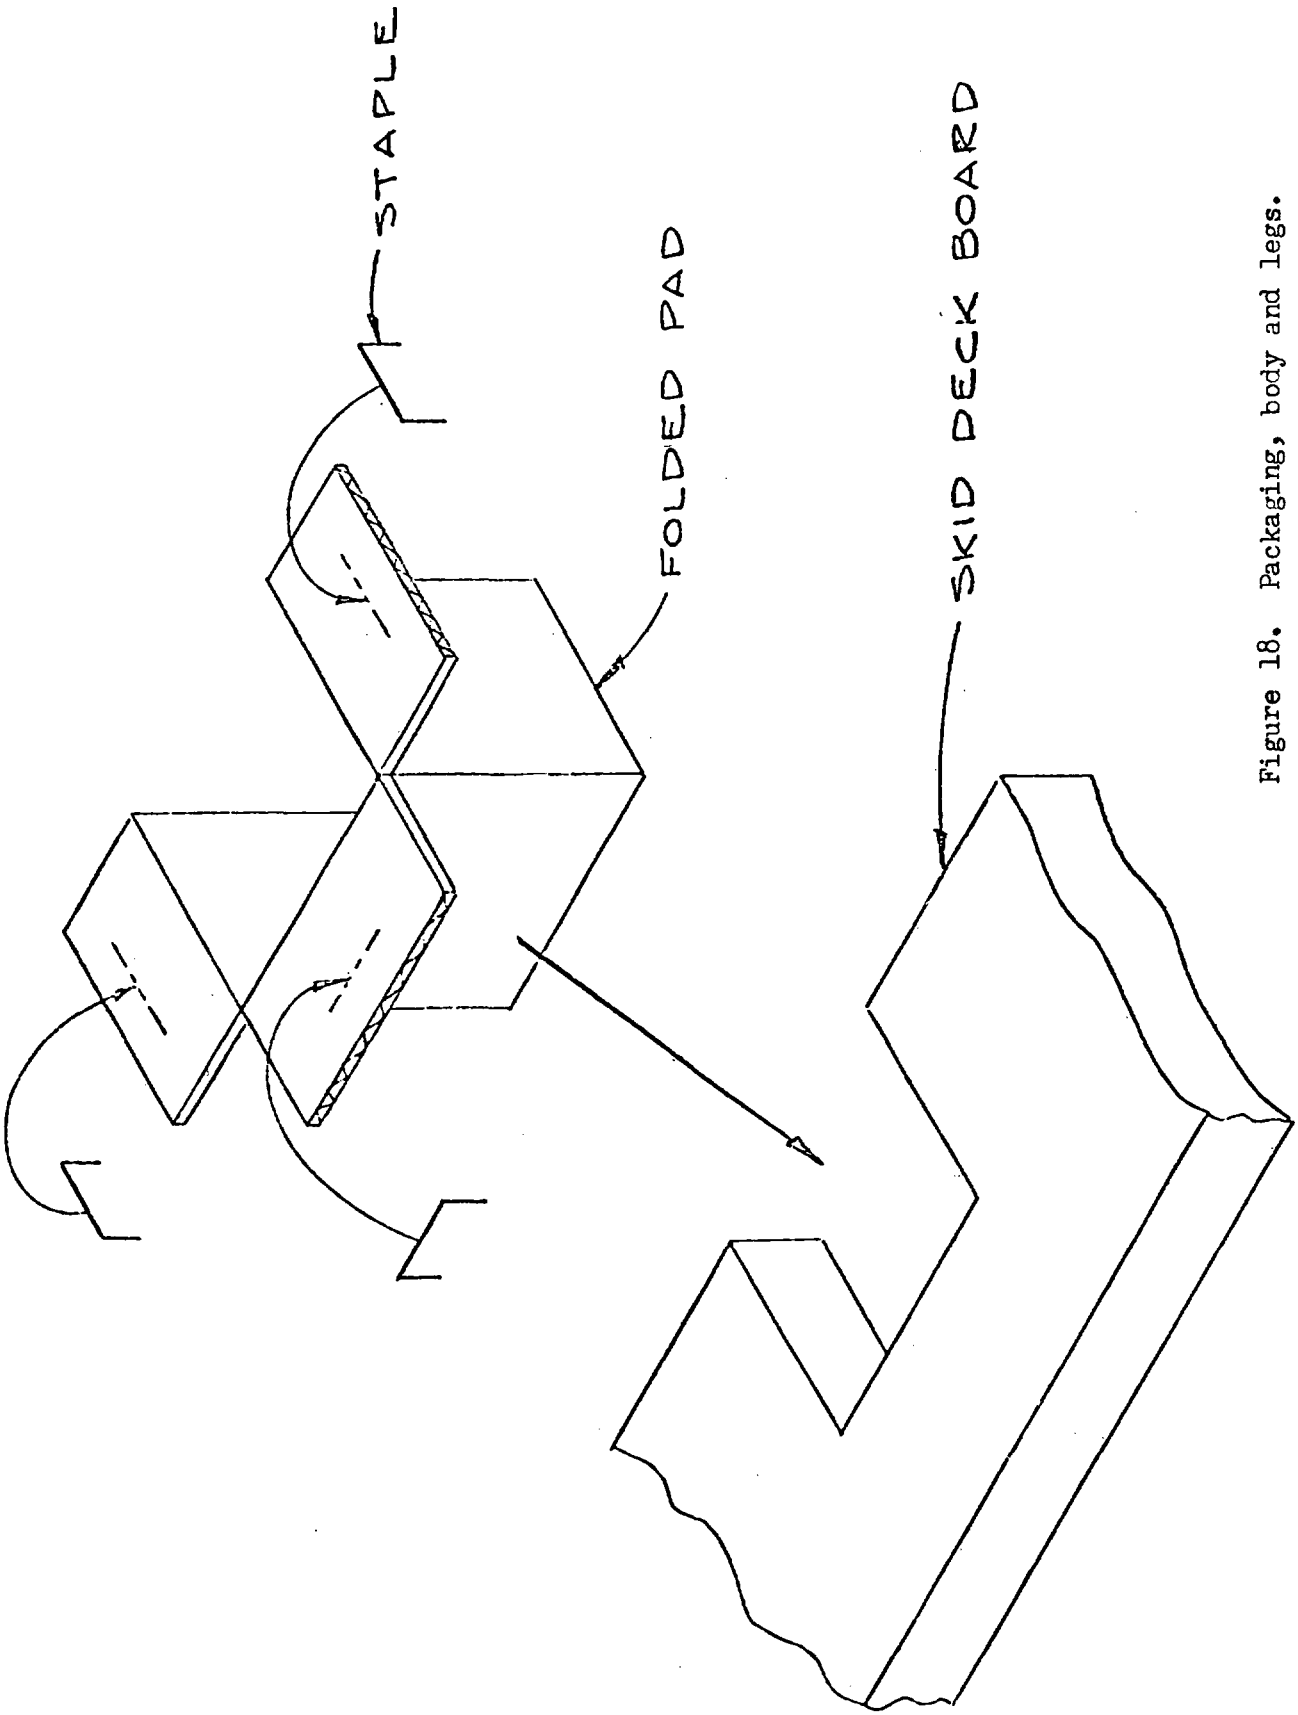



Figure 18. Packaging, body and legs.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.