INCH POUND


FF-B-187/6
10 SEPTEMBER 1993

FEDERAL SPECIFICATION SHEET

BEARING, ROLLER, TAPERED, DOUBLE ROW, NORMAL ANGLE, TWO SINGLE CONES, ONE DOUBLE CUP. (TYPE TOO)

This specification is approved by the Administrator, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

The complete requirements for procuring the bearings described herein, shall consist of this document and the latest issue of FF-B-187/GEN.

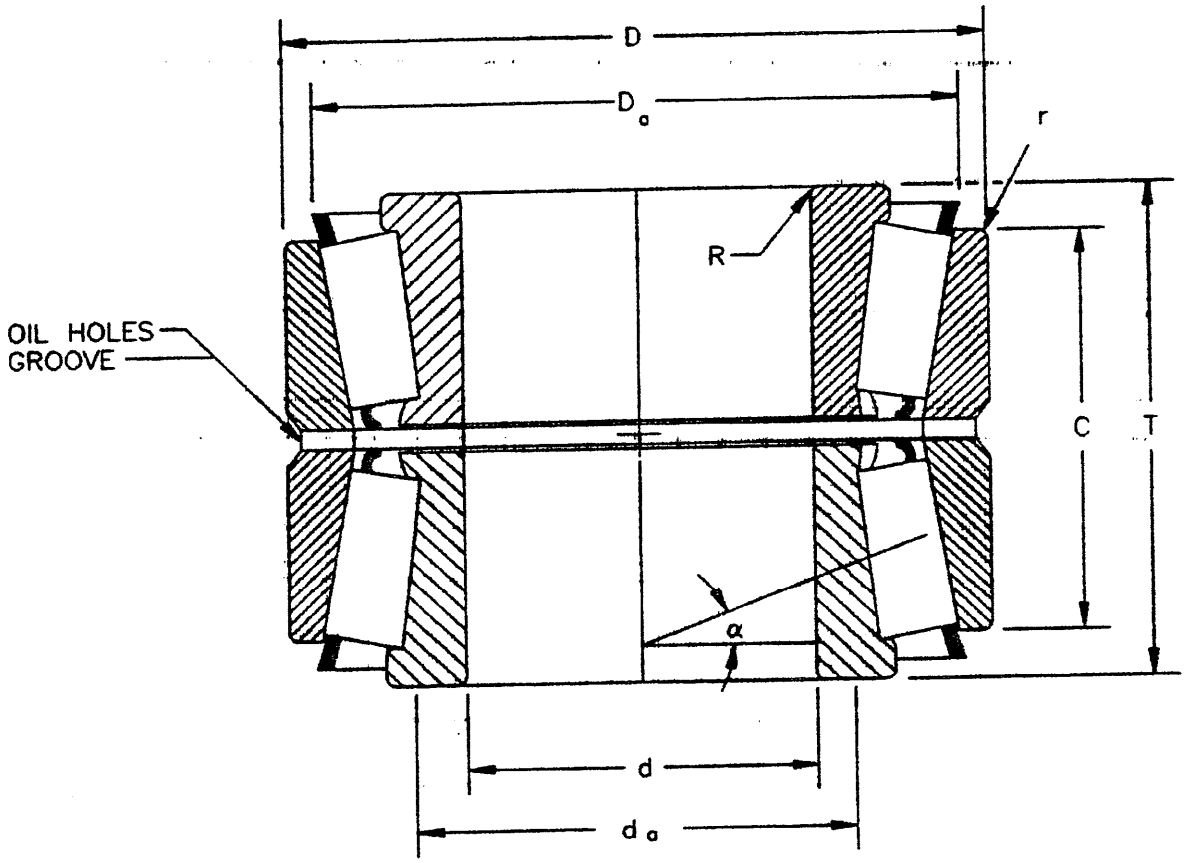

BEARING CONFIGURATION

FSC 3110

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
001	A2037-A2120D	0.3750	1.2000	0.8370	1.0000	0.05	SPCL	0.59	1.10	1.10	3200
002	A4050-A4138D	0.5000	1.3775	0.8125	0.9911	0.05	0.03	0.73	1.24	1.24	3700
003	05062-05185D	0.6250	1.8504	0.9926	1.2500	0.06	0.03	0.93	1.67	1.64	7500
004	05075-05185D	0.7500	1.8504	0.9926	1.2500	0.05	0.03	0.98	1.67	1.64	7500
005	07087-08196D	0.8750	1.9687	1.0000	1.3126	0.05	0.03	1.12	1.83	1.45	8100
006	07093-07196D	0.9375	1.9687	1.0000	1.3126	0.06	0.025	1.20	1.83	1.45	8100
007 *	07100-07196D	1.0000	1.9687	1.0000	1.3126	0.04	0.025	1.20	1.83	1.45	8100
008	07100S-07196D	1.0000	1.9686	1.0000	1.3126	0.06	0.025	1.24	1.83	1.45	8100
009	15100-15251D	1.0000	2.5000	1.4375	1.8125	0.14	0.03	1.50	2.32	1.67	14000
010	15101-15251D	1.0000	2.5000	1.4375	1.8125	0.03	0.03	1.28	2.32	1.67	14000
011 *	15102-15251D	1.0000	2.5000	1.4375	1.8125	0.06	0.03	1.34	2.32	1.67	14000
012	15106-15251D	1.0625	2.5000	1.4375	1.8125	0.03	0.03	1.32	2.32	1.67	14000
013	15112-15251D	1.1250	2.5000	1.4375	1.8125	0.14	0.03	1.57	2.32	1.67	14000
014	15113-15251D	1.1250	2.5000	1.4375	1.8125	0.03	0.03	1.36	2.32	1.67	14000
015	2578-2523D	1.1250	2.7500	2.2500	2.6250	0.09	0.03	1.54	2.52	2.14	23100
016	26112-26284D	1.1250	2.8338	1.4375	1.6835	0.06	0.03	1.46	2.56	1.62	16300
017	02872-02823D	1.1250	3.0000	1.5000	1.8750	0.03	0.03	1.48	2.76	1.29	18200

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART NUMBER 1/ CONE–CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
018	17119–17245D	1.1875	2.4409	1.4275	1.5625	0.06	0.03	1.46	2.24	1.53	12000
019	2558–2523D	1.1875	2.7500	2.2500	2.6250	0.09	0.03	1.57	2.52	2.14	23100
020	15118–15251D	1.1875	2.5000	1.4375	1.8125	0.14	0.015	1.48	2.17	1.67	14000
021	08125–08231D	1.2500	2.3125	0.9688	1.2812	0.04	0.03	1.63	2.32	1.23	8900
022	15123–15251D	1.2500	2.5000	1.4375	1.7425	SPCL	0.03	1.67	2.32	1.67	14000
023	15125–15251D	1.2500	2.5000	1.4375	1.8125	0.14	0.03	1.67	2.32	1.67	14000
024 *	15126–15251D	1.2500	2.5000	1.4375	1.8125	0.03	0.03	1.46	2.32	1.67	14000
025	14124–14276D	1.2500	2.7170	1.5000	1.8126	0.03	0.03	1.52	2.48	1.53	15100
026	14125A–14276D	1.2500	2.7170	1.5000	1.8126	0.14	0.03	1.73	2.48	1.53	15100
027 *	2580–2523D	1.2500	2.7500	2.2500	2.6250	0.03	0.03	1.52	2.52	2.14	23100
028	2582–2523D	1.2500	2.7500	2.2500	2.6250	0.14	0.03	1.73	2.52	2.14	23100
029	02875–02823D	1.2500	3.0000	1.5000	1.8750	0.14	0.03	1.79	2.76	1.29	18200
030	02876–02823D	1.2500	3.0000	1.5000	1.8750	0.03	0.03	1.57	2.76	1.29	18200
031 *	3476–3423D	1.2500	3.2500	2.1875	2.6251	0.05	0.03	1.69	2.95	1.60	28900
032	26126–26284D	1.2600	2.8338	1.4375	1.6835	0.06	0.03	1.56	2.56	1.62	16300
033	14130–14276D	1.3125	2.7170	1.5000	1.8126	0.14	0.03	1.77	2.48	1.53	15100
034	14131–14276D	1.3125	2.7170	1.5000	1.8126	0.03	0.03	1.56	2.48	1.53	15100
035	2581–2523D	1.3125	2.7500	2.2500	2.6250	0.03	0.03	1.56	2.52	2.14	23100
036	2585–2523D	1.3125	2.7500	2.2500	2.6250	0.14	0.03	1.77	2.52	2.14	23100
037	26131–26282D	1.3125	2.8125	1.4375	1.6875	0.14	0.02	1.75	2.56	1.62	16300

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_o RECOMMENDED SHOULDER DIAMETER SHAFT	D_o RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
038	26131-26284D	1.3125	2.8338	1.4375	1.6835	0.14	0.03	1.75	2.56	1.62	16300
039	14137A-14276D	1.3750	2.7170	1.5000	1.8126	0.06	0.03	1.65	2.48	1.53	15100
040	14138A-14276D	1.3750	2.7170	1.5000	1.8126	0.14	0.03	1.81	2.48	1.53	15100
041	02877-02823D	1.3750	3.0000	1.5000	1.8750	0.14	0.03	1.91	2.76	1.29	18200
042	02878-02823D	1.3750	3.0000	1.5000	1.8750	0.03	0.03	1.67	2.76	1.29	18200
043	3478-3423D	1.3750	3.2500	2.1875	2.6251	0.14	0.03	1.97	2.95	1.60	28800
044	449-432D	1.3750	3.7500	2.0000	2.4376	0.03	0.03	1.73	3.43	2.05	35200
045	14139-14276D	1.3770	2.7170	1.5000	1.8126	0.05	0.03	1.63	2.48	1.53	15100
046	13682-13621D	1.4375	2.7170	1.5000	1.8124	0.14	0.03	1.89	2.56	1.45	15400
047	3479-3423D	1.4375	3.2500	2.1875	2.6251	0.03	0.03	1.79	2.95	1.60	28800
048	25570-25520D	1.4375	3.2650	1.8750	2.2500	0.14	0.03	2.01	3.03	1.74	24900
049	13685-13621D	1.5000	2.7170	1.5000	1.8124	0.14	0.03	1.95	2.56	1.45	15400
050 *	13687-13621D	1.5000	2.7170	1.5000	1.8124	0.08	0.03	1.83	2.56	1.45	15400
051	28150-28318D	1.5000	3.1510	1.3750	1.8126	0.06	0.03	1.79	2.87	1.45	17700
052	27880-27820D	1.5000	3.1510	1.7700	2.2500	0.03	0.03	1.89	2.95	1.04	21700
053	27881-27820D	1.5000	3.1510	1.7700	2.2500	0.14	0.03	2.09	2.95	1.04	21700

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
069	355A-353D	1.7500	3.5480	1.7500	2.0000	0.03	0.03	2.01	3.23	1.91	22800
070	3782-3729D	1.7500	3.6718	2.0625	2.5625	0.14	0.03	2.28	3.46	1.73	33700
071	438-432D	1.7500	3.7500	2.0000	2.4376	0.14	0.03	2.24	3.43	2.05	35200
072	33885-33821D	1.7500	3.7500	2.0624	2.5000	0.03	0.03	2.09	3.54	1.77	35800
073	460-452D	1.7500	4.2500	2.1250	2.5626	0.14	0.03	2.36	3.94	1.74	37400
074 *	535-533D	1.7500	4.3750	2.5000	3.1250	0.14	0.06	2.36	3.94	1.97	47400
075	18690-18620D	1.8125	3.1250	1.3125	1.6249	0.11	0.03	2.20	2.91	1.56	14500
076	25592-25520D	1.8125	3.2650	1.8750	2.2500	0.14	0.03	2.28	3.03	1.74	24900
077	359A-353D	1.8125	3.5480	1.7500	2.0000	0.14	0.03	2.24	3.23	1.91	22800
078	359S-353D	1.8125	3.5480	1.7500	2.0000	0.09	0.03	2.17	3.23	1.91	22800
079	3777-3729D	1.8125	3.6718	2.0625	2.5625	0.14	0.03	2.36	3.46	1.73	33700
080	18610-18620D	1.8125	3.7500	2.0000	2.4376	0.11	0.03	2.18	2.93	1.56	14500
081	436-432D	1.8125	3.7500	2.0000	2.4376	0.14	0.03	2.32	3.43	2.05	35200
082	369A-363D	1.8750	3.5433	1.6563	1.9689	0.14	0.03	2.36	3.31	1.83	23900
083	369S-363D	1.8750	3.5433	1.6563	1.9689	0.09	0.03	2.24	3.31	1.83	23900
084	3778-3729D	1.8750	3.6718	2.0625	2.5625	0.25	0.03	2.64	3.46	1.73	33700
085	3779-3729D	1.8750	3.6718	2.0625	2.5625	0.14	0.03	2.40	3.46	1.73	33700

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
054 *	3490-3423D	1.5000	3.2500	2.1875	2.6251	0.14	0.03	2.05	2.95	1.60	28800
055	25572-25520D	1.5000	3.2650	1.8750	2.2500	0.03	0.03	1.81	3.03	1.74	24900
056	440-432D	1.5000	3.7500	2.0000	2.4376	0.03	0.03	1.83	3.43	2.05	35200
057	33880-33821D	1.5000	3.7500	2.0624	2.5000	0.14	0.03	2.13	3.54	1.77	35800
058 *	542-533D	1.5000	4.3750	2.5000	3.1250	0.14	0.06	2.17	3.94	1.97	47400
059	28158-28318D	1.5748	3.1510	1.3750	1.8126	0.06	0.03	1.87	2.87	1.45	17700
060	24780-24720D	1.6250	3.0000	1.5625	1.9375	0.14	0.03	2.13	2.83	1.49	21000
061	365A-363D	1.6250	3.5433	1.6563	1.9689	0.14	0.03	2.17	3.31	1.83	23900
062	22168-22325D	1.6875	3.2500	1.3750	1.7500	0.09	0.03	2.05	2.99	1.36	18200
063	25578-25520D	1.6875	3.2650	1.8750	2.2500	0.09	0.03	2.09	3.03	1.74	24900
064	18685-18620D	1.7500	3.1250	1.3125	1.6249	0.11	0.03	2.13	2.91	1.56	14500
065	25580-25520D	1.7500	3.2650	1.8750	2.2500	0.14	0.03	2.24	3.03	1.74	24900
066	25581-25520D	1.7500	3.2650	1.8750	2.2500	0.02	0.03	2.01	3.03	1.74	24900
067	25582-25520D	1.7500	3.2650	1.8750	2.2500	0.02	0.03	2.36	3.03	1.74	24900
068	355-353D	1.7500	3.5480	1.7500	2.0000	0.09	0.03	2.13	3.23	1.91	22800

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
086	386A-384ED	1.8750	3.9370	1.5620	1.9370	0.03	0.03	2.20	3.66	1.65	25400
087	386A-384D	1.8750	3.9370	1.6875	2.0625	0.03	0.03	2.20	3.66	1.65	25400
088	463-452D	1.8750	4.2500	2.1250	2.5626	0.19	0.03	2.56	3.94	1.74	37400
089	467-452D	1.8750	4.2500	2.1250	2.5626	0.03	0.03	2.24	3.94	1.74	23900
090	365S-363D	1.9375	3.5433	1.6563	1.9689	0.03	0.03	2.17	3.31	1.83	23900
091	3781-3729D	1.9375	3.6718	2.0625	2.5625	0.14	0.03	2.44	3.46	1.73	33700
092	L305649-L305610D	2.0000	3.1875	1.3750	1.6876	0.06	0.03	2.28	3.03	1.64	16900
093	368-363D	2.0000	3.5433	1.6563	1.9689	0.06	0.03	2.28	3.31	1.83	23900
094	368A-363D	2.0000	3.5433	1.6563	1.9689	0.14	0.03	2.44	3.31	1.83	23900
095	370A-363D	2.0000	3.5433	1.6563	1.9689	0.20	0.03	2.56	3.31	1.83	23900
096	3775-3729D	2.0000	3.6718	2.0625	2.5625	0.03	0.03	2.28	3.46	1.73	33700
097	3780-3729D	2.0000	3.6718	2.0625	2.5625	0.14	0.03	2.52	3.46	1.73	33700
098	3784-3729D	2.0000	3.6718	2.0625	2.5625	0.25	0.03	2.76	3.46	1.73	33700
099	33889-33821D	2.0000	3.7500	2.0624	2.5000	0.14	0.03	2.52	3.54	1.77	35800
100	385A-384ED	2.0000	3.9370	1.5620	1.9370	0.09	0.03	2.40	3.66	1.65	25400
101	385AX-384ED	2.0000	3.9370	1.5620	1.9370	0.03	0.03	2.28	3.66	1.65	25400
102	375-372XD	2.0000	3.9370	1.5626	2.0000	0.09	0.03	2.36	3.54	1.73	24400
103	385A-384D	2.0000	3.9370	1.6875	2.0625	0.09	0.03	2.40	3.66	1.65	25400

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
104	385AX-384D	2.0000	3.9370	1.6875	2.0625	0.03	0.03	2.28	3.66	1.65	25400
105	455-452D	2.0000	4.2500	2.1250	2.5626	0.03	0.03	2.36	3.94	1.74	37400
106	455S-452D	2.0000	4.2500	2.1250	2.5626	0.14	0.03	2.56	3.94	1.74	37400
107	398-394DC	2.0000	4.3307	1.8125	2.0625	0.03	0.03	2.44	4.11	1.45	27700
108	537-533D	2.0000	4.3750	2.5000	3.1250	0.14	0.06	2.56	3.94	1.97	47400
109 *	555-552D	2.0000	4.8750	2.5000	3.1250	0.09	0.06	2.60	4.53	1.69	52600
110	3685-363D	2.0312	3.5433	1.6563	1.9689	0.08	0.03	2.32	3.31	1.83	23900
111	3767-3729	2.0625	3.6718	2.0625	3.6718	0.09	0.03	2.48	3.46	1.73	33700
112	33890-33821D	2.0625	3.7500	2.0624	2.5000	0.06	0.03	2.40	3.54	1.77	35800
113	33891-33821D	2.0625	3.7500	2.0624	2.5000	0.14	0.03	2.60	3.54	1.77	35800
114	468-452D	2.0625	4.2500	2.1250	2.5626	0.06	0.03	2.44	3.94	1.74	37400
115	33895-33821D	2.1250	3.7500	2.0624	2.5000	0.06	0.03	2.48	3.54	1.77	35800
116	389A-384ED	2.1250	3.9370	1.5620	1.9370	0.03	0.03	2.40	3.66	1.65	25400
117	389A-384D	2.1250	3.9370	1.6875	2.0625	0.03	0.03	2.40	3.66	1.65	25400
118	456-452D	2.1250	4.2500	2.1250	2.5626	0.14	0.03	2.68	3.94	1.74	37400
119	539-533D	2.1250	4.3750	2.5000	3.1250	0.14	0.06	2.68	3.94	1.97	47400
120	539A-533D	2.1250	4.3750	2.5000	3.1250	0.22	0.06	2.83	3.94	1.97	47400

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
121	557-S-552D	2.1250	4.8750	2.5000	3.1250	0.14	0.06	2.80	4.53	1.69	52600
122	636-632D	2.1250	5.3750	3.0000	3.7500	0.14	0.06	2.87	4.92	1.61	64100
123	L507949-L507914D	2.2500	3.6250	1.3437	1.6563	0.06	0.03	2.56	3.39	1.50	16200
124	387-384ED	2.2500	3.9370	1.5620	1.9370	0.09	0.03	2.60	3.66	1.65	25400
125	387A-384ED	2.2500	3.9370	1.5620	1.9370	0.14	0.03	2.72	3.66	1.65	25400
126	387-S-384ED	2.2500	3.9370	1.5620	1.9370	0.03	0.03	2.48	3.66	1.65	25400
127	387AS-384ED	2.2500	3.9370	1.5620	1.9370	0.20	0.03	2.83	3.66	1.65	25400
128	387-384D	2.2500	3.9370	1.6875	2.0625	0.09	0.03	2.60	3.66	1.65	25400
129	387A-384D	2.2500	3.9370	1.6875	2.0625	0.14	0.03	2.72	3.66	1.65	25400
130	387-S-384D	2.2500	3.9370	1.6875	2.0625	0.03	0.03	2.48	3.66	1.65	25400
131	387AS-384D	2.2500	3.9370	1.6875	2.0625	0.20	0.03	2.83	3.66	1.65	25400
132	462-452D	2.2500	4.2500	2.1250	2.5626	0.09	0.03	2.64	3.94	1.74	37400
133	469-452D	2.2500	4.2500	2.1250	2.5626	0.14	0.03	2.76	3.94	1.74	37400
134 *	390-394D	2.2500	4.3307	1.8125	2.0625	0.09	0.03	2.76	4.11	1.45	27700
135	33225-33462D	2.2500	4.6250	2.1250	2.6250	0.14	0.03	2.91	4.41	1.34	38300

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
136 *	555-S-552D	2.2500	4.8750	2.5000	3.1250	0.14	0.06	2.87	4.53	1.69	52600
137 *	635-632D	2.2500	5.3750	3.0000	3.7500	0.14	0.06	2.95	4.92	1.61	64200
138	78225-78549D	2.2500	5.5000	2.0395	3.0625	0.14	0.06	3.27	5.16	0.87	55200
139	28985-28921D	2.3750	3.9370	1.7500	2.1874	0.14	0.03	2.87	3.78	1.37	29500
140	558-552D	2.3750	4.8750	2.5000	3.1250	0.09	0.06	2.87	4.53	1.69	52600
141	392-394D	2.4375	4.3307	1.8125	2.0625	0.03	0.03	2.76	4.11	1.45	27700
142	28995-28921D	2.4700	3.9370	1.7500	2.1874	0.14	0.03	2.95	3.78	1.37	29500
143	L610549-L610510D	2.5000	3.7188	1.3750	1.6874	0.06	0.03	2.80	3.58	1.38	18700
144 *	390A-394D	2.5000	4.3307	1.8125	2.0625	0.06	0.03	2.87	4.11	1.45	27700
145	395-394D	2.5000	4.3307	1.8125	2.0625	0.14	0.03	3.03	4.11	1.45	27700
146	29585-29526D	2.5000	4.4375	1.6875	2.1875	0.14	0.03	3.03	4.13	1.27	24400
147	29586-29526D	2.5000	4.4375	1.6875	2.1875	0.06	0.03	2.87	4.13	1.27	24400
148	477-472D	2.5000	4.7244	2.1250	2.5626	0.03	0.03	2.87	4.49	1.52	39500
149	483-472D	2.5000	4.7244	2.1250	2.5626	0.14	0.03	3.07	4.49	1.52	39500
150 *	559-552D	2.5000	4.8750	2.5000	3.1250	0.14	0.06	3.07	4.53	1.69	52600
151	565-563D	2.5000	5.0000	2.5625	3.1875	0.14	0.06	3.15	4.69	1.61	50000
152 *	639-632D	2.5000	5.3750	3.0000	3.7500	0.14	0.06	3.19	4.92	1.61	64100
153 *	745S-742D	2.5000	6.1250	3.3750	4.0000	0.14	0.06	3.31	5.63	1.80	87100

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART 1/ NUMBER CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
154	395A-394D	2.6250	4.3307	1.8125	2.0625	0.03	0.03	2.87	4.11	1.45	27700
155	395-S-394D	2.6250	4.3307	1.8125	2.0625	0.14	0.03	3.11	4.11	1.45	27700
156	29590-29526D	2.6250	4.4375	1.6875	2.1875	0.14	0.03	3.15	4.13	1.27	24400
157	560-552D	2.6250	4.8750	2.5000	3.1250	0.14	0.06	3.19	4.53	1.69	52600
158	641-632D	2.6250	5.3750	3.0000	3.7500	0.14	0.06	3.27	4.92	1.61	64100
159	399A-394D	2.6875	4.3307	1.8125	2.0625	0.09	0.03	3.07	4.11	1.45	27700
160	399AS-394D	2.6875	4.3307	1.8125	2.0625	0.20	0.03	3.27	4.11	1.45	27700
161	33269-33462D	2.6875	4.6250	2.1250	2.6250	0.14	0.03	3.23	4.41	1.34	38300
162	480-472D	2.6875	4.7244	2.1250	2.5626	0.14	0.03	3.23	4.49	1.52	12600
163	560-S-552D	2.6875	4.8750	2.5000	3.1250	0.14	0.06	3.27	4.53	1.69	52600
164	570-563D	2.6875	5.0000	2.5625	3.1875	0.14	0.06	3.27	4.69	1.61	50000
165	29675-29622D	2.7500	4.4995	1.8125	2.3125	0.06	0.03	3.15	4.29	1.20	30800
166	33275-33462D	2.7500	4.6250	2.1250	2.6250	0.14	0.03	3.31	4.41	1.34	38300
167	482-472D	2.7500	4.7244	2.1250	2.5626	0.14	0.03	3.27	4.49	1.52	39600
168	47487-47420D	2.7500	4.7244	2.3125	2.8125	0.14	0.03	3.31	4.49	1.62	49300
169	566-563D	2.7500	5.0000	2.5625	3.1875	0.14	0.06	3.35	4.69	1.61	50000
170	643-632D	2.7500	5.3750	3.0000	3.7500	0.14	0.06	3.39	4.92	1.61	64100
171	655-654D	2.7500	6.0000	3.0000	3.7500	0.14	0.06	3.46	5.55	1.43	67900
172	745A-742D	2.7500	6.1250	3.3750	4.0000	0.14	0.06	3.46	5.63	1.80	87000
173	835-834D	2.7500	6.7500	3.9375	4.9375	0.14	0.03	3.58	6.10	1.95	111500
174	34274-34478D	2.7540	4.7812	1.5000	2.0626	0.08	0.03	3.19	4.57	1.30	28500

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART 1/ NUMBER CONE–CUP	d	D	T	B	R 2/	r 2/	d_a	D_a	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)
		BORE	OUTSIDE DIA	BEARING WIDTH OVER CUPS	CONE WIDTH	MAX SHAFT FILLET RADIUS	MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER			TWO ROW RADIAL
								SHAFT	HOUSING		
175	33281–33462D	2.8125	4.6250	2.1250	2.6250	0.14	0.03	3.35	4.41	1.34	38300
176	47490–47420D	2.8125	4.7244	2.3125	2.8125	0.14	0.03	3.39	4.49	1.62	49300
177	567A–563D	2.8125	5.0000	2.5625	3.1875	0.14	0.06	3.39	4.69	1.61	50000
178	495–S–493D	2.8125	5.3750	2.1250	2.7500	0.14	0.03	3.46	5.12	1.31	42800
179	644–632D	2.8125	5.3750	3.0000	3.7500	0.14	0.06	3.43	4.92	1.61	64100
180	29685–29622D	2.8750	4.4995	1.8125	2.3125	0.14	0.03	3.39	4.29	1.20	30800
181	33287–33462D	2.8750	4.6250	2.1250	2.6250	0.14	0.03	3.43	4.41	1.34	38300
182	567–563D	2.8750	5.0000	2.5625	3.1875	0.14	0.06	3.46	4.69	1.61	50000
183	659–654D	2.8750	5.0000	2.5625	3.1875	0.14	0.06	3.46	4.69	1.43	67900
184	576–572D	2.8750	5.5115	2.6250	3.2500	0.14	0.03	3.54	5.24	1.45	51100
185	657–654D	2.8750	6.0000	3.0000	3.7500	0.14	0.06	3.58	5.55	1.43	67900
186	744–742D	2.8750	6.1250	3.3750	4.0000	0.14	0.06	3.58	5.63	1.80	87000
187	762–752D	2.8750	6.3750	3.3750	4.1250	0.14	0.06	3.62	5.91	1.71	89700
188	29688–29622D	2.9062	4.4995	1.8125	2.3125	0.06	0.03	3.27	4.29	1.20	30800
189	568–563D	2.9375	5.5115	2.6250	3.2500	0.14	0.03	3.58	5.24	1.61	50000
190	577–572D	3.0000	4.1563	0.9374	1.2500	0.06	0.03	3.27	4.02	1.45	51100
191	LL714649–LL714610D	3.0000	4.3125	1.3750	1.6874	0.06	0.03	3.31	4.13	1.24	30800
192	L814749–L814710D	3.0000	4.7812	1.5000	2.0626	0.08	0.03	3.39	4.57	1.16	19400
193	34300–34478D	3.0000	4.7812	1.5000	2.0626	0.14	0.03	3.50	4.57	1.30	28600
194	34301–34478D	3.0000	5.3750	2.1250	2.7500	0.14	0.03	3.62	5.12	1.30	28600
195	485A–493D	3.0000	5.3750	2.1250	2.7500	0.25	0.03	3.86	5.12	1.31	42800

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART 1/ NUMBER CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
196	495AX-493D	3.0000	5.3750	2.1250	2.7500	0.25	0.03	3.86	5.12	1.31	42800
197 *	575-572D	3.0000	5.5115	2.6250	3.2500	0.14	0.03	3.62	5.24	1.45	29800
198	575-S-572D	3.0000	5.5115	2.6250	3.2500	0.27	0.03	3.90	5.24	1.45	29800
199 *	590A-592D	3.0000	6.0000	2.5000	3.2500	0.14	0.03	3.74	5.67	1.32	59600
200	659-654D	3.0000	6.0000	3.0000	3.7500	0.14	0.06	3.66	5.55	1.43	67900
201	748-S-742D	3.0000	6.1250	3.3750	4.0000	0.14	0.06	3.66	5.63	1.80	87000
202	755-752D	3.0000	6.3750	3.3750	4.1250	0.14	0.06	3.74	5.91	1.71	89700
203 *	837-834D	3.0000	6.7500	3.9375	4.9375	0.03	0.03	3.54	6.10	1.95	111500
204	843-834D	3.0000	6.7500	3.9375	4.9375	0.25	0.03	3.98	6.10	1.95	111500
205 *	HH221430-HH221410D	3.0000	7.5000	4.1250	5.0000	0.14	0.06	3.98	7.05	1.74	14600
206	34306-34478D	3.0625	4.7812	1.5000	2.0626	0.14	0.03	3.54	4.57	1.30	28500
207	34307-34478D	3.0625	4.7812	1.5000	2.0626	0.25	0.03	3.78	4.57	1.30	28500
208	495AS-493D	3.0625	5.3750	2.1250	2.7500	0.14	0.03	3.66	5.12	1.31	42800
209	661-654D	3.1250	6.0000	3.0000	3.7500	0.14	0.06	3.78	5.55	1.43	67900
210	756A-752D	3.1250	6.3750	3.3750	4.1250	0.31	0.06	4.17	5.91	1.71	89700
211	HH221431-HH221410D	3.1250	7.5000	4.1250	5.0000	0.14	0.06	4.06	7.05	1.74	146000
212	496-493D	3.1875	5.3750	2.1250	2.7500	0.14	0.03	3.74	5.12	1.31	42800
213	581-572D	3.1875	5.5115	2.6250	3.2500	0.14	0.03	3.78	5.24	1.45	51100
214	740-742D	3.1875	6.1250	3.3750	4.0000	0.20	0.06	3.98	5.63	1.80	87000

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
215	L116149-L116110D	3.2500	4.5625	1.5626	1.8750	0.06	0.03	3.54	4.37	1.90	15000
216	495-493D	3.2500	5.3750	2.1250	2.7500	0.14	0.03	3.82	5.12	1.31	42800
217	580-572D	3.2500	5.5115	2.6250	3.2500	0.14	0.03	3.86	5.24	1.45	51100
218	582-572D	3.2500	5.5115	3.6250	3.2500	0.27	0.03	4.09	5.24	1.45	51100
219	595-592D	3.2500	6.0000	2.5000	3.2500	0.14	0.03	3.94	5.67	1.32	59600
220	663-654D	3.2500	6.0000	3.0000	3.7500	0.14	0.06	3.90	5.55	1.43	67900
221	749A-742D	3.2500	6.1250	3.3750	4.0000	0.14	0.06	3.90	5.63	1.80	87000
222	750A-742D	3.2500	6.1250	3.3750	4.0000	0.27	0.06	4.17	5.63	1.80	87000
223	757-752D	3.2500	6.3750	3.3750	4.1250	0.14	0.06	3.94	5.91	1.71	89700
224	842-834D	3.2500	6.7500	3.9375	4.9375	0.14	0.03	3.98	6.10	1.95	111500
225	498-493D	3.3125	5.3750	2.1250	2.7500	0.14	0.03	3.86	5.12	1.31	42800
226	497-493D	3.3750	5.3750	2.1250	2.7500	0.14	0.03	3.90	5.12	1.31	42800
227	497A-493D	3.3750	5.3750	2.1250	2.7500	0.25	0.03	4.13	5.12	1.31	42800
228	596-592D	3.3750	6.0000	2.5000	3.2500	0.14	0.03	4.02	5.67	1.32	59600
229	665-654D	3.3750	6.0000	3.0000	3.7500	0.14	0.06	4.02	5.55	1.43	67900
230	665A-654D	3.3750	6.0000	3.0000	3.7500	0.25	0.06	4.21	5.55	1.43	67900
231	758-752D	3.3750	6.3750	3.3750	4.1250	0.14	0.08	4.06	5.91	1.71	89700
232	677-672D	3.3750	6.6250	2.7500	3.6250	0.14	0.03	4.13	6.30	1.24	73000
233	841-834D	3.3750	6.7500	3.9375	4.9375	0.14	0.03	4.09	6.10	1.95	111500

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART 1/ NUMBER CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
234	L217849-L217810D	3.5000	4.8750	1.6875	1.9999	0.06	0.03	3.82	4.69	1.77	25900
235	42350-42587D	3.5000	5.8750	2.0625	2.6249	0.12	0.03	4.09	5.63	1.19	45300
236	593-592D	3.5000	6.0000	2.5000	3.2500	0.14	0.03	4.09	5.67	1.32	59600
237	593A-592D	3.5000	6.0000	2.5000	3.2500	0.25	0.03	4.33	5.67	1.32	59600
238 *	759-752D	3.5000	6.3750	3.3750	4.1250	0.14	0.06	4.17	5.91	1.71	89700
239	766-752D	3.5000	6.3750	3.3750	4.1250	0.28	0.06	4.45	5.91	1.71	89700
240	679-672D	3.5000	6.6250	2.7500	3.6250	0.14	0.03	4.21	6.30	1.24	68200
241	850-834D	3.5000	67500	3.9375	4.9375	0.14	0.03	4.17	6.10	1.95	111500
242 *	855-854D	3.5000	7.5000	4.0000	5.0000	0.31	0.06	4.65	6.85	1.74	125400
243	HH221434-HH221410D	3.5000	7.5000	4.1250	5.0000	0.31	0.06	4.72	7.05	1.74	146000
244	760-752D	3.5625	6.3750	3.3750	4.1250	0.14	0.06	4.21	5.91	1.71	89700
245	598-592D	3.6250	6.0000	2.5000	3.2500	0.14	0.03	4.21	5.67	1.32	59600
256	598A-592D	3.6250	6.0000	2.5000	3.2500	0.25	0.03	4.45	5.67	1.32	59600
247	681-672D	3.6250	6.6250	2.7500	3.6250	0.14	0.03	4.33	6.30	1.24	68200
248	681A-672D	3.6250	6.6250	2.7500	3.6250	0.25	0.03	4.57	6.30	1.24	68200
249	778-774D	3.6250	7.1250	3.3750	4.1250	0.14	0.06	4.37	6.61	1.51	88200
250	857-854D	3.6250	7.5000	4.0000	5.0000	0.31	0.06	4.76	6.85	1.74	125400
251	42368-42587D	3.6875	5.8750	2.0625	2.6249	0.12	0.03	4.21	5.63	1.19	59600
252	L319249-L319210D	3.7500	5.1250	1.5625	1.8749	0.06	0.03	4.06	4.92	1.67	26700
253	42375-42587D	3.7500	5.8750	2.0625	2.6249	0.12	0.03	4.25	5.63	1.19	59600

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART 1/ NUMBER CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
254	594-592D	3.7500	6.0000	2.5000	3.2500	0.14	0.03	4.33	5.67	1.32	59600
255	594A-592D	3.7500	6.0000	2.5000	3.2500	0.20	0.03	4.45	5.67	1.32	59600
256	52375-52637D	3.7500	6.3750	2.4375	3.2499	0.14	0.03	4.41	6.06	1.23	61900
257	683-672D	3.7500	6.6250	2.7500	3.6250	0.14	0.03	4.45	6.30	1.24	68200
258	683XA-672D	3.7500	6.6250	2.7500	3.6250	0.20	0.03	4.57	6.30	1.24	68200
259	864-854D	3.7500	7.5000	4.0000	5.0000	0.31	0.06	4.84	6.85	1.74	125400
260	HH221440-HH2214100	3.7500	7.5000	4.1250	5.0000	0.31	0.06	4.92	7.05	1.74	14600
261	42381-42587D	3.8125	5.8750	2.0625	2.6249	0.14	0.03	4.33	5.63	1.19	45300
262	52387-52637D	3.8750	6.3750	2.4375	3.2499	0.14	0.03	4.49	6.06	1.23	61900
263	685-672D	3.8750	6.6250	2.7500	3.6250	0.14	0.03	4.57	6.30	1.24	68200
264	HH221442-HH2214100	3.8750	7.5000	4.1250	5.0000	0.14	0.06	4.69	7.05	1.74	146000
265	52393-52637D	3.9375	2.4375	3.2499	6.3750	0.14	0.03	4.57	6.06	1.23	61900
266	L521945-L5219100	4.0000	1.5625	1.9375	5.7500	0.06	0.03	4.41	5.55	1.49	26900
267	52400-52637D	4.0000	6.3750	2.4375	3.2499	0.14	0.03	4.61	6.06	1.23	61900
268	687-672D	4.0000	6.6250	2.7500	3.6250	0.14	0.03	4.65	6.30	1.24	68200
269	780-774D	4.0000	7.1250	3.3750	4.1250	0.14	0.06	4.69	6.61	1.51	88200
270	861-854D	4.0000	7.5000	4.0000	5.0000	0.31	0.06	5.08	6.85	1.74	125400
271	HH221449-HH2214100	4.0000	7.5000	4.1250	5.0000	0.31	0.06	5.16	7.05	1.74	146000
272	HH221449A-H2214100	4.0000	7.5000	4.1250	5.0000	0.14	0.06	4.80	7.05	1.74	146000
273 *	941-932D	4.0000	8.3750	3.3750	4.0000	0.14	0.03	5.87	7.52	1.79	142500

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART 1/ NUMBER CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
274	782-773D	4.1250	7.0866	3.3750	4.1250	0.14	0.03	4.80	6.61	1.51	88200
275	782-774D	4.1250	7.1250	3.3750	4.1250	0.14	0.06	4.80	6.61	1.51	88200
276	786-774D	4.1250	7.1250	3.3750	4.1250	0.25	0.06	5.04	6.61	1.51	88200
277	787-774D	4.1250	7.1250	3.3750	4.1250	0.28	0.06	5.08	6.61	1.51	88200
278	71412-71751D	4.1250	7.5000	3.1875	4.1875	0.14	0.06	4.88	7.13	1.40	100000
279	56418-56650D	4.1875	6.5000	2.5000	3.2500	0.14	0.03	4.80	6.26	1.18	62700
280	L521949-L521910D	4.2500	5.7500	1.5625	1.9375	0.06	0.03	4.57	5.55	1.49	26900
281	LM522546-LM522510D	4.2500	6.2987	2.3125	2.9375	0.14	0.03	4.80	6.06	1.45	54200
282	56425-56650D	4.2500	6.5000	2.5000	3.2500	0.14	0.03	4.84	6.26	1.18	62700
283	71425-71751D	4.2500	7.5000	3.1875	4.1875	0.14	0.06	4.96	7.13	1.40	100000
284	L623149-L623110D	4.5000	6.0000	1.5000	1.8750	0.06	0.03	4.84	5.79	1.41	28000
285	64450-64700D	4.5000	7.0000	2.7500	3.6250	0.14	0.03	5.16	6.77	1.13	75900
286 *	71450-71751D	4.5000	7.5000	3.1875	4.1875	0.14	0.06	5.20	7.13	1.40	100000
287	938-932D	4.5000	8.3750	4.6250	5.6250	0.28	0.06	5.55	7.60	1.79	142900
288	HH224346-HH224310D	4.5000	8.3750	4.6250	5.6250	0.28	0.06	5.63	7.94	1.79	185600
289	71453-71751D	4.5310	7.5000	3.1875	4.1875	0.14	0.06	5.24	7.13	1.40	100000
290	L624549-L624514D	4.7500	6.3750	2.1250	2.5000	0.06	0.03	5.08	6.14	1.34	29600
291	L225842-L225812D	4.7500	6.6919	1.9375	2.3125	006	0.04	5.16	6.46	1.76	39900

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART 1/ NUMBER CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
292	M224749-M224710D	4.7500	6.8750	2.4375	3.0625	0.14	0.03	5.31	6.61	1.76	68000
293	48286-48220D	4.8750	7.1875	2.8750	3.3750	0.14	0.03	5.47	6.93	1.91	74000
294	L225849-L225812D	5.0000	6.6919	1.9375	2.3125	0.06	0.04	5.35	6.46	1.76	39900
295	48290-48220D	5.0000	7.1875	2.8750	3.3750	0.14	0.03	5.55	6.93	1.91	74000
296	67388-67322D	5.0000	7.7500	3.3750	4.0000	0.14	0.03	5.67	7.48	1.24	54900
297 *	95500-95927D	5.0000	9.2500	4.5000	5.6250	0.25	0.06	6.06	8.54	1.58	153200
298	799-792D	5.0625	8.1250	3.2500	4.2500	0.13	0.03	5.75	7.80	1.27	97800
299	67389-67322D	5.1250	7.7500	3.3750	4.0000	0.14	0.03	5.75	7.48	1.24	54900
300	L327249-L327210D	5.2500	6.9688	1.8750	2.2500	0.06	0.03	5.59	6.73	1.68	41200
301	48385-48320D	5.2500	7.5000	2.8750	3.3750	0.14	0.03	5.83	7.24	1.82	75000
302	67390-67322D	5.2500	7.7500	3.3750	4.0000	0.14	0.03	5.87	7.48	1.24	54900
303	67391-67322D	5.2500	7.7500	3.3750	4.0000	0.31	0.03	6.18	7.48	1.24	54900
304	67390-67323D	5.2500	7.7500	3.6250	4.2500	0.14	0.03	5.87	7.48	1.24	54900
305	67390-67325D	5.2500	7.8750	3.3750	4.0000	0.14	0.03	5.87	7.52	1.24	54900
306	95525-95927D	5.2500	9.2500	4.5000	5.6250	0.38	0.06	6.54	8.54	1.58	153000
307	48393-48320D	5.3750	7.5000	2.8750	3.3750	0.14	0.03	5.94	7.24	1.82	75000
308	74550-74851D	5.5000	8.5000	3.1875	4.1875	0.14	0.06	6.22	8.19	1.20	98800
309	73551-73876D	5.5000	8.7500	2.1250	2.9800	0.14	0.09	6.14	8.15	1.34	42400
310	898-892D	5.5000	9.0000	3.8750	4.8750	0.14	0.06	6.30	8.50	1.39	142500
311 *	99550-99102D	5.5000	10.0000	4.3750	5.8750	0.28	0.06	6.69	9.37	1.43	156800
312 *	HH234031-HH234011D	5.5000	12.1250	6.1250	7.8750	0.38	0.09	7.09	11.24	1.79	333700

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART 1/ NUMBER CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
313	48684-48620D	5.6250	7.8750	2.8750	3.4376	0.31	0.03	6.54	7.60	1.74	74600
314	48685-48620D	5.6250	7.8750	2.8750	3.4376	0.14	0.03	6.22	7.60	1.74	74600
315	36690-36620D	5.7500	7.6250	2.1250	2.5624	0.06	0.03	6.10	7.40	1.59	58600
316	36691-36620D	5.7500	7.6250	2.1250	2.5624	0.19	0.03	6.38	7.40	1.59	58600
317	82576-82951D	5.7500	9.5000	4.1875	5.1875	0.14	0.06	6.54	8.90	1.32	141300
318	99575-99101D	5.7500	10.0000	4.5000	6.0000	0.28	0.06	6.89	9.37	1.43	156800
319	HM231149-HM231111D	5.8750	9.3125	4.1875	5.1875	0.14	0.06	6.57	8.82	1.83	148200
320	HM231149-HM231116D	5.8750	9.5000	4.1875	5.1875	0.14	0.06	6.57	8.82	1.83	148200
321	99587-99102D	5.8750	10.0000	4.3750	5.8750	0.28	0.06	7.01	9.37	1.43	156800
322	LM330448-LM330410D	6.0000	8.0000	3.1250	3.6250	0.13	0.03	6.54	7.76	1.68	78300
323	M231649-M231610D	6.0000	8.7500	3.0000	3.9374	0.14	0.03	6.65	8.39	1.76	94300
324 *	99600-99101D	6.0000	10.0000	4.5000	6.0000	0.28	0.06	7.13	9.37	1.43	156800
325	EE107060-107105D	6.0000	10.5625	4.9375	6.3125	0.25	0.06	7.13	9.82	1.51	205200
326	EE450601-451215D	6.0000	12.1250	5.7500	7.8750	0.38	0.09	7.44	10.82	1.79	288200
327	HH234048-HH234011D	6.0000	12.1250	6.1250	7.8750	0.38	0.09	7.52	11.24	1.79	333700
328	L433749-L433710D	6.5000	8.5000	1.8750	2.3126	0.06	0.03	6.85	8.23	1.60	50300
329	46790-46720D	6.5000	8.8750	2.7500	3.3750	0.14	0.03	7.13	8.58	1.52	78200
330	86650-86100XD	6.5000	10.0000	3.0000	4.0000	0.19	0.06	7.28	9.41	1.58	106700
331	M235145-M235113D	6.5000	10.0000	3.0000	4.0000	0.19	0.06	7.28	9.45	1.83	119700
332	94687-94114D	6.8750	11.3750	4.3750	5.6250	0.28	0.06	8.03	10.71	1.25	173800

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART 1/ NUMBER CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH OVER CUPS	B CONE WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) TWO ROW RADIAL
333	67790-67720D	7.0000	9.7500	3.3125	4.0625	0.14	0.03	7.64	9.45	1.33	66800
334	HM237545-HM237510D	7.0000	11.3750	4.3750	5.6250	0.28	0.06	8.07	10.68	1.83	211800
335	94700-94118D	7.0000	11.7500	4.3750	5.6250	0.28	0.06	8.15	10.71	1.25	173800
336 *	EE420701-421451D	7.0000	14.5000	5.3750	7.6250	0.05	0.06	9.09	13.16	1.45	320200
337	LL537649-LL537610D	7.2500	9.3125	1.6250	2.1874	0.06	0.03	7.64	9.06	1.45	49200
338	M238849-M238810D	7.3750	10.6250	3.6875	4.6875	0.14	0.06	8.07	10.08	1.76	151000
339	87737-87112D	7.3750	11.1250	3.1250	4.2500	0.14	0.06	8.15	10.50	1.45	119700
340	H239649-H239612D	7.3750	12.6250	5.4375	7.3125	0.22	0.06	8.43	11.73	1.83	303000
341	67885-67820D	7.5000	10.5000	3.3125	4.0625	0.14	0.03	8.23	10.20	1.22	115900
342	87750-87112D	7.5000	11.1250	3.1250	4.2500	0.14	0.06	8.23	10.50	1.45	119700
343	EE420751-421451D	7.5000	14.5000	5.3750	7.6250	0.25	0.06	8.94	13.16	1.45	320200
344	87762-87112D	7.6250	11.1250	3.1250	4.2500	0.14	0.06	8.31	10.50	1.41	119700
345	L540049-L540010D	7.7500	10.0000	1.8750	2.4374	0.06	0.03	8.15	9.72	1.47	59600
346	LM739749-LM739710D	7.7500	10.1250	2.6250	3.3750	0.14	0.03	8.39	9.88	1.31	88800
347	LM241149-LM241110D	8.0000	10.8750	2.8750	3.5624	0.14	0.03	8.62	10.51	1.83	112100
348	M241547-M241510D	8.0000	11.5000	4.0000	4.9376	0.14	0.06	8.70	10.98	1.76	122600
349 *	EE420801-421451D	8.0000	14.5000	5.3750	7.6250	0.13	0.06	9.06	13.16	1.45	320200

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Cones, cups, and rollers: bearing quality - carburizing grade alloy or through-hardening grade alloy steel in accordance with ASTM-A295, ASTM–A534, or ASTM-A535. Cage: carbon steel (one piece stamped). Powdered process steel may be used.

2. Hardness: Cones, cups and rollers: 58 to 64HRC.

3. Tolerances: Standard grade (AFBMA Class 4) (allowable tolerances are in 0.0001 inch).

Cone bore (d)			
Size range B		Tolerance	
Over	Incl.	Plus	Minus
0 3.0000	3.0000 6.0000	5 10	0 0

Cup diameter (D)			
Size range		Tolerance	
Over	Incl.	Plus	Minus
0.0000 12.0000	12.0000 24.0000	10 20	0 0

Bearing width (T)			
Bore size range		Tolerance	
Over	Incl.	Plus	Minus
0 4.0000	4.0000 12.0000	160 280	0 200

Assembled bearing maximum radial runout		
Cup O.D. (D)		Tolerance
Over	Incl.	
0	24.0	20


4. Operating temperature: Recommended operating temperature not to exceed 230° F.

5. Lubrication: Bearings shall be furnished without lubrication. All bearings shall be preserved in accordance with MIL–P-197.

6. Contact angle: All bearings are normal angle bearings having a contact angle (a) between 10 and 19 degrees. The contact angle is the angle between the line of action of the roller load and a plane perpendicular to the bearing axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

7. Part number: The part number consist of the letters FFB, the basic federal specification number, the specification sheet number and a dash number from table 1.

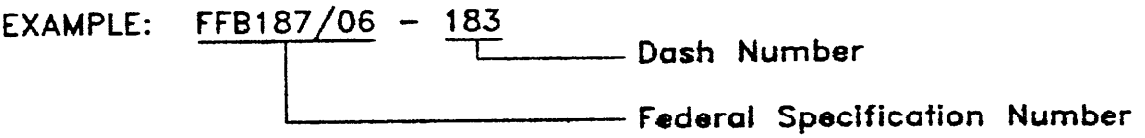

8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

9. Referenced documents shall be of the issue in effect on the date of invitation for bids, or request for proposal.

NOTE: Inch units can be converted to soft metric units as follows:

Inch	X	25.4	=	millimeters

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19086-1	FFB187/06-004	MS19086-24	FFB187/06-203
MS19086-2	FFB187/06-007	MS19086-25	FFB187/06-205
MS19086-3	FFB187/06-011	MS19086-26	FFB187/06-238
MS19086-4	FFB187/06-074	MS19086-27	FFB187/06-242
MS19086-5	FFB187/06-027	MS19086-28	FFB187/06-269
MS19086-6	FFB187/06-031	MS19086-29	FFB187/06-270
MS19086-7	FFB187/06-050	MS19086-30	FFB187/06-273
MS19086-8	FFB187/06-054	MS19086-31	FFB187/06-286
MS19086-9	FFB187/06-058	MS19086-32	FFB187/06-288
MS19086-10	FFB187/06-065	MS19086-33	FFB187/06-296
MS19086-11	FFB187/06-074	MS19086-34	FFB187/06-297
MS19086-12	FFB187/06-093	MS19086-35	FFB187/06-311
MS19086-13	FFB187/06-097	MS19086-36	FFB187/06-312
MS19086-14	FFB187/06-109	MS19086-37	FFB187/06-324
MS19086-15	FFB187/06-134	MS19086-38	FFB187/06-327
MS19086-16	FFB187/06-136	MS19086-39	FFB187/06-334
MS19086-17	FFB187/06-137	MS19086-40	FFB187/06-336
MS19086-18	FFB187/06-144	MS19086-41	FFB187/06-349
MS19086-19	FFB187/06-150	MS19086-42	FFB187/06-005
MS19086-20	FFB187/06-152	MS19086-43	FFB187/06-018
MS19086-21	FFB187/06-153	MS19086-44	FFB187/06-020
MS19086-22	FFB187/06-197	MS19086-45	FFB187/06-021
MS19086-23	FFB187/06-199	MS19086-46	FFB187/06-032

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE – Continued

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19086-47	FFB187/06-035	MS19086-70	FFB187/06-176
MS19086-48	FFB187/06-037	MS19086-71	FFB187/06-179
MS19086-49	FFB187/06-041	MS19086-72	FFB187/06-183
MS19086-50	FFB187/06-045	MS19086-73	FFB187/06-188
MS19086-51	FFB187/06-046	MS19086-74	FFB187/06-214
MS19086-52	FFB187/06-052	MS19086-75	FFB187/06-218
MS19086-53	FFB187/06-059	MS19086-76	FFB187/06-220
MS19086-54	FFB187/06-060	MS19086-77	FFB187/06-226
MS19086-55	FFB187/06-080	MS19086-78	FFB187/06-234
MS19086-56	FFB187/06-077	MS19086-79	FFB187/06-244
MS19086-57	FFB187/06-081	MS19086-80	FFB187/06-251
MS19086-58	FFB187/06-108	MS19086-81	FFB187/06-252
MS19086-59	FFB187/06-110	MS19086-82	FFB187/06-254
MS19086-60	FFB187/06-115	MS19086-83	FFB187/06-267
MS19086-61	FFB187/06-116	MS19086-84	FFB187/06-268
MS19086-62	FFB187/06-125	MS19086-85	FFB187/06-271
MS19086-63	FFB187/06-132	MS19086-86	FFB187/06-274
MS19086-64	FFB187/06-139	MS19086-87	FFB187/06-280
MS19086-65	FFB187/06-159	MS19086-88	FFB187/06-281
MS19086-66	FFB187/06-162	MS19086-89	FFB187/06-282
MS19086-67	FFB187/06-163	MS19086-90	FFB187/06-285
MS19086-68	FFB187/06-174	MS19086-91	FFB187/06-287
MS19086-69	FFB187/06-175	MS19086-92	FFB187/06-289

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE - Continued

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19086-93	FFB187/06-290	MS19086-111	FFB187/06-321
MS19086-94	FFB187/06-292	MS19086-112	FFB187/06-323
MS19086-95	FFB187/06-295	MS19086-113	FFB187/06-325
MS19086-96	FFB187/06-298	MS19086-114	FFB187/06-326
MS19086-97	FFB187/06-300	MS19086-115	FFB187/06-329
MS19086-98	FFB187/06-304	MS19086-116	FFB187/06-331
MS19086-99	FFB187/06-305	MS19086-117	FFB187/06-332
MS19086-100	FFB187/06-306	MS19086-118	FFB187/06-333
MS19086-101	FFB187/06-307	MS19086-119	FFB187/06-335
MS19086-102	FFB187/06-308	MS19086-120	FFB187/06-338
MS19086-103	FFB187/06-309	MS19086-121	FFB187/06-340
MS19086-104	FFB187/06-310	MS19086-122	FFB187/06-341
MS19086-105	FFB187/06-313	MS19086-123	FFB187/06-342
MS19086-106	FFB187/06-315	MS19086-124	FFB187/06-343
MS19086-107	FFB187/06-317	MS19086-125	FFB187/06-345
MS19086-108	FFB187/06-318	MS19086-126	FFB187/06-346
MS19086-109	FFB187/06-319	MS19086-127	FFB187/06-347
MS19086-110	FFB187/06-320	MS19086-128	FFB187/06-348

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.