ZZ-S-666C
April 13, 1976
SUPERSEDING
Fed. Spec. ZZ-S-666B
November 3, 1965

FEDERAL SPECIFICATION

SQUEEGEES, FLOOR AND WINDOW

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers floor and window squeegees with or without handles.

1.2 Classification. Squeegees shall be of the following types, classes, sizes, styles, and grades furnished with or without handles as specified (see 6.2).

Type I - Floor squeegees, wood block.
Class 1 - Heavy duty.
Size - 12 inch.
Class 2 - Light duty.
Size - 18 inch.
Size - 24 inch.

Type II - Floor squeegees, metal frame.
Class 3 - Straight frame.
Size - 15 inch.
Size - 18 inch.
Size - 24 inch.
Size - 30 inch.
Size - 36 inch.
Class 4 - Curved frame.
Size - 24 inch.
Size - 30 inch.
Size - 36 inch.

Style A - One piece frame.
Style B - Two piece frame.
Grade A - Brass frame.
Grade B - Aluminum frame.
Grade C - Steel frame.

Type III - Window squeegees, metal frame.
Class 5 - Single blade, one piece frame.
Size - 8 inch.
Size - 10 inch.
Size - 12 inch.
Size - 16 inch.
Size - 24 inch.
Class 6 - Double blade, two piece frame.
Size - 10 inch.
Size - 12 inch.
Size - 16 inch
Grade A - Brass frame.
Grade B - Aluminum frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for porposal, form a part of this specification to the extent specified herein.

Federal Specifications:

NN-H-104 - Handles, Wood, Acme Threaded and Circular Tapered End.
QQ-Z-325 - Zinc Coating, Electrodeposited, Requirements For.
TT-W-572 - Wood Preservative; Water Repellent.
PPP-B-636 - Boxes, Shipping Fiberboard.
PPP-B-676 - Boxes, Set-up, Paperboard.

Federal Standards:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).
Fed. Std. No. 601 - Rubber; Sampling and Testing.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-1363 - Measurement of wood moisture content.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, one sample of each item being procured shall be made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of the specification. The preproduction sample shall be manufactured in the same facilities to be used for the production items. The approved preproduction sample shall be identified and made available to the Government throughout the life of the contract.

3.2 Materials. Materials shall conform to the referenced specifications and requirements in figure 1 and as specified hereinafter. When materials are not definitely specified, they shall be of the quality normally used by the manufacturer, for his standard commercial product.

3.2.1 Screws, bolts, and nuts. Screws, bolts, and nuts shall be made of corrosion-resistant material or shall be of steel which is plated to resist corrosion.

3.2.2 Wood. Wood blocks shall be solid close-grained and straight-grained hardwood, with a moisture content at time of fabrication not less than 8 percent nor more than 12 percent when tested as specified in 4.3.1.2, and shall be free from imperfections such as warp, decay, knots, checks, splits, or slivers. Blocks constructed from laminated wood, compression molded wood particles, solid plastic or foam plastic that meet all other requirements of this specification may be substituted for the solid hardwood blocks.

3.2.3 Rubber blades. The rubber blades shall be made of natural or synthetic rubber containing no coloring agent which will stain, bleed, or run. The blades shall not become hard or soft and show no signs of cracking or breaking when tested as specified in 4.4.3.1, 4.4.3.2, and 4.4.3.3.

3.3 Construction. The construction of the squeegees shall conform to the requirements in figure 1 as specified herein. The squeegees shall consist of a rubber blade supported by a wood or plastic block or metal frame. Blocks shall be equipped with a tapered hole, and frames shall be equipped with a handle socket taper bored for insertion of a wooden handle (see 3.4.2).

3.3.1 Type I.

3.3.1.1 Class 1. The heavy duty, wood or plastic block, floor squeegee shall consist of a rubber blade specified in 3.4.3, held securely in the grooved portion of the block specified in 3.4.1, by not less than four equally spaced flathead wood screws. The screws shall be 1-1/4 ± 1/16 inch in length, countersunk with the block surface so that the points of the screws do not project beyond the block face.

3.3.1.2 Class 2. The light duty wood or plastic block floor squeegee shall consist of a rubber blade as specified in 3.4.4, held securely in the grooved portion of the block specified in 3.4.1, by not less than seven equally spaced flathead wood screws for the 24 inch block and by not less than five equally spaced flathead wood screws for the 18 inch block. The screws shall be 3/4 ± 1/16 inch in length, countersunk with the block surface so that the points of the screws do not project beyond the block face.

3.3.2 Type II.

3.3.2.1 Class 3. Type II, class 3 squeegee shall be a straight metal frame floor squeegee and shall be either style A, one piece, or style B, two piece construction (see 6.2), and as specified hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

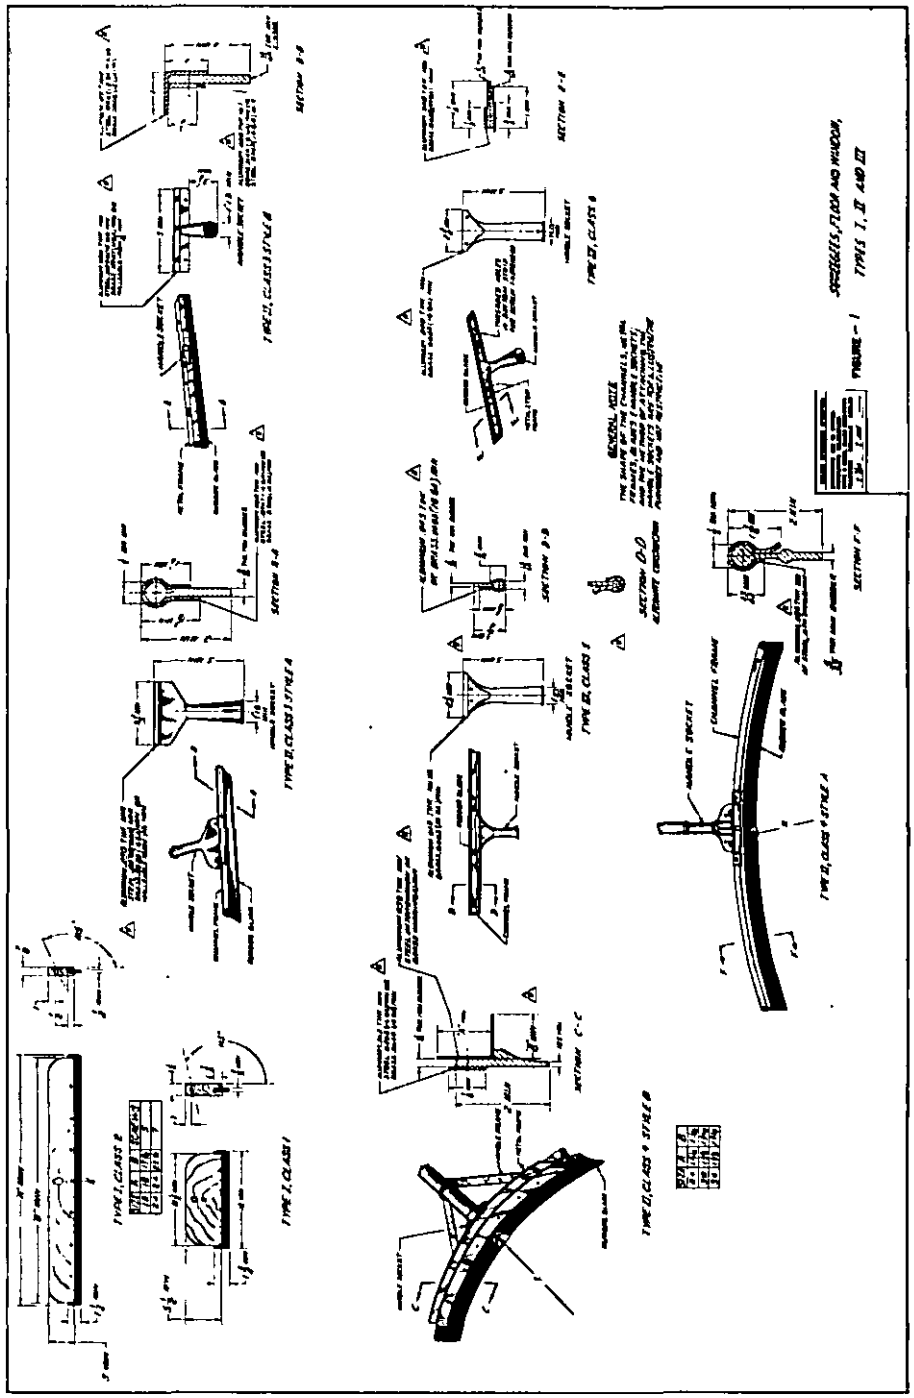


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

3.3.2.2 Class 4. Type II, class 4 squeegee shall be a curved metal frame floor squeegee and shall be either style A, one piece construction, or style B, two piece construction (see 6.2), and as specified hereinafter. The radius of the curved frame for each size shall be that used in the manufacturer's standard commercial product.

3.3.2.3 Style A. Style A one piece construction shall have a rubber blade specified in 3.4.4, secured in the channel of the frame specified in 3.4.3 by any mechanical means which will allow the removal and replacement of the blade. The frames shall be attached to the handle socket, specified in 3.4.5 by not less than 2 bolts.

3.3.2.4 Style B. Style B two piece construction shall have a rubber blade specified in 3.4.4, securely bolted or screwed to the metal frame, specified in 3.4.3, by not less than 6 equally spaced bolts or screws of not less than 1/8 inch diameter. The bolts or screws shall extend through the metal strips and blade not more than 1/16 inch beyond the bottom strip. The handle socket specified in 3.4.5, shall be secured to the frame by not less than 2 of the screws or bolts used in securing the blade and frame. The frame shall be made with an angle bar at the rear and a flat bar at the front of the frame, so that one side and edge of the angle bar may be used for scraping purposes.

3.3.3 Type III.

3.3.3.1 Class 5. The single blade, one piece frame, window squeegee shall have the round beaded edge of the rubber blade specified in 3.4.4, secured at each end in the channel specified in 3.4.3, by any mechanical means or clips which shall allow the removal and replacement of the blade without the use of tools. Deformation of the channel shall not be used as a means of retention. The handle socket specified in 3.4.5 shall be attached to the channel by not less than 2 bolts or screws. As an alternate construction, the handle socket may be attached by one bolt or screw provided that the channel does not cock or move after being tightened but remains at a right angle to the handle during use. The thread ends of the bolts or screws shall not extend more than 1/8 inch beyond the nut.

3.3.3.2 Class 6. The double blade, two piece frame, window squeegee shall have a 2-ply rubber blade specified in 3.4.4, secured to the metal strip frame specified in 3.4.3 by not less than 6 equally spaced screws or bolts of not less than 1/8 inch diameter. The bolts or screws shall extend through the metal strips and blade not more than 1/16 inch. The socket specified in 3.4.5 shall be secured to the metal frame by not less than 2 of the above screws or bolts. When flathead screws are used, they shall be countersunk into the metal strips so that the heads are flush with the surface of the metal strip.

3.4 Details of components.

3.4.1 Blocks. The wood or plastic blocks shall conform to the requirements shown in figure 1 and as specified herein. The bottom of the block shall be grooved and all corners and edges shall be rounded. Screw holes shall be equally spaced along the length through the approximate center of the groove depth. A hole to fit the tapered end of the handle specified in 3.4.2, shall be made in each block. The wood blocks shall be water resistant treated after machining and before assembly with blade for a minimum of 3 minutes in accordance with composition A of TT-W-572.

3.4.2 Handles. When handles are required, the handles shall conform to type II, size 2 or size 3 of NN-H-104 with a minimum length of 4-1/2 feet, as specified (see 6.2). The size 2 handle shall be furnished with the window squeegees and the size 3 handle with the floor squeegees. The taper of the handle hole or the handle socket of the squeegees shall conform to the taper of the handles as specified in NN-H-104.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

3.4.3 Frames and channels. The frames and channels of types II and III squeegees shall conform to the dimensions shown on figure 1. The channels and metal strips which make up complete frames for type II, grade A floor squeegees, shall be made of brass; type II, grade B of aluminum; type III grade C of steel. The type III, grade A window squeegees shall be made of brass; type III, grade B shall be made of aluminum. The length of the channels and frames shall be 3/8 + 1/8 inch less than the size squeegees required (see 1.2). At the option of the manufacturer, the long leg and bottom side of the channel for type III, class 5 window squeegee may be curved in lieu of straight as illustrated in section D-D of figure 1, with the long leg measuring not less than 5/8 inch overall in width and the bottom side not less than 5/16 inch in width.

3.4.4 Blades. Blades shall conform to the dimensions shown on figure 1. The blades shall extend not less than 1/8 inch nor more than 1/4 inch from each side of the block or frame. The working edge shall be free of dirt inclusions, cutter marks, or serations. When replacement blades are procured, the length of the blades and the dimensions specified on figure 1 shall be specified (see 6.2 and 6.7).

3.4.5 Handle sockets. Handle sockets shall conform to the dimensions shown on figure 1. All handle sockets shall have an integral collar not less than 1/4 inch in width except that when a handle brace is furnished (see 3.4.5.1), a collar is not required. Handle sockets shall be of the same material as the frame or channel to which they are attached except that on type II floor squeegees, a plated steel socket handle may be used with aluminum channels and malleable iron handle sockets may be used with steel frames. Malleable iron sockets do not require a collar.

3.4.5.1 Handle brace. At the option of the manufacturer, a handle brace may be used with the handle socket to hold the handle securely to the frame or channel of type II floor squeegees.

3.5 Performance requirements.

3.5.1 Floor squeegees. There shall be no visible evidence of surface water on the floor when tested as specified in 4.4.1.

3.5.2 Window squeegees. There shall be no visible evidence of surface water or streaks on the window pane when tested as specified in 4.4.2.

3.6 Finish.

3.6.1 Brass, aluminum, and wood. The brass and aluminum shall have a natural (unfinished) or lacquer finish. The wood and plastic blocks shall be furnished in a natural (unfinished) or lacquered finish after having the water resistant treatment specified in 3.4.1.

3.6.2 Iron and steel. The iron and steel shall be coated with a phosphate treated zinc plate conforming to class 2, type III of QQ-Z-325. The zinc plated iron and steel shall be coated with a baked enamel finish. The enamel shall consist of a uniform level film without objectionable orange peel, wrinkles, drops, streaks, or areas of no film.

3.7 Workmanship. The finished squeegee shall be clean, well made, and free from any defect which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

4.2 Preproduction sample inspection. When a preproduction sample is required, the preproduction sample shall be examined for defects listed in table I, dimensions specified, and tested as specified in 4.4.1 or 4.4.2.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Inspection of materials and components. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification.

4.3.1.1 Rubber blade test. The rubber blades shall be tested as specified in 4.4.3. The lot shall be all the blades for one type, class, and size of squeegee offered for inspection at one time, and the sample unit shall be one blade. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5 expressed in terms of defects per 100 units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish (metal components)	No lacquer finish on aluminum or brass	X	
	No bake enamel on steel or iron	X	
	Evidence of orange peel, wrinkles, drops, streaks, or areas of no film		X
	Dirt, grit or foreign material imbedded in finish, evidence of rust or corrosion		X
(wood or plastic components)	No natural or lacquer finish	X	
	Any warp, decay, knots, checks, splits, slivers		X
Construction and workmanship (general)	Sharp burr, splinter or sliver, rough or sharp edges		X
	Blade has chips, splits or deterioration, dirt inclusions, cutter marks, or serrations	X	
Type I	Corners not rounded on block, holes not bored straight, groove not cut straight, holes not evenly distributed along length of block	X	
	No tapered hole in block	X	
	Blade not securely held in block by number screws specified	X	
	Screws not countersunk, or points project beyond face of block		X
	Screws do not pass through approximate center of groove		X
	Handle hole missing	X	
Type II	Less than 2 bolts used to attach handle to frame	X	
Style A	Rubber blade not securely held in channel by mechanical means at each end.		X
Style B	Less than 6 bolts or screws to hold rubber blade securely between metal strips		X
	Bolts or screws not evenly distributed along length of frame		X
	Threaded ends of bolts or screws extended more than 1/16 inch beyond bottom strip		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
	Frame not assembled as specified	X	
	Bottom edges of metal strips not straight and parallel	X	
Type III	Less than two bolts or screws used to attach handle socket to frame or channel, except where alternate construction using one bolt or screw is furnished	X	
	Channel does not remain at right angle to socket handle when alternate construction is furnished	X	
	Flathead screws, when used, not countersunk		X

4.3.1.2 Moisture content. Tests shall be performed on each lot of wood offered for acceptance at time of fabrication for moisture content in accordance with MIL-STD-1363. The sample unit shall be one piece of wood. Three determinations shall be taken on each sample unit, and results should be the average of the three determinations. The inspection level shall be S-2 with an AQL of 2.5 defects per 100 units.

4.3.1.3 Zinc plating. The zinc plating specified in 3.6.2 shall be examined for compliance with the requirements of class 2, type III of QQ-Z-325.

4.3.2 In process examination. Examination shall be made of the water resistant treatment of the blocks specified in 3.4.2. Whenever nonconformance is noted, corrections shall be made to affected items and process.

4.3.3 End item inspection. A lot shall consist of all the squeegees and handles, when applicable, of the same type, class, style, grade, and size offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated squeegee with handle, when applicable.

4.3.3.1 Visual examination. Examination shall be made of the end item for the defects in table I. The inspection level shall be level II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per 100 units.

4.3.3.2 Dimensional examination. Inspection shall be made of the end item for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per 100 units.

4.3.3.3 Testing of the end item. The end item shall be tested as specified in 4.4.1 and 4.4.2. The inspection level shall be S-2 and the AQL shall be 4.0 expressed in terms of defects per 100 units.

4.3.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects will be scored as specified in table II. The lot shall be the number of containers offered for delivery at one time. The sample unit shall be one shipping container fully prepared for delivery, except that it need not be sealed. The inspection level shall be S-2 and the AQL shall be 4.0 expressed in terms of defects per 100 units. Inspection for closure and strapping shall be in accordance with PPP-B-676 and PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Contents (exterior and interior)	Contents, more or less than required.

4.4 Tests.

4.4.1 Wiping test for floor squeegee. A smooth, flat wood, or stone-surfaced floor, at least 10 feet square, shall be washed with clear, clean water. With the blade of the squeegee wet, and while the floor is still wet, the floor shall be wiped with not more than 2 pushing or forward strokes of the squeegee in the same area. The floor shall then be examined to determine compliance with 3.5.1.

4.4.2 Wiping test for window squeegee. A glass window pane, at least 3 feet square, shall be washed with clear, clean water. With the blade of the squeegee wet, and while the pane is still wet, the pane shall be wiped with not more than 2 downward strokes of the squeegee in the same area. The pane shall then be examined to determine compliance with 3.5.2.

4.4.3 Test for rubber blades.

4.4.3.1 Soaking test. A blade shall be soaked in clear, clean water at 170° ± 10° F., for a period of not less than 15 minutes. The blade shall then be removed and examined to determine compliance with 3.4.4.

4.4.3.2 Oxygen pressure test. Test shall be conducted as described in method 7111 of Fed. Std. No. 601. The blade shall then be examined to determine compliance with 3.4.4.

4.4.3.3 Bending test. After the oxygen pressure test, each rubber blade shall be bent 90° ± 10°, on each side of its normal position not less than 25 times. The blade shall then be examined to determine compliance with 3.4.4.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Squeegees without handles. Squeegees of the same type, class, style, grade, and size only, in quantities shown in table III, shall be packaged in the most compact manner in a nontest fiberboard box conforming (except for test fiberboard) to style RSC, type CF, class domestic of PPP-B-636. Closure shall be in accordance with the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

TABLE III.

Classification	Qty. per package	Qty. per pack
Type I		
Class 1		
12 inch		24
Class 2		
18 inch		48
24 inch		24
Type II		
Class 3		
15 inch	12	48
18 inch	12	48
24 inch	12	36
30 inch	12	36
36 inch	12	24
Class 4, styles A and B		
24 inch	2	12
30 inch	2	12
36 inch	2	12
Type III		
Classes 5 and 6		
8 inch	12	144
10 inch	12	144
12 inch	12	120
16 inch	12	96
24 inch	12	60

5.1.1.2 Blades only. Six double blades or twelve single blades, of one length and hole location only, shall be packaged flat in a snug-fitting paperboard box conforming to type I or II of PPP-B-676. Closure shall be in accordance with the appendix of the box specification.

5.1.1.3 Handles. Handles shall be packaged in accordance with NN-H-105.

5.1.2 Level C. Squeegees, blades, or handles, shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Squeegees without handles; and blades only. Squeegees of the same type, class, style, grade, and size only, in quantities shown in table III, or 144 blades of one length and hole location, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3c or V3s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat steel strapping or tape banding shall be in accordance with the appendix of the container specification.

5.2.1.2 Handles. Handles packaged as specified in 5.1, shall be packed in accordance with NN-H-104.

5.2.2 Level B.

5.2.2.1 Squeegees without handles; and blades only. Squeegees of the same type, class, style, grade, and size only, in quantities shown in table III, or 144 blades of one length and hole location, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF or SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

5.2.2.2 Handles. Handles packaged as specified in 5.1, shall be packed in accordance with NN-H-105.

5.2.3 Level C. Squeegees, blades, or handles, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall comply with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The squeegees covered by this specification are used for wiping floors and windows dry. Type II, style B can also be used for light scraping action on floors.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type, class, style, size, and grade required (see 1.2).
(c) When handles are required (see 1.2 and 3.4.2).
(d) When preproduction sample is required (see 3.1).
(e) When blades are ordered separately, the dimensions and length of blade (see 3.4.4).
(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Replacement blades are procured without holes and the user will punch or bore holes to match the holes in the user's block or frame.

DOD WAIVED COORDINATION

USER INTEREST:

Army - GL

PREPARING ACTIVITY:

GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.