INCH-POUND

A-A-54586A
14 January 1994
SUPERSEDING
A-A-54586
14 February 1992

COMMERCIAL ITEM DESCRIPTION

SCISSORS, BANDAGE, ANGULAR

The General Services Administration has authorized the use of this Commercial Item Description.

This Commercial Item Description covers angular bandage scissors capable of cutting heavy or multiple layers of cloth and zippered flight clothing.

Salient characteristics:

General. Scissors shall be of the following sizes:

Size 1 - 5-1/2 inches
Size 2 - 7-1/4 inches

Scissors shall be angular bandage scissors with molded polypropylene finger rings and be capable of cutting heavy or multiple layers of clothing, and zippered flight clothing. The scissor half with the thumb ring shall have a finely serrated blade and for Size 1 have a molded polypropylene probe tip.

Material. The shanks, blades and rivet shall be Class 4 stainless steel material in accordance with ASTM Designation F899. As an alternate, rivets shall be manufactured from Class 3 austenitic stainless steel. Finger rings and for Size 1 scissors the probe tip shall be manufactured from non-toxic molded polypropylene capable of withstanding temperatures of 290° Fahrenheit (143° Celsius) without the polypropylene softening, separating from the shank or blade tip, blooming, discoloring, or being adversely effected.

The polypropylene shall have the following physical properties:

AMSC N/A FSC 6515
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:36Z
Check the source to verify that this is the current version before use.

Crystallinity Melting Point	290°F
Tensile Strength	4450 psi (30.5 MPa)
Tear Strength (Tenacity)	4600 psi (31.5 MPa)
Modulus of Elasticity	178,000 psi (1225 MPa)
Specific Gravity	0.90
Rockwell Hardness A scale	85 minimum

When tested in accordance with ASTM Designations D638 and D651 for Tensile Strength, ASTM Designation D747 for Modulus of Elasticity, ASTM Designation D792 for Specific Gravity, and ASTM Designation D784 for Rockwell Hardness.

Weight. The finished bandage scissors, less packing and packaging weight, shall not weigh more than 1.2 ounces (37.5 grams) for Size 1 and 2.2 ounces (68.5 grams) for Size 2.

Style, design and dimensions. Scissors shall be in accordance with Figures 1 and 2 for style, design and dimensions.

Hardness. Scissors shall have a Rockwell Hardness C scale (HRC) of 48 to 53 when tested in accordance with ASTM Designations E18 or E92 whichever is applicable. Conversion of hardness values shall be in accordance with ASTM Designation E140.

Finish. The finish of the scissors shall be satin or matte. The matte finish shall exhibit a uniform nondirectional surface texture equivalent to that produced by lightly blasting the prepared surface with fine abrasives under pressure.

Passivation. Scissors shall be properly passivated.

Corrosion resistance. Scissors shall show no signs of corrosion or plating of copper when tested for corrosion resistance in accordance with ASTM Designation F1089.

Sterilization. Bandage scissors shall be capable of being autoclaved in a steam sterilizer at 272°F (136°C) for 10 minutes without any damage to the metal components or to the molded polypropylene finger rings, and on Size 1 scissors the probe tip. This test shall be performed a total of five times.

Identification marking and labeling. Scissors shall be legibly marked with the contractor's name or registered trademark and the word "stainless". Scissors of foreign manufacture shall bear the name of the country of origin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:36Z
Check the source to verify that this is the current version before use.

Performance. The bandage scissors shall be capable of completely cutting through a closed medium heavy duty special size zipper, see Note 2 and Cotton Webbing 1.250 ± 0.031 inch wide and 0.125 ± 0.010 inch thick weighing 1.90 ounces minimum per linear yard, see Note 3. The scissors to be tested shall be cleaned prior to testing. Three separate, consecutive tests shall be performed for each scissors on each test material. Tests on the closed zipper shall be by making one cut across the chain and through the scoop of the zipper and for cotton webbing one cut across the width of the webbing. Scissors shall be held in the normal manner (with the examiner's fingers in the finger rings of the scissors).

For Size 1 scissors a maximum of three cutting strokes shall be allowed to cut through the zipper and cotton webbing, the tips shall be excluded from the cutting requirement.

For Size 2 scissors each cut shall be the entire length of the blades, including the tips.

The scissors shall also meet the applicable performance requirements for heavyweight scissors in accordance with ASTM Designation F1079.

Workmanship. Scissors shall be uniform and free from blooms, blisters, cracks, pits, burrs, sharp edges, scale, rough areas, corrosion, grind or tool marks, and dirt or polishing materials.

Unit. Each (EA). One bandage scissors, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:36Z
Check the source to verify that this is the current version before use.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after the delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Examination. Examination shall be conducted to determine compliance with specification requirements.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and as specified herein. Unit of product for examination purposes shall be one scissors as specified. Sampling shall be inspection level II with an Acceptable Quality Level (AQL) of 1.0.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as specified. Unit of product for test purposes shall be one scissors. Sampling shall be inspection level S-2 with an AQL of 1.0.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:36Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be as specified in the contract and/or order.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:36Z
Check the source to verify that this is the current version before use.

NOTE 1: The following National Stock Numbers are covered by this document:

NATIONAL STOCK NUMBER	ITEM IDENTIFICATION	SIZE
6515-01-030-4465	SCISSORS, BANDAGE, Angular, 5-1/2 inch	1
6515-00-935-7138	SCISSORS, BANDAGE, Angular, 7-1/4 inch	2

NOTE 2: Suitable zippers for testing are:

NATIONAL STOCK NUMBER	ITEM IDENTIFICATION
5325-00-222-1521	FASTENER, SLIDE, INTERLOCKING (Type III, MHS Size)
5325-00-186-6237	FASTENER, SLIDE, INTERLOCKING (Type IV, MHS Size)

NOTE 3: Suitable webbing material for testing is:

NATIONAL STOCK NUMBER	ITEM IDENTIFICATION
8305-00-261-8465	WEBBING, TEXTILE, COTTON, General Purpose, Natural or in Colors (Type IV-Webbing, Special use)

MILITARY INTERESTS:

Custodians:

Army-MD
Navy-MS
Air Force-03

Preparing Activity:

DoD-MB

Agent:


DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
USPHS
FDA-MPQAS

Project No. 6515-5672
Location: c:word\david\angular

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:36Z
Check the source to verify that this is the current version before use.

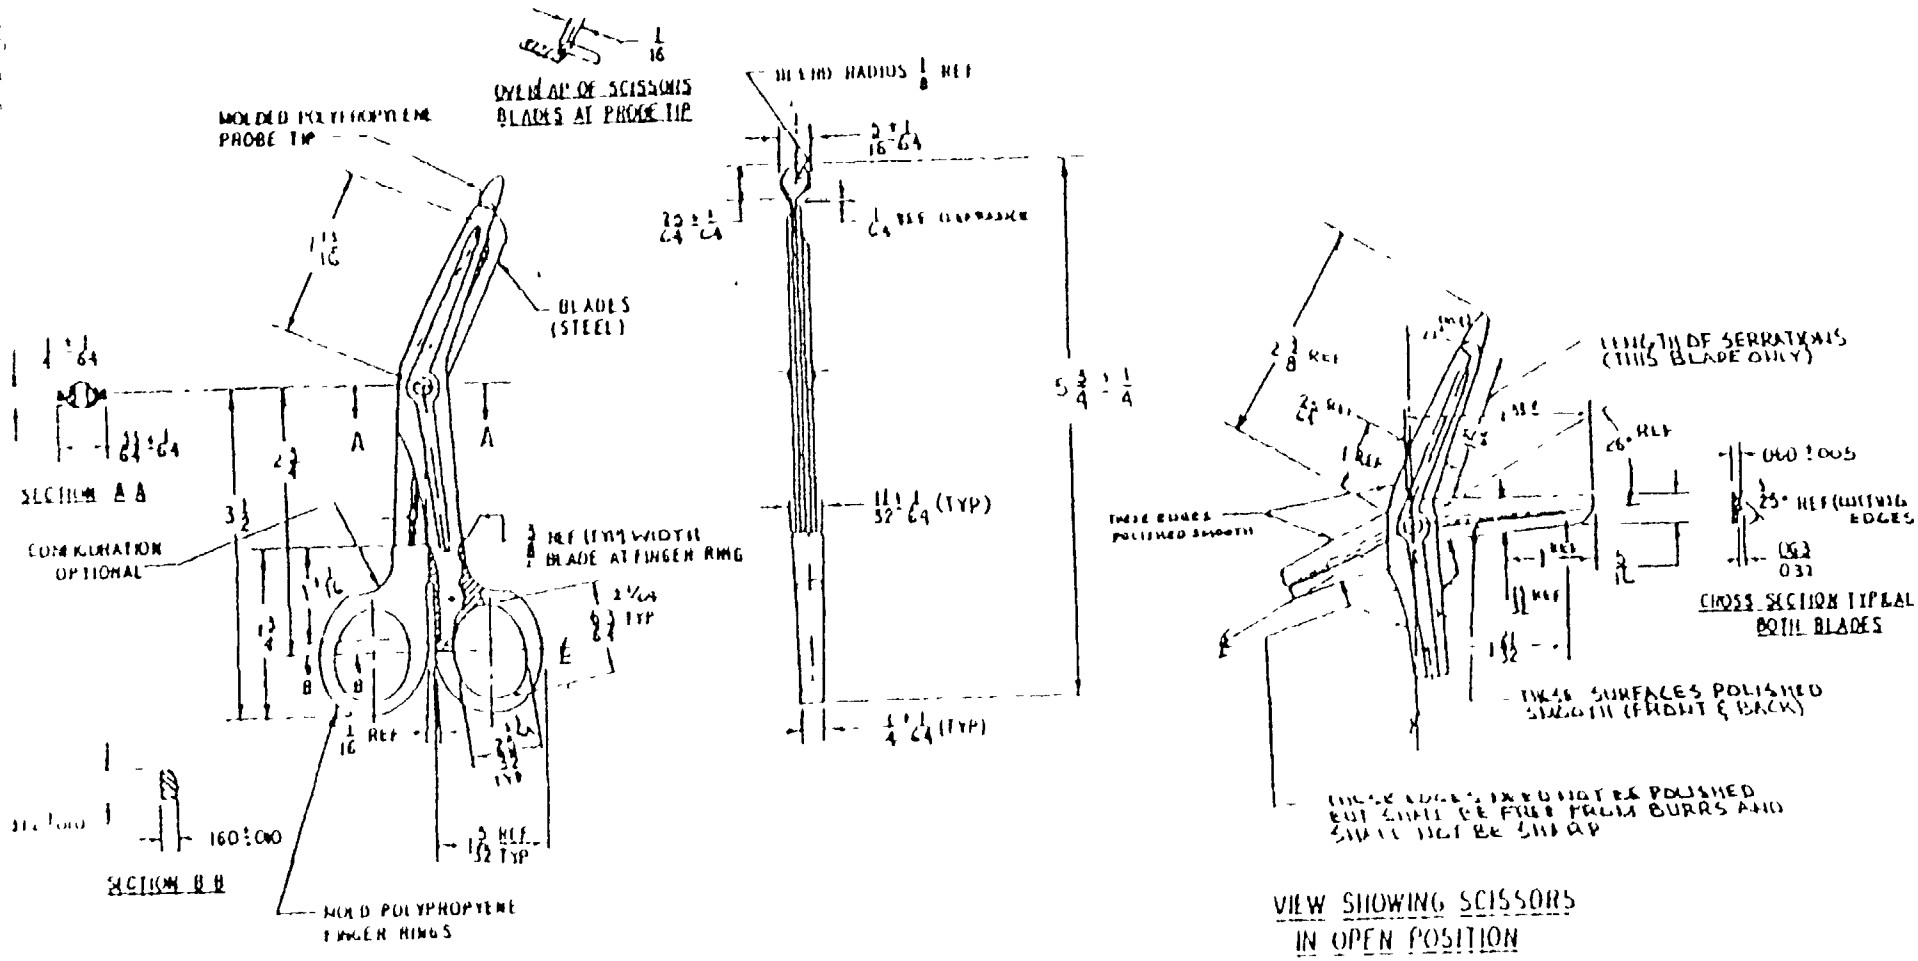

NOTE 1

REMOVE BURRS AND BREAK ALL SHARP EDGES EXCEPT AS NOTED

NSN 6515 01-030-4465

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCES ON FRACTIONS ±1/32 DECIMALS ANGLES °

FIGURE 1 SCISSORS, BANDAGE, ANGULAR, 5-1/2 INCH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:36Z
Check the source to verify that this is the current version before use.

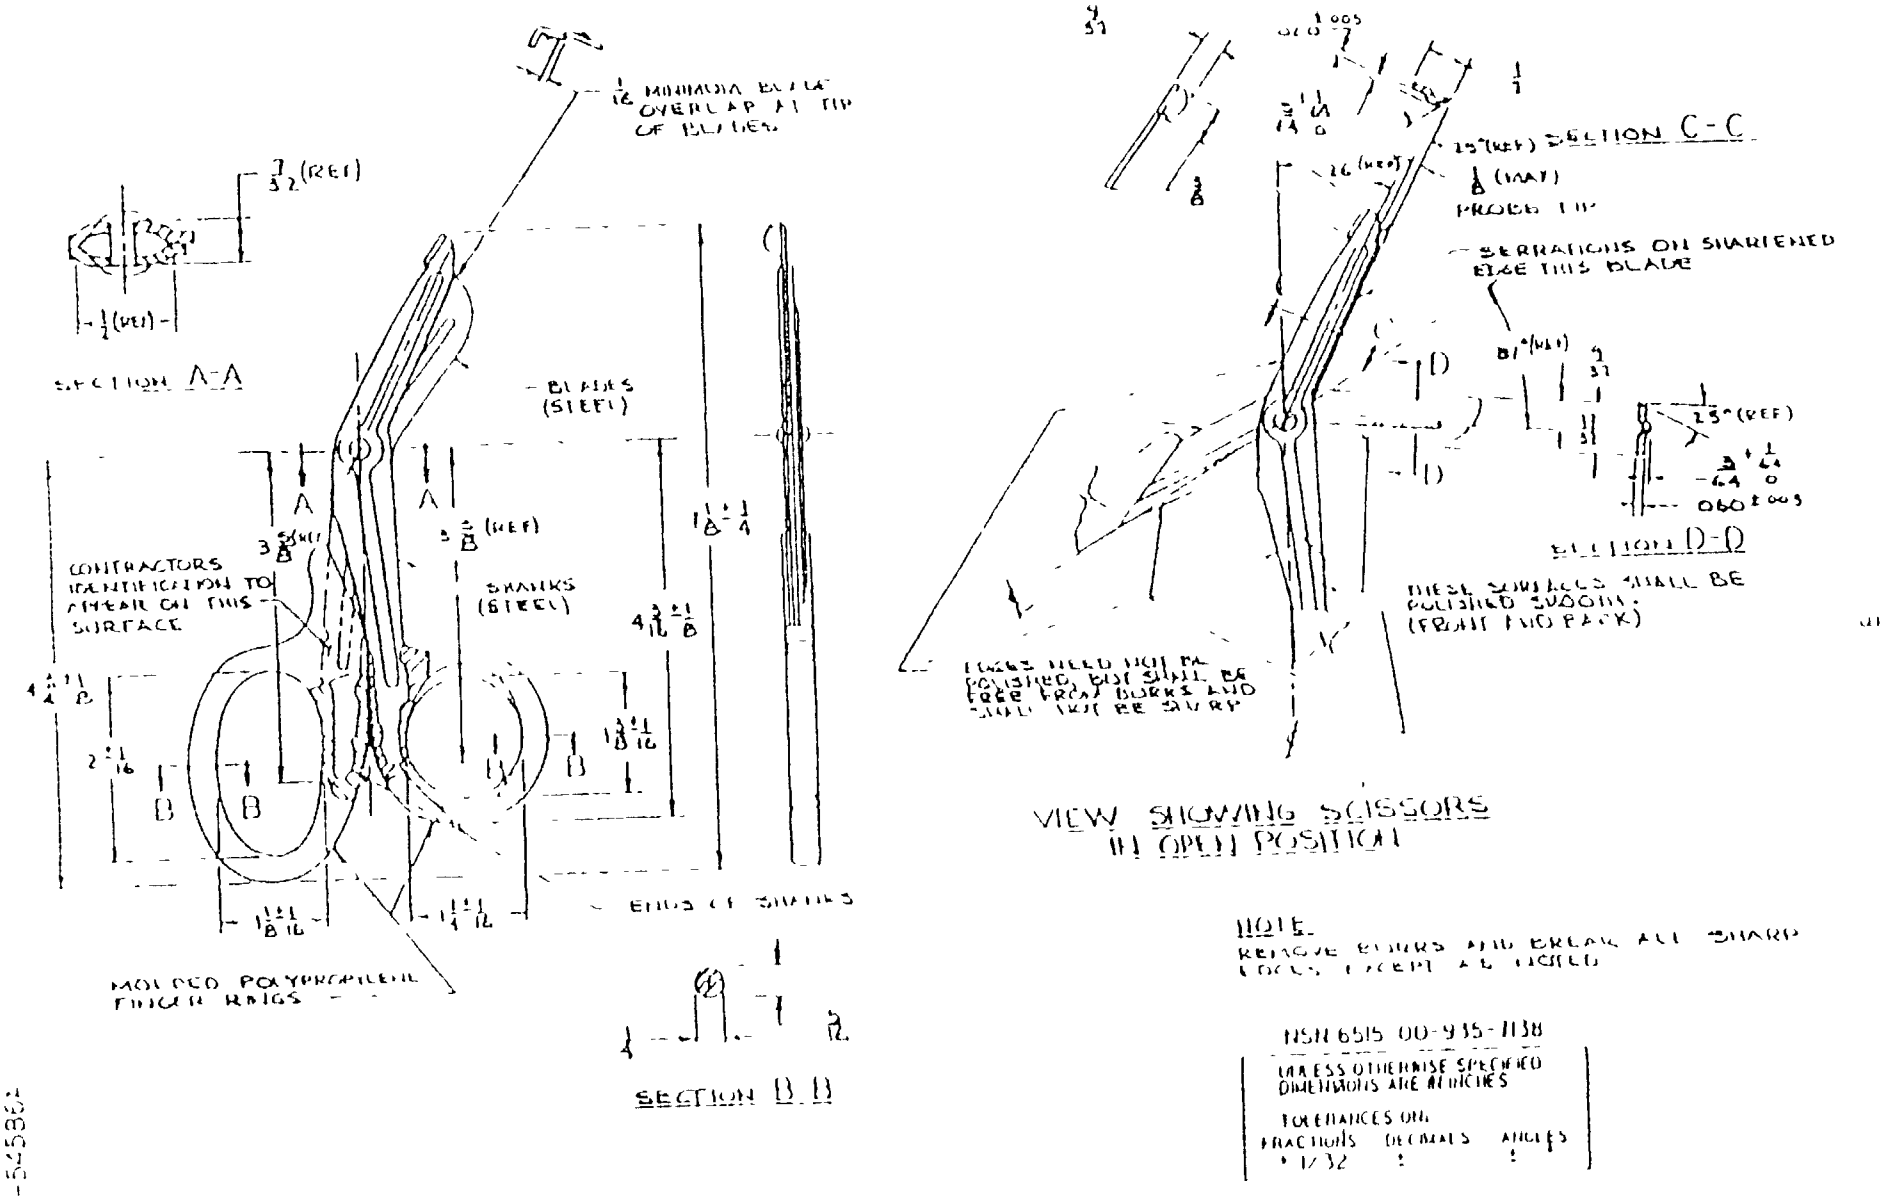


FIGURE 2. SCISSORS, BANDAGE, ANGULAR, 7 1/4 INCH

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T09:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER A-A-54586A	2 DOCUMENT DATE (YYMMDD) 940114

3 DOCUMENT TITLE
SCISSORS, BANDAGE, ANGULAR

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)

5 REASON FOR RECOMMENDATION

6 SUBMITTER

a NAME (Last, First, Middle Initial)	b ORGANIZATION	
c ADDRESS (Include Zip Code)	d TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7 DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME Defense Personnel Support Center ATTN: DPSC-MSE	b TELEPHONE (Include Area Code) (1) Commercial (215)7372870	(2) AUTOVON 444-2870
c ADDRESS (Include Zip Code) 2800 South 20th Street Philadelphia, PA 19145	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete* 196/290

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:36Z
Check the source to verify that this is the current version before use.