INCH-POUND
A-A-59871A(SH)
July 13, 2021
SUPERSEDING
A-A-59871
July 12, 2010

# COMMERCIAL ITEM DESCRIPTION

# WATER CLOSET, VACUUM, FOR SHIPBOARD USE

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description (CID) covers vacuum water closets (toilets) used with sewage vacuum collection, holding, and transfer (VCHT) systems aboard ships.

2. CLASSIFICATION. Vacuum water closets shall conform to the following grades, types, and styles:

2.1 Grades.

Grade A – White vitreous china

Grade B – Stainless steel

2.2 Types.

Type I – Deck-mounted

Type II – Bulkhead (wall) direct-mounted

Type III – Bulkhead (wall) carrier-mounted

2.3 Styles.

Style 1 – Regular bowl

Style 2 – Elongated bowl

3. SALIENT CHARACTERISTICS.

3.1 Description. The vacuum water closet (toilet) assembly shall be fully equipped with all equipment needed for installation and operation. Such equipment may include, for example, a toilet bowl, toilet seat, flushing activator, discharge valve, control assembly, water valve, vacuum breaker, flushing water hoses, discharge coupling with clamps, mounting gasket, edge strip (types II and III only), and carrier (type III only).

3.1.1 Parts. When specified (see 7.5), the vacuum water closet shall be furnished without external parts in lieu of a complete assembly. External parts may include flushing activator, vacuum breaker, flushing water hoses, discharge coupling with clamps, mounting gasket, edge strip, and carrier.

3.2 Materials. The materials for vacuum water closets shall be as specified herein. When a definite material is not specified, the material selected shall be the best commercial marine grade for the purpose intended. Acceptance or approval of any constituent material shall not be construed as a guarantee of the acceptance of the finished product.

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: Commander, Naval Sea Systems Command, ATTN: SEA 05S, 1333 Isaac Hull Avenue, SE, Stop 5160, Washington Navy Yard, DC 20376-5160 or emailed to CommandStandards@navy.mil, with the subject line “Document Comment”. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 4510

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

3.2.1 Corrosion. Vacuum water closet parts in contact with sewage shall be made of materials resistant to corrosion by these wastes. Shipboard sewage contains freshwater or seawater mixed with various concentrations of human wastes and fixture (water closet and urinal) cleaning agents in accordance with S6480-A4-CAT-010, with most of the cleaners belonging to the following chemical component/cleaning families:

a. Quaternary ammonium compounds (CAS Numbers 32426-11-2, 5538-94-3, and 68424-85-1)
b. Ethoxylated alcohols
c. DPM glycol ether (CAS Number 034590-94-8)
d. Betaines
e. Alpha olefin sulfonates
f. Alkanolamides
g. Alkanolamines
h. Hydrotropes
i. Hydroxides (potassium, sodium, ammonium)
j. N-Alkyl dimethylamine oxides
k. Acids (sulfamic, muriatic, phosphoric, citric, glycolic)
l. D-Limonene (CAS Number 5989-27-5)
m. Sodium metasilicate pentahydride (CAS Number 6834-92-0)
n. Sodium tripolyphosphate (CAS Number 7758-29-4)
o. Polyglycols
p. Urea (CAS Number 57-13-6)
q. Propylene glycol (CAS Number 57-55-6)
r. Iminoacetic acid (including ethylenediaminetetraacetic acid)/chelating agents

Shipboard sewage in addition to the wastes listed above may contain scale prevention products in accordance with MIL-PRF-32217.

3.2.2 Alternate materials. The manufacturer may use alternate materials for those materials specified herein; however, these materials shall have greater corrosion resistance and better physical and electrical qualities for the intended use than the materials specified.

3.3 Operating requirements.

3.3.1 Fluid. Vacuum water closets shall be able to evacuate fluid containing sewage.

3.3.2 Temperature. Vacuum water closets shall operate within temperature variations from 40 to 100 °F, with no effect on operation.

3.3.3 Flushing water pressure. Unless otherwise specified (see 7.5), vacuum water closet internal wetted components shall withstand and operate when subjected to continuous internal water pressure equal to the maximum water pressure rating of the toilet (not to exceed 90 pounds per square inch)without leakage, failure, or corrosion.

3.3.4 Vacuum. Vacuum water closet internal vacuum components shall withstand and operate when subjected to continuous internal vacuum of 9 to 20 inches mercury (Hg) without leakage or failure.

3.3.5 Shock. When specified (see 7.5), the vacuum water closet assembly (stainless steel only) shall be shock tested in accordance with MIL-DTL-901 and meet the requirements for grade B, type A hull/deck-mounted equipment. During shock testing, the vacuum water closet assembly shall be mounted to simulate a shipboard installation.

3.3.6 Vibration. When specified (see 7.5), the vacuum water closet assembly shall operate within the vibration limits set in MIL-STD-167-1, type I over the expected service life of the unit (see 3.3.8).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

3.3.7 Airborne noise. When specified (see 7.5), the vacuum water closet shall meet noise requirement 5 of MIL-STD-1474 for grade B equipment during operation.

3.3.8 Service life. The vacuum water closet shall automatically operate for a minimum of 200,000 cycles with no failures or leaks (air or water) when operated in accordance with the normal operating range of current U.S. Navy systems (see 3.6).

3.4 Design and operation.

3.4.1 Design.

3.4.1.1 Toilet bowl. The toilet bowl for grade A units shall be a white vitreous china bowl of first quality grade in accordance with ASME A112.19.2/CSA B45.1. Suppliers of white vitreous china bowls not made in accordance with ASME A112.19.2/CSA B45.1 shall supply evidence, such as the specification with which the product complies or a written explanation of why deviations from ASME A112.19.2/CSA B45.1 are equivalent or better, and the technical authority will make a determination of equivalent quality. The toilet bowl for grade B units shall be 316L stainless steel. The toilet bowl configuration and other dimensions except as specified herein shall be in accordance with the contractor's normal practice. The toilet bowl houses the discharge valve, control assembly, and water valve. These components shall be accessible for service without removing the water closet for type I fixtures.

3.4.1.2 Toilet seat. Water closet seats shall be white plastic in accordance with IAPMO/ANSI Z124.5 and shall be hinged at the rear. The type of seat shall be one of the following as specified (see 7.5):

a. Open front without cover.

b. Open front with cover.

c. Closed front with cover.

3.4.1.3 Flushing activator. Flushing activators shall be pneumatic and integral to the water closet or remote pushbuttons. A pushbutton on the water closet or remote pushbutton shall be provided that requires manual activation to initiate the flush sequence. The external pushbutton shall be provided with means to attach the device to the bulkhead.

3.4.1.4 Discharge valve. The discharge valve shall be a vacuum-operated valve. The valve shall automatically close upon loss of system vacuum or water closet control components or, if a tubular diaphragm valve is used, failure of the valve bellows. Tubular diaphragms shall be made of neoprene or natural rubber.

3.4.1.5 Control assembly. A control assembly shall be provided that controls operation of vacuum water closet components. Tubing from the control assembly to the vacuum collection system piping shall be provided with a check valve to prevent contamination of the control assembly.

3.4.1.6 Water valve. The flushing water supply valve shall be a vacuum-operated valve. The valve shall dispense the amount of flushing water specified in 3.6.3 when activated.

3.4.1.7 Vacuum breaker. In accordance with U.S. Public Health Service requirements, a vacuum breaker or other anti-siphon device shall be provided to prevent contaminated water from being back-siphoned into the flushing water supply. The device may be separately mounted external to the water closet. Separately mounted vacuum breakers shall be provided with means to attach the device and connecting pipe to the bulkhead.

3.4.1.8 Flushing water connection hoses. Flexible hoses with ½-inch pipe connections and braided stainless sheathing for burst protection shall be furnished to connect the toilet to the ship water supply.

3.4.1.9 Discharge couplings. A 90-degree elbow (neoprene or black PVC) and a straight coupling (neoprene or black PVC) with stainless steel, worm-drive hose clamps shall be furnished. These fittings can be rotated and clamped as required to direct discharge down or to the side.

3.4.1.10 Carrier. A carrier shall be furnished with each type III toilet to provide the interface between the toilet bowl and both the bulkhead and deck. The carrier shall consist of two brackets capable of being attached to the deck by means of bolts or nuts. The carrier shall be supplied with studs, nuts, and washers, as necessary, to mount the toilet bowl to the bulkhead.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

3.4.2 Operation.

3.4.2.1 Automatic operation. When the flush cycle is initiated by pressing a flush pushbutton, the control assembly (valve or solenoid) shall direct a vacuum-mechanical-hydraulic circuit that opens the flushing water and discharge valves. The flushing water valve shall dispense water to rinse the bowl as atmospheric air propels the bowl contents into the collection piping through the open discharge valve. The discharge valve shall close as it is vented, and additional flushing water shall be directed into the bowl to form a pool of water for the next use.

3.4.2.2 Operation after an insufficient vacuum condition. When specified (see 7.5), upon restoration of sufficient vacuum conditions, a water closet shall have the capability to automatically flush if the flush cycle was initiated during the insufficient vacuum condition.

3.5 Dimensions and mountings.

3.5.1 Deck-mounted (type I) toilet. The height of the toilet bowl for deck-mounted toilets, measured at the front top of the rim to the base shall be as shown on figures 1 through 3. Unless otherwise specified (see 7.5), the toilet bowl mounting hole pattern shall be as shown on these figures. The toilet bowl shall be mounted on 5/16-inch studs welded to the deck. Figures 1 and 2 show two alternate outline dimensions for vitreous china toilets, while figure 3 shows dimensions for a stainless unit.

3.5.2 Bulkhead direct-mounted (type II) toilet. The toilet bowl shall be mounted on the bulkhead at the height shown on figure 4. Unless otherwise specified (see 7.5), the toilet bowl mounting hole pattern shall be as shown on this figure. The toilet bowl shall be mounted on 3/8-inch studs welded to the bulkhead or on ship installed supports with 3/8-inch bolts.

3.5.3 Bulkhead carrier-mounted (type III) toilet. The toilet bowl shall be mounted on the bulkhead at the height shown on figure 5. Unless otherwise specified (see 7.5), the toilet bowl mounting hole pattern shall be as shown on this figure. The toilet bowl shall be attached to the bulkhead by 3/8-inch studs that pass through the bulkhead into the toilet carrier brackets on the opposite side of the bulkhead. The toilet bowl shall be secured to the studs with nuts. Bulkhead mounting hardware including studs, flat washers, and nuts shall be furnished with the carrier. The carrier shall be mounted on 1/2-inch studs welded to the deck.

3.5.4 Discharge connection. The vacuum water closet discharge connection shall be 1½-inch Nominal Pipe Size (NPS). Unless otherwise specified (see 7.5), the discharge connection height above the water closet base or deck level shall be as shown on figures 1 through 5 for the different grades, types, and styles of water closets.

3.5.5 Mounting gasket. Each deck-mounted water closet (type I) shall be furnished with a neoprene gasket having a minimum thickness of 1/8 inch mounted on the deck to account for surface irregularities in both the water closet and deck. The gasket material shall be larger to allow the gasket to be trimmed after installation.

3.5.6 Edge strip. Bulkhead-mounted water closets shall be furnished with a white, synthetic rubber, molded edge strip around the periphery of the toilet bowl at the junction with the bulkhead. The edge strip shall be a minimum of 1/8 inch thick between the water closet and the bulkhead. The edge strip shall be easy to clean and give a nice appearance.

3.6 Performance.

3.6.1 Vacuum. The water closet shall operate connected to piping under vacuum ranging from 11 to 18 inches Hg.

3.6.2 Minimum operating vacuum. The vacuum water closet shall operate at a minimum vacuum of 9 inches Hg.

3.6.3 Flushing water. The water closet shall operate when connected to a freshwater flushing water supply. Unless otherwise specified (see 7.5), the water pressure of the water supply shall be 30 to 90 pounds per square inch. The water closet shall use an average of 0.375 gallon of water per flush with an additional 0.125-gallon residual amount of water directed into the bowl.

3.7 Workmanship. Parts shall be of first-class workmanship and shall be free from defects of manufacture that detract from their appearance or impair their serviceability.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

3.8 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376 and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request may be made to the Contracting Officer to determine if the product is acceptable. The Contracting Officer has the option of accepting or rejecting the product.

4. REGULATORY REQUIREMENTS. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The item offered must have been sold to the Government or commercial market. A modified commercial, off-the-shelf item may be used to minimize design and engineering risk. The offeror shall certify and provide supporting documentation as to the product's serviceability and the long-term (5 years) availability of all necessary maintenance and logistics support parts and materials.

5.3 Bid samples. When specified (see 7.5), one water closet shall be submitted to the Government for examination and testing. The bid sample shall be non-returnable. Shock (see 5.4.8), airborne noise (see 5.4.9), and vibration (see 5.4.10) testing will be performed on the bid sample, as applicable. Failure of the bid sample to meet the requirements of any of the applicable tests or examinations listed herein shall be cause for rejection of the bid.

5.4 Inspection requirements.

5.4.1 Responsibility of inspection. Unless otherwise specified (see 7.5), the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Unless otherwise specified (see 7.5), the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this CID where such inspections, examinations, and tests are deemed necessary to ensure supplies and services conform to prescribed requirements.

5.4.2 Failure. Failure of any of the tests and examinations listed herein shall be cause for rejection.

5.4.3 Examination. The vacuum water closet shall be visually examined to determine compliance with all requirements of this CID and with all specified dimensions.

5.4.4 Operational test. The vacuum water closet shall be connected to vacuum and flushing water at the pressures specified in 3.6.3 and operated not less than 10 times to perform automatic flushing operation to demonstrate operation of all moving parts and mechanisms without any leaks.

5.4.4.1 Flushing water volume. The volume of flushing water discharged during each flush cycle shall be measured to determine compliance with the requirements of 3.6.3.

5.4.5 Minimum vacuum. The vacuum water closet shall be connected to vacuum at the minimum vacuum specified in 3.6.2 and flushing water pressures specified in 3.6.3 and operated not less than 10 times to perform automatic flushing operation with no failure to dispense water and discharge.

5.4.6 Operation with loss of vacuum. The vacuum water closet shall be activated with zero vacuum in the connected soil line. When specified (see 7.5), the water closet shall automatically flush upon restoration of vacuum pressure. This operation shall be demonstrated a minimum of 10 times.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

5.4.7 Endurance cycling. The vacuum water closet assembly shall be connected to vacuum and flushing water at system operating pressures and continuously cycled by automatic flush operation for the number of cycles specified in 3.3.8 with no failures or leakage. Minor leaks that can be corrected by tightening a connection may be repaired during the test. A failure of controls to operate, mechanism failure, or leak shall be considered a failure and cause for rejection. Certification that this testing requirement has been met may be used in lieu of a test.

5.4.8 Shock test. When shock testing is required (see 7.5), it shall be accomplished in accordance with 3.3.5.

5.4.9 Airborne noise test. The noise test, when specified (see 7.5), shall be performed with the water closet connected to vacuum and flushing water at the pressures specified herein and operated in the automatic discharge mode to determine conformance with the requirements specified in 3.3.7.


5.4.10 Vibration test. When vibration testing is required (see 7.5), it shall be accomplished in accordance with 3.3.6.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.5).

7. NOTES.

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for CID A-A-59871A(SH).

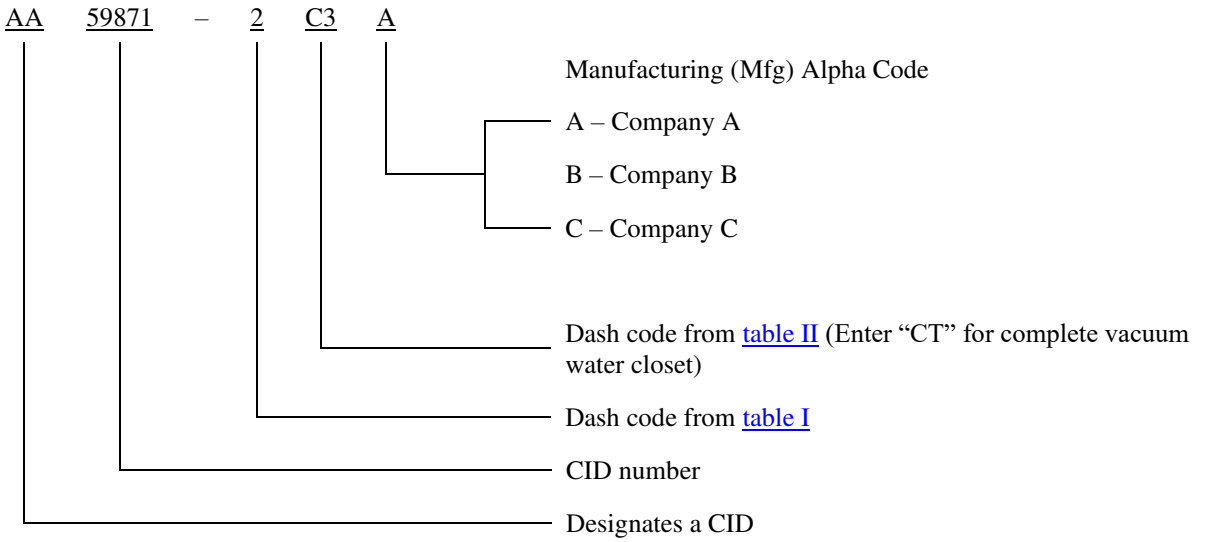




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE I. Dash codes for vacuum water closet.

| Dash code | Grade | Type mounted | Style | Seat type | Shock test required | Figure |
|---|---|---|---|---|---|---|
| 1 | A | I | 1 | a | No | 1 |
| 2 | | | | b | | |
| 3 | | | | c | | |
| 4 | A | I | 2 | a | No | 1 |
| 5 | | | | b | | |
| 6 | | | | c | | |
| 7 | A | I | 1 | a | No | 2 |
| 8 | | | | b | | |
| 9 | | | | c | | |
| 10 | A | I | 2 | a | No | 2 |
| 11 | | | | b | | |
| 12 | | | | c | | |
| 13 | B | I | 1 | a | Yes | 3 |
| 14 | | | | b | | |
| 15 | | | | c | | |
| 16 | B | I | 2 | a | Yes | 3 |
| 17 | | | | b | | |
| 18 | | | | c | | |
| 19 | A | II | 1 | a | No | 4 |
| 20 | | | | b | | |
| 21 | | | | c | | |
| 22 | A | II | 2 | a | No | 4 |
| 23 | | | | b | | |
| 24 | | | | c | | |
| 25 | B | II | 1 | a | Yes | 4 |
| 26 | | | | b | | |
| 27 | | | | c | | |
| 28 | B | II | 2 | a | Yes | 4 |
| 29 | | | | b | | |
| 30 | | | | c | | |
| 31 | A | III | 1 | a | No | 5 |
| 32 | | | | b | | |
| 33 | | | | c | | |
| 34 | A | III | 2 | a | No | 5 |
| 35 | | | | b | | |
| 36 | | | | c | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE I. Dash codes for vacuum water closet – Continued.

| Dash code | Grade | Type mounted | Style | Seat type | Shock test required | Figure |
|---|---|---|---|---|---|---|
| 37 | B | III | 1 | a | Yes | 5 |
| 38 | | | | b | | |
| 39 | | | | c | | |
| 40 | B | III | 2 | a | Yes | 5 |
| 41 | | | | b | | |
| 42 | | | | c | | |

TABLE II. Dash codes for individual components.

| Dash code | Individual component | Requirement | Mfg Alpha Code required |
|---|---|---|---|
| C1 | Toilet bowl | 3.4.1.1 | Yes |
| C2 | Toilet seat a | 3.4.1.2.a | Yes |
| C3 | Toilet seat b | 3.4.1.2.b | Yes |
| C4 | Toilet seat c | 3.4.1.2.c | Yes |
| C5 | Flushing activator | 3.4.1.3 | Yes |
| C6 | Discharge valve | 3.4.1.4 | Yes |
| C7 | Control assembly | 3.4.1.5 | Yes |
| C8 | Water valve | 3.4.1.6 | Yes |
| C9 | Vacuum breaker | 3.4.1.7 | Yes |

7.2 Source of documents.

7.2.1 American National Standards Institute (ANSI). ANSI standards are available from https://webstore.ansi.org/ or the American National Standards Institute, 25 W. 43rd St, 4th Floor, New York, NY 10036.

7.2.2 American Society of Mechanical Engineers (ASME). ASME standards are available from www.asme.org or the American Society of Mechanical Engineers, 150 Clove Road, Little Falls, NJ 07424-2100.

7.2.3 Federal and Department of Defense specifications and standards. Federal and Department of Defense specifications and standards are available online at https://quicksearch.dla.mil.

7.2.4 Naval Sea Systems Command (NAVSEA) Publications. NAVSEA Publications are available online via Technical Data Management Information System (TDMIS) at https://mercury.tdmis.navy.mil/. Refer questions, inquiries, or problems to: DSN 296-0669, Commercial (805) 228-0669. NAVSEA Publications are also available for ordering (hard copy) via the Naval Logistics Library (NLL) at https://nll.navsup.navy.mil. For questions regarding the NLL, contact the NLL Customer Service at nllhelpdesk@navy.mil, (866) 817-3130, or (215) 697-2626/DSN 442-2626.

7.3 Sources of supply. Manufacturers whose products are known to meet the requirements of this CID are listed below. Competition is not limited to those products and manufacturers.

EVAC North America, Inc.
1445 Huntwood Drive
Cherry Valley, IL 61016-9560



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

7.4 Intended use. Vacuum water closets covered by this CID are intended for use in VCHT systems for new construction ships or as stock replacements for water closets currently installed on existing ships. When acquiring water closets for replacement purposes, the contracting activity should ensure that interface requirements are specified (see 7.5) for water and discharge connections that are compatible with the water closet being replaced to avoid the need for costly ship modifications. Acquisition for new construction allows for more latitude in water closet dimensions and interface requirements, enabling more suppliers to bid, thereby increasing competition. Originally installed water closets may no longer be in production and specifying special mounting dimensions and interface connections for exact replacement should be avoided. Consideration should be given to making minor shipboard changes instead of specifying special dimensions. The availability of supplier-furnished retrofit kits should be investigated, as specified (see 7.5). Water and discharge connections location and mounting bolt patterns generally are not an issue for new construction.

7.5 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Grade, type, and style of vacuum water closet (see section 2).

c. When to furnish without external parts in lieu of a complete assembly (see 3.1.1).

d. Maximum potable water system pressure requirement for the vacuum water closet if other than specified herein (see 3.3.3 and 3.6.3).

e. When shock testing is required (see 3.3.5 and 5.4.8).

f. When vibration testing is required (see 3.3.6 and 5.4.10).

g. When airborne noise testing is required (see 3.3.7 and 5.4.9).

h. Type of toilet seat (see 3.4.1.2).

i. Whether automatic flush capability is required upon restoration of sufficient vacuum conditions in situations where a flush cycle was initiated during an insufficient vacuum condition (see 3.4.2.2 and 5.4.6).

j. Mounting hole pattern and size of studs or bolts required if other than specified herein (see 3.5.1, 3.5.2, and 3.5.3 and figures 1, 2, 3, 4, and 5).

k. Discharge connection height required if other than specified herein (see 3.5.4).

l. When bid samples are required (see 5.3 and 7.6).

m. Responsibility of inspection requirements if other than specified herein (see 5.4.1).

n. When vibration testing is required (see 5.4.10).

o. Packaging requirements.

p. Interface requirements for water and discharge connections (see 7.4).

q. If retrofit kit may be provided (see 7.4).

7.6 Bid sample inspection. Bid sample testing and examination is performed by the Government before contract award. When a bid sample is required (see 7.5), the equipment should be a production unit normally provided by the manufacturer. The contracting officer should include specific instructions in the acquisition documents regarding arrangements for examinations and disposition of the bid samples.

7.7 National Stock Numbers (NSN). The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

| NSN | ITEM |
|---|---|
| 4510-01-582-4126 | 5800416 (Deck mount, china bowl) |
| 4510-01-656-1339 | 5800425-001 (Deck mount, china bowl) |
| 4510-01-583-6845 | 7250125 (Deck mount, stainless bowl) |
| 4510-01-678-4944 | 6544766 (Bulkhead mount, china bowl) |
| 4510-01-580-4834 | 7250070-001 (Bulkhead mount, china elongated bowl) |

7.8 Key words.

Fixtures, plumbing

System, pollution control

System, sewage vacuum collection, holding, and transfer (VCHT)

Toilet, vacuum

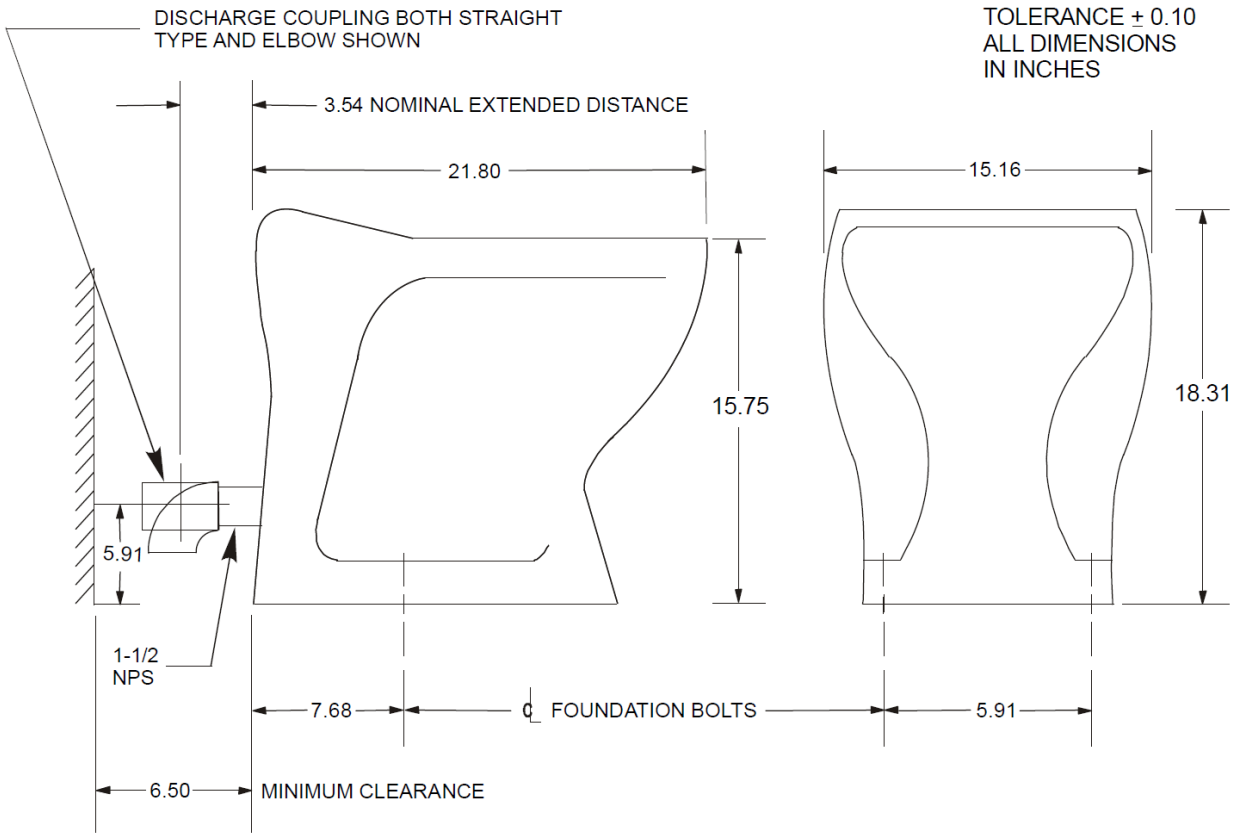



FIGURE 1. Type I, grade A deck-mounted vacuum toilet outline (alternative 1).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

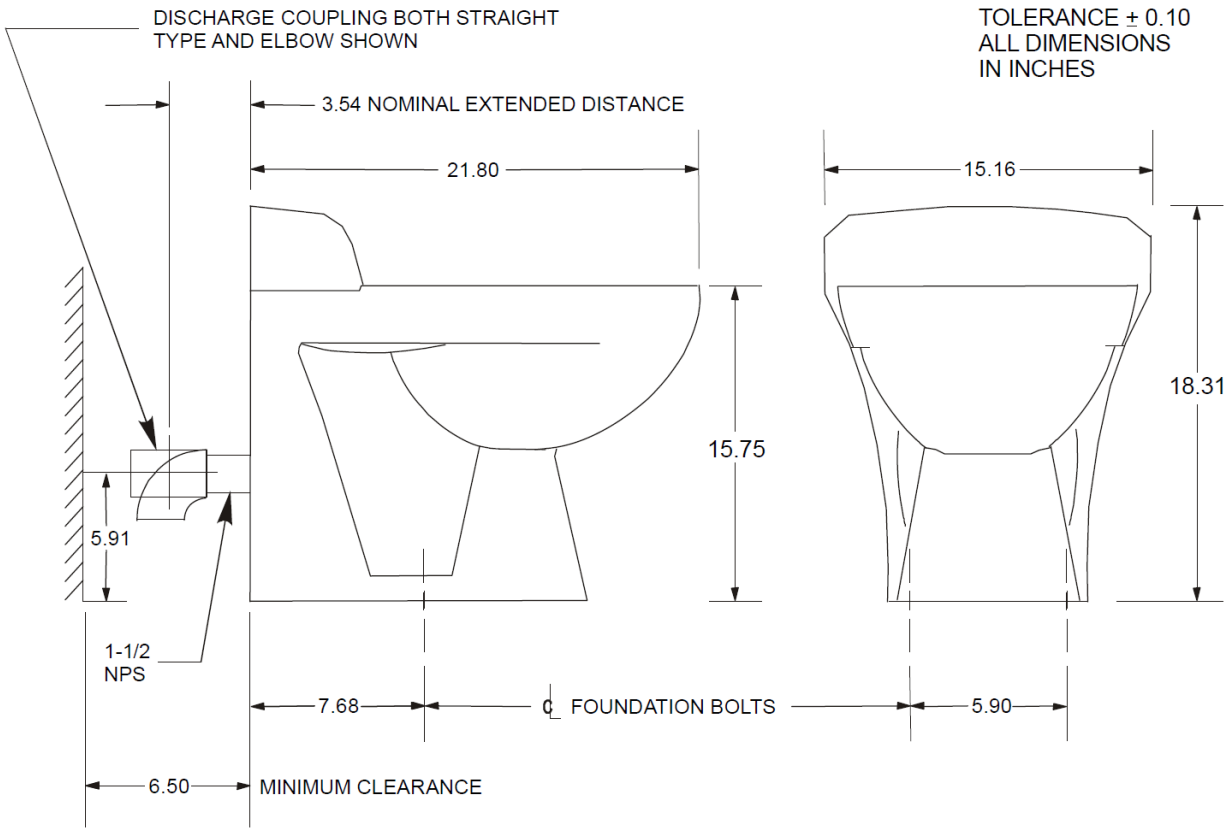



FIGURE 2. Type I, grade A deck-mounted vacuum toilet outline (alternative 2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

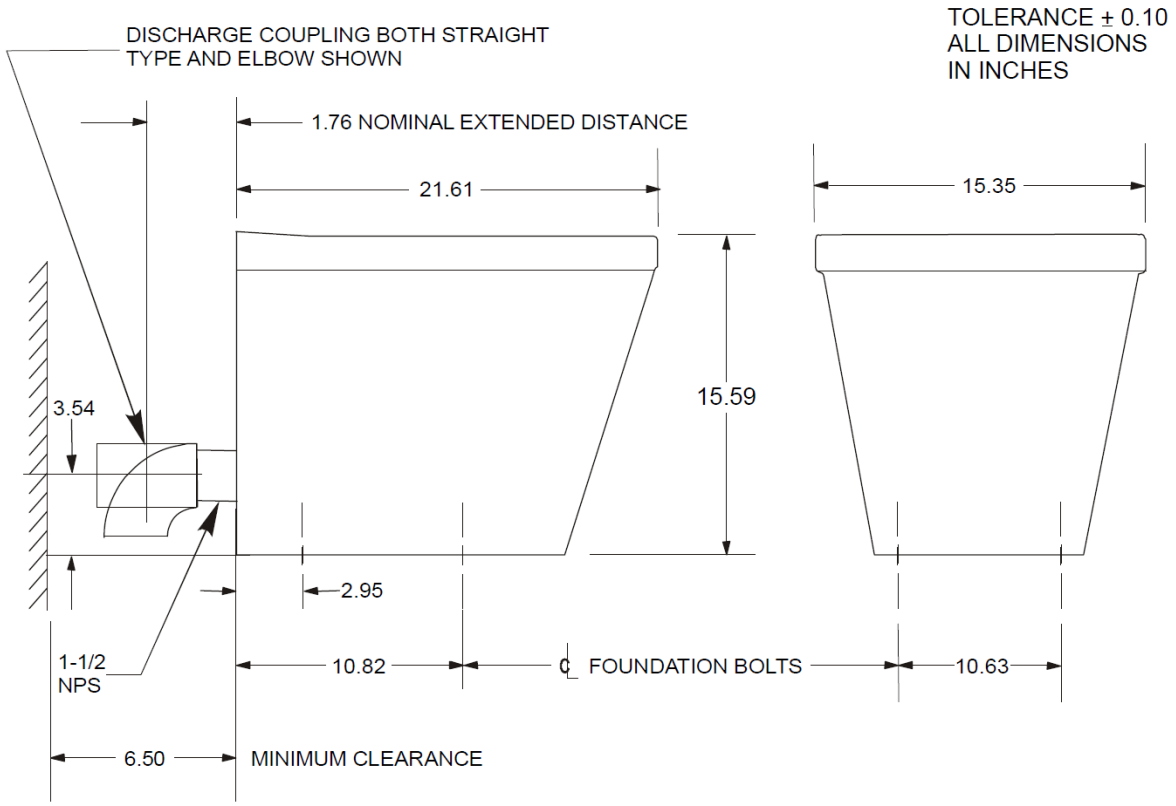



FIGURE 3. Type I, grade B deck-mounted vacuum toilet outline.

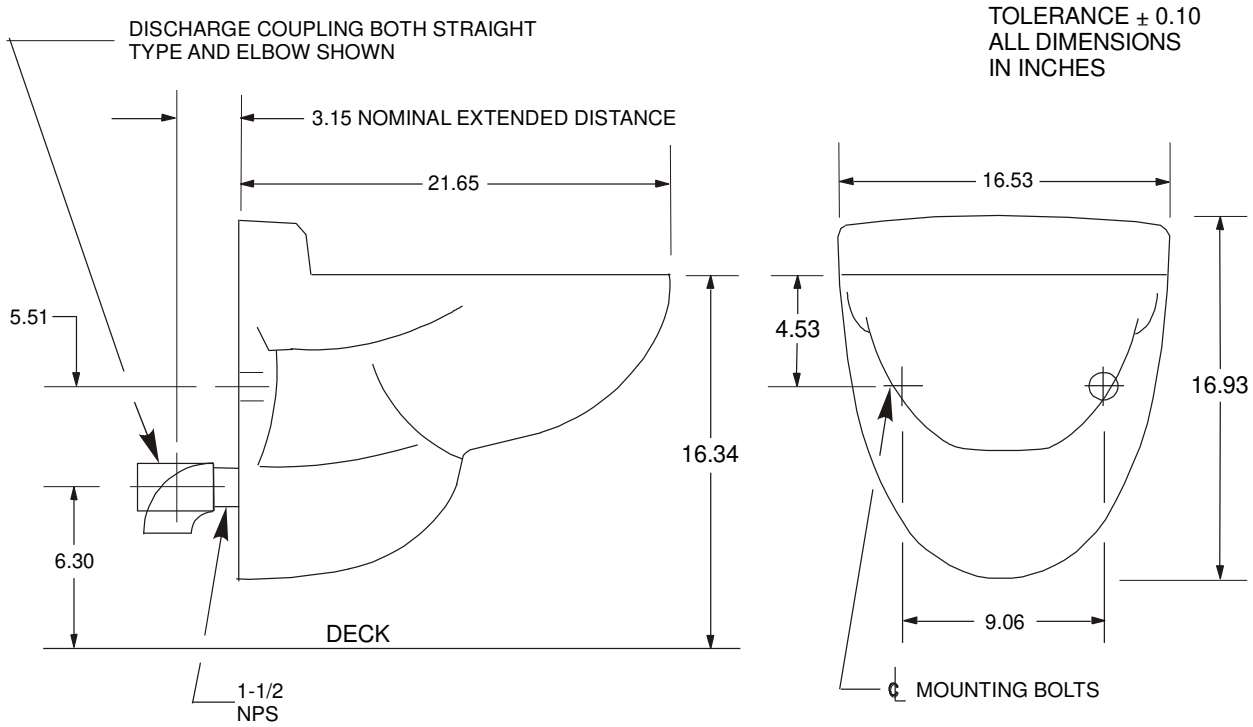



FIGURE 4. Type II bulkhead direct-mounted vacuum toilet outline.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

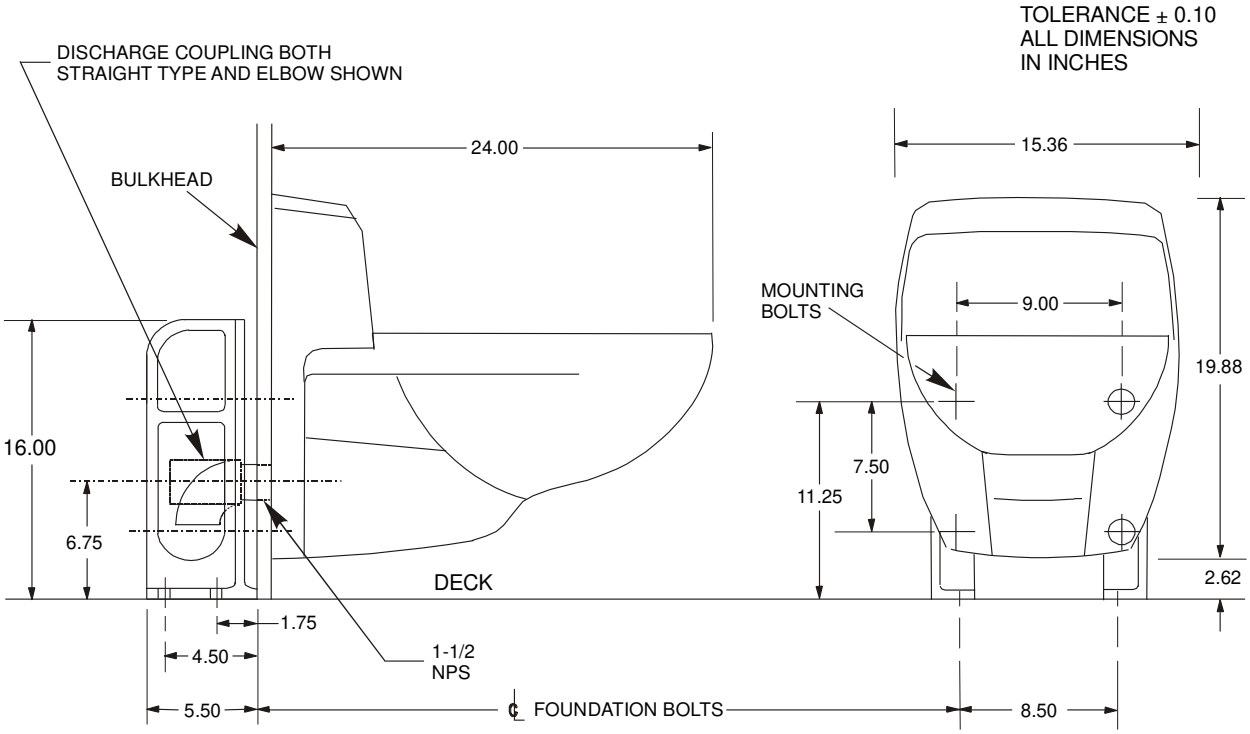



FIGURE 5. Type III bulkhead carrier-mounted vacuum toilet outline.

CONCLUDING MATERIAL

Preparing Activity:
Navy – SH
(Project 4510-2021-001)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.