
FEDERAL SPECIFICATION SHEET

WIRE, METAL, ROUND, NON-ELECTRICAL, COPPER ALLOY 270

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the wire described herein shall consist of this document and the latest issue of QQ-W-321.

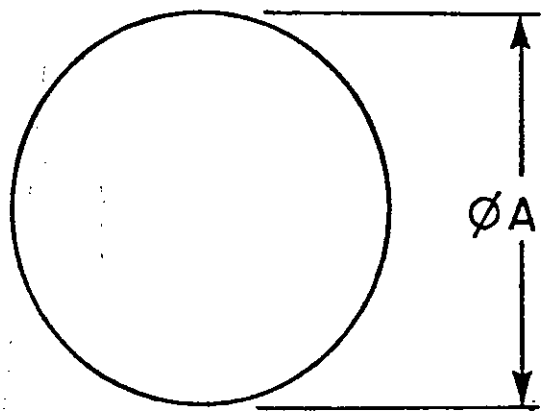

NOTES:

1. All dimensions are in inches.

FIGURE 1. WIRE, METAL, ROUND, NON-ELECTRICAL, COPPER ALLOY 270

AMSC N/A FSC 9525

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:05Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

1. MATERIAL. Copper base alloy 270 (UNS C27000) as specified in procurement document.

2. FORMING PROCESS. Cold drawn

3. PART NUMBER. The part number consists of the basic number of this specification sheet, and a dash number taken from Table I.

EXAMPLE: QQW321/8-001

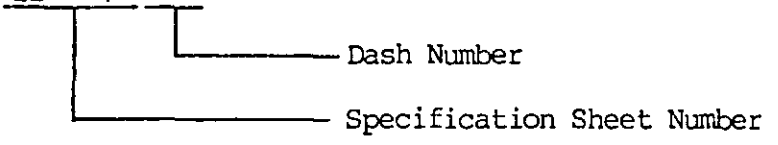

4. MARKING. Copper and copper base alloys shall be marked in accordance with FED-STD-185 with the exception that a part number from this military standard shall be included as part of the identification marking.

5. HAZARDOUS WASTES. Hazardous waste generated by this process shall be disposed of in accordance with local and federal regulations. Material safety data sheets shall be prepared in accordance with FED-STD-313.

NOTES:

1. The product purchased with this specification sheet shall be in accordance with QQ-W-321 except the dimensional characteristics will conform to this specification sheet.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:05Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	ØA (IN.)	LENGTH (FT) APPROX	FT/LB APPROX	CL = COIL SL = SPOOL	HEAT TREATMENT (TEMPER)
-001	.010	3442	3450	1 Lb/CL	Annealed
-003	.014	1723	1710	1 Lb/CL	Annealed
-005	.020	21475	853	25 Lb/CL	Annealed
-007	.022	16775	674	25 Lb/CL	Annealed
-009	.025	13505	538	25 Lb/CL	Annealed
-011	.028	10712	336	1 Lb/CL	Annealed
-013	.032	336	336	1 Lb/CL	Eight Hard
-015	.032	8495	336	25 Lb/CL	Annealed
-017	.040	21371	133	100 Lb/CL	Annealed
-019	.051	13440	133	100 Lb/CL	Annealed
-021	.057	10650	106	100 Lb/CL	Annealed
-023	.064	8468	8,468	100 Lb/CL	Annealed
-025	.091	215	42.15	100 Lb/CL	Annealed
-027	.128	2100	21.02	100 Lb/CL	Spring Temper

Custodians:
Army - MR
Navy - AS
Air Force - 99

Review Activities:
Army - MI, AV, AL, GL, AR
Air Force - 84

User Activities:
Army - ME
Navy - SH

Preparing Activity:
Army - MR

(Project 9525-0186)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:05Z
Check the source to verify that this is the current version before use.