MIL-C-29121A(SA)
12 February 1976
SUPERSEDING
MIL-C-29121(SA)
16 March 1973

MILITARY SPECIFICATION

COAT, WOMAN'S, SERVICE, WHITE

This specification is approved for use by Naval Supply Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a white service coat fabricated of a polyester/rayon tropical fabric.

1.2 Classification. The coat shall be of one type only and in the following sizes and lengths (see 6.2):

Sizes: 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20 and 22

Lengths: Short, Regular, and Long

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton
V-T-280 - Thread, Cotton Gimp, Buttonhole
V-T-301 - Thread, Silk
DDD-L-20 - Label; For Clothing, Equipage and Tentage (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain for Sealing and Securing

* MILITARY

MIL-B-371 - Braid, Textile, Tubular
MIL-B-3461 - Buttons, Insignia, Metal, Uniform and Cap
MIL-B-17757 - Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-29104 - Cloth, Tropical, Polyester and Rayon
MIL-T-43548 - Thread, Polyester, Cotton-Covered
MIL-C-43836 - Cloth, Interlining, Non-Woven

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1608 - Provisions for Evaluating Quality of Coats, Women's, Dress

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of this manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the samples, in which case this specification shall govern.

* 3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:36Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 Cloth, tropical, polyester and rayon. The basic material for the coat shall be a polyester/rayon blend, shade White 3053, conforming to MIL-C-29104.

3.3.2 Cloth, plain weave, rayon. The material for lining the coat shall be a cuprammonium rayon, plain weave, natural finish, shade White, conforming to the following requirements when tested as specified in Table IV:

Fiber - cuprammonium rayon
Weight - 2.5 (± 0.5) oz/sq yd (84.75 ± 17 g/sq m)
Yarns per inch (cm) - warp - 120 (47) min.
filling - 86 (33) min.
Breaking strength - warp - 30 lbs. (13.5 kg) min.
filling - 30 lbs. (13.5 kg) min.
Shrinkage - warp - 6.0% max.
filling - 2.0% max.
pH - 5.0% min. - 8.5% max.

3.3.3 Binding. The material for binding the coat seams shall be made of the same material as the coat lining (see 3.3.2) or, as an alternate, a nylon taffeta may be utilized. The binding shall be bias-cut on a 45 (± 5) degree angle in strips 7/8 to 1 inch (22.25 to 25.40 mm) wide. The ends of the strips shall be joined together with stitch type 301, seam type SSa-1, and 10 to 14 stitches per inch. The seams shall finish 1/8 to 3/16 inch (3.17 to 4.76 mm) wide and shall be spread open and flat.

3.3.3.1 When the nylon taffeta is used as a binding, it shall be plain weave, woven with continuous filament nylon, shade White, and conform to the following requirements when tested as specified in Table IV:

Weight - 1.7 oz/sq yd (57.6 g/sq m) max.
Yarns per inch (cm) - warp - 104 (40) min.
filling - 70 (27) min.
Shrinkage - warp - 2.0% max.
filling - 2.0% max.

* 3.3.4 Interlining. The material for interlining the front and collar shall be a nylon/rayon blend non-woven bonded fabric conforming to type II, class 1 of MIL-C-43836.

3.3.5 Buttons. The metal buttons for the coat closure shall conform to type I, style 4, class A, 35-line, regular or short shank (secured with a bodkin type toggle) of MIL-B-3461.

3.3.6 Threads.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:36Z
Check the source to verify that this is the current version before use.

3.3.6.1 Thread, cotton. The cotton thread for seaming and stitching the coat shall be bleached to match shade White AH, Cable No. 66050, and shall conform to V-T-276 as follows:

Use	Type	Ticket No.	Ply
Assembling	ICl	00	3
Buttonholes and eyelets	ICl	A	3
Blindstitching	IA2	70	3

NOTE: The thread for basting and tacking (inside) may be bleached or unbleached and shall be of a good commercial grade cotton.

3.3.6.2 Thread, polyester, cotton-covered. As an alternate, the following polyester, cotton-covered threads may be used. When this option is exercised, the threads shall match shade White AH, Cable No. 66050, and shall conform to MIL-T-43548.

Use	Ticket No.	Ply
Assembling, buttonholes and eyelets	50	2
Blindstitching	70	2

3.3.6.3 Thread, silk. The silk thread for hand felling and tacking (inside) the coat shall be White AG, Cable No. 66049 and shall conform to type III, class 3, size A/2 of V-T-301.

3.3.6.4 Thread, cotton gimp, buttonhole. The cotton gimp thread for reinforcing the buttonholes shall be bleached White AH, Cable No. 66050 and shall conform to type I or II, size No. 8 of V-T-280.

3.3.7 Labels.

* 3.3.7.1 Identification label. Each coat shall have an identification label conforming to type I, class 1 of DDD-L-20. The printing on the labels shall show fastness to dry cleaning. The label shall bear the following inscription:

NAME:
SERVICE NO.:
COAT, WOMAN'S, SERVICE, WHITE
FIBER CONTENT: Polyester (65%) and Rayon (35%)
CONTRACT NO.: DSA-100-00-0-000 (Example)
NAME OF SUPPLIER:

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:36Z
Check the source to verify that this is the current version before use.

* 3.3.7.2 Instruction label. Each coat shall have an instruction label conforming to type I, class 3 of DDD-L-20. The printing on the label shall show fastness to dry cleaning. The label shall bear the following inscription:

COAT, WOMAN'S, SERVICE, WHITE
DRY CLEAN ONLY

* 3.3.7.3 Combination label. As an alternate, a combination identification and instruction label conforming to type I, classes 1 and 3 of DDD-L-20 may be used.

* 3.3.7.4 Size label. Each coat shall have a size label conforming to type I, class 2 of DDD-L-20. The printing shall show fastness to dry cleaning. The label shall bear the following inscription:

14R (Example)
STOCK NO.: 8410-00-000-0000 (Example)

NOTE: Abbreviations for applicable lengths (Short, Regular, Long) are S, R and L.

* 3.3.8 Hanger loop braid. The hanger loop for the coat shall be tubular braid, shade White, conforming to type IX, class 1 of MIL-B-371.

3.4 Design. The coat shall be single breasted (Princess Style), half-lined body and fully lined sleeves with four 35-line gold plated Navy eagle buttons on left front, two outside breast pocket flaps, one inside waist pocket, and rounded collar ends overlapping half peaked lapels. The bottom of the sleeves shall be unhemmed (see Figure 1).

3.4.1 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns to be used for cutting the supplier's working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the standard patterns and shall not be altered in any way, except as allowed by footnotes to the list of pattern parts. Unless otherwise specified in Table I, seam allowances shall be as follows:

-Joining collar and collar to neckline - 1/4 to 5/16 inch (6.35 to 7.93 mm)
-Joining sides and back - 3/8 to 1/2 inch (9.52 to 12.70 mm)
-Joining shoulders and sleeves - 3/8 ± 1/16 inch (9.52 ± 1.58 mm)
-Joining lining - 3/8 to 1/2 inch (9.52 to 12.70 mm)
-Joining front to facing - 1/4 ± 1/16 inch (6.35 ± 1.58 mm)

3.5.1 Pattern parts. The component parts shall be cut from the materials specified and in accordance with the following pattern parts:

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:36Z
Check the source to verify that this is the current version before use.

Material	Pattern Parts	Cut Parts
Cloth, tropical, polyester and rayon	Center, front	2
	Side front	2
	Side back	2
	Back (center)	1
	Front, facing	2
	Topsleeve	2
	Undersleeve	2
	Topcollar	1
	Undercollar	1 1/
	Flap	4
Cloth, plain weave, rayon	Front	2
	Back (yoke)	1
	Topsleeve	2
	Undersleeve	2
	Inside pocket	2
Interlining, non-woven	Coat front	2
	Front-chest piece	2
	Undercollar	1 1/
Templates	Undercollar marker	-
	Collarstand marker	-
	Lapel marker	-
	Flap marker	-

1/ Pattern may be cut as two pieces with seam allowance added.

3.6 Construction.

3.6.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one may be used. Unless otherwise specified, top stitching and edge stitching shall be 1/16 inch (1.58 mm) from the folded edge.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitching shall be backtacked not less than 3/8 inch (9.52 mm). The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch (12.70 mm). Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch (12.70 mm). Skipped stitches or thread breaks may be repaired by using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:36Z
Check the source to verify that this is the current version before use.

3.7 Manufacturing operations requirements. The coat shall be manufactured in accordance with operation requirements as specified in Table I. The supplier is not required to follow the exact sequence of operations provided the finished coat is identical to that produced by following the sequence as listed in Table I. Any additional basting or holding stitch used to facilitate manufacture is permissible provided that the threads are removed or do not show in the finished item.

3.7.1 Shade and size marking. The component parts shall be marked or ticketed to insure a uniform shade and size throughout the coat. Any method of shade and size marking may be used except:

1. Corrosive metal fastening devices.
2. Sew-on shade tickets.
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

3.7.2 Pressing. All pressing as required by Table I shall be performed with a heated pressing iron or machine at a suitable temperature for synthetics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the coat in strict accordance with patterns furnished, which shall show size, placement of inside waist pocket, outer pocket flaps, directional warp lines for cutting, and instructions and notch for the proper assembly of all component parts.					
	b. Cut the component parts of the coat from one piece of material, except flap underply and undercollar which may be cut from ends.					
*2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1608 shall be removed from production and replaced with non-defective and properly matched components.					
*3.	Prepare pocket flaps a. Pocket flaps shall consist of two pieces of the basic material.					
	b. Seam 1/4 inch (6.35 mm) from raw edge, pocket flap pieces face to face leaving top edge open. Trim rounded corners, turn to finished position and edgestitch 1/16 inch (1.58 mm) from folded edge.	301	SSe-2	10-14	00/3	00/3
	c. Mark width with flap marker. Trim for seam and overedge stitch raw edges. Press flaps.	503 or 504 or 505	EFd-1	6-8	00/3 or 70/3	00/3 or 70/3

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*4.	Make inside waist pocket and attach label a. Position inner ply of waist pocket, face to face, on front edge of right front lining, as indicated by marks on pattern, and stitch 3/8 inch (9.52 mm) from raw edge.	301	SSa-1	10-14	00/3	00/3
	b. Fold inner ply of pocket back on the right front lining and stitch instruction label on all four sides to pocket piece. Label shall be centered between ends of pocket opening with bottom edge of label positioned 1/4 to 3/8 inch (6.35 to 9.52 mm) from folded edge of pocket opening. Stitch identification label directly above and centered horizontally with instruction label. Labels shall finish on the inside of the pocket on inner pocket piece with printing facing the outside of coat. Close pocket by superimposing outer ply of pocket on inner ply and stitch 3/8 inch (9.52 mm) from raw edge.	301	LSbj-1	10-14	00/3	00/3
		301	SSa-1	10-14	00/3	00/3
	c. Hand or machine tack ends of pocket opening with 1/4 to 3/8 inch (6.35 to 9.52 mm) tack.	Machine or Hand		21-31 per bartack 10-18 per tack	A/3 A/3	A/3
5.	Make lining and attach label a. Hem bottom of yoke lining 1/4 inch (6.35 mm) from folded edge.	301	EFb-1	10-14	00/3	00/3
	b. Fold and stitch waist and shoulder darts on front linings as indicated by marks on pattern. Darts shall be tapered to a point at each end and backtacked.	301	OSf-1	10-14	00/3	00/3
	c. Press waist and shoulder darts folded towards the front edge of coat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*5.	Make lining and attach label (cont'd)					
	d. Join yoke to front lining at side seam.	301	SSa-1	10-14	00/3	00/3
	e. Join yoke to front lining at shoulder, starting and ending approximately 2-1/2 inches (6.35 cm) from armhole.	301	SSa-1	10-14	00/3	00/3
	f. Join the forearm seam of the sleeve lining face to face.	301 or 401	SSa-1	10-14	00/3	00/3
	g. Join the backarm seam of the sleeve lining face to face. Turn sleeves to finished position.	301 or 401	SSa-1	10-14	00/3	00/3
	h. Join sleeve linings to front and yoke linings at armhole.	301	SSa-1	10-14	00/3	00/3
	i. Stitch a 3/4 to 1 inch (19.05 to 25.4 mm) pleat at top center of yoke lining, simultaneously catching ends of hanger loop and top edge of size label on face side of yoke. Pleat shall face towards the left front of coat. NOTE: As an alternate, the yoke lining pleat may be formed and the hanger loop and size label attached when joining yoke lining to neck edge of coat (see operation 16.c).	301	SSa-1	10-14	00/3	00/3
	j. The spread of the attached hanger loop shall measure 1-1/2 (± 1/4) inches (38.10 ± 6.35 mm) between inside edges of braid.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*6.	Join fronts a. Each front shall consist of two pieces; a center front and a side front section.					
	b. Seam waist dart in each side front section, as indicated by marks on pattern, approximately 1/4 inch (6.35 mm) deep at center and tapering to a point at each end. Each end of dart shall be backtacked.	301	OSf-1	10-14	00/3	00/3
	c. Press darts folded towards front edge of coat.					
	d. Join center front and side front sections face to face.	301 or 401	SSa-1	10-14	00/3	00/3
	e. Press seams open and flat.					
*7.	Join backs a. The back shall consist of a back (center) and two side backs.					
	b. Join respective back sections, face to face.	301 or 401	SSa-1	10-14	00/3	00/3
	c. Tension stitch back armhole of side backs 1/8 to 3/16 inch (3.17 to 4.76 mm) from raw edge.	301		10-14	00/3	00/3
	d. Bind each raw edge of joining seams.	301	BSb-1 or BSc-1	10-14	00/3	00/3
	e. Press seams open and flat.					
*8.	Prepare front interlinings Overlap the front and chest interlinings 1/2 inch (12.7 mm) and join 1/4 inch (6.35 mm) from raw edge.	301 or 401	LSa-1	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*9.	Join interlinings to fronts Stitch, 1/8 to 3/16 inch (3.17 to 4.76 mm) from raw edges, the assembled interlinings to the fronts along front of armholes, shoulders, neckline, lapels, and front edges. When necessary, trim excess interlinings.	301 or 401	SSa-1	6-10	00/3	00/3
10.	Attach pocket flaps Stitch, 1/8 to 3/16 inch (3.17 to 4.76 mm) from over-edged edge the pocket flaps to each front and interlining as indicated by marks on pattern. Turn flap to finished position and edgestitch top of flap 1/16 inch (1.58 mm) from folded edge and down each side for a distance of 1/4 to 3/8 inch (6.35 to 9.52 mm).	301	LSbk-2	10-14	00/3	00/3
11.	Shape lapels Mark and shape lapels in accordance with lapel marker.					
12.	Join facings to front Stitch facings on marked line to respective fronts from lapel notch, across top of lapels, down fronts, and across bottom to back edge of facings, 1/4 inch (6.35 mm) from raw edge.	301	SSe-2(a)	10-14	00/3	00/3
13.	Join side seams					
	a. Join side seams of back and fronts.	301	SSa-1	10-14	00/3	00/3
	b. Bind raw edge of inside side back seam.	301	BSB-1 or BSc-1	10-14	00/3	00/3
	c. Press seams open and flat.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Bind and blindstitch bottom edge of coat					
	a. Bind bottom edge of coat to a point extending under the front lining.	301	BSb-1 or BSc-1	10-14	00/3	00/3
	b. Turn up bound edge of coat bottom to form a 1-1/8 (± 1/8) inch (28.57 ± 3.17 mm) hem and blindstitch. The blindstitching shall be inconspicuous on the outside.	103 or 306	EF1-1 EF1-1	4-8 4-8	70/3 70/3	70/3
*15.	Join shoulder seams					
	a. Join assembled fronts to back at shoulders.	301 or 401	SSa-1	10-14	00/3	00/3
	b. Press seam open and flat.					
	c. Vertical seamline on front and back shall meet at shoulder seamline.					
16.	Attach assembled lining to coat					
	a. Position respective front linings on facings, as indicated by marks on pattern, and stitch from the top continuing down to a point 1 inch (25.4 mm) from the folded bottom edge of coat front. When joining the right front lining, care shall be taken to assure that the waist pocket opening remains free.	301	SSa-1	10-14	00/3	00/3
	b. Join the balance of the front lining at the shoulder to the top edge of the facing with the shoulder dart folded towards the front edge of coat.	301	SSa-1	10-14	00/3	00/3
	c. Join yoke lining to neck edge of coat from shoulder to shoulder, continuing the stitching approximately 1-1/2 to 2 inches (3.81 to 5.08 cm) into the facing at neckline.	301	SSa-1	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Attach assembled lining to coat (cont'd)					
	d. Turn seam allowance of the facing and lining joining seam towards the side seam and press flat.					
	e. Baste back edge of front facing from top to bottom parallel to joining seam of facing and lining.	Hand or machine			Commercial	
	f. Stitch seam allowance of facing and front lining to interlining starting 1 inch (2.54 cm) below shoulder seam to a point 1 inch (2.54 cm) above bottom turnup.	103 or	EF1-1	4-8	70/3 or Commercial	
		306 or Hand	EF1-1	4-8	70/3 or Commercial 70/3 or Commercial	70/3
	g. Turn under back and bottom edges of front lining and baste to side seam allowances and bottom turnup of coat. Finished folded edge of lining at bottom shall be 1/4 to 3/8 inch (6.35 to 9.52 mm) from folded bottom edge of coat.	Hand or Machine			Commercial	
	h. Blindstitch side and bottom edges of front lining to front.	103 or	EF1-1	4-8	70/3	
		306 or Hand	EF1-1	4-8	70/3 70/3	70/3
17.	Assemble and attach collar					
	a. The collar shall consist of a one-piece topcollar, a one or two-piece basic material undercollar, and a one or two-piece collar interlining. When a one-piece undercollar and interlining are used, operations b., c., and d. shall not apply.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Assemble and attach collar (cont'd)					
	b. Stitch 1/4 inch (6.35 mm) from raw edge the two-piece undercollar face to face.	301	SSa-1	10-14	00/3	00/3
	c. Press seam open and flat.					
	d. Stitch 1/4 inch (6.35 mm) from raw edge the two-piece collar interlining with the ends overlapping approximately 1/2 inch (12.70 mm).	301	LSa-1	10-14	00/3	00/3
	e. Mark collar interlining with undercollar marker to insure correct size and shape. Position collarstand marker on collar interlining and mark breakline.					
	f. Position premarked collar interlining on undercollar stitch breakline through both plies.	301	SSv-1	10-14	00/3	00/3
	g. Superimpose undercollar with attached interlining on topcollar, face to face, and stitch along marked line made by undercollar marker around outer edge through interlining, undercollar, and topcollar, from notch to notch. Trim excess material from along inner edge of collar. Turn collar to finished position, force out top and rounded edges, and edgestitch 1/16 inch (1.58 mm) from folded edge.	301	SSe-2	10-14	00/3	00/3
	h. Stitch along neck edge of assembled collar, from notch to notch, 1/8 to 3/16 inch (3.17 to 4.76 mm) from raw edge.	301	SSa-1	10-14	00/3	00/3
	i. Insert finished collar between coat and facing and stitch to neck edge of coat, from notch to notch, 1/4 to 5/16 inch (6.35 to 7.93 mm) from raw edge.	301	SSa-1	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Assemble and attach collar (cont'd)					
	j. Notch seam allowance of gorge seam to permit it to lie flat.					
	k. Notch corners of lapels, trim rounded corners of lapels and bottom corners of front. Trim front edges 1/8 to 3/16 inch (3.17 to 4.76 mm)					
	l. Turn facings to finished position, work out lapels and bottom corners of fronts and edgestitch 1/16 inch (1.58 mm) from folded edge.	301	SSe-2(b)	10-14	00/3	00/3
	m. Finished collar shall measure 2-5/8 (± 1/8) inches (66.67 ± 3.17 mm) from the outer edge to the neck edge at center back.					
*18.	Assemble and attach sleeves					
	a. Sleeve shall be two piece; top sleeve and under sleeve with the bottom edge unhemmed.					
	b. Join the backarm and forearm seams of sleeve.	301 or 401	SSa-1	10-14	00/3	00/3
	c. Press seams open and flat.					
	d. The sleeve caps may be tension stitched prior to sleeve setting.	301	OSa-1	6-8	00/3	00/3
	e. Join the assembled sleeves to the armholes catching the prestitched front interlinings in the seam.	301 or 401	SSa-1	10-14	00/3	00/3
	f. Pull sleeve lining through sleeves. Pink bottom edges of sleeves and sleeve linings.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*18.	Assemble and attach sleeves (cont'd)					
	g. Tack seam allowance of sleeve and armhole to seam allowance of lining at shoulder seam.	Hand		4-6 per tack	A/2 (silk)	
19.	Hand fell collar and lining					
	a. Fell the full width of undercollar to top edge of lapel (from notch to front end of undercollar) with the collar overlapping the lapel. Ends of felling shall be securely tacked.	Hand		6-8	A/2 (silk)	
	b. Fell corners of yoke lining to side seam outlet.	Hand		6-8	A/2 (silk)	
	c. Fell corners of lining and facing at bottom.	Hand		6-8	A/2 (silk)	
20.	Mark and stitch buttonholes					
	a. All buttonholes shall be eyelet end, square bar, cut first type, reinforced with well worked over gimp with the stitching securely caught in fabric and the ends of the gimp pulled through the underside. Buttonholes shall be clean, correctly positioned and the purling finishing on the outside.					
	b. The ends of all buttonholes shall be tacked by hand or machine with 1/4 inch (6.35 mm) bartack in a separate operation from buttonhole making; securely catching ends of gimp and covering the width of the bar. The bartack shall be not more than 1/4 inch (6.35 mm) long.	Machine or Hand		21 per bartack 10-12 per tack	A/3 A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
20.	Mark and stitch buttonholes (cont'd) c. Mark and sew, four 1 to 1-1/8 inch (25.4 to 28.57 mm) cut length horizontal buttonholes as indicated by pattern marks with the inside purled edge of eyelet 5/8 (± 1/16) inch (15.87 ± 1.58 mm) from the right front edge.	Buttonhole		1 inch, 63 to 70 1-1/8 inch, 70 to 80 per buttonhole not including bartack	A/3	A/3
21.	Mark and stitch eyelets Superimpose right front on left front aligning bottom edges. Mark location and sew four 3/16 to 1/4 inch (4.76 to 6.35 mm) (inside dimension) eyelets through all plies with center of eyelet 1 (± 1/8) inch (25.4 ± 3.17 mm) from finished left front edge to correspond with respective eyelets of buttonholes.	Eyelet		25 per eyelet	A/3	A/3
22.	Clean coat a. Trim thread ends and remove all loose threads, spots and stains and basting stitches. b. Remove all shade tickets.					
23.	Pressing a. Press edges of lapels, fronts, collar and bottom of coat. b. Crease press collar for a distance of approximately 3 to 4 inches (7.62 to 10.16 cm) forming a 1-1/8 (± 1/8) inches (28.57 ± 3.17 mm) wide breakline at center back. Roll press balance of the collar extending to the bottom of the lapel.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
23.	Pressing (cont'd) c. Roll press sleeves. d. Press balance of coat (see 3.7.2). e. Press armholes and shoulders on armhole machine. f. Press lining smooth and flat maintaining creased pleat at front shoulders and center back. g. Remove gloss, wrinkles, creases, and all pressing impressions.					
24.	Attach buttons Insert four 35-line metal buttons through eyelets of coat and secure with bodkin type toggles.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished coat shall conform to the measurements shown in Table II.

Table II - Measurements in inches and centimeters

Size	(A) Bust	(B) Waist	Length of Coat (C) Short	Regular	Long	Sleeve inseam (unhemmed) (D) Short	Regular	Long
7	36-1/2 (92.71)	29-1/2 (74.93)	21-7/8 (55.56)	23-3/8 (59.37)	24-7/8 (63.21)	19 (48.26)	20 (50.80	21 (53.34)
8	37 (93.98)	30 (76.20	22 (55.88)	23-1/2 (59.68)	25 (63.52)	19 (48.26)	20 (50.80)	21 (53.34)
9	37-1/2 (95.25)	30-1/2 (77.47)	22 (55.88)	23-1/2 (59.68)	25 (63.52)	19 (48.26)	20 (50.80)	21 (53.34)
10	38 (96.52)	31 (78.74)	22-1/8 (56.20)	23-5/8 (60.00)	25-1/8 (63.84)	19 (48.26)	20 (50.80)	21 (53.34)
11	38-1/2 (97.79)	31-1/2 (80.01)	22-1/8 (56.20)	23-5/8 (60.00)	25-1/8 (63.84)	19 (48.26)	20 (50.80)	21 (53.34)
12	39 (99.06)	32 (81.28)	22-1/4 (56.51)	23-3/4 (60.32)	25-1/4 (64.16)	19 (48.26)	20 (50.80)	21 (53.34)
13	39-3/4 (100.96)	32-3/4 (83.18)	22-1/4 (56.51)	23-3/4 (60.32)	25-1/4 (64.16)	19 (48.26)	20 (50.80)	21 (53.34)
14	40-1/2 (102.87)	33-1/2 (85.09)	22-3/8 (56.83)	23-7/8 (60.64)	25-3/8 (64.47)	19 (48.26)	20 (50.80)	21 (53.34)
15	41-1/4 (104.77)	34-1/4 (86.99)	22-3/8 (56.83)	23-7/8 (60.64)	25-3/8 (64.47)	19 (48.26)	20 (50.80)	21 (53.34)
16	42 (106.68)	35 (88.90)	22-1/2. (57.15)	24 (60.95)	25-1/2 (64.79)	19 (48.26)	20 (50.80)	21 (53.34)
18	44 (111.76)	37 (93.98)	22-5/8 (57.46)	24-1/8 (61.27)	25-5/8 (65.11)	19 (48.26)	20 (50.80)	21 (53.34)
20	46 (116.84)	39 (99.06)	22-3/4 (57.78)	24-1/4 (61.59)	25-3/4 (65.42)	19 (48.26)	20 (50.80)	21 (53.34)
22	48 (121.92)	41 (104.14)	22-7/8 (58.10)	24-3/8 (61.90)	25-7/8 (65.74)	19 (48.26)	20 (50.80)	21 (53.34)
Tolerance	+ 1 (2.54)	+ 1 (2.54)	+ 1/2 (1.27)	+ 1/2 (1.27)	+ 1/2 (1.27)	+ 1/2 (1.27)	+ 1/2 (1.27)	+ 1/2 (1.27)

NOTE: Bust, waist, and length of coat measurements shall be taken with coat fully buttoned, placed smooth and flat (see Figure 1).

A. Bust - Twice the measurement taken across from 1 inch (2.54 cm) below armholes from folded edge to folded edge.

B. Waist - Twice the measurement taken across front between third and fourth buttons.

C. Length of coat - Measurement taken from base of undercollar down center of back to bottom folded edge of coat.

D. Sleeve inseam - Measurement taken along inseam from armhole to bottom of unhemmed sleeve.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:36Z
Check the source to verify that this is the current version before use.

* 3.9 Workmanship. The finished coat shall conform to the quality established by this specification. As a final step in the supplier's production control plan, before formation of a lot, each coat shall be fully buttoned and examined for selected defects. A coat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in Table IV of MIL-STD-1608. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

* 4.3 Inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated in MIL-STD-1608.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise amended, excluded, modified or qualified in this specification or applicable purchase document.

* 4.3.1.1 Testing of components. In addition to the quality assurance provisions of the referenced specifications, components listed below shall be tested for the characteristics shown in Table IV. The methods of testing specified in FED-STD-191 wherever applicable and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with Table III and the lot shall be unacceptable if one or more units fail to meet any requirement specified. The sample unit and basis for lot size shall be expressed as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:36Z
Check the source to verify that this is the current version before use.

Material	Basis for lot size	Sample unit
Cloth, plain weave, rayon (lining)	yard	3 continuous yards (2.7 m) full width
Cloth, taffeta, nylon (alternate binding)	yard	1 yard (0.9 m) full width

Table III - Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table IV - Component tests

Component	Characteristic	Requirement paragraph	Test method
Cloth, plain weave, rayon (lining)	Fiber identification	3.3.2	1/
	Weight	3.3.2	5041
	Yarns per inch (cm)	3.3.2	5050
	Breaking strength	3.3.2	5100
	Shrinkage	3.3.2	5552
	pH	3.3.2	2811
Cloth, taffeta, nylon (alternate binding)	Weight	3.3.3.1	5041
	Yarns per inch (cm)	3.3.3.1	5050
	Shrinkage	3.3.3.1	5552 2/

1/ A certificate of compliance shall be acceptable for this characteristic.

2/ One determination shall be made per sample unit.

* 4.3.2 Examination of the end item. The end item examination provisions for the finished coat shall be as specified in MIL-STD-1608.

* 4.3.3 Dimensional examination. The dimensional examination provisions for the finished coat shall be as specified in MIL-STD-1608.

* 4.3.4 Examination of preparation of delivery requirements. The examination for compliance with packaging, packing, and marking requirements shall be as specified in MIL-STD-1608.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

5. PREPARATION OF DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each coat shall have a sheet of minimum 10 pound (4.5 kg) basis weight (24 by 36-480) bleached tissue paper placed inside the length and width of the coat. Tissue paper padding shall be inserted inside the coat at the shoulders and across the back of the collar, so as to eliminate sharp creases and fold lines. The coat shall be fully buttoned and placed front down. Fold over the sides and sleeves toward the center of the back and then fold the coat in half by bringing up the bottom edge even with the shoulder line. The completely folded coat shall measure approximately 15 inches (38.1 cm) in length by 11 inches (27.9 cm) in width. Each folded coat shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125-inch (0.03175 mm) thickness (± 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch (6.35 mm) diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

5.1.1.2 Intermediate packaging. Three coats of one size and length only, packaged as specified in 5.1.1.1 and alternated top to bottom shall be placed in a fiberboard box conforming to style OPF, type CF, variety SW, class domestic, grade 175 of PPP-B-636. The outside dimension of each fiberboard box shall be 15-3/8 inches (39.05 cm) in length, 11-5/8 inches (29.52 cm) in width and 3-3/8 inches (8.57 cm) in depth. The box closure shall be secured by taping all seams and corners with minimum 2 inch (50.8 mm) gummed paper tape conforming to type III, grade B of PPP-T-45. The tape shall be centered over the seam formed by the closure of the outer flaps of the top and bottom and shall extend over the end panels by not less than 1 inch (25.4 mm).

5.1.2 Level C. Coats shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Twelve coats of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type SF, class weather resistant, grade V2s, size 2 of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and two in depth within the shipping container. Toward the end of the contract or order, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:36Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Twelve coats of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, grade 275, size 2 of MIL-B-17757. Level A packages shall be packed flat two in length, one in width and two in depth within the shipping container. Toward the end of the contract or order, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C. Coats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with U. S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black, bold letters 1/4 inch (6.35 mm) in height, directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
ITEM DESCRIPTION
SIZE
QUANTITY

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (12.7 by 10.1 cm) with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The summer dress white service coat is intended to be worn by female personnel of the Navy in conjunction with the summer dress white skirt.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:36Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2.1 and 1.2.2).
c. Whether first article sample is required (see 3.2).
d. Levels of packaging and packing required (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).


6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - SA

Preparing activity:
Navy - SA

Project No. 8410-N325

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:36Z
Check the source to verify that this is the current version before use.

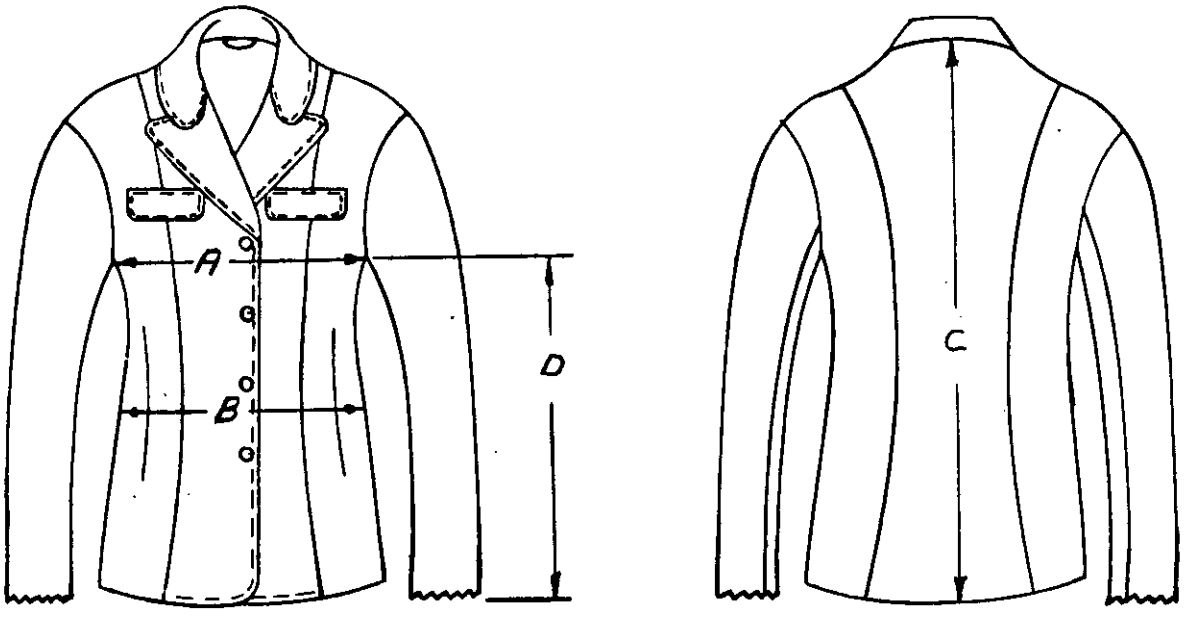

FRONT VIEW

BACK VIEW

FIG. 1 COAT, WOMAN'S, SERVICE, WHITE

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:36Z
Check the source to verify that this is the current version before use.