MIL-C-29124D(NU)
8 January 1988
SUPERSEDING
MIL-C-29124C(NU)
1 October 1982

MILITARY SPECIFICATION

COAT, WOMAN'S, BLUE, DRESS

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a blue single breasted dress coat fabricated from a 10 ounce polyester/wool fabric.

1.2 Classification. The coat shall be of one type only and in the following sizes and lengths as specified (see 6.2):

Sizes: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20 and 22
Lengths: Short, Regular, and Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-280	- Thread, Gimp, Cotton, Buttonhole
V-T-295	- Thread, Nylon
V-T-301	- Thread, Silk
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
DDD-L-20	- Label, For Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)

*MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp and Spun Hair Wool Filling
MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-371	- Braid, Textile, Tubular
MIL-B-3461	- Button, Insignia, Metal, Uniform and Cap
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4-Way Entry
MIL-P-15064	- Pads, Shoulder and Sleeve-head
MIL-C-15065	- Coat Fronts
MIL-C-16375	- Cloth, Wigan, Cotton
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-T-43548	- Thread, Polyester, Cotton Covered and Rayon Covered
MIL-C-43718	- Cloth, Twill, Polyester, Polyester and Cotton, Polyester and Rayon
MIL-C-44121	- Cloth, Twill, Polyester
MIL-C-44192	- Container, Shipping and Storage, Coat (Hanger Pack)

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

*MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1608	- Provisions for Evaluating Quality of Coats, Women's, Dress

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T21:37Z
Check the source to verify that this is the currentversion before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402).

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR SEWING THREADS

(Applications for copies may be obtained from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016).

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the currentversion before use.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for the coat shall be a 10 ounce polyester/wool blend tropical in shade Blue 3346, conforming to type III, class 3 of MIL-C-21115. The piece number for the standard sample is 4001369.

* 3.3.2 Lining. The material for lining the body and sleeves shall be a rayon twill, 3.7 ounce, shade Black 3202, conforming to class 1 of MIL-C-368. The piece number for the standard sample is 79221. As an alternate, the lining may be polyester twill cloth, black 3202, conforming to MIL-C-44121. The piece number for the standard sample is 87034.

3.3.3 Coat front. The coat fronts shall conform to type XVI of MIL-C-15065.

3.3.4 Collar interlining. The material for interlining the collar shall conform to type III, class 1 or 2 of MIL-C-297.

3.3.5 Wigan. The material for interlining the hem of the sleeves shall be cotton wigan, natural shade, conforming to type I of MIL-C-16375.

* 3.3.6 Shoulder and sleeve-head pads. The shoulder pads shall conform to type III, class 1 and the sleeve-head pads shall conform to type IV of MIL-P-15064, except that the length shall be 12 to 13 inches.

3.3.7 Tapes.

* 3.3.7.1 Woven tape. The tape for staying the coat shall be preshrunk cotton, dyed or undyed, conforming to type I and II, and class 1, 2, or 3 of DDD-T-86. The types and widths of the tapes shall be as follows:

Type I - 5/8 inch wide stay for bridle at breakline of lapel
Type II - 3/16 inch wide stay for staying armholes

3.3.7.2 Cross-cut tape. The tape for staying the front gorge, back neck, lapel, front, and bottom edges shall be dyed or undyed twill cloth conforming to class 1 of MIL-C-43718. The tape shall be cut across the width of the cloth in strips 1/2 (± 1/16) inch wide. The raw edges of the cross-cut tape shall be treated with a synthetic resin to prevent ravelling (see 4.4.1).

3.3.7.3 Tape fusible. As an alternate to 3.3.7.2, the tape for joining the fronts and facing shall be a natural color woven or non-woven tape with a thermoplastic polyamide resin. The tape shall be 5/8 inch wide (see 4.4.1).

3.3.8 Hanger loop. The hanger loop shall be cotton tubular braid conforming to type III, class 1 of MIL-B-371, or shall be of the material specified in 3.3.2. The braid shall be dyed black and show good fastness to crocking and wet-dry cleaning (see 4.4.1).

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:37Z
Check the source to verify that this is the current version before use.

* 3.3.9.1 Covered polyester thread. The thread used for seaming and stitching shall be dyed shade Black AA, Cable No. 66043 conforming to MIL-T-43548 in the following sizes except when the use of silk or nylon is indicated as an alternate in Table I.

Operation	Ticket No.	Ply
Seaming, stitching and tacking of coat	50, 70	2 or 3
Overedging, blindstitching, and machine felling	70	2 or 3
Button sewing (except automatic shank type - see 3.3.9.5)	30, 50	2 or 3
Buttonhole and bartack	30	2 or 3
Tacking armhole and attaching sleeve-head and pads	30 (white)	2 or 3

3.3.9.1.1 Cotton thread. As an alternate to 3.3.9.1, cotton thread, dyed black AA, Cable No. 66043 conforming to V-T-276 may be used.

Operation	Type	Ticket No.	Ply
Seaming, stitching, tacking	IC2	50	3
Overedging, blind-stitching, felling	IC2	70	2 or 3
Button sewing	IA3 or IB3	30	3
Buttonhole and bartack	IC2	30	3
Tacking armhole and sleeve head	IA1 or IA2	30	3

3.3.9.2 Basting thread. The thread for basting and tacking shall be a good commercial grade, bleached or unbleached cotton. As an alternate, the covered thread specified for seaming in 3.3.9.1 may be used or a soluble monofilament synthetic thread may be used only for those basting operations where the thread is required to be removed, providing the garment is subsequently is given a treatment by a dry-cleaning agent in which the synthetic thread is soluble. When this soluble thread is used, any residue remaining on the garment after the dry-cleaning process shall be brushed off or removed.

3.3.9.3 Silk thread. The silk thread shall be dyed shade Black AA, Cable No. 66043 and shall conform to V-T-301 in the following types and sizes:

Use	Type	Ticket No.	Ply
Machine stitching	I	0	3
Hand or machine felling	III	A, C	2

3.3.9.4 Nylon thread. Nylon threads may be used as alternates to silk threads or for the operations indicated below:

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

a. For machine blind stitching and felling - nylon thread conforming to type III, size A/1 or AA/1 of V-T-295.

b. For hand felling - nylon thread conforming to type IV, size A/2 or C/2 of V-T-295.

c. For padding lapels and collars - nylon thread conforming to type III, size 000 of V-T-295.

3.3.9.5 Automatic button sewing. If an automatic machine which sews shank buttons imitating hand sewing is used, the thread shall be nylon waxed monocord, special No. 4, having a breaking strength of 11 pounds and a minimum length per pound of 3,250 yards and shall be tested for these requirements in accordance with test methods outlined in V-T-295.

3.3.9.6 Colorfastness of threads. The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276, V-T-295, V-T-301, and MIL-T-43548. When no standard sample is available, the dyed threads shall show good colorfastness to wet-dry cleaning and light when tested as specified in V-T-276, V-T-295, V-T-301, and MIL-T-43548.

3.3.10 Gimp. The gimp for reinforcing the buttonholes shall be cotton gimp buttonhole thread conforming to type I or II, size No. 8 of V-T-280. The gimp shall be dyed black.

3.3.10.1 Colorfastness. The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show good fastness to wet-dry cleaning when tested as specified in V-T-280.

3.3.11 Buttons. The silver plated oxidized finish metal buttons for the front shall be type I, style 4, class C, 35-ligne, hopper back conforming to MIL-B-3461.

* 3.3.12 Label. Each coat shall have a combination personal/size/ - identification instruction label conforming to type VI, classes 10 and 14 of DDD-L-20. The label shall measure not more than 1-7/8 inches in width by 3-1/4 inches in length. The printing shall show fastness to dry cleaning and shall bear the following inscription:

NAME:
SERVICE NO:
SIZE: 14 REGULAR (EXAMPLE)
STOCK NO: 8410-00-000-0000 (EXAMPLE)
COAT, WOMAN'S, BLUE, DRESS
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
FIBER CONTENT: 55 POLYESTER/45 WOOL
NAME OF CONTRACTOR:
NAME OF MANUFACTURER (If other than contractor)

DRY CLEAN ONLY

NOTE: The length (Short, Regular, or Long) may be abbreviated S, R, or L.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

3.3.13 Size ticket. Each coat shall have a commercial type size ticket attached on the outside of the lower left sleeve. The ticket shall be 1-1/2 inches long and 2 inches high, made of a suitable plain white cardboard. The corners of the ticket may be double perfoated for ease in tacking. The size (38R - Example) shall be printed or stamped on the upper left hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviation for length shall be allowed iln accordance with 3.3.12.

3.4 Design. The fully lined single breasted (Princess style) coat has two outside breast pocket flaps, rounded collar ends overlapping half-peaked lapels, two piece set-in sleeves, and is buttoned on the left side with four silver plated Navy eagle buttons (se Figure 1).

3.4.1 Figure. The figure is furnished for information purposes only. To the extent of inconsistencies between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns. Standard patterns to be used for cutting the contractor's working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns provide a 3/8 inch allowance for all seams, except 5/8 inch for joining side seams and attaching undercollar to neckline of coat. Unless otherwise indicated in Table I, seams shall be in accordance with these seam allowances.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T21:37Z
Check the source to verify that this is the currentversion before use.

3.5.1 Pattern parts. The component parts shall be cut from the materials as specified, and in accordance with the following list of pattern parts:

Material	Pattern Parts	Cut Parts
Cloth, tropical, polyester/wool	Front (center)	2
	Side front	2
	Side back	2
	Back (center)	1
	Facing (front)	2
	Top sleeve	2
	Undersleeve	2
	Topcollar	1
	Undercollar	2 1/
	Pocket flap	4
Cloth, lining	Front lining	2
	Side back lining	2
	Back lining	2
	Top sleeve lining	2
	Under sleeve lining	2
	Pocket	2
Cloth, interlining	Undercollar interlining	2 1/
Cloth, cotton wigan	Sleeve, bottom, interlining	2
Templates	Undercollar shaper (working)	-
	Lapel shaper (working)	-
	Undercollar stand marker	-
	Pocket flap shaper (finished)	-
	Lapel template (finished)	-
	Collar template (finished)	-

1/ Pattern may be cut in one piece with seam allowance omitted.

3.6 Construction.

* 3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types as specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same operation, any one of them may be used. Unless otherwise specified, topstitching and edgestitching shall be 1/16 inch from the edge and straight and parallel to the edge. Seam alowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, pockers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

3.6.2 Thread breaks and ends of seams. Unless otherwise specified, ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches and thread breaks may be repaired by using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The coat shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished coats are identical to those produced by following the sequence of operations as listed in Table I. Any additional basting or holding stitching used to facilitate manufacture is permissable provided that the thread is removed or does not show on the finished coat.

* 3.7.1 Pressing. All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine designed specifically for pressing operations being performed. Any additional under pressing to facilitate manufacture is permissable. Fusible tape shall be applied in accordance with the fusible manufacturer's recommended time, temperature, and pressure settings and in accordance with good commercial practice.

3.7.2 Shade and size marking. The component parts of the coat shall be marked or ticketed to insure a uniform shade and size throughout the garment. The following methods are not permitted:

(1) Corrosive metal fastening devices.
(2) Metal devices or sew-on type markings on lining pieces.
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

* 3.7.3 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting.				
	*a. Spread the material without tension having one side of the lay even. The plies shall not be stretched or pulled.				
	*b. Cut the coat parts in strict accordance with patterns furnished which show size, placement of component parts, warp directional lines for cutting, and notches for the proper assembly of all parts. The directional lines shall be placed in the warp direction of the cloth unless otherwise indicated on the pattern. The cut parts from the top and bottom plies shall match and correspond to the pattern. The use of drill marks to position pocket flap are prohibited. Perforated paper markers are prohibited on the basic fabric. Felt back paper markers are permitted.				
	c. All polyester/wool parts shall be cut from one piece of material, except the undercollar which may be cut from ends and must approximate the shade of the main assembly. When undercollar is cut from ends, the two parts shall be shade marked and match each other.				
	d. All lining parts shall be cut from one piece of material, except the sleeves which may be cut from ends and must approximate the shade of the main lining assembly. When pairs of sleeves are cut from ends, the pairs shall be shade marked and match each other.				
	*e. Cut the sleeve bottom and collar interlinings from materials specified and in accordance with directional lines on pattern parts.				

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1608 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Size and shade marking. (see 3.7.2) To insure a uniform shade and size assembly, mark or ticket all components.					
4.	Make coat front interlinings. The coat front interlining shall conform to the requirements specified in 3.3.3.					
*5.	Make fronts. a. Each two piece front shall consist of a front and side front with a slit dart and the bust lines on both sides shall be alike.					
	b. Form and stitch a slit dart in each side front as indicated by marks on pattern. The point shall taper to nothing and dart shall be slit to 1/2 inch of point.	301	OSf-1	12-14	50	50
	c. Press dart open and flat.					
	d. Seam front and side sections face to face, working in bust fullness between notches.	301	SSa-1	12-14	50	50
	e. Press seams open and flat maintaining contour and without stretching seam.					
	f. Seam a cross-cut stay tape to gorge neck of front. Stay shall extend to approximately 1/4 inch from top edge of gorge.	301	SSaa-1	12-14	50	50
*6.	Make and attach pocket flaps. a. The pocket flap shall consist of two pieces of the basic material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. With face sides together, stitch pocket flap together 1/4 inch from raw edge and leave the top (straight) edge open. Trim seamed edges, corners and turn to finished position forcing out edges and corners.	301	SSa-1	12-14	50	50
	c. Press flaps smooth and flat.					
	d. Overedge stitch raw edges together.	502 or 503	EFd-1	6-8	70	70
	NOTE: Care shall be taken to prevent stretching when overedging, resulting in the ends protruding beyond the sides of flap when stitched to coat.					
	e. Mark seamline on top edge of flap to conform with finished pocket flap shaper measuring 1-3/4 to 2 inches for all sizes.					
	f. Mark flap position on fronts as indicated by marks on pattern.					
	g. Place flap on front with bottom finished edge facing shoulder. Stitch top edge along the marked seamline.	301	LSbj-1	12-14	50	50
	h. Turn flap down and baste across the top edge.	Hand or Machine			Commercial	
	i. The size and shape of the flap shall conform to the finished flap shaper.					
*7.	Make backs.					
	a. The back shall consist of a center back and two side sections joined without gathers, puckers, or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Position cross cut stay tape 1/8 to 1/4 inch below back neck edge extending from shoulder seam to shoulder seam and stitch along top edge of tape.	301	SSaa-1	12-14	50	50
	c. With face sides together, stitch side back pieces to center back.	301	SSa-1	12-14	50	50
	d. Press seams open and flat, maintaining contour and without stretching seam.					
8.	Make inside waist pocket and attach label.	301	SSa-1	12-14	50	50
	a. With face sides together, position outer ply of waist pocket on right front facing. Stitch seam having raw edges even and positioned in accordance with marks on pattern.					
	b. Stitch inner ply of pocket back on the right front lining and stitch combintion label to pocket piece along the four sides. Stitching shall not be through the front lining. Label shall be centered between ends of pocket opening with bottom edge of label positioned 1/4 to 3/8 inch from seamed edge of pocket opening. Label shall be stitched to the inside of the pocket on the ply next to the body. Printing shall face outside of coat.	301 or 401	LSbj-1	12-14	50 50	50 70
	c. Close pocket by superimposing outer ply of pocket on inner ply and stitch 3/8 inch from raw edge.	301 or 401	SSa-1	12-14	50 50	50 70
	d. Tack ends of pocket opening with a 1/4 to 3/8 inch tack forming a pocket opening of approximately 4-1/2 inches.	301		12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
9.	Prepare front lining.	301	OSf-1	12-14	50	50
	*a. Fold and stitch a slit dart in each front lining as indicated on pattern. Points shall taper to nothing and dart shall be slit to 1/2 inch of point.					
	b. With face sides together, seam front lining to front facing ending the seam 1 to 1-1/2 inches above the bottom of facing-lining assembly, thus facilitating hem felling operation. When joining the right front lining, care shall be taken to ensure that the waist pocket opening remains free.	301	SSa-1	12-14	50	50
	c. Press seam joining front lining to facing, and front dart toward side seam.					
10.	Join back lining.					
	a. Back lining shall consist of two center back and two side back sections.					
	b. With face sides together, join center back seam.	301	SSa-1	12-14	50	50
	c. With face sides together, join side back sections to center back.	301	SSa-1	12-14	50	50
	d. Press side back seams flat, towards center back.					
11.	Join fronts and back linings at sides.	301	SSa-1	12-14	50	50
	a. With a 5/8 inch seam, join the fronts to back at sides.					
	b. Press side seams flat, towards center back.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*12.	Stitch tape to fronts and back.					
	a. Holding tape taut, stitch a 3/16 inch wide tape along the front armhole extending approximately 1/4 to 1/2 inch from the side seam allowance to within 4 inches of shoulder seam line.	301	SSaa-1	12-14	50	50
	b. To prevent material from stretching, hold tape taut and stitch a 3/16 inch wide tape along the back armhole extending the tape approximately 1/2 to 3/4 inch from shoulder seam line to approximately 1 inch from the side seam line.	301	SSaa-1	12-14	50	50
	c. Press taped areas, shrinking out fullness where tape was held taut.					
*13.	Baste canvas interlining to fronts.					
	a. With seams aligned, fit coat front interlining on the front of coat and keep interlining slightly full to support the form and shape of fronts.					
	b. Baste interlining to each respective coat front along the seam, approximately 2 inches below shoulder edge to approximately 1-1/2 inches above the bottom edge.	Hand or 301		2-4 or 4-6	50 50 or Commercial	50
	c. Baste through front and interlining along breakline of lapel and down front edge to bottom of coat.	Hand or 301		2-4 or 4-6	50 50 or Commercial	50
	d. Tack seam allowance joining front and side front sections to canvas interlining starting 5 inches below shoulder and extending approximately 3 inches above bottom of coat. or As an alternate, the canvas interlining may be joined to the seam allowance joining front and side front sections through the combination of machine tacking and fusible tape.	Hand or 301		2-4 4-6	50 50 or Commercial	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Baste front to interlining across shoulder (allowing room for placement of shoulder pad) along armhole, and down the back edge. The felt padding shall be trimmed along the shoulder so that it will not be caught in the shoulder seaming of coat (see operation 21a).	Hand or 30L			50 50	50 or commercial
	f. Position 5/8 inch wide bridle stay tape on interlining with the front edge of stays within 1/4 inch on the inside of breakline of each lapel from gorge to 1-1/2 inches from bottom of lapel. Baste tape even and smooth for a distance of 3/4 to 1 inch from gorge, then hold tape taut to work in not less than 1/4 inch or more than 3/8 inch breast fullness. The balance of tape shall be stitched without tautness or fullness. Tape and interlining shall be stamp marked to assure proper amount of fullness.	Hand or Machine			50 50	50 or Commercial
14.	Pad lapels. a. Pad each lapel of coat to canvas interlining with 6 or 7 equally spaced rows of blindstitching. Fullness shall be equally distributed between rows of stitching in order to roll lapel.	103 or 306	SSm-6 or 7	6-8	70 70	70
	b. Blindstitch both edges of bridle stay to canvas interlining.	103 or 306	SSm-2	6-8	70 70	70
15.	Join fronts and backs at sides. a. With face sides together, join fronts to backs at sides with 5/8 inch seam. The interlining shall not be caught in stitching and care should be taken to prevent stretching waistline.	301	SSa-1	12-14	50	50
	b. Press seams open and flat holding seam taut at waistline.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	BOB/ LPR
16.	Press fronts. Individually press front edge, lapel and bust of right and left fronts on a women's right and left form steam pressing machine.					
*17.	Shape lapels and fronts. a. Mark and shape lapels in accordance with lapel shaper and trim lapel. If necessary, front and bottom frayed edges may be trimmed. b. Trim canvas interlining approximately 3/16 inch in from lapel, front and bottom edges. c. Cut The canvas interlining diagonally at the bottom so that the edge is not caught in the tape stitching. d. Mark the bottom turn up 1-1/8 (+ 1/8) inches.					
18.	Baste and join facings to coat front. a. Match, fit and baste facings to each front putting in proper lapel and bust fullness. The facings shall be held slightly taut at bottom edges of fronts.	Hand or Machine			Commer-cial	
	*b. With face sides together, seam facing to front while stitching a cross-cut stay tape to edge of coat front extending from lapel notch, across top of lapel, down front and across bottom to a point 2 to 3 inches beyond back edge of facing. The seam allowance for stitching across top of lapel and down the front is 1/4 inch. The stay tape shall be sewn smoothly and slightly loose along lapel edges without material take-up, and held taut from bottom of lapel breakline to bottom edge.	301	SSab-1 and OSa-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Blindstitch back edge of tape to interlining along fronts and lapels.	103 or 306	SSm-1	3-4	50 50	 50
	NOTE: As an alternate to operations b and c, a 5/8 inch fusible tape may be used. When this method is used, the tape must be pressed and fused to the interlining and the back edge of the tape shall not be blindstitched to the interlining.					
	d. Pull basting threads and press edge seam open and flat.					
	e. Notch corner of lapels, trim around rounded corner of lapels, bottom corners and front edges. Turn facing to finished position, work out lapels and bottom corner of fronts. The lapel shall conform to the finished lapel shaper.					
	f. Baste edges around coat from lapel step, turning up coat hem as marked (see op. 17d) and rolling the lapel seam to the underside and the joining seam toward the inside of coat along the front and bottom edges.	Hand or Machine			Commercial	
	g. Approximately 1 inch from edge, baste facings along lapel fronts (second basting) to a point in line with top edge of flaps, while maintaining the inward roll along the lower front edge.	Hand or Machine			Commercial	
	h. Baste a row of stitching diagonally from lapel break to the point of lapel placing fullness in lapel to allow lapel to roll.	Hand or Machine			Commercial	
	i. Baste along breakline of lapel, allowing fullness in facing, to permit lapel to roll.	Hand or Machine			Commercial	

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	BOB/ LPR
	j. Baste back edge of facing putting fullness over bust.	Hand or Machine			Commercial	
19.	Tack facings to interlinings.					
	Tack the inner edge of facings to the canvas interlining with one row of blindstitching from not more than 2-1/2 inches from shoulder seam to within 2 inches above finished bottom of coat.	Hand or 103 or 306	 SSm-1 SSm-1	2-4 4-6 4-6	50 50 50	 50
20.	Fit and baste body lining to coat.	Hand or Machine			Commercial	
	a. Beginning at the inner edge of facing, approximately 3 inches above finished edge of coat, baste lining fronts across bottom, up side seam (seam on seam) to approximately 4 inches below pit of armhole, then diagonally upward forming a front shoulder dart pleat in accordance with marks on pattern with the outside fold of pleat facing the armhole.					
	b. Baste lining back by joining basting at pit of armhole at side seam, diagonally upward to center back neck edge, taking in excess material and forming a back pleat with the folded edge of the pleat facing the right front of coat (as worn).	Hand or Machine			Commercial	
	c. Blindstitch complete bottom turn up of coat.	Hand or 103 or 306	 EF1-1 EF1-1	8-10 6-8 6-8	A or C (silk) 0 (silk) 0 (silk)	 0
	d. Baste back pleat from neckline to bottom edge of lining. Pleats in lining must be pressed prior to removing basting threads.	Hand or Machine			Commercial	
	e. Trim facing at neck gorge, and lining at armholes, shoulders and trim lining along the bottom edge of coat.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Fold bottom edge of lining under approximately 1 inch and position fold 1/2 inch in from finished bottom of coat and baste allowing room for the felling operation.	Hand or Machine			Commer-cial	
21.	Join shoulder seam. a. Join shoulder seams of front and back smoothly easing in proper fullness on back and preventing distortion.	301	SSa-1	12-14	50	50
	b. Press shoulder seams open and flat without stretching seam.					
22.	Make collar. a. The collar shall consist of a one-piece topcollar and a two-piece undercollar of basic material with a two-piece canvas interlining.					
	NOTE: Undercollar and collar interlining may be one piece with seam allowance omitted. Undercollar and interlining shall be cut on the bias.					
	b. With face sides together, stitch 1/4 inch seam along center back of undercollar.	301	SSa-1	12-14	50	50
	c. Press seam open and flat.					
	d. Overlap collar interlining pieces approximately 1/2 inch at center back and stitch 1/4 inch from edges of canvas.	301	LSa-1	12-14	50	50
	e. Pad undercollar to canvas interlining with 6 or 7 evenly spaced rows of blindstitching.	103 or 306	SSm-6 or 7	6-8	70 70	 70
	f. Press undercollar flat.					
	g. To assure correct size and shape, mark undercollar (on interlining side) in accordance with the applicable sized undercollar shaper. Position neck edge of undercollar stand marker even with neck edge of undrecollar and mark breakline. Trim both plies of material along top and rounded edges. Trim interlining 3/8 to 1/2 inch from neck edge of undercollar as indicated at the outer notches (steps).					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
h.	Stitch undercollar to interlining at breakline, extending 1-3/4 to 2 inches on each side of center back.	301 or 401	SSv-1 SSv-1	12-14 12-14	50 50	50 50
i.	Slash, turn, and baste or stay stitch neck edge of undercollar over the interlining between the outer notches (steps) leaving a 3/8 to 1/2 inch seam allowance.	Hand or Machine or 301	 SSbc-1	 8-10	Commercial 50	 50
j.	With face sides together, superimpose center back seam of undercollar to center of topcollar and baste top edge of finished undercollar along straight edge of topcollar distributing proper topcollar fullness. Baste a second row of stitching along breakline and ends of collar.	Hand or Machine			Commercial	
k.	Stitch the undercollar to topcollar 1/8 inch from edge, on the inside of the marked line as indicated by the undercollar shaper. The sewing and trimming of excess topcollar may be performed in one operation.	301	SSa-1	12-14	50	50
l.	Trim excess topcollar and undercollar assembly even with the undercollar shaper and remove basting.					
m.	Turn collar to finished position, force out top and rounded edges and baste around outer collar edge, rolling the edge of the topcollar to the underside.	Hand or Machine			Commercial	
n.	Trim and slash neck edge of topcollar between the outer notches (steps) leaving a 3/8 inch seam allowance up to 1 inch beyond breakline and gradually working to 1/2 inch between gorges.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Press top, rounded edges and breakline of assembled collar. Do not crease 3-4 inches along stitched breakline area, or fold or crease collar.					
23.	Attach collar and hanger loop. Finished appearance: The collar shall roll on the finished coat and hug the neckline and the collar edges shall not curl. The collar shall cover the felled seam at the back and the undercollar shall not be exposed at the bottom edge. The collar shall conform to the finished collar shaper.					
	a. Seam topcollar to front facings at gorge to a point not less than 1 inch back of lapel breakline; notch seam allowance of gorge facing at end of stitching.	301	SSa-1	12-14	50	50
	b. Spread and tack gorge seam open catching top edge of canvas.	Hand or 301	 SSa-1	6-8 12-14	50 50	 50 or Commercial
	c. Baste undercollar to body of coat along neckline putting in proper fullness of shoulders, turning under lower edge when hand stitched.	Hand or Machine			Commercial	
	d. Tack neck outlet of coat to undercollar interlining by hand or blindstitching.	Hand or 103 or 301		2-4 4-6 4-6	50 50 50	 50 or Commercial
	e. With hanger loop ends even with the neck edge, center hanger loop at back neck and stitch ends.	301		12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Finished hanger loop shall measure 1-1/2 (+ 1/4) inches between inner edges. When constructed of lining fabric, the loop shall finish approximately 1/4 inch wide.	301	EFp-2	8-10	50	50
	g. Stitch lower edge of topcollar to coat across neck from gorge seam to gorge seam. (see 29e for alternate method).	301	SSa-1	12-14	50	50
*24.	Make sleeves.					
	a. With face sides together, join forearm seam of sleeves 3/8 inch from edge, distributing fullness between notches.	301 or 401	SSbd-1	12-14	50 50	50 70
	b. Shape-press forearm seam open, without stretching.					
	c. Seam a bias cut wigan piece to forearm and side of backarm seam allowance. Bottom edge of wigan shall be 1/2 to 3/4 inch below turn up notches. Trim ends of wigan even with sleeves or as an alternate, the wigan may be basted to the sleeve along bottom length of wigan piece. Ends of wigan will be caught in operation 24f.	301 Hand or Machine	SSa-1	12-14	50 Commer-cial	50
	d. Turn up sleeve bottom as indicated by pattern marks and baste along folded edge.	Hand or Machine	OSf-1		Commer-cial	
	e. Press bottom of sleeve and remove basting.					
	f. With face sides together, stitch backarm seam catching ends of wigan.	301 or 401	SSa-1	12-14	50 50	50 70
	g. Press backarm seam open and flat.					
	h. Blindstitch top of sleeve hem to wigan. NOTE: Care should be taken that stitching does not show on the outside.	Hand or 103 or 306	 SSm-1 SSm-1	2-4 4-6 4-6	50 50 50	 50

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
25.	Make and tack sleeve lining.					
	With face sides together, join the forearm seam of the sleeve lining 3/8 inch from edge, distributing fullness between notches.	301	SSbd-1	12-14	50	50
	b. With face sides together, join backarm seam of sleeve linings.	301	Sa-1	12-14	50	50
	c. The sleeve lining shall extend not less than 3/4 inch above top of sleeve. Tack forearm and backarm seam of sleeve linings to respective forearm seam and backarm seam of sleeves, distributing fullness in lining. The tacking shall extend from not more than 7 inches below top of sleeve to not more than 7 inches above creased bottom edge of sleeve.	Hand		2-4 1/2 to inches in length	50	1-1/2 in
		or				
		301		6-8	50	50 or Commercial
	NOTE: When tacking is done by hand, both ends of stitching shall be securely tacked with not less than 3 stitches.					
	d. Turn sleeve through lining and baste bottom turn up of sleeve lining. Sleeve lining shall have not less than 1-1/4 inch outlet at bottom. Turn sleeves to finished position and assemble in pairs.	Hand or Machine			Commercial	
	e. Sleeves may be pressed prior to hanging to facilitate check on balance of sleeves during setting operation.					
26.	Join and press sleeve to armhole.					
	Finished appearance: The sleeves shall hang alike with the front of each in the same relative position. Front and back shall have a rolled effect.					
	a. Set and stitch sleeves to armholes, notch to notch, distributing proper fullness so that there is no puckering, crooked seams, break or twist, fullness concentrated in one area, or front or back of sleeve too tight.	301	SSa-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Press seam flat, shrinking fullness around sleevehead using a suitably shaped pressing buck. Open seam and press across top from back notch to not less than 3 inches nor more than 4 inches forward of shoulder seam.					
27.	Set and tack shoulder pads.					
	a. Center shoulder pads on each shoulder with edge of pad even with edge of armhole and securely tack to shoulder and armhole seam allowance.	Hand or 301		2-4 4-6	50 50	50 or Commercial
28.	Baste and tack armholes and sleeve heads.					
	a. Baste around outside of armholes placing lining, back end of shoulder, and shoulder pad in proper place; continue the basting along shoulder seam to gorge seam distributing fullness of lining at armhole and leaving shoulder lining free on the underside.	Hand or Machine				Commercial
	b. Turn coat to lining side at shoulder and armhole; tack straight edge of each shoulder pad through sleeve armhole seam allowance.	Hand or 301		2-4 4-6	50 50	50 or Commercial
	c. Lap and baste back shoulder lining over front shoulder lining properly distributing fullness between neck gorge and end of shoulder at armhole. Baste balance of back armholes.	Hand or Machine				Commercial
	NOTE: In lieu of basting shoulder linings and hand felling in 29b, the shoulder seam may be stitched by machine.	301	SSa-1	12-14	50	50
	d. Tack all around armhole seam. NOTE: When armholes are tacked by machine, a loose but properly formed and elastic stitch may be used, and when so tacked operation 28e may be omitted. When armholes are tacked by hand, every other stitch from front notch, across top to end of shoulder pad shall be backstitched.	Hand or 301		2-4 4-6	50 50	50 or Commercial

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Tack across base of armhole from sleeve notch on front to side seam.	301		4-6	50	50
	f. Having a minimum allowance of 3/8 inch, trim away excess lining, interlining, and shoulder pads.					
	g. Tack sleeve head wadding to armhole from front sleeve notch to back seam of sleeve. The sleeve head wadding shall be positioned with the folded edge even with the edge of armhole, backing cloth side against sleeve and in such a manner as to cause it to fold on itself. The tacking shall be adjacent to the armhole seam and fullness shall be evenly distributed. When armhole is tacked by machine, the sleeve head wadding shall be attached in the armhole tacking operation. When sleeve head waddings are tacked by hand, every other stitch shall be backstitched.	Hand or 301		2-4 4-6	50 50	 50 or Commercial
29.	Complete felling.					
	a. Fell lining to armholes. When armholes are hand felled, backstitch pit of armhole from forearm seam to side seam. The sleeve lining shall be properly distributed and seam on seam with sleeve, or fell the top half of the armhole by blindstitch machine which utilizes the bobbin/bobbin case above the seam.	Hand or Machine (Hand type)		8-10 6-8	A or C (silk) A (silk)	
	or					
	The sleeve lining may be stitched to the armhole on the inside from forearm seam of sleeve to the backarm seam across undersleeve.	301	SSa-1	12-14	50	50
	b. Fell lining at shoulder. See 28c Note for alternate machine method.	Hand		8-10	A or C (silk)	
	c. Fell lower opening of facing-lining assembly and across bottom of lining 5/8 to 3/4 inch from inner edge of facing.	Hand		8-10	A or C (silk)	

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	d. Fell neck edge of undercollar to coat, securely hand tacking corners of undercollar to lapel at notch.	Hand or Machine (Hand type)		8-10 6-8	A or C (silk) A (silk)
	e. When hand felling, turn under lower edge of top collar and baste across back. Fell neck edge of topcollar from gorge seam to gorge seam, securely tacking coat hanger loop. (see 23g for alternate machine method).	Hand		8-10	A or C (silk)
	f. With the collar overlapping the lapel 1/2 to 5/8 inch, fell undercollar to top of lapel (at notch and front end of undercollar) approximately 1-1/2 inches.	Hand		8-10	A or C (silk)
	g. Fell lapel top edge to the underside of collar approximately 1-1/2 inches. Overlap the collar on the lapel not less than 1/2 inch or more than 5/8 inch.	Hand		8-10	A or C (silk)
	h. Fell underside of flap to coat front 1/4 inch from seamline.	Hand		8-10	A or C (silk)
	i. Position bottom fold of sleeve lining approximately 1 to 1-1/2 inches from the finished bottom edge of sleeve and fell or blindstitch.	Hand or Machine		8-10 8-10	A or C (silk) 0 0 (silk)
	j. Fell or blindstitch lining to coat hem. The top ply of folded edge of lining shall not be caught in the stitching.	Hand or Machine		8-10 8-10	A or C (silk) 0 0 (silk)
30.	Press fronts and collar. Press front edges and collar prior to removing edge basting and buttonhole operation.				

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
31.	Mark and make buttonholes.					
	a. All buttonholes shall be eyelet end, square bar, cut first type, reinforced with gimp having the stitching securely caught in the fabric, the gimp well covered and the ends of gimp pulled through the underside. Buttonholes shall be clean, correctly positioned and the purling finishing on the outside.					
	b. The ends of all square bar type buttonholes shall be bartacked in a separate operation from buttonhole making; securely catching ends of gimp and covering the width of the bar. The bartack shall not be more than 1/4 inch long.	Bartack or Hand		2-22 per bartack 10-12 per tack	30	30
	c. Mark and sew four 1 to 1-1/8 inch horizontal buttonholes on right front in accordance with marks on pattern. The inside purled edge of each buttonhole eyelet shall be 5/8 (+ 1/8) inch from the finished edge, vertically aligned and equally spaced.	But-ton-hole	Stitches per size: 1 inch 1-1/8 inches	53-60 60-70 (not including bartack)	30	30
32.	Clean coat.					
	a. Remove all bastings except edge bastings and lapel bastings which shall be removed after pressing edges.					
	b. All ends of stitching shall be trimmed and loose threads removed from the coat.					
	c. Remove all spots and stains.					
	d. Remove all shade tickets without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
*33.	Press coat. Finished appearance: The finished pressed coat shall be free of gloss, wrinkles, creases, spots and impressions from marking ticket, thread, seam or binding. The bust seam shall not break or "cave-in" below the shoulders. The sleeves shall be balanced and hang evenly. The sleeves shall not be creased and the collar ends and lapels shall roll. The top collar shall not be creased at center back. a. Press edge of lapels, fronts, collar and bottom of coat on edge pressing machine. b. Press fronts on women's right and left front form pressing machine. c. Sleeves shall be roll pressed. d. Press balance of fronts, side seams, and back on a suitable pressing machine. e. Press collar on collar machine stretching outer edge of collar over shoulder area. Collar shall be neither too short nor too long. f. Press armholes and shoulders on an armhole machine. Shoulders may be pressed on a shoulder machine. g. Press lapels. The roll line of the lapels shall extend a uniform distance from the gorge seam. The lapels shall be roll pressed 1 to 1-1/2 inches from the gorge seam to bottom of the lapel.				
34.	Finish pressing. a. Finish press lining smooth and flat maintaining creased pleat at front shoulders and center back.				

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	b. Remove gloss, wrinkles, creases and pressing impressions from under lapels, collar, and pocket flaps.				
	c. Touch up any areas missed by machine pressing.				
	d. Block armholes and shrink top of sleeve.				
	e. Place coat on hanger until thoroughly dry.				
	g. Brush coat.				
35.	Mark and sew buttons.				
	a. Hand or machine sewn buttons shall have the thread ends securely tacked off with not less than two stitches and the thread ends hidden.				
	b. All metal buttons shall be sewn with the eagle in the upright position.				
	NOTE: The button shall be measured from the center of its circumference.				
	c. Mark and sew four 35-ligne short shank metal buttons on the left front 7/8 (+ 1/8) inch from front edge corresponding with buttonholes on right front. Sew buttons through all plies of material.	Hand		4 per button (double thread)	50
		or			
		301		14-16 per button	50
		or			
		101		14-16 per button	50
		or			
		205		12 min. per button	No. 4 nylon
36.	Attach size ticket.				
	Attach removable size ticket to the outside of lower left sleeve.				

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of finished coat shall be as shown in Table II (see Figure 1). All measurements and tolerances are expressed in inches.

Table II - Sizes and measurements of coat

Size	(A) Bust	(B) Waist	Length of Coat (C) S	R	L	Sleeve Inseam (D) S	R	L
6	36	28	24	25-1/2	27	16-3/4	17-3/4	18-3/4
7	36-1/2	28-1/2	24	25-1/2	27	16-3/4	17-3/4	18-3/4
8	37	29	24-1/8	25-5/8	27-1/8	16-3/4	17-3/4	18-3/4
9	37-1/2	29-1/2	24-1/8	25-5/8	27-1/8	16-3/4	17-3/4	18-3/4
10	38	30	24-1/4	25-3/4	27-1/4	16-3/4	17-3/4	18-3/4
11	38-1/2	30-1/2	24-1/4	25-3/4	27-1/4	16-3/4	17-3/4	18-3/4
12	39	31	24-3/8	25-7/8	27-3/8	16-3/4	17-3/4	18-3/4
13	39-3/4	31-3/4	24-3/8	25-7/8	27-3/8	16-3/4	17-3/4	18-3/4
14	40-1/2	32-1/2	24-1/2	26	27-1/2	16-3/4	17-3/4	18-3/4
15	41-1/4	33-1/4	24-1/2	26	27-1/2	16-3/4	17-3/4	18-3/4
16	42	34	24-5/8	26-1/8	27-5/8	16-3/4	17-3/4	18-3/4
18	44	36	24-3/4	26-1/4	27-3/4	16-3/4	17-3/4	18-3/4
20	46	38	24-7/8	26-3/8	27-7/8	16-3/4	17-3/4	18-3/4
22	48	40	25	26-1/2	28	16-3/4	17-3/4	18-3/4
Tolerance	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: Bust, waist, and length of coat measurements shall be taken with coat fully buttoned, placed smooth and flat. Refer to Figure 1 for A, B, C, and D measurements.

A. Bust - Twice the measurement taken across frontat base of armholes from folded edge to folded edge.
B. Waist - Twice the measurement taken across front between third and bottom buttonhole.
C. Length of Coat - Measurement taken from base of undercollar down center of back to bottom edge of coat.
D. Sleeve Inseam - Measurement taken along inseam from armhole to bottom edge of sleeve.

3.9 Workmanship. The finished coats shall conform to the quality established by this specification. As a final step in the contractor's production control plan before formation of a lot, each coat shall be buttoned on a model form and examined for selected defects. A coat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in Table IV of MIL-STD-1608. The occurrence of defects shall not exceed the applicable point value or selected defect limit.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the currentversion before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2, shall be inspected as specified for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, the contractor shall furnish a certificate of compliance for the resin treatment requirements of 3.3.7.2, colorfastness requirements of 3.3.8, and the tape requirements of 3.3.7.3.

4.4.2 Examination of the end item. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1608 except as otherwise specified and the following defects:

LABEL	
Removable size ticket missing, incorrect or illegible	3 Points

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A, C, or hanger packs as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the currentversion before use.

5.1.1 Level A. Each fully buttoned coat shall be placed front down. Fold in the sides towards the center of the back with the sleeves positioned full length vertically. Fold coat in half by bringing up the bottom edge to the shoulderline. The completely folded coat shall measure approximately 14 inches in length by 12 inches in width. Each coat shall be inserted in a snug-fitting clear polyethylene film bag of not less than 0.003 inch thickness (+ 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required.

5.1.2 Level C (Commercial packaging). Coats shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.1.3 Hanger pack. Coats shall be hung with fronts lapped and unbuttoned and preserved as specified in the appendix of MIL-C-44192.

5.2 Packing. Packing shall be level A, B, C, or hanger packs as specified (see 6.2).

5.2.1 Level A. Ten coats, of one size and length, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 2A of MIL-B-17757. The fiberboard used for fabricating the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be placed flat in two stacks and five in depth within the shipping container with every one reversed. Length of the bags shall be parallel to the end panels of the container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Ten coats, of one size and length, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, of MIL-B-17757. Level B packages shall be packed flat in two stacks and five in depth within the shipping container with every one reversed. Length of the bags shall be parallel to the end panels of the container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

5.2.4 Hanger pack. When specified (see 6.2) twelve coats shall be packaged, packed, palletized, and marked in accordance with Appendix to MIL-C-44192, in Type I containers.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129. When hanger pack containers are used, the containers shall have marked on each side in bold clear red or blue lettering not less than two inches high "DO NOT DROP" and "THIS SIDE UP" with arrows pointing to the top of the containers.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted with the bag so as to permit ready identification. The bag or label shall only indicate the following information:

COAT, WOMAN'S, BLUE, DRESS
STOCK NUMBER;
SIZE;
QUANTITY:

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "Mixed NSN" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and national stock numbers contained therein.

5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

NOTE: When hanger packs are required the containers shall be palletized in a single layer. Interlocking of loads is not required.

5.5 Hanger pack. When specified (see 6.2), coats shall be packaged, packed, palletized, and marked in accordance with Type I containers of MIL-C-44192 and its appendix. Container types II, III, and IV may be used to pack coats at the end of the contract or when the number of items remaining to be packed is less than the twelve required for the Type I container.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:37Z
Check the source to verify that this is the currentversion before use.

6.1 Intended use. The coat is part of the service dress uniform worn by female Navy personnel.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification
b. Sizes and lengths required (see 1.2)
c. Levels of packaging and packing required (see 5.1, 5.2, and 5.5)
d. When a first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
e. When palletization is required (see 5.4 and 5.5, as applicable).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets requirements of this specification.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.6 Subject term (key word) listing.

Coat, front
Label, half peak
Tropical, polyester/wool
Shoulder, sleeve head pads
Uniform, coat

Custodian:
Navy - NU

Review Activity:
DLA - CT

Preparing Activity:
Navy - NU

Project No. 8410-N608

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.

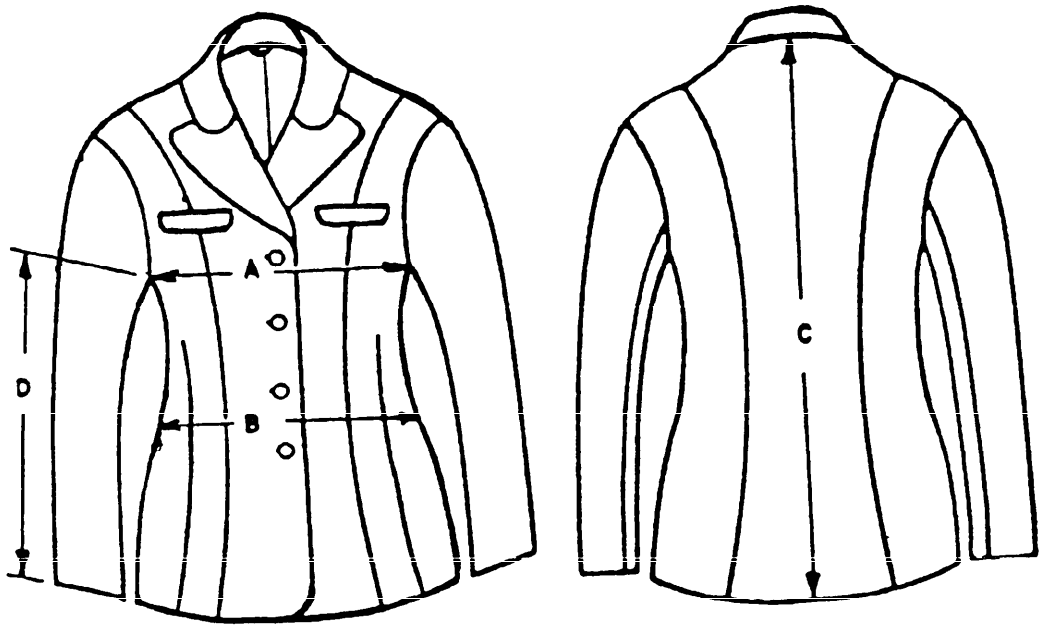


Figure 1

COAT, WOMAN'S, BLUE, DRESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

TO BE FOLLOWED IN PERFORMING THE

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-29124D(NU)	Coat, Woman's, Blue, Dress

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:37Z
Check the source to verify that this is the current version before use.