MILITARY SPECIFICATION

CAP, FOOD HANDLER'S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the requirements for a food handler's cap.

1.2 Classification.- The cap shall be of one type only, and shall be procured in the following sizes as specified (see 6.2):

Schedule of sizes

Small	Medium	Large
(6-3/4)	(7-1/8)	(7-1/2)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton
CCC-C-461 - Cloth, Uniform Twill, Cotton
DDD-L-20 - Label; For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-17757 - Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-C-29127 - Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish)
MIL-T-43548 - Thread, Polyester, Cotton-Covered

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

3.2 First article approval.- The requirement for first article will be as specified by the procuring activity (see 6.2).

3.3 Materials.-

3.3.1 Cloth, twill, cotton or polyester/cotton.- The cloth used for the headband of the cap, shall be of a cotton twill or polyester/cotton twill material. The cotton twill shall conform to any type specified in CCC-C-461, and shall match White Shade 3006. The polyester/cotton twill shall conform to class 2 of MIL-C-29127.

3.3.2 Cloth, net.- The net cloth used for the crown of the cap, shall be of a white bleached cotton or polyester fiber, conforming to the physical requirements shown in Table I when tested as specified in 4.3.1.

Table I - Physical requirements for net cloth

Weave	Meshes per inch (minimum)		Weight (ozs. per sq. yd.)	
	Warp	Filling	Minimum	Maximum
Cotton leno	7	7	4	6
Polyester-Raschel Knit	5	5	2	4

3.3.2.1 Nonfibrous materials.- The starch and protein content including chloroform-soluble and water-soluble material of the finished cotton and polyester net cloth, whichever is applicable, shall not exceed 15.0 percent and 3.0 percent respectively when tested as specified in 4.3.1.

3.3.2.2 pH.- The pH value of the water extract of the finished cloth shall be not lower than 5.5 or higher than 8.5 when tested as specified in 4.3.1.

3.3.3 Thread.- The thread for seaming and stitching the cap shall be cotton, conforming to type IA2; ticket numbers 50 and 70; 3-ply and 2-ply; of V-T-276. The color shall be White AH, Cable No. 66050. As an alternate, a cotton-covered polyester thread conforming to ticket number 70, 3-ply, and ticket number 80, 2-ply, of MIL-T-43548 may be used. The color shall be Natural White AG, Cable No. 66049.

3.3.4 Label.- Each cap shall be marked with a combination identification and size label conforming to types III or IV, class 4, of DDD-L-20; except that the height of characters shall be a minimum of 18-point (approximately 1/4 inch) and shall bear the following inscription specified below. The printing shall show fastness to launde ing only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

CAP, FOOD HANDLER'S
HEADBAND (100% Cotton) 1/
CROWN (100% Cotton) 2/
CONTRACT NO.: DSA-000-000-0000 (Example)
STOCK NO.: 8415-00-000-0000 (Example)
SIZE: Medium (7-1/8) (Example)
NAME OF SUPPLIER:

1/ Applicable only when cotton is used. For the polyester/cotton headband, the label shall read (50% Polyester/50% Cotton).

2/ Applicable only when cotton is used. For the polyester crown, the label shall read (100% Polyester).

3.4 Design.- The cap shall be of a turn-up style, two-piece construction, consisting of a two-ply circular headband and a flat circular crown. When worn, the headband shall be turned up to form four plies (see Figure 1).

3.4.1 Figure.- Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns.- Standard patterns to be used to cut the working patterns will be furnished by the Government (see 6.3). Unless otherwise specified in Table II, seam allowance shall be 1/4 to 5/16 inch. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 Pattern parts.- The component parts of the cap shall be cut from materials as specified, and in accordance with the pattern parts required for the manufacturing process as follows:

Material	Nomenclature of pattern parts	Cut parts
Cloth, twill, cotton or polyester/cotton	Headband	1
Cloth, net, cotton or polyester	Crown	1

3.6 Construction.-

3.6.1 Stitches, seams, and stitchings.- Stitch, seam, and stitching types as specified in Table II, shall conform to FED-STD-751. Whenever two or more seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

3.6.2 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.6.3 Thread breaks and ends of seams.- Ends of all seams and stitchings, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types), shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type), may be repaired by using 301 stitch type.

3.7 Manufacturing operations.- The cap shall be manufactured in accordance with operation requirements specified in Table II. The supplier is not required to follow the exact sequence of operations, provided the finished cap is identical to that produced by following the exact sequence as shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

Table II - Construction of cap

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the cap in strict accordance with patterns furnished, which shall show size; shape; directional lines for cutting; and notches for proper assembly of component parts. The headband may be cut in either the warp or filling direction. b. Cut the component parts of the cap in one piece.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Section 4, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Assemble headband a. Stitch the ends of the headband (face to face) to form a continuous circle. b. Fold headband in half, with the seam on the inside.	301 or 304	SSa-1	12-14	50/3 50/3	50/3 70/3
4.	Attach crown to headband a. Turn in the raw edges of the headband, inserting the raw edge of the crown between the turned in edges of the headband, and stitch 1/16 to 1/8 inch from the folded edge. OR b. Join the crown to the two (2) plies of headband. OR c. Join the crown to the inner ply of headband (underside of crown to underside of inner ply).	301 Any 500 series 301	LSe-1 SSa-1 SSa-1	12-14 12-14 12-14	50/3 50/3 50/3	50/3 50/3 50/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

Table II - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Attach crown to headband (cont'd) d. Turn in the raw edge of the outer ply of headband, and stitch to crown 1/16 to 1/8 inch from the folded edge.	301	Similar to LSq-2(b)	12-14	50/3	50/3
5.	Marking (Label) With the headband unfolded, place markings on the outside adjacent to the headband seam and approximately 3/4 inch above the bottom edge. The markings shall be on the inside when the headband is folded to its finished position.					
6.	Cleaning a. Trim and remove all loose thread throughout the cap. b. Remove all spots and stains.					

NCSR Form 1, 15 Sep 1967

MIL-C-44136(SA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

3.8 Measurements.- The finished measurements of the cap shall conform to Table III for each size. All measurements and tolerances are expressed in inches, and shall be taken without pulling or stretching the cap.

Table III - Finished measurements

Size	Circumference (inside) 1/	Height of headband 2/
Small (6-3/4)	21-1/4	7-1/2
Medium (7-1/8)	22-3/8	7-1/2
Large (7-1/2)	23-1/2	7-1/2
Tolerance	-0, +3/8	± 1/4

1/ This measurement shall be taken with a gauge.

2/ With the headband unfolded, measure from the base of the headband to the top of the headband.

3.9 Workmanship.- The finished cap shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance.- When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.3.2.1 and 4.3.2.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.3 Inspection.- Inspection shall be in accordance with MIL-STD-105, except where otherwise indicated herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection.- In accordance with 4.1, components and material shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, testing shall be performed on the cotton or polyester net cloth, whichever is applicable, for characteristics specified in Table IV and in accordance with the referenced test methods of FED-STD-191. Testing for all the requirements listed in Table IV is applicable to the sample unit. The lot size shall be expressed in units of yards and the sample unit shall be 1 yard full width of the cloth. The sample size (number of sample units), shall be as shown below:

Lot size (yards)	Sample size (units)
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any requirement specified.

Table IV - Component tests

Characteristic	Requirement paragraph	Test method
Cotton identification	3.3.2	1/
Polyester identification	3.3.2	1/
Type of weave or knit	3.3.2	Visual 2/
Meshes per inch:		
Warp	3.3.2	5050
Filling	3.3.2	5050
Weight	3.3.2	5041
Nonfibrous material	3.3.2.1	2611
pH	3.3.2.2	2811

1/ A certificate of compliance will be acceptable for this requirement.

2/ One determination shall be made from each sample unit and the results reported as "pass" or "fail."

4.3.2 Examination of the end item.- Examination of the end item shall be in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels (AQL's) shall be as indicated in 4.3.2.3. The sample unit shall be one finished cap. The lot size shall be expressed in units of caps.

4.3.2.1 Visual examination.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
MATERIAL DEFECTS AND DAMAGES		
a. Hole, cut, tear, smash, burn, scorched area, or open place:		
1. On outside	X	
2. On inside (longest dimension in any direction):		
-More than 1/4 inch		X
b. Any knot or slub on outside		X
c. Missing yarn, loose yarn, broken yarn, woven or knitted in waste, snagged thread, thin place, float, drop stitch, visible mend; more than 1/2 inch (largest dimension in any direction): on outside		X
d. Needle chews on outside:		
1. Up to 1/4 inch, inclusive		X
2. More than 1/4 inch	X	
CLEANNESS		
a. Any spot or stain on outside		X
b. Thread ends not trimmed or loose threads not removed on outside		X
CUTTING		
Any component part not cut in accordance with specified pattern, directional lines on patterns, or not in accordance with specification requirements	X	
COMPONENTS AND ASSEMBLY		
a. Any component part or required operation omitted (unless otherwise classified herein)	X	
b. Any component part not as specified	X	
c. Any component part tight, twisted, distorted, pleated, or full (unless otherwise classified herein)		X
d. Any operation not as specified (unless otherwise classified herein)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Seam puckered		X
2. Seam irregular, pleated, or wavy		X
3. Any part of cap caught in any unrelated operation or stitching	X	
4. Ends of all seams and stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch		X
5. Ends of a continuous line of stitching overlapped less than 1/2 inch		X
6. Thread breaks not secured or stitching back of the break less than 1/2 inch		X
b. Gage of stitching: -Stitching irregular, not within range specified, or varies more than 1/16 inch when no range is specified (Score only when the condition exists on more than 1/2 the length of seam)		X
c. Open seam:		
1. Up to 1/4 inch, inclusive		X
2. More than 1/4 inch	X	
NOTE: The seam shall be classified open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur.		
d. Raw edges:		
1. On outside:		
(a) More than 1/4 inch up to and including one inch		X
(b) More than one inch	X	
e. Seam and stitch type:		
1. Not specified seam or stitch type		X
2. Looper thread of 401 stitch type on outside	X	
f. Stitch tension:		
1. Loose tension resulting in a loose seam	X	
2. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
SEAMS AND STITCHING (cont'd)		
g. Stitches per inch (score only when the condition exists on more than 1/2 the length of seam or stitching):		
1. More than the maximum specified		X
2. Less than the minimum specified:		
(a) By one or two stitches		X
(b) By three or more stitches	X	
CROWN		
a. Loose, not positioned or attached as specified		X
b. Other than one piece		X
c. Twisted or poorly shaped		X
HEADBAND		
a. Loose, not positioned or attached as specified		X
b. Other than one piece		X
c. Twisted or poorly shaped		X
LABEL (MARKING)		
a. Omitted, incorrect, illegible, or incomplete	X	
b. Misplaced		X

4.3.2.2 Size measurements.- Any measurement deviating from dimension and tolerance included in table of measurements specified in 3.8, shall be scored as a size measurement defect.

4.3.2.3 Inspection levels and acceptable quality levels (AQL's).- The inspection levels and the acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	Inspection level	AQL's Major	Total
For defects applicable to 4.3.2.1	II	2.5	15.0
For defects applicable to 4.3.2.2 (one class)	S-3	-	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing, and marking complies with the Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be on one shipping container fully prepared for delivery except that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: Incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container. Polyethylene bags' heat sealed seams open, non-continuous, or crooked. Incorrectly fabricated bag.
Content	Number of caps per bundle is more or less than specified. 1/

1/ For this defect, two bundles from each shipping container in the sample shall be examined.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Twenty caps, of one size only, shall be flat folded and stacked one on top of another to form a compact bundle. Each bundle of caps shall be inserted into a flat style, snug-fitting, polyethylene bag, made from clear polyethylene film of 0.00125 inch thickness (± 25 percent tolerance). The bag may be fabricated from polyethylene film tubing or sheeting. As an alternate, the bundle of caps may be completely wrapped in any suitable commercial grade kraft paper. The bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the seal made as close as possible to the open end, or may be accomplished by a mechanical twist tie method. Prior to or during the closure operation, excess air within the bag shall be expelled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

5.1.2 Level C (Commercial packaging).- Caps shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Eighty (80) caps of one size only, packaged as specified in 5.1, shall be packed within a fiberboard shipping container conforming to type SF, class weather-resistant, grade V2s, size 1A, of MIL-B-17757. Level A packages shall be packed on edge, four in length, one in width, and one in depth within the shipping container. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B.- Eighty (80) caps of one size only, packaged as specified in 5.1, shall be packed within a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class domestic, variety SW, grade 200, size 1A, of MIL-B-17757. Level A packages shall be packed on edge, four in length, one in width, and one in depth within the shipping container. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial packing).- Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes.- Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling a 4 by 5 inch white paper label with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

5.3.2 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required identification listed below legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall only indicate the following information:

NOMENCLATURE
STOCK NO.
SIZE
QUANTITY

6. NOTES

6.1 Intended use.- The cap covered by this specification is intended for use by cooks and bakers of the Department of the Navy.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Size required (see 1.2)
c. Whether first article sample is required (see 3.2)
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1)

6.3 Samples and patterns.- For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Supersession data.- This specification incorporates the requirements of the type III, class 2 cap, which was included in Federal Specification DDD-C-41C dated 3 April 1970.

Custodian:
Navy - SA

Preparing activity:
Navy - SA

Project No. 8410-N166

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

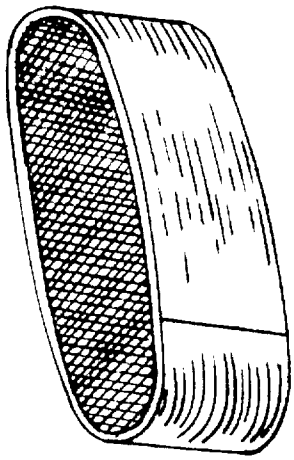


FIGURE 1 CAP, FOOD HANDLER'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-C-29136(SA); Cap, Food Handler's

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

FOLD

Officer in Charge
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Officer in Charge
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.