MIL-C-29145B
2 July 1984
SUPERSEDING
MIL-C-29145A
21 March 1977

MILITARY SPECIFICATION

# COAT, FIREMEN'S ALUMINIZED, PROXIMITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

* 1.1 Scope. This specification covers the requirements for a heat protective coat constructed of aluminized aramid outer fabric with a snap-in removable liner.

1.2 Classification. The coat covered by this specification shall be of one type only and in the following sizes (see 6.2):

| | | | |
|---|---|---|---|
| Small | (34-36) | Large | (42-44) |
| Medium | (38-40) | Extra Large | (46-48) |

## 2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| V-T-295 | - Thread, Nylon |
| FF-R-556 | - Rivets, Solid, Small; Rivets, Split, Small; Rivets, Tubular, Small; and Caps, Rivets; General Purpose |
| FF-W-92 | - Washers, Metal, Flat (Plain) |
| KK-L-2004 | - Leather, Cattlehide, Deerskin and Horsehide, Chrome-Tanned |
| QQ-N-290 | - Nickel Plating (Electrodeposited) |
| QQ-P-416 | - Plating, Cadmium (Electrodeposited) |

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

DDD-L-20 - Label; For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-371 - Braid, Textile, Tubular
MIL-B-543 - Buckles, Tongueless and Web Strap
MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-19699 - Cloth, Coated (Nylon Taffeta)
MIL-E-20652 - Eyelets, Metallic, and Eyelet, Washers, Metallic
MIL-T-43636 - Thread, Aramid
MIL-T-44100 - Thread, Para-Aramid, Spun, Intermediate Modulus
MIL-B-87002 - Batting, Synthetic Fibers, Quilted, Aramid
MIL-C-87076 - Cloth, Coated, Aramid, Aluminized

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-1666 - Classification of Defects for Evaluating Quality of Aluminized Firemen's Clothing
MS-27980 - Fastener, Snap, Style 2

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for Copies should be addressed to American Trucking Association, ATTN: Traffic Department, 1616 P Street, NW., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the samples, in which case this specification shall govern.

* 3.2 First article approval. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials.

* 3.3.1 Basic material. The basic material for the outer shell shall be aramid material coated with a vacuum deposited aluminized face conforming to Type I or II of MIL-C-87076.

3.3.2 Quilted liner. The material for the quilted liner shall be aramid quilted batting conforming to Type I of MIL-B-87002 except the outer covering cloth conforming to MIL-C-43774 shall have 69 filling yarns and the dimensional stability for warp and filling shall be 3 percent maximum.

* 3.3.3 Thread. The thread for assembling the outershell and for joining the outershell to the lining shall be non melting nylon (aramid), natural shade, conforming to Size B of MIL-T-43636. As as alternate, a thread conforming to size T-50 of MIL-T-44100, natural in color may be used. The thread for the liner shall be Type I, Class A, Size A of V-T-295. The shade shall approximate that of the outershell.

* 3.3.4 Lining. The material for lining the outershell and binding the facings shall be a coated nylon taffeta conforming to Type II of MIL-C-19699. The binding shall be bias-cut in strips of 1-1/8 ( $\pm$ 1/8) inches wide and may be spliced.

3.3.5 Leather. The leather strip for reinforcing the bottom of the sleeve, the adjustable sleeve straps and for reinforcing hardware shall be a flesh split cattlehide, natural color of tannage, of not less than 2 3/4 nor more than 3-1/2 ounce thickness conforming to Type IV, Class 2 of KK-L-2004 after silicone treatment specified in 3.3.5.1, except for the following:

a. Shrinkage temperature shall be not less than 105°C.
b. Tests for percent ash and chloroform-soluble material not required.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

3.3.5.1 Silicone treatment. The leather shall be treated with an approved durable silicone compound to lower its water absorption (see 4.4.1, 6.2 and 6.4).

* 3.3.6 Cloth, corduroy. The material for the topcollar and topcollar stand shall be 100% cotton or a cotton/polyester blend of not less than 80% cotton. It shall have a minimum of eight wales per inch and weigh not less than 8.0 oz. per sq. yd. The cloth shall be fast dyed (no sulphur) either dark blue, dark green, black, or olive drab and have an approved durable flame resistant treatment (see 6.4). The dyed and treated cloth shall show good colorfastness to crocking and perspiration.

3.3.7 Hanger loop. The material for the hanger loop shall be cotton braid, plain, flat tubular, conforming to type VII, class 1 of MIL-B-371, except that the requirements for colorfastness shall not apply. The color of the braid shall be Navy Blue, Black or Olive Drab.

3.3.8 Hardware.

3.3.8.1 Eyelets and washers. The eyelets and washers for the patch pockets shall conform to rolled flange type, M20652/1-BBE114 and M20652/1-BBW101 of MIL-E-20652.

3.3.8.2 Snaps and dee rings. The snaps and dee rings for fastening the protective flap shall be cast malleable iron, brass or cast aluminum conforming to the style and measurement requirements specified in Figure 3 (see 4.4.1). The finish for the malleable iron shall be cadmium plate conforming to class 3, type I of QQ-P-416. The finish for the brass shall be nickel plated conforming to class 2, 0.0005 inch minimum thickness of QQ-N-290.

* 3.3.8.3 Fasteners, snap. The snap fasteners for attaching the snap-in liner and for fastening the pocket flap shall consist of a button and socket (female half) and a stud and eyelet (male half). The fasteners shall be style 2, 24-line (size 1), nickel plate or bright chrome finish conforming to MS-27980 and the following part numbers:

| | |
|---|---|
| Button - 1N or 1C | Socket - 6N or 6C |
| Stud - 7N or 7C | Eyelet - 8N or 8C |

* 3.3.8.4 Rivets, tubular with caps or washers. The rivets for attaching snaps and dee rings and also for the pockets shall conform to type XII, class 3, grade B or F of FF-R-556, except that they shall be drilled to the head or partially drilled to the head and the inside of the rivet shank shall be chamfered. The rivets shall be 9/64 inch nominal diameter and their length shall be sufficient to assure proper clinching. The caps shall conform to Type II of FF-R-556. The finish for the brass rivets and caps shall be nickel plate conforming to class 2 of QQ-N-290, except that the minimum thickness shall be 0.0005 inch. An aluminum washer conforming to type A, grade I, class C, No. 20 of FF-W-92 may be used in lieu of caps for securing the tubular rivets. The diameters of the aluminum washer shall be 0.170 to 0.180 inch for the inside and 0.470 to 0.500 inch for the outside.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

3.3.8.5 Buckle. The buckle shall be tongueless, double bar, conforming to type II, style 4, Class 1, 1/2 inch nominal strap width, construction A or B, of MIL-B-543, except that the finish for the brass shall be nickel plate conforming to class 2, 0.0005 inch minimum thickness of QQ-N-290.

3.3.9 Labels.

* 3.3.9.1 Identification label (coat). Each coat shall have an identification label conforming to type VI, class 1 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription:

COAT, FIREMAN'S ALUMINIZED, PROXIMITY
BASE FABRIC: ARAMID (100%)
CONTRACT NO: DSA-100-00-0-0000 (EXAMPLE)
NAME OF SUPPLIER:

* 3.3.9.2 Size and stock number label (coat). Each coat shall have a size and stock number label conforming to type VI, Class 2 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription:

SIZE: MEDIUM (38-40) (EXAMPLE)
STOCK NO: 8415-00-000-0000 (EXAMPLE)

* 3.3.9.3 Instruction label (coat). Each coat shall have an instruction label conforming to type VI, class 3 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription:

INSTRUCTIONS

1. CAUTION: MUST BE WORN WITH LINER.
2. Hang to dry and store properly to prevent damage to aluminized surface.
3. Clean by gently rubbing surface with cloth using mild soap PERCHLORETHYLENE or ISOPROPANOL.
4. To maintain reflective properties and to extend service life, use coat for intended purposes only.
5. Do not use aluminized paint to repair worn out surface as it will not provide protection.

NOTE: Aluminized coating is damaged by contact with fire extinguishing agent Potasium Bicarbonate Powder (PKP). Before storing garment with PKP residue present, the following is recommended:

1. Dry powder should be removed with clean soft brush or blower.
2. Wet powder should be removed by throughly flushing with water and wiping the surfaces down with a clean soft cloth. Damp or wet garments should be hung to dry.

* 3.3.9.4 Identification label (liner). Each coat liner shall have an identification label comforming to type VI, class 1 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription:



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

LINER, COAT, FIREMAN'S ALUMINIZED, PROXIMITY
BASE FABRIC: ARAMID
CONTRACT NO: DSA-100-00-0-0000 (EXAMPLE)
NAME OF SUPPLIER:

CLEANING INSTRUCTION

1. Wash liner in warm water (100 to 120°F) using detergent.
2. Rinse thoroughly to remove all soap residue.
3. Dry liner for 20 to 30 minutes in a tumble dryer at 140 to 160°F.

OR

USE NAVY FORMULAR III

* 3.3.9.5 Size and stock number label (liner). Each coat liner shall have a size and stock number label conforming to type VI, class 2 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription:

SIZE: MEDIUM (38-40) (EXAMPLE)
STOCK NO: 8415-00-000-0000 (EXAMPLE)

* 3.3.9.6 Warning label coat. Each coat shall have a warning label conforming to Type IV, class 9 of DDD-L-20 applied to the inside back lining. The label shall be applied to the lining by a red marking medium. The label shall be printed with block, sansserif type with letter 3/4 to 1 inch in height. The label shall contain the following inscription:

WARNING
MUST BE WORN WITH LINER IN PLACE

Two lines may be used for warning inscription.

* 3.3.9.7 Warning label (liner). Each liner shall have a warning label conforming to type VI, class 9 of DDD-L-20 stitched to the inside back of the liner. The label shall be printed with a red marking medium. The label shall be printed with block, sansserif type with letters 1/2 inch in height. The label shall contain the following inscription:

WARNING
MUST BE WORN THIS SIDE TOWARDS BODY

Two lines may be used for warning inscription.

3.3.10 Repair of aluminum film. The aluminum film used for patches for repairing uncoated or cracked areas on the finished coat shall be the same as specified for coating the aramid base cloth. The area to be repaired shall not exceed 1 inch in the longest direction. The patch shall be completely bonded onto the aluminum film of the coat and shall be so placed that it extends not less than 1/2 inch beyond all edges of the uncoated or cracked area. No coat shall contain more than 3 patches on single ply areas or 3 patches on multiple ply areas (total of 6 patches). The unsupported aluminum film and self-curing adhesive used for repairing shall be obtained from the basic material supplier (see 3.3.1). The size of the patch shall not exceed 2 inches in any direction.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

* 3.3.11 Binding. The binding for the raw edges of the removable liner shall be a commercial grade bias-cut rayon binding with a minimum width of 2 5/8 inches.

* 3.4 Design. The coat shall consist of an outershell fabricated from a highly reflective aluminized coated aramid cloth outer surface and an inner lining of coated nylon which provides waterproofness. The outershell shall have a snap-in quilted liner innershell which provides thermal insulation. The coat shall have a corduroy topcollar, sleeves with leather bound bottom edges, adjustable straps on cuffs, and side patch pockets with flaps. The front closure shall consist of a protective flap secured by means of three snaps and dee rings (see Figures 1 and 2).

3.4.1 Figures. Figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow a 1/2 (+ 1/16) inch seam allowance for major joining seams on outershell and 3/8 to 1/2 inch seam allowance for innershell assembly, except as otherwise indicated in Table II. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

* 3.5.1 Pattern parts. The component parts for the coat shall be cut from the materials specified in accordance with the following pattern parts:

| Material | Pattern parts | Cut parts |
|---|---|---|
| Cloth, coated, aramid aluminized (outershell) | Back | 1 |
| | Front, right | 1 |
| | Front, left | 1 |
| | Protective flap (right side) | 1 1/ |
| | Sleeve | 2 |
| | Patch pocket | 2 |
| | Patch pocket flap (1 piece) | 2 |
| | Front facing, left | 1 |
| | Front facing, right | 1 |
| | Undercollar | 1 |
| | Undercollar stand | 1 |
| Quilted lining (Removable liner) | Back | 1 |
| | Front | 2 |
| | Sleeve | 2 |
| Cloth, coated, nylon taffeta (Lining) | Back | 1 |
| | Front (left side) | 1 |
| | Front (right side) | 1 |
| | Sleeve | 2 |
| Cloth, corduroy, cotton | Topcollar | 1 |
| | Topcollar stand | 1 |
| Template | Fastener marker (facing) | - |

1/ Pattern may be cut as two pieces (front and back) with 3/8 inch seam allowance added to each piece.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitch, seam, and stitching types. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the ends of stitching shall be caught in other seams or row(s) of stitching and the looper (underthread) shall be on the inside. Topstitching and edgestitching shall be 3/16 to 1/4 inch from the turned edge, except where otherwise specified in Table I. In order to minimize the size of needle hole in the aluminized fabric, the needle used in the seaming operations shall be of the smallest size which will accommodate the specified size of thread. Wherever LSq-2 stitch type is specified, the top ply shall not be turned back sharply over the first row of stitching but turned in such a manner that a loose welt is formed. The bight of overedge stitching shall be 3/16 to 1/4 inch. A knife shall be used on the overedging machine with the guide set so that the edges of fabric are not cut off, but only the ravelled edges are trimmed.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitching shall be backstitched or over-stitched not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks or skipped stitches (301 or 401 stitch types) may be repaired by 301 stitch type with the stitching anchoring both ends of the break or skipped stitches not less than 1/2 inch.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The coat shall be manufactured in accordance with the operation requirements specified in Table I. The supplier is not required to follow the exact sequence of operations listed provided that the finished coats are identical to those produced by following the sequence of operations as listed in Table I.

3.7.1 Size marking. The component parts of the coat shall be bundled, marked or ticketed to assure proper size assembly. The use of metal fastening devices or sewn-on tickets for marking is prohibited. Adhesive tickets, when used, shall not discolor the material and the adhesive mass shall not adhere to the material upon removal of the tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the coat and wherever possible, is covered by the seam allowance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction of coats**

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 1. | Cutting<br>a. The coat shall be cut in strict accordance with patterns furnished which show size, placement of component parts, directional lines and notches for proper assembly. A maximum swing of 2-1/2 inches from the directional line is permitted. Measurements shall be taken at the top and bottom of the directional line on the pattern to the selvage edge of the fabric on the even side of the lay. The difference between the two measurements shall not exceed 2-1/2 inches. Drill holes for positioning are permitted provided they are covered in the finished coat.<br><br>b. The component parts of the aramid cloth may be cut from ends and when so cut shall finish with the aluminized side face up.<br><br>c. The component parts of the snap-in quilted liner and coated nylon lining may be cut from ends.<br><br>d. All snaps, dee rings, rivets, snap fasteners and both ends of the sleeve adjustment straps on the aluminized outershell, except sockets on sleeve tabs, shall be reinforced with a piece of cut leather that extends not less than 1/8 inch beyond their outer edges and the outer edges of the boxstitching. Stud snap fasteners on removable liner shall not be reinforced with leather. | | | | | |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 2. | Replacement of damaged parts<br>During the spreading, cutting, and manufacturing operations, components having material defects or damages that are classified as defects in MIL-STD-1666 shall be removed from production and replaced with nondefective and properly matched components. | | | | | |
| 3. | Size marking (see 3.7.1)<br>Mark, bundle or ticket the component parts to assure proper size assembly. | | | | | |
| 4. | Prepare quilted liner assembly<br>a. The aramid cloth side of the quilted innershell assembly shall be against the uncoated side of the taffeta lining when snapped into the coat. | | | | | |
| | b. Join 3/8 to 1/2 inch from the raw edge the front and back at shoulder. | 301 or 401 | SSa-1 | 6-8 | A | A |
| | c. Overedge raw edges of shoulder seam. | 602 or 503 or 504 | SSa-1 | 6-8 | A | A |
| | d. Join 3/8 to 1/2 inch from raw edge, the sleeve to armhold as indicated by notches on patterns. | 301 or 401 | SSa-1 | 6-8 | A | A |
| | e. Overedge raw edges of armhole seam. | 602 or 503 or 504 | SSa-1 | 6-8 | A | A |

NCTR Form 1, 15 Sep 1967





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 4. | Prepare quilted liner assembly (cont'd) f. Join 3/8 to 1/2 inch from raw edge, the side seam and sleeve inseam in one continuous operation. | 301 or 401 | SSa-1 | 6-8 | A | A |
| | g. Overedge raw edges of side seam and inseam. | 602 or 503 or 504 | SSa-1 | 6-8 | A | A |
| | h. As an alternate, operations 4.b and c, d and e and f and g may be performed in one operation by simultaneously stitching and overedging. | 515 or 516 or 519 | SSa-2 | 6-8 | A | A |
| * 11 | i. Bind all outer raw edges of body and bottom of sleeves with a 2 5/8 inch minimum width strip of rayon binding. All raw edges of the binding shall be turned under and the finished dimension from outside folded edge to turned edge shall be 1 ± 1/8 inch. Stitching shall be 7/8 ± 1/16 inch from folded edge. On body edges start and finish the binding at bottom front corners. On sleeve bottoms overlap ends of binding 3/4 to 1 1/4 inches. The raw edges of liner assembly shall extend within and to the fold line of the binding. | 301 | BSC-1 | 6-8 | A | A |
| * | j. Center the identification label on the rayon side of the back with the top edge of label 1 1/2 to 2 inches below the bound edge of neckline. Stitch all four sides of label 1/16 to 1/8 inch from edge. | 301 | LSbj-1 | 6-8 | A | A |
| * | k. Center the size and stock number label directly below the identification label and stitch all four sides of label 1/16 to 1/8 inch from edge. Lower edge stitching of identification label may be used to secure top edge of size and stock number label. | 301 | LSbj-1 | 6-8 | A | A |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 4. | Prepare quilted liner assembly (cont'd) | | | | | |
| | 1. Center the warning label (see 3.3.97) approximately 1 1/2 inches below size and stock number label and stitch all four sides of label 1/16 to 1/8 inch from edge. | 301 | LSbj-1 | 6-8 | A | A |
| | m. Snap fasteners shall be positioned 1/2 to 5/8 inch back from folded edge of binding to center of stud in accordance with marks on patterns. All studs shall be fastened thru all plies of material. Eleven studs shall be placed along front edge with the stud pointing toward the wearer. Two studs shall be placed at the bottom of each sleeve, one on the inseam and one directly opposite on the other side of sleeve, both studs to point away from the wearer. | | | | | |
| 5. | Prepare facings and attach labels | | | | | |
| | a. Center the identification label on the aluminized side of the left front facing. The size and stock number label shall be positioned besides the identification label. Center the instruction label on the aluminized side of the right front facing. The labels shall be positioned midway between the locations for the two uppermost snap fasteners on the wide portion of facing. | | | | | |
| | b. Stitch all four sides of each label 1/16 to 1/8 inch from edges. Label shall finish with their top edge parallel to outer edges of facings. Edge stitching of identification label may be used to secure edge of size and stock number label. | 301 | LSbj-1 | 6-8 | B | B |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 5. | Prepare facings and attach labels (cont'd) | | | | | |
| | c. Join left and right aluminized facings at center back, face to face, 3/8 to 1/2 inch from raw edge. Stitch down both sides 1/8 to 3/16 inch from seamline. | 301 | SSz-3 | 6-8 | B | B |
| | d. Bind entire interior edge of joined facings with a 1 1/8 (± 1/16) inch wide strip of coated nylon taffeta. The raw edges of the facings shall extend within and to the foldline of binding. | 301 | BSa-1 | 6-8 | B | B |
| 6. | Prepare taffeta lining assembly | | | | | |
| | a. The rubber coated side of the taffeta lining material shall be against the uncoated side of the aluminized outershell. | | | | | |
| | b. Join 3/8 to 1/2 inch from raw edge the shoulder seam, side seam, sleeve inseam, and armhole seam. The side seam and sleeve inseam shall be joined in one continuous operation. | 301 or 401 | LSq-2(a) | 6-8 | B | B |
| | c. Turn one ply back over seam allowance and top-stitch 1/8 to 3/16 inch from the folded edge. | 301 or 401 | LSq-2(b) | 6-8 | B | B |
| | d. As an alternate, operations 6b and 6c may be performed in one operation by joining with a double lapped and double stitched seam, 1/4 inch gauge. | 301 or 401 | LSc-2 | 6-8 | B | B |
| * | e. Apply warning label, (see 3.3.9.6) horizontally across back of lining so that the top edge of label will finish 6 to 8 inches below collar joining seam on the finished coat. | | | | | |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 7. | Attach aluminized facings to taffeta lining | | | | | |
| | a. Position pre-assembled aluminized facings on assembled coated nylon lining with fronts and neckline edges even with uncoated side of lining against uncoated side of aluminized facing. Stitch 5/16 to 3/8 inch from raw edges. | 301 or 401 | SSa-1 | 6-8 | B | B |
| | b. Stitch thru all plies the entire length of facings 1 3/4 (± 1/16) inches from folded edge of binding. | 301 or 401 | LSbj-1 | 6-8 | B | B |
| 8. | Make inside tab fasteners for sleeves | | | | | |
| | a. Strips of the aluminized fabric shall be cut 2 inches wide. | | | | | |
| | b. Fold strip lengthwise, overlapping the sides equally, forming a tab 5/8 to 3/4 inch wide. Stitch one row of stitching down the center and lengthwise of tab thru all plies. | 301 | EFy-1 | 6-8 | B | B |
| | OR | | | | | |
| | c. Fold strip of aluminized fabric to center with edges abutted and double stitch 1/4 inch gauge with a covering stitch on the under side. | 406 | EFh-1 | 6-8 | B | B |
| | OR | | | | | |
| | d. Fold strip of aluminized fabric to center with edges turned under and abutted. Stitch with a line of stitching covering the abutted folded edges. | 105 | EFae-1 | 6-8 | B | B |
| | e. Cut strips into 3 inch lengths. | | | | | |
| | f. Attach snap fastener thru all plies of material Center of socket portion of fastener shall be 5/8 to 3/4 inch from one end of tab. | | | | | |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction of coat (cont'd)**

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 9. | Make collar<br>a. The assembled collar shall consist of an aluminized undercollar and undercollar stand joined to a corduroy topcollar and topcollar stand with hanger loop. The points and edges of the collar shall be completely forced out with the points uniform in length. | | | | | |
| | b. Join face to face 1/4 to 5/16 inch from raw edge the aluminized undercollar stand to undercollar. Turn undercollar back over seam allowances and topstitch undercollar 1/8 to 3/16 inch from the folded edge. | 301 or 401 | LSq-2 | 6-8 | B | B |
| | c. Join face to face 1/4 to 5/16 inch from raw edge the corduroy topcollar stand to topcollar. Turn topcollar back over seam allowance and topstitch topcollar 1/8 to 3/16 inch from the folded edge. | 301 or 401 | LSq-2 | 6-8 | B | B |
| | d. Join face to face 5/16 to 3/8 inch from raw edge the corduroy topcollar assembly to aluminized undercollar assembly along outer edge and sides. | 301 or 401 | SSe-2(a) | 6-8 | B | B |
| | e. Trim corners and turn collar to finished position, working out corners and edges. Topstitch outer edge and sides 1/4 to 5/16 inch from folded edge. The bottom raw edge may also be stitched for ease in attaching collar to neckline of coat. | 301 | SSe-2(b) | 6-8 | B | B |
| | f. The hanger loop, cut 5 inches in length, may be prestitched to collar prior to joining the taffeta lining and outershell, to neck portion of finished collar. | 301 or 401 | SSab | 6-8 | B | B |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction of coat (cont'd)**

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 9. | Make collar (cont'd)<br>g. When attached to coat the finished collar and collarstand for all sizes shall measure 4-1/4 ( + 1/8) inches wide at center back. The hanger loop shall be centered between the ends of the collar and its opening shall measure 3 (+ 1/4) inches long between attached ends. | | | | | |
| 10. | Make protective flap (see 3.5.1)<br>a. Fold protective flap lengthwise, face to face, in accordance with marks on pattern. Stitch ends 5/16 to 3/8 inch from the raw edge. Trim corners, turn to finished position, and stitch ends and folded front side 3/16 to 1/4 inch from folded edge. | 301 | SSe-2 and OSf-1 | 6-8 | B | B |
| | OR | | | | | |
| | b. As an alternate, fold flap lengthwise, back to back, turn ends to the inside and edge stitch ends and folded front side 3/16 to 1/4 inch from the folded edge. | 301 | SSc-1 and OSf-1 | 6-8 | B | B |
| 11. | Prepare aluminized outer shell assembly<br>a. The direction of the joining seam shall be lapped as follows:<br>1. Back over fronts at sides and shoulders.<br>2. Front and back body over sleeves at armholes.<br>3. Back portion of sleeve over front portion of sleeves at underarm. | | | | | |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 11. | Prepare aluminized outer shell assembly (cont'd) | | | | | |
| | b. Position three metal eyelets on each patch pocket in accordance with marks on pattern and attach with the center of each eyelet 7/8 (± 1/8) inch from the finished bottom edge of pocket. | | | | | |
| * | c. Turn under top edge of pocket, as indicated by notches on pattern, and stitch 3/16 to 1/4 inch from raw edge. The finished hem shall measure 2 1/4 (± 1/8) inches wide. Snap fastener shall be positioned according to marks on pattern. Attach stud portion of fastener thru all plies. | 301 | EFa-1 | 6-8 | B | B |
| | d. Turn under the front and bottom edges of each pocket 3/8 to 1/2 inch and double stitch 1/4 to 5/16 inch gauge to coat front, as indicated by marks on patterns, with the outer row of stitching 1/8 to 3/16 inch from the folded edge. | 301 or 401 | LSd-2 | 6-8 | B | B |
| | e. Rivet the top front corner of each pocket to coat front. Rivets shall be reinforced with a cap or washer and a piece of die cut leather (see operation 1.d). The head of the rivet shall finish on the outside of coat. | | | | | |
| * | f. The finished patch pocket for all sizes shall measure 10 1/2 (± 1/4) inches deep at center of pocket. The width of the pocket shall be 8 1/4 (± 1/4) inches when measured across top of pocket from folded edge of side seam to folded edge of pocket. | | | | | |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 11. | Prepare aluminized outer shell assembly (cont'd)<br>g. Fold pocket flaps in half, face to face, as indicated by notches on patterns and stitch sides 7/16 to 9/16 inch from raw edge. | 301 | SSe-3(a) | 6-8 | B | B |
| * | h. Trim points, turn flap to finished position and double stitch the turned in sides and bottom folded edge 1/4 to 5/16 inch gauge. The corners of the flaps shall be completely forced out. Snap fasteners shall be positioned according to marks on patterns. Attach socket portion of fastener thru all plies. | 301 | SSe-3(b) | 6-8 | B | B |
| | i. Turn under 7/16 to 9/16 inch the top raw edge of the flap and double top stitch 1/4 to 5/16 inch gauge to each front as indicated by marks on pattern. The inner row of topstitching shall be 3/8 ( ± 1/8) inch above top folded edge of the pocket. | 301 or 401 | LSd-2 | 6-8 | B | B |
| | OR<br>j. As an alternate, position flap face down on coat front, as indicated by marks on pattern, with top raw edge facing towards bottom of coat. Stitch 1/4 to 5/16 inch from raw edge. Turn flap down to finished position and topstitch 3/8 to 7/16 inch from top folded edge of flap.<br><br>NOTE: Back edge of the flap shall be free of side seams. When LSd-2 or LSbk-2 type seam is used to attach flap, the raw edge shall not extend more than 1/8 inch below lower row of stitching. | 301 or 401 | LSbk-2 or LSb1-2 | 6-8 | B | B |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction of coat (cont'd)**

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 11. * | Prepare aluminized outer shell assembly (cont'd)<br>k. The finished pocket flaps for all sizes shall measure 3 1/2 (± 1/4) inches deep at center, and 7 1/2 (± 1/4) inches wide when measured along bottom edge of flap. | | | | | |
| | 1. Join, face to face, 7/16 to 9/16 inch from raw edge, the fronts and back at the shoulder. Turn back panel back over seam allowances and topstitch 3/16 to 1/4 inch from folded edge. | 301 or 401 | LSq-2 | 6-8 | B | B |
| | OR | | | | | |
| | As an alternate, finger press joined seam open, turn face side up and stitch 1/8 to 3/16 inch on both sides of seamline. | 301 or 401 | SSz-3 | 6-8 | B | B |
| | m. Join face to face 7/16 to 9/16 inch from the raw edge, the sleeves to the armhole. Turn back the front and back panels over seam allowances and topstitch 3/16 to 1/4 inch from folded edge. | 301 or 401 | LSq-2 | 6-8 | B | B |
| | n. Join face to face 7/16 to 9/16 inch from the raw edge, the side of coat and underarm of sleeve, simultaneously catching back edge of pocket, in one continuous operation. Turn back the back panel and sleeve over the seam allowances and topstitch 3/16 to 1/4 inch from folded edge. | 301 or 401 | LSq-2 | 6-8 | B | B |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 12. | Join prepared coat assemblies<br>a. Position edges of outer shell and inner shell assemblies even at the neckline and fronts with the aluminized facing of interlining assembly against the aluminized side of the outer shell. | | | | | |
| * | b. Join, 1/4 inch from raw edge, front edges across steps, and along neckline in one continuous operation, simultaneously inserting and catching the braid hanger loop and assembled collar between the inner and outer shells, as indicated by notches on the patterns. Trim step corners, turn coat to finished position and work out step corners and front edges. | 301 or 401 | SSe-2(a) and SSq-2(a) | 6-8 | B | B |
| | c. Edgestitch, 1/4 to 5/16 inch from folded edge, the folded edge, the fronts and neckline of coat in one continuous operation. | 301 | SSe-2(b) and SSq-2(b) | 6-8 | B | B |
| * | d. Position the assembled protective flap piece to the right front of coat, with the center top edge of the flap approximately 1 inch down from the notch at the junction of step and collar and the front edge aligned with the front edge of the coat. Turn under the back edge of flap 1/2 inch and double stitch 1/4 to 5/16 inch gauge to front of coat, with the outer row of stitching 1/8 to 3/16 inch from the folded edge. | 301 | LSd-2 | 6-8 | B | B |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction of coat (cont'd)**

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 13. | Hem bottom<br>Turn under entire bottom edge of coat 1/4 to 3/8 inch and form a 1 (± 1/8) inch wide hem, as indicated by marks on pattern. Ends of hem may be folded square or diagonally. Stitch top edge of hem and diagonally folded ends 1/8 to 3/16 inch from folded edge. Square folded ends shall be stitched 1/4 to 5/16 inch from folded front edge. | 301 | EFb-1 | 6-8 | B | B |
| *14. | Stay stitch sleeve bottoms<br>Join the outershell and interlining 1/4 inch from the bottom raw edge around sleeve bottom. | 301 or 401 | SSa-1 | 6-8 | B | B |
| *15. | Attach sleeve tabs<br>a. Two tab fasteners shall be attached to each sleeve, one at the underarm seam and the other on side of sleeve directly opposite the seam. | | | | | |
| | b. Turn under free end of tab 3/8 inch. Place tabs in position so that the folded edge of tab is towards the bottom and is 3 (± 1/4) inches from the finished sleeve bottom. With the tab in the upwards position, the rivet shall face the quilted liner. Tack or bartack to sleeve through all plies, full width of the tab, 1/8 inch from the folded edge. | 301 or bartack | LSd-1 | 6-8<br>26-30 per bartack | B<br>B | B<br>B |
| 16. | Make and attach sleeve adjustment straps<br>a. The leather straps shall be 7/16 to 1/2 inch wide. The buckle portion of the strap shall be cut 4 inches long and the adjustment portion of the strap shall be cut 10 inches long. Straps shall not be spliced. | | | | | |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction of coat (cont'd)**

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 16. | Make and attach sleeve adjustment straps (cont'd) | | | | | |
| | b. Thread buckle strap over back bar of buckle and pull free ends of strap even. Face buckle end of strap towards the inseam parallel with sleeve bottom, and stitch doubled free ends of strap to sleeve, thru all plies, with 3/4 ( ± 1/8) inch long cross boxstitch. Stitched end of buckle strap shall measure 5 1/2 (±1/4) inches from the inseam and the bottom edge 1 1/2 ( ± 1/4) inches from the finished folded edge of sleeve bottom. | 301 | LSbj-1 (cross boxstitch) | 6-8 | B | B |
| | c. Fold under one end of long adjustment strap 1 inch and stitch together with a 3/4 ( ± 1/8) inch cross boxstitch. Thread long strap properly over front bar of buckle. | 301 | EFa-1 (cross-boxstitch) | 6-8 | B | B |
| | d. Position unfinished end of long adjustment strap towards back of sleeve, parallel with sleeve bottom, and stitch to sleeve thru all plies with a 3/4 ( ±1/8) inch long cross boxstitch. Stitched end of strap shall finish 4 ( ± 1/4) inches from inseam and the bottom edge shall finish 1 1/2 ( ± 1/4) inches from the finished edge of sleeve bottom. | 301 | LSbj-1 (cross-boxstitch) | 6-8 | B | B |
| 17. | Attach snaps and dee rings to front | | | | | |
| | a. The snaps and dee rings shall be so set that there is no twisting or bulging when the protective flap is fastened. (see operation 1.d). | | | | | |
| | b. Rivets shall be reinforced with a cap or washer. The head of the rivet shall finish on the outside of the coat. | | | | | |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 17. | Attach snaps and dee rings to front (cont'd)<br>c. Center rivet holes of each dee ring on front edge of protective flap as follows and as indicated by pattern template:<br>1. Top ring 1 ( ± 1/16) inch from top edge of flap.<br>2. Bottom ring 3 5/8 ( ± 1/16) inches from bottom edge of flap.<br>3. Center ring equally spaced between top and bottom ring.<br><br>Rivet the three rings thru all plies. The back inside straight edge of the dee rings shall be in line with or not more than 1/4 inch in from front folded edge of protective flap.<br><br>d. Position edge of left front under the protective flap on right front adjacent to the line of top stitching with bottom edges of coat even.<br><br>e. Rivet three snaps thru left front opposite the corresponding dee rings on right front. Rivets shall not catch the aluminized facing. | | | | | |
| 18. | Attach socket portion of snap fastener to aluminized facing<br>Position and attach snap fastener sockets to finished aluminized facing as marked on pattern templates for each size (see operation 1.d). Socket opening shall face away from wearer. | | | | | |







Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**Table I - Construction** of coat (cont'd)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch | Thread | |
|---|---|---|---|---|---|---|
| | | | | | Needle | Bobbin or Looper |
| 19. * | Attach leather sleeve bindings<br>a. Position a two inch wide leather strip onto the inside of sleeve opening approximately 7/8 inch in from each sleeve opening. Stitch 1/8 to 3/16 inch from the edge through all plies of material, overlapping ends of the strip approximately 1 to 1 1/2 inches near the underarm seam. Turn strip to the outside of sleeve opening and stitch 1/8 to 3/16 inch from the edge along free edge and across the overlapped portion through all plies of material. | 301 | LSa-1 (each edge) | 6-8 | B | B |
| | OR | | | | | |
| 24 * | b. As an option, fold leather strip in half lengthwise and using a folder, stitch each sleeve opening with a single or double row of stitching 1/8 to 3/16 inch from edges of leather strip, through all plies of material, overlapping ends of strip approximately 1 to 1 1/2 inches near the underarm seam. The ends of the sleeves shall extend within and to the folded edge of the leather strips. | 301 | BSa-1 or BSa-2 | 6-8 | B | B |
| 20. | Clean coat<br>a. Trim all thread ends.<br>b. Remove all loose threads.<br>c. Remove all spots and stains.<br><br>NOTE: Care shall be taken in the use of solvents for cleaning to assure that the aluminized coating is not damaged. | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished coats and removable liners shall be as shown in Tables II and III (see Figures 1 and 2). All measurements and tolerances are expressed in inches.

Table II - Coats

| Size | (A) Chest | (B) Bottom | (C) Back Length | (D) Sleeve length |
|---|---|---|---|---|
| Small (34-36) | 48 | 50 | 30 | 22 1/2 |
| Medium (38-40) | 52 | 54 | 30 3/4 | 23 |
| Large (42-44) | 56 | 58 | 31 1/2 | 23 1/2 |
| X-Large (46-48) | 60 | 62 | 32 1/4 | 24 |
| Tolerance | ±1 | ±1 | ±1/2 | ±1/2 |

NOTE: The coat shall be laid flat and smooth with the front dee rings and snaps closed.

(A) Chest - Twice the measurement taken across front from folded edge to folded edge at base of armhole.

(B) Bottom - Twice the measurement taken along bottom edge of coat from folded edge to folded edge.

(C) Back Length - Measure from collar joining seam to bottom of coat along center of back.

(D) Sleeve Length - Measure along underarm seam from base of armhole to bottom edge of sleeve.

Table III - Removable Liner

| Size | (A) Chest | (B) Bottom | (C) Back Length | (D) Sleeve Length |
|---|---|---|---|---|
| Small (34-36) | 42 | 44 | 24 1/2 | 18 1/2 |
| Medium (38-40) | 46 | 48 | 25 | 19 |
| Large (42-44) | 50 | 52 | 25 1/2 | 19 1/2 |
| X-Large (46-48) | 54 | 56 | 26 | 20 |
| Tolerance | ±1 | ±1 | ±1/2 | ±1/2 |

NOTE: The liner shall be laid flat and smooth.

(A) Chest - Twice the measurement taken across front from side seam to side seam at the base of armholes.

(B) Bottom - Twice the measurement taken along bottom edge of liner from side seam to side seam.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

(C) Back length - Measure from neckline to bottom of liner along center of back.

(D) Sleeve length - Measure along underarm seam from base of armhole to bottom edge of sleeve.

3.9 Workmanship. The finished coats shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design construction, workmanship and dimensional requirements.

* 4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-1666.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. A certificate of compliance shall be furnished for paragraphs 3.3.5.1 - identification of silicone treatment, and 3.3.8.2 - identification of metal fasteners. In addition, testing shall be performed on the components and characteristics listed in Table IV. The methods of testing specified in FED-STD-191, wherever applicable, and as listed in Table IV shall be followed. The physical and chemical values specified in Section 3, except where otherwise specified, apply to the average of the determinations made on the sample unit



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

for test purposes as specified in the applicable test methods. All test reports shall contain the individual values utilized in expressing the final results. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The sample size shall be in accordance with the following:

| Lot Size | Sample Size |
|---|---|
| 800 or less | 2 |
| 801 thru 22,000 | 3 |
| 22,001 and over | 5 |

The basis for lot size and sample units for testing shall be as follows:

| Component | Lot size expression | Sample unit |
|---|---|---|
| Cloth, corduroy, cotton | yards | 2 yards full width |
| Snaps and dee rings | gross | 6 each |

Table IV - Testing of components

| Component | Characteristic | Requirement paragraph | Test method |
|---|---|---|---|
| Leather | Silicone identification | 3.3.5.1 | 1/ |
| Corduroy cloth | All: | 3.3.6 | 1/ |
| Snaps and dee rings | Metal identification | 3.3.8.2 | 1/ |
| | Style | 3.3.8.2 | Visual |
| | Dimensions | 3.3.8.2 | Visual |

1/ A certificate of compliance shall be accepted for this characteristic.

4.4.2 Examination of the end item. Sampling and examination of the end item shall be in accordance with MIL-STD-1666.

4.4.3 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

| Examine | Defect |
|---|---|
| Finished dimensions | Length, width, or height exceeds specified maximum requirements. |
| Palletization | Pallet pattern not as specified.<br>Interlocking of loads not as specified.<br>Load not bonded with required straps as specified. |
| Weight | Exceeds maximum load limits. |
| Marking | Omitted; incorrect; illegible; of improper size, location, |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

* 5.1.1.1 Coat. Each coat shall be folded as follows:

1. Fasten snaps and dee rings (except for snap fasteners on pockets).
2. Place coat flat front down.
3. Fold each side and sleeve toward center back of coat.
4. Each sleeve shall then be placed parallel to the folded sides of the coat.
5. Fold coat in half by bringing the bottom up toward the collar.

The folded coat shall measure approximately 23 inches by 15 inches. Each folded coat shall be individually packaged in a snug-fitting, clear polyethylene film bag having a film thickness of not less than 0.003 inch. The bag may be fabricated from polyethylene film tubing or sheeting. All seams and closures shall be formed by heat sealing. A 1/4 inch diameter hole shall be made at one corner of each bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner hole are not required.

* 5.1.1.2 Liner Each liner shall be folded as follows:

1. Place liner flat face up.
2. Fold each sleeve over front and down so that top edge of sleeve is parallel to front opening.
3. Fold liner in half by placing right side over left side.
4. Fold liner in half again by bringing the bottom up towards the top.

The folded liner shall measure approximately 15 inches by 15 inches. Each folded liner shall be individually packaged in a snug-fitting, clear polyethylene film bag having a film thickness of not less than 0.00125 inch. The bag may be fabricated from polyethylene film tubing or sheeting. All seams and closures shall be formed by heat sealing. A 1/4 inch diameter hole shall be made at one corner of each bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner hole are not required.

5.1.2 Level C (Commercial packaging). Each coat and liner shall be packaged separately to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

* 5.2.1.1 Coat Eight coats, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to the type CF, class weather-resistant, grade V15c, variety DW, size 3A of MIL-B-17757. The fiberboard used for the liner shall conform to Type CF, class domestic conforming to MIL-B-17757. Level A folded coats shall be stacked flat with each coat reversed end to end, eight in depth within the shipping container. The length of the coats shall be parallel to the side panels of the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.1.2 Liner. Ten liners, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to the type CF, class weather-resistant, grade V15c, variety DW, size 3A of MIL-B-17757. The fiberboard used for the liner shall conform to Type CF, class domestic conforming to MIL-B-17757. Level A folded liners shall be stacked on edge within the shipping container with the face of the packages parallel to the end panels within the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B.

* 5.2.2.1 Coat. Eight coats, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, grade 275, variety DW, size 3A of MIL-B-17757. The fiberboard used for the liner shall conform to Type CF, class domestic conforming to MIL-B-17757. Level A folded coats shall be stacked flat with each coat reversed end to end, eight in depth within the shipping container. The length of the coats shall be parallel to the side panels of the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2.2 Liner. Ten liners, of one size only, packaged as specified in 5.1, shall be packed in a fiberbord shipping container assembled, closed and reinforced conforming to type CF, class domestic, grade 275, size 3A, variety DW of MIL-B-17757. The fiberboard used for the liner shall conform to Type CF, class domestic conforming to MIL-B-17757. Level A folded liners shall be stacked on edge within the shipping container with the face of the packages parallel to the end panels within the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.3 Level C (Commercial packing). Coats and liners separately packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2), coats and liners, separately packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or bonding means O. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.4.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall only indicate the following information:

STOCK NUMBER
NOMENCLATURE
SIZE
QUANTITY

5.4.2 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The coats are intended to be used in conjunction with the Trouser, Hood and Gloves, Fireman's, Aluminized, Proximity. The coat is intended for use by personnel engaged in aircraft rescue fires and damage control work.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes required (see 1.2).
c. When first article is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity and testing and approval of the first article.
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. List of approved silicone compounds (see 3.3.5.1).
f. When palletization is required (see 5.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Silicone compounds and flame resistant treatments. Only those silicone compounds and flame resistant treatments approved by the U.S. Army Natick Research and Development Center, Natick, Massachusetts 01760, and the appropriate medical service and so listed in the invitation for bids or request for proposal, shall be considered acceptable for the related procurement (see 3.3.5.1 and 3.3.6).

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modification, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - NU
Army - GL
Air Force - 99

Preparing activity:
Navy - NU

Project No. 8415-0294


Review:
Navy - MC
Army - MD
Air Force - 82
DLA - CT

User Activities
Navy - AS, SH, CG
Air Force - 45



☆U.S GOVERNMENT PRINTING OFFICE: 1984—705-040/A3433

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

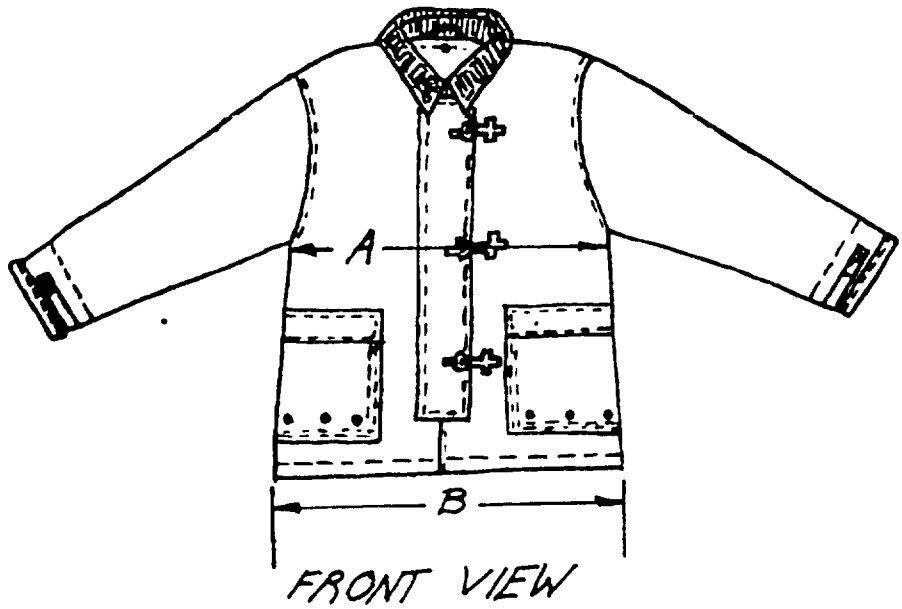






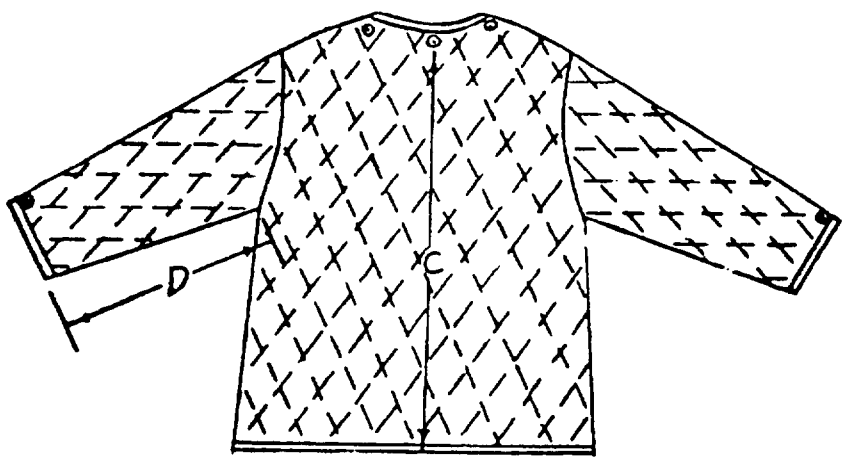

FIGURE 1
COAT, FIREMEN'S, ALUMINIZED PROXIMITY



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

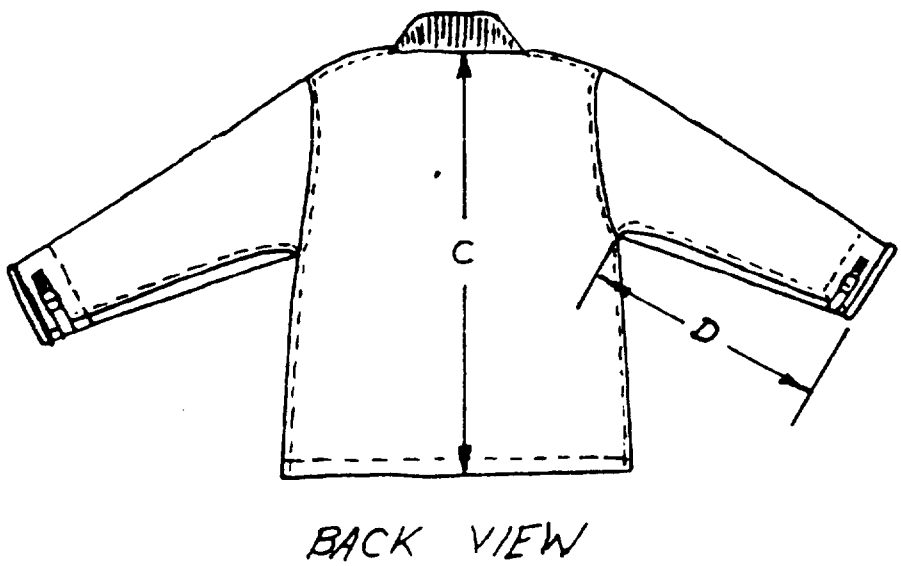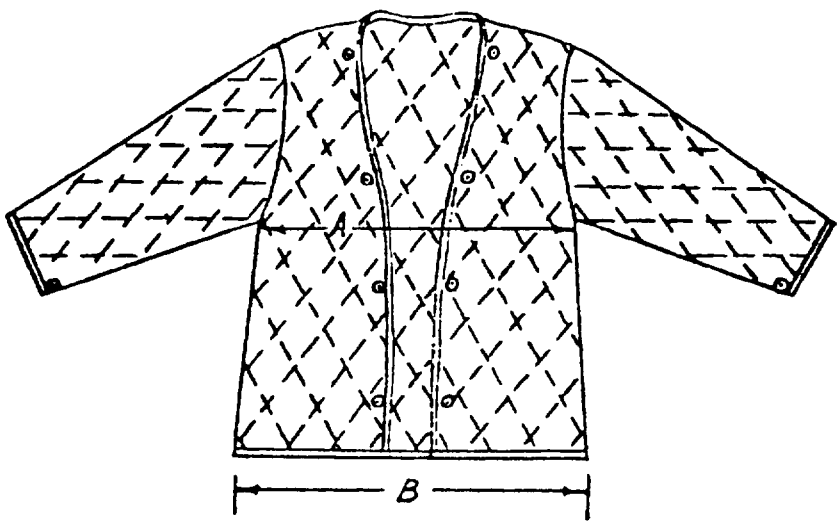


FRONT VIEW




BACK VIEW

FIGURE 2

LINER REMOVABLE



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

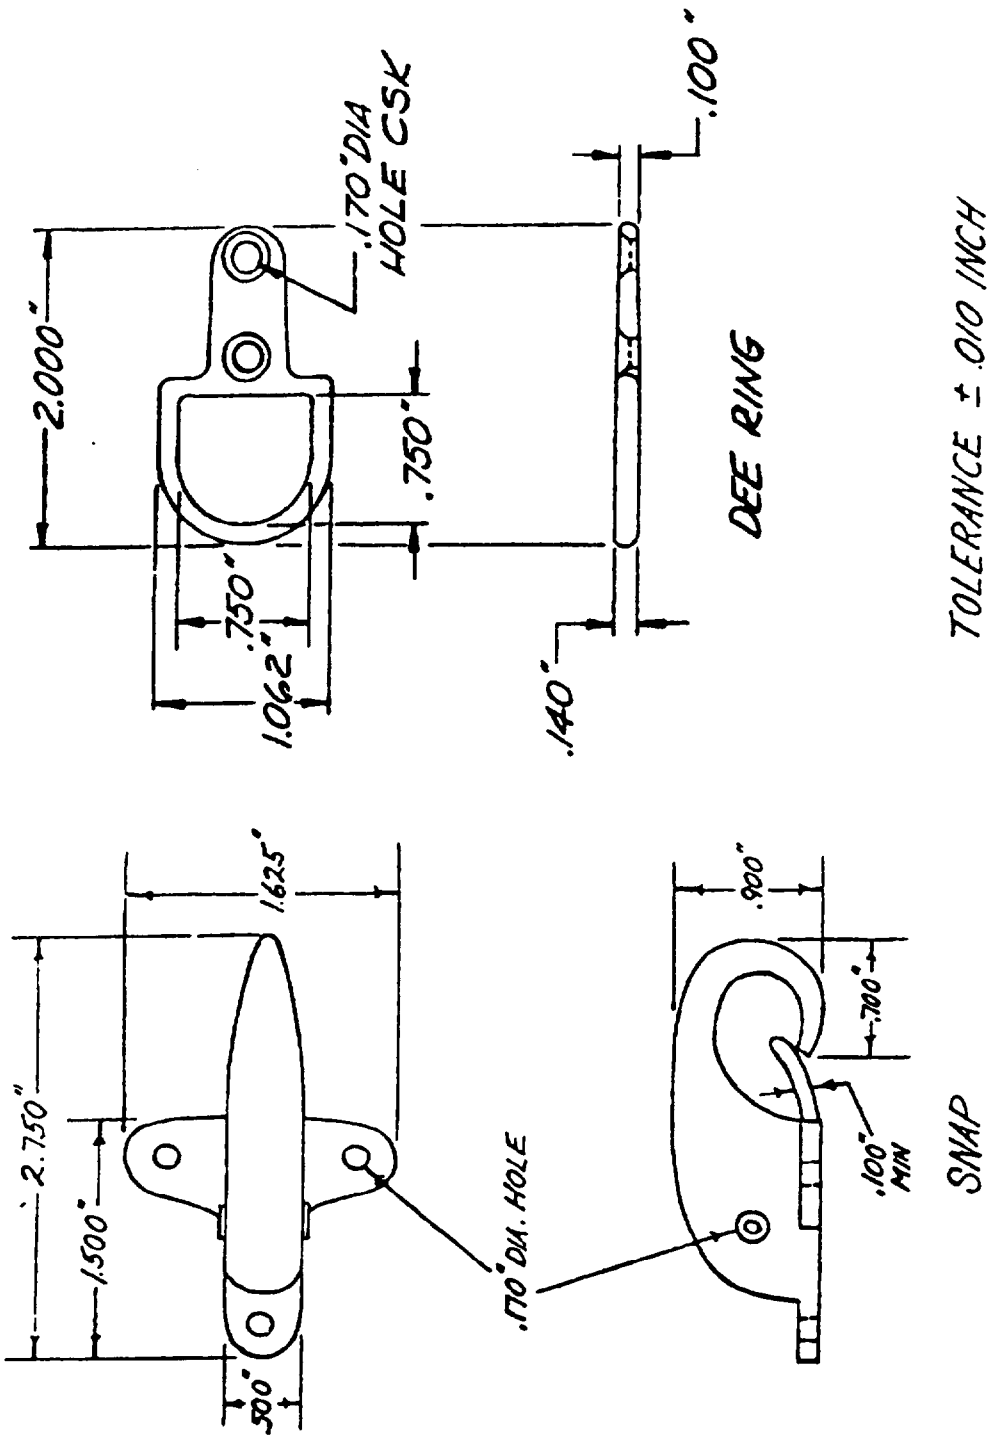



FIGURE 3

SNAP AND DEE RING



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**OFFICIAL BUSINESS**
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
Code 50
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-29145B | Coat, Firemen's, Aluminized, Proximity |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:41Z
Check the source to verify that this is the current version before use.