MIL-G-29114A
13 April 1977
SUPERSEDING
MIL-G-29114
8 June 1972

MILITARY SPECIFICATION

GLOVES, CLOTH, VINYL COATED, MEN'S AND WOMEN'S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for the manufacture of vinyl coated cotton flannel work gloves.

1.2 Classification The gloves shall be of one type, and shall be procured in the following classes and sizes (see 6.2):

Class 1 - Men's
Class 2 - Women's

Sizes

Medium, Large

2. APPLICABLE DOCUMENTS

2.1 Issues of documents The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
DDD-L-20	- Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing & Textile Research Facility, 21 Strathmore Road, Natick, MA 01760) by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-595 - Colors
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Traffic Department, 1616 P Street, NW Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:34Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

3.3 Materials

3.3.1 Basic material The basic material shall consist of a plain weave, unbleached, soft filled double napped cotton flannel sheeting, having a heavily napped surface on one side and a lightly (scratched) napped surface on the other side (commercial designation 2/1 or 3/1). The finished material shall weigh not less than 5.5 ounces nor more than 6.2 ounces per square yard when tested as specified in 4.3.1.

NOTE: To convert ounces per square yard to kilograms/square metre (Kg/m^2), multiply by .034.

* 3.3.2 Thread The thread for seaming and stitching the gloves shall be cotton, conforming to type IA1 or IA3; ticket numbers 36, 40, and 50; 3 ply; of V-T-276. The thread color shall be either natural (unbleached), or dyed tan or gray approximating the shade of the coated side of the material specified in 3.4.

3.3.3 Coating compound The coating compound shall be of a polyvinyl chloride, suitably compounded and pigmented tan or gray in color, to approximate color chip no. 33690 or 36314 respectively of FED-STD-595. The coating compound shall be adequate to provide for a good gripping surface and abrasion resistance on the finished gloves.

3.4 Coated cloth The lightly (scratched) napped surface of the basic material specified in 3.3.1, shall be coated with the compound specified in 3.3.3. The finished coated cloth shall show no evidence of strike through on the heavily napped surface of the basic material, and shall conform to the requirements specified in table I when tested as specified in 4.3.1.

Table I - Physical requirements of coated cloth

Characteristic	Requirement	
	Minimum	Maximum
Weight, ounces per square yard	13.5 1/	15.5 1/
Blocking, scale rating	-	No. 2
Abrasion resistance, 500 cycles	2/	-

1/ To convert ounces per square yard to kilograms/square metre (Kg/m^2), multiply by .034.

2/ There shall be no breakage through the fabric after the coated surface is abraded for the required number of cycles.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.

3.5 Label Each glove shall be marked with a combination identification and size label, conforming to type III or IV, class 4, of DDD-L-20, except that the label shall bear the inscription below. The markings shall show fastness to accelerated laundering.

GLOVES, CLOTH, VINYL COATED
CLASS 1 - MEN'S (MEDIUM) (EXAMPLE)
CONTRACT NO: DSA-00-000-0000 (EXAMPLE)
STOCK NO: 8415-00-000-0000 (EXAMPLE)
NAME OF CONTRACTOR:

* 3.6 Design The design of the gloves shall be of a Clute cut pattern, with the attachment of the fingers on back side of gloves accomplished by outseaming as shown in figure 1.

3.6.1 Figure Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.7 Dies or patterns The dies or patterns for cutting all parts of the gloves shall be furnished by the contractor, and shall be of the proper proportions to provide for good fitting gloves conforming to the finished measurements specified in 3.10.

3.7.1 Pattern parts The component parts of the gloves shall be cut from the coated cloth specified in 3.4., and in accordance with the following pattern parts required for the manufacturing process:

Nomenclature of pattern parts	Cut parts per pair
Palm	2
Thumb	2
No. 2 finger	2
No. 3 finger	2
No. 4 finger	2

3.8 Construction

3.8.1 Stitches, seams, and stitchings Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.

3.8.2 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in table II.

* 3.8.3 Type 301 stitching Ends of 301 stitching shall be backstitched or backtacked not less than 3/8 inch (9.52mm), except where ends are caught in other seams and stitching. Thread tension shall be maintained so there will be no loose stitching resulting in a loose bobbin or top thread or no excessively tight stitching, resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

* 3.8.3.1 Repairs of type 301 stitching Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-offs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 3/8 inch (9.52mm) back of the end of the stitching. 1/

b. Thread breaks, or two or more consecutive skipped stitches or run-offs noted during inspection of the item (in-process or end item) shall be repaired. The stitching shall start a minimum of 3/8 inch (9.52mm) in back of the defective area, continue over the defective area and continue a minimum of 3/8 inch (9.52mm) beyond the defective area onto the existing stitching. Loose or tight stitching shall be repaired by removing the defective stitching without damaging the material, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of stitching are not required to be backstitched.

* 3.8.4 Type 401 stitching Thread tension shall be maintained so that there will be no loose stitching. Where stitch type 401 is used, excluding the outseaming of the fingers on back side of glove, the looper (underthread) shall be on the inside of the gloves. Both ends of all seams and stitching produced with stitch type 401, when not caught in other seams or stitching shall have a 3/4 inch (19.05mm) chain (minimum) extending beyond each end.

* 3.8.4.1 Repair of types 401, 503, 504, or 505 stitching All repairs shall be in accordance with the methods specified in 3.8.3.1(a) and 3.8.3.1(b).

3.9 Manufacturing operations requirements The gloves shall be manufactured in accordance with all operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations, provided the finished gloves are identical to those produced by following the sequence as shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

Table II - Construction of the gloves

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the component parts of the gloves from the coated fabric specified in 3.4, in the length (warp) direction. b. The face side of the fabric to be assembled shall be the coated side.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Section 4, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Marking Mark, ticket, or bundle all component parts to insure proper assembly of the gloves.					
4.	Assemble thumb and fingers a. Stitch the No. 2 finger portion to the No. 3 finger portion back to back from the wrist edge to the finger crotch, 1/8 (± 1/32) inch (3.17 ± 0.79mm) from the raw edge.	301 or 401	SSa-1	8-10	36/3 or 40/3 36/3 or 40/3	36/3 or 40/3 50/3
	b. Stitch the No. 3 finger portion to the No. 4 finger portion back to back from the wrist edge to the finger crotch, 1/8 (± 1/32) inch (3.17 ± 0.79mm) from the raw edge.	301 or 401	SSa-1	8-10	36/3 or 40/3 36/3 or 40/3	36/3 or 40/3 50/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

Table II - Construction of gloves (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Assemble thumb and fingers (cont'd)					
	c. Stitch the No. 2 finger portion to the first (index) finger back to back from the wrist edge to the finger crotch, 1/8 (± 1/32) inch (3.17 ± 0.79mm) from the raw edge.	301 or 401	SSa-1	8-10	36/3 or 40/3 36/3 or 40/3	36/3 or 40/3 50/3
	d. Turn glove inside out.					
	e. Stitch the thumb piece to thumb section of palm face to face from the wrist edge to the thumb crotch, 1/8 (± 1/32) inch (3.17 ± 0.79mm) from the raw edge.	301 or 401	SSa-1	8-10	36/3 or 40/3 36/3 or 40/3	36/3 or 40/3 50/3
	f. Fold the thumb piece to its finished position, and stitch face to face from the top of thumb piece to wrist edge 1/8 (± 1/32) inch (3.17 ± 0.79mm) from the raw edge.	301 or 401	SSa-1	8-10	36/3 or 40/3 36/3 or 40/3	36/3 or 40/3 50/3
5.	Closing					
	a. Close the glove by stitching face to face from the top of the first (index) finger and along the periphery of the fingers and side of glove to the top open edge, 1/8 (± 1/32) inch (3.17 ± 0.79mm) from the raw edge.	301 or 401	SSa-1	8-10	36/3 or 40/3 36/3 or 40/3	36/3 or 40/3 50/3
	b. Overedge stitch the wrist edge of glove at top opening.	503 or 504 or 505	EFd-1	8-10	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

Table II - Construction of the gloves (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Finishing Turn glove to its finished position, coated side of the fabric on the outside with all seams worked out, and form or lay-off gloves on the applicable size heated laying-off boards.					
7.	Labeling Each glove shall have the identification marking (see 3.5) applied on the palm side (outside), centered and positioned so that the distance between the top edge of the first line and top opening is approximately one inch (2.54cm). The legend shall face the opening.					
8.	Pairing The finished gloves shall be paired, and tacked or stapled together in accordance with the best commercial practice which will permit the gloves to be separated without damaging the fabric.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

3.10 Measurements The measurements of the finished gloves shall conform to the dimensions specified in table III. All measurements and tolerances are expressed in inches and the metric equivalents, and shall be made with the glove laid flat under no tension and with the palm side face up.

Table III - Finished measurements

Measurement	Class 1 - Men's		Class 2 - Women's		Tolerance
	Medium	Large	Medium	Large	
Overall length (A)	9 1/4 (23.49cm)	9 5/8 (24.45cm)	8 3/4 (22.23cm)	9 (22.86cm)	± 1/4 (6.35mm)
Width (B)	5 (12.70cm)	5 1/4 (13.34cm)	4 1/4 (10.79cm)	4 1/2 (11.43cm)	± 1/4 (6.35mm)
Thumb length (C)	3 1/4 (8.26cm)	3 3/8 (8.57cm)	2 7/8 (7.31cm)	3 (7.62cm)	± 1/8 (3.17mm)

NOTE: A, B, and C refer to Figure 1.

A. Measurement taken from tip of second finger to cuff edge.
B. Measurement taken across palm at base of thumb, folded edge to folded edge.
C. Measurement taken from thumb crotch to tip of thumb.

3.11 Workmanship The finished gloves shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.3.2.1 and 4.3.2.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.3 Inspection Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

4.3.1 Component and material inspection In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, components and materials listed in table IV shall be tested for the characteristics specified and in accordance with the referenced test methods of FED-STD-191. Testing for all the requirements listed in Table IV is applicable to the sample unit. For the base cloth, the lot size shall be expressed in units of 1 linear yard (0.92m) and the sample unit shall be 1/4 yard (0.23m) full width. For the coated cloth, the lot size shall be expressed in units of 1 linear yard (0.92m) and the sample unit shall be 1 yard (0.92m)full width. The lot shall be unacceptable if one or more units fail to meet any requirement specified. The sample size (number of sample units) shall be as shown below:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:34Z
Check the source to verify that this is the currentversion before use.

Table IV - Component Testing

Component	Characteristic	Requirement paragraph	Test method
Base cloth	Material identification	3.3.1	1/
	Weave	3.3.1	Visual 2/
	Weight	3.3.1	5041
Coating compound	Material identification	3.3.3	1/
Coated cloth	Weight	3.4	5041
	Blocking	3.4	5872
	Abrasion resistance	3.4	5305 3/

1/ A certificate of compliance will be acceptable for this characteristic.
2/ One determination shall be performed per sample unit, and the results reported as "pass" or "fail".
3/ The test shall be performed using H-18 wheels, 100 gr. weights on each wheel. Five specimens from each sample unit shall be tested in any direction.

4.3.2 Examination of the end item The defects found during the examination of the end item shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.2.3. The lot size shall be expressed in units of one glove each. The sample unit shall be one glove and selection shall be by pairs. Defects for pairing shall be classified as a single defect.

4.3.2.1 Visual examination

Defects	Classification Major	Minor
MATERIAL DEFECTS AND DAMAGES		
a. Hole, cut, tear, smash, needle chew, or burn	X	
b. Any visible mend, float, loose yarn, snagged thread, broken yarn, or slubby yarn more than twice the size of the normal diameter of the yarn		X
c. Any evidence of delamination of the coating on the outside of gloves	X	
d. Any uncoated area on the outside of gloves	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
MATERIAL DEFECTS AND DAMAGES (cont'd)		
e. Any evidence of strike through of the coating on the inside of gloves		X
f. Color of the coating not as specified		X
g. Any lump or heavier coated area on the outside of gloves		X
h. Any abraded area of coating on the outside of gloves	X	
CLEANNESS		
a. Any spot or stain (outside)		X
b. Thread ends not trimmed or loose threads not removed (except when chain on stitch type 401 is required)		X
CUTTING		
Any component part not cut in accordance with specification requirements, e.g., any hand component part not cut in the length (warp) direction from the coated fabric	X	
DESIGN		
Not as specified	X	
PAIRING		
a. Mispaired, i.e., two left or two right hand gloves submitted as a pair; wrong sizes	X	
b. Pair not tacked or stapled together		X
c. Tacking or stapling too tight, i.e., not permitting the gloves to be pulled apart without tearing the fabric	X	
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Seam puckered, twisted, or pleated (unless otherwise classified herein)	X	
2. Any part of glove caught in an unrelated operation	X	
3. End of 301 stitching, when not caught in other seams of stitching, not backstitched or backstitched less than 3/8 inch (9.52mm)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
4. End of seam or stitching produced with 401 stitch type, when not caught in other seams or stitching:		
a. Chain does not extend beyond each end	X	
b. Chain extends less than 3/4 inch (19.05mm) beyond each end		X
b. Gauge or margin of stiching irregular or not as specified:		
1. Seriously affecting serviceability	X	
2. Affecting serviceability, but not seriously		X
c. Any open seam	X	
d. Open seam repaired, but not repaired as specified		X
NOTE: The seam shall be classified open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur.		
e. Seam and stitch type:		
1. Not specified seam or stitch type	X	
2. Any line of stitching omitted	X	
3. Any line of stitching misplaced or not beginning or ending where specified		X
4. Looper thread of 401 stitch type on outside of glove excluding the outseaming of the fingers	X	
f. Stitch tension:		
1. Loose tension resulting in a loose seam	X	
2. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
g. Stitches per inch (to be scored only when condition exists on major portion of seam or stitching):		
1. One or two stitches per inch less than the		
2. More than the maximum number of stitches per inch, damaging assembly	X	
3. More than the maximum number of stitches per inch, but not damaging assembly		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
COMPONENTS AND ASSEMBLY		
1. Any component part or operation omitted	X	
2. Any operation not performed as specified	X	
3. Any component part not securely affixed, e.g., thumb loosely attached to thumb section of palm		X
LABEL (MARKING)		
1. Omitted, incorrect, illegible, or incomplete:		
-on one glove		X
-on both gloves	X	
2. Misplaced		X

4.3.2.2 Dimensional examination The gloves shall be examined for dimensional defects. Any dimension that is not within the established tolerance shall be classified as a defect (see 3.10).

4.3.2.3 Inspection levels and acceptable quality levels (AQL's) The inspection levels and the acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	AQL's	Inspection level
For defects applicable to 4.3.2.1		
Major	2.5	II
Total (Major and Minor combined)	6.5	II
For defects applicable to 4.3.2.2		
One class	4.0	S-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of packaging requirements An examination shall be made to determine that packaging, packing, and marking complies with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery, with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size and location.
Materials	Any component omitted, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, etc. Bulging or distortion of containers.
Content	Number of bundles per container is more or less than required. Number of pairs per bundle are more or less than required. 1/

1/ For this defect, one bundle shall be examined from each shipping container in the sample.

5. PACKAGING

5.1 Preservation-packaging Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A Twelve (12) pairs of gloves, of one class and size only, shall be evenly stacked in a bundle with every other pair reversed fingertip to cuff. Each bundle shall be securely tied at each end with cotton tape or twine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

5.1.2 Level C (Commercial packaging) Gloves shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets this requirement. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A One hundred forty four (144) pairs of gloves, of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type SF, class weather-resistant, grade V2s, style RSC-L, of PPP-B-636. The inside of each fiberboard shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c, of PPP-B-636. Inside dimensions of each shipping container for class 1 gloves shall approximate 19 1/2 inches, (49.53cm) in length, 10 1/2 inches (26.67cm) in width, and 10 inches (25.4cm) in depth, and for class 2 gloves shall approximate 17 1/2 inches (44.45cm) in length, 9 inches (22.86cm) in width, and 10 inches (25.4cm) in depth. Approximate dimensions are furnished as a guide only. Level A packages shall be packed flat two in length, two in width and three in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper, and shall be closed, waterproofed, and reinforced in accordance with the appendix of the box specification. Toward the end of the contract or when there are less than the required amount per container of the same class and size, mixed sizes of one class may be packed within the same shipping container.

5.2.2 Level B One hundred forty four (144) pairs of gloves, of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety SW, grade 275, or type SF, class domestic, grade 275, of PPP-B-636. The style of box shall be RSC-L. The inside of each fiberboard shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 200, of PPP-B-636. Inside dimensions of each shipping container for class 1 gloves shall approximate 19 1/2 inches (49.53cm) in length, 10 1/2 inches (26.67cm) in width, and 10 inches (25.40cm) in depth; and for class 2 gloves shall approximate 17 1/2 inches (44.45cm) in length, 9 inches (22.86cm) in width, and 10 inches (25.40cm) in depth. Approximate dimensions are furnished as a guide only. Level A packages shall be packed flat two in length, two in width, and three in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper, and shall be closed in accordance with Method II as specified in the appendix of the box specification. Toward the end of the contract, or when there are less than the required amount per container of the same class and size, mixed sizes of one class may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial packing) Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such deliveries. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes Each shipping container packed with mixed sizes of one class only, shall have securely attached to the end and side directly under the printing or stenciling, a white paper label 5 by 4 inches (12.70 by 10.16cm) with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity of pairs and sizes contained therein.

6. NOTES

6.1 Intended use The gloves covered by this specification are intended for use by personnel of the Military Services engaged in the production of ammunition and pyrotechnics.

6.2 Ordering data Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Class and size required (see 1.2).
c. Whether first article approval is required (see 3.2).
d. Selection of applicable levels of packaging and packing required (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples For access to samples, address the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

6.4 Vinyl impregnated cotton flannel For commercial glove fabrication, the requirements of the coated fabric as specified in 3.4, may also be identified as vinyl impregnated cotton flannel.

6.5 Marginal notations The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - SA
Air Force - 11

Review activity:
Air Force - 99

User activity:
Navy - OS

Preparing activity:
Navy - SA

Project No. 8415-0878

*U.S. GOVERNMENT PRINTING OFFICE: 1977—703-020/5916

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

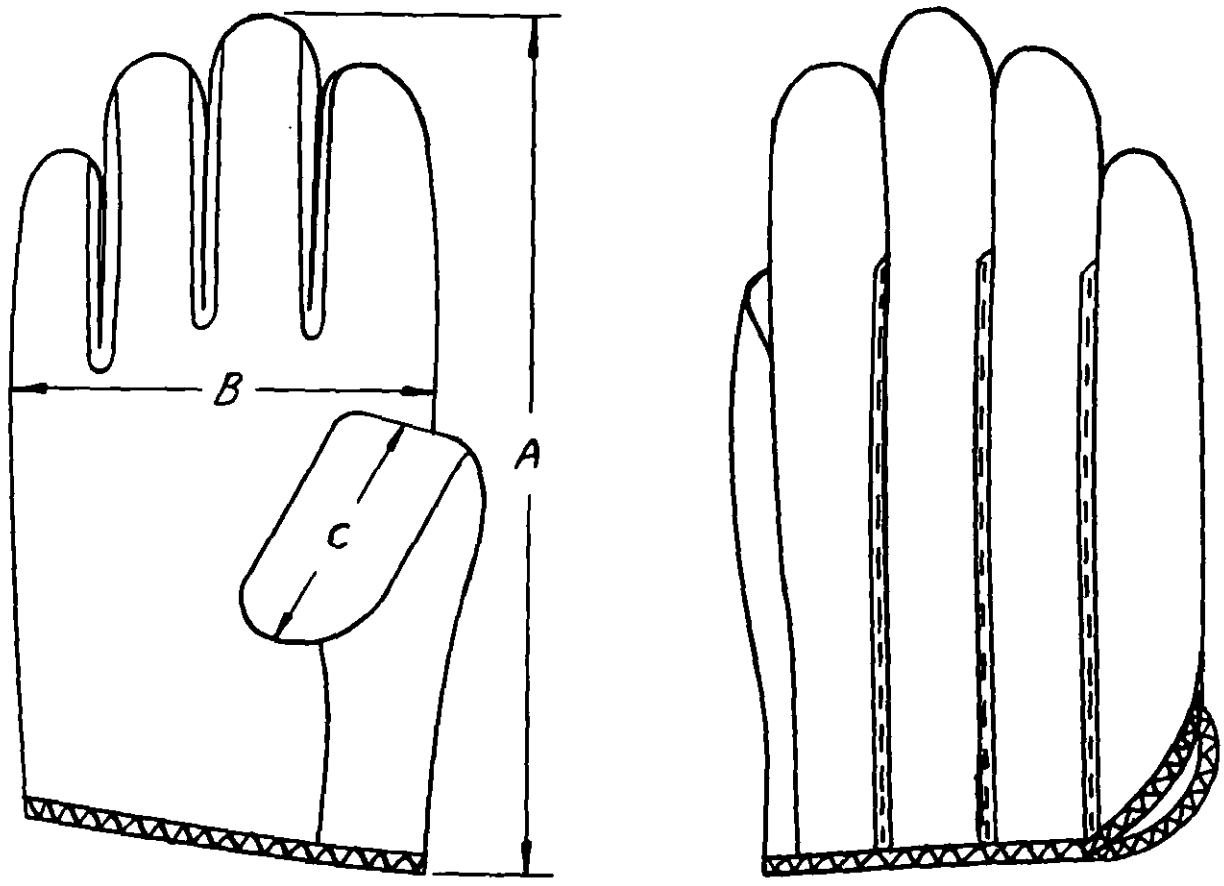


FIG. 1 GLOVES, CLOTH, VINYL COATED, MEN'S AND WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

POSTAGE AND FEES PAID
DoD 316

OFFICIAL BUSINESS

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-G-29114A GLOVES, CLOTH, VINYL COATED, MEN'S AND WOMEN'S

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD, FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.