INCH-POUND

MIL-I-29139C(NU)
30 June 1989
SUPERSEDING
MIL-I-29139B(NU)
1 October 1984

MILITARY SPECIFICATION

INSIGNIA, EMBROIDERED

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for all embroidered, uni-sized, sleeve insignia worn by enlisted male and female personnel of the Navy.

* 1.2 Classification. Embroidered insignia shall be of the following types and classes (see 6.2).

Type I - Badge, Rating

Class 1 - Petty Officer, 1st Class
Class 2 - Petty Officer, 2nd Class
Class 3 - Petty Officer, 3rd Class

Type II - Specialty mark and Striker Mark

Size 1 - 1 5/8 X 1 1/2
Size 2 - 2 1/4 X 1 5/8
Size 3 - 2 3/4 X 1 5/8
Size 4 - 2 3/4 X 2 5/8

Type III - Group Rate Mark

Class 2 - Two Stripes
Class 3 - Three Stripes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Type IV - Stripe, Service (Rayon)

Size 1 - 1 stripe
Size 2 - 2 stripes
Size 3 - 3 stripes
Size 4 - 4 stripes
Size 5 - 5 stripes
Size 6 - 6 stripes
Size 7 - 7 stripes

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
PPP-B-676	- Boxes, Setup

MILITARY

MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-2073-1	- DoD Materials Procedures Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

* 2.1.2 Other Government documents, drawings, and publications. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

STANDARD SHADES FOR HERALDIC YARNS FOR EMBROIDERY AND RIBBONS

(Applications for copies should be addressed to the Color Association of the United States, 343 Lexington Ave., New York, NY 10016-0927.)

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Method No. 8 - Colorfastness to Crocking: AATCC Crockmeter Method

(Application for copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

* 3.2 First article. When specified, (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3 Material.

3.3.1 Base cloth. The base cloth shall be cotton or a polyester/cotton blend, twill weave, single or plied yarns, 6.0 to 8.0 ounces per square yard, with a minimum breaking strength of 150 pounds in the warp and 70 pounds in the filling. The cloth shall be dyed black and the use of sulphur dyes is prohibited. The dyed cloth shall have not less than fair colorfastness to laundering. Shrinkage in laundering shall be not more than 2.0 percent in the warp or filling direction. Testing shall be as specified in Table II.

3.3.2 Embroidery yarn and thread.

* 3.3.2.1 Background (schiffli) and cover stitching. The yarn used for the backround and overedge cover stitching for all types and classes of insignia shall be a texturized, polyester continuous filament yarn. The yarn size before texturizing shall be 150 (± 5) denier, 2 ply, 34 filaments per ply, and shall have 1 1/2 turns per inch of "S" twist. After texturizing, the yarn size shall be approximately 170 (± 5) denier. The color shall be Black, Cable No. 67138, in accordance with the Standard Shades for Threads. Sulphur dyes are not permitted. Colorfastness requirements shall be as specified in 3.3.2.5. Testing shall be as specified in Table II.

3.3.2.2 Thread (bobbin). The bobbin thread shall either be a good commercial grade of two ply (minimum) undyed cotton thread or a continuous filament undyed (white) nylon thread equal to or better than the quality of the specified cotton thread.

3.3.2.3 Thread (needle and looper). The needle and looper thread used in the overedge cover stitching shall be cotton conforming to type IC2, ticket No. 00, 3 ply of V-T-276. The color shall be black and approximately match the color of the polyester overedge cover thread in 3.3.2.1.

* 3.3.2.4 Rayon yarn (overlay). The yarn used for the eagle, chevrons, striker mark, specialty mark, type IV service stripes and group rate mark shall be a bright, continuous filament, regenerated cellulose type rayon. Sulphur dyes are not permitted. Application, yarn sizes and color numbers shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Application	Yarn Size	Color Numbers
Eagle	75 denier, 3 ply	White - 67101
Chevrons	150 denier, 2 ply	Scarlet - 67111
Stripe, Sevice (Type IV)	150 denier, 2 ply	Scarlet - 67111 Goldenlight - 67107
Group Rate mark	150 denier, 2 ply	White - 67101 (Hospitalman, Dentalman, Seaman) Emerald - 67128 (Airman) Scarlet - 67111 (Fireman) Bluebird - 67117 (Construction man)
Specialty Mark and Striker Mark	75 denier, 3 ply	White - 67101

Color numbers are in accordance with the Department of Defense Standard Shades For Heraldic Yarns.

* 3.3.2.5 Colorfastness. The dyed polyester and rayon yarns shall show fastness to light, wet-dry cleaning, dry and wet heat (hot pressing), laundering and crocking equal to or better than the standard sample when tested as specified in 4.4.5. As a limit of acceptability or when no standard sample is available, the dyed polyester and rayon yarns shall show a minimum of "good" fastness to light, wet-dry cleaning, dry and wet heat (hot pressing), laundering and an AATCC wet and dry crocking rating not lower than 5.0, when tested as specified in 4.4.5.

* 3.3.2.6 Matching. The dyed polyester and rayon yarns shall match the available standard shade sample when viewed under filtered tungsten lamps that approximate artificial daylight, having a correlated color temperature of 7500° (± 200°) K, with illumination of 100 (± 20) foot candles and shall be a good match to the standard shade sample under incandescent lamplight at 2300° (± 200°) K.

* 3.4 Construction. The insignia shall be schiffli embroidered on an automatic type embroidery machine in accordance with this specification, guide sample and the applicable stitch enlargement listed in Table I. Finished measurements for the insignia shall be as shown in Figures 1 through 11.

3.4.1 Ground/overlay stitches. The ground and overlay stitches shall be in accordance with the applicable stitch enlargement and shall completely cover the applicable background design area in a close, dense and tightly drawn manner to produce a clear, sharp execution of the design. The base reinforcement cloth shall not be visible.

3.4.2 Stiele stitches. Stiele stitches used as a border for the chevrons, group rate marks, and service stripes shall be in accordance with the applicable stitch enlargement or guide sample and shall be tightly drawn and well executed to produce a clear, sharp border and shall completely cover the background embroidery. The width of the Stiele border stitch shall be 1/16 inch.

3.4.3 Edge stitching. Unless otherwise specified, the edges of the embroidered insignia shall be overedged with a Schrage stitch or a combination of Blatt and Schrage or Stiele stitches provided they are equal in density to

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

the specified Schrage stitch. The edge stitching shall be as indicated on the applicable stitch enlargement or guide sample.

3.4.4 Overedge cover stitching. Unless otherwise specified, the insignia shall have a second row of overedging covering the first row of edge stitching specified in 3.4.3. The overedge cover stitching shall conform to stitch types 504 or 505 of FED-STD-751, using 26 (± 4) stitches per inch with a stitch bight of 1/8 (- 1/32, +0) inch. The needle and looper threads shall be cotton as specified in 3.3.2.3 and the cover thread shall be two ends (stitching as one) of polyester as specified in 3.3.2.1. The stitching shall start and finish at either top corner of the insignia and there shall be approximately a half inch overlap of the stitching. Stitching shall completely cover the edge of the embroidered cloth. The free end of the overedge stitching chain shall extend a minimum of 1/2 inch, turned and secured to the backside of the insignia with a pressure sensitive tape or masking tape and shall not be visible on the face of the insignia. The masking tape shall be no closer than 1/8 inch from the overedging.

3.4.5 Cutting. The completely embroidered insignia shall be cut from the base cloth and properly trimmed before the cover overedging operation in 3.4.4. The Schrage edgestitching shall not be cut

3.4.6 Resin stiffener The embroidered base cloth may be treated on the reverse side with a resin fabric finish to facilitate subsequent processing of the insignia. The resin finish shall have no adverse visual or physical effect on the finished insignia.

3.5 Tolerances. Unless otherwise specified, the overall measurement of the finished insignia shall have a plus or minus tolerance of 1/8 inch. Other measurements 1/2 inch or less shall be ± 1/32 inch and more than 1/2 inch, ± 1/16 inch.

3 6 Design. Stitch enlargements shall be furnished by the Government to the contractor for use in preparing the necessary punchings. The stitch enlargements shall not be altered in any way. Before production is commenced punchings shall be approved by the Government for conformity to requirements for minimum number of stitches as specified for the applicable insignia in Table I.

* 3.6.1 Stitch requirements (schiffli embroidered). The stitch requirements and dimensions used for the various types of embroidered insignia shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Table I - Stitch Requirements

Type and class	Minimum No. of stitches	Design and dimensions	Background Size Number for striker mark 1/	Stitch enlargement drawing No.
Type I, Badge, Rating (Background)				
Class 1-1st Class P.O.	13238	See Figure 1	-	16-1-501
Class 2-2nd Class P.O.	10761	See Figure 1	-	16-1-501
Class 3-3rd Class P.O.	8432	See Figure 1	-	16-1-501
Type II, Specialty Mark and Striker Mark				
Aerographer's Mate	995	See Figure 2	3	16-1-283
Air Controlman	1050	See Figure 2	2	16-1-207
Aircrew Survival Equipmentman	1075	See Figure 2	2	16-1-23
Airman 2/	1305	See Figure 2	4	16-1-579
Aviation Antisubmarine Warfare Operator	1346	See Figure 2	3	16-1-531
Aviation Antisubmarine Warfare Technician	965	See Figure 2	2	16-1-529
Aviation Boatswain's Mate	935	See Figure 3	3	16-1-285
Aviation Electrician's Mate	895	See Figure 3	3	16-1-286
Aviation Electronic's Technician	825	See Figure 3	3	16-1-208
Aviation Fire Control Technician	1250	See Figure 3	3	16-1-287
Aviation Machinist's Mate	960	See Figure 3	2	16-1-288
Aviation Maintenance Administrationman	1083	See Figure 3	3	16-1-289
Aviation Ordnanceman	1095	See Figure 3	3	16-1-206
Aviation Storekeeper	970	See Figure 3	3	16-1-290
Aviation Structural Mechanic	910	See Figure 3	3	16-1-291
Aviation Support Equipment Technician	867	See Figure 3	2	16-1-292
Boatswain's Mate	580	See Figure 4	1	16-1-293
Boiler Technician	745	See Figure 4	2	16-1-295
Builder	675	See Figure 4	1	16-1-296
Cryptologic Technician	405	See Figure 4	1	16-1-209
Construction Electrician	465	See Figure 4	1	16-1-298
Construction Mechanic	610	See Figure 4	3	16-1-299
Data Processing Technician	550	See Figure 4	1	16-1-24
Data Systems Technician	597	See Figure 4	2	16-1-300
Dental Technician	755	See Figure 4	2	16-1-301
Disbursing Clerk	574	See Figure 5	1	16-1-532

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Table I - Stitch Requirements (Cont'd)

Type and Class	Minimum No. of stitches	Design and dimensions	Background Size Number for Striker Mark 1/	Stitch enlargement drawing No.
Type II, Speciaty Mark and Striker mark (cont'd)				
Electrician's Mate	1280	See Figure 5	1	16-1-204
Electronic's Technician	450	See Figure 5	1	16-1-221
Electronic Warfare Technician	489	See Figure 5	1	16-1-254
Engineman	690	See Figure 5	1	16-1-303
Engineering Aid	447	See Figure 5	1	16-1-530
Equipment Operator	790	See Figure 5	2	16-1-305
Fire Controlman	740	See Figure 5	2	16-1-625
Fire Control Technician	540	See Figure 5	2	16-1-306
Fireman 2/	1354	See Figure 5	4	16-1-584
Gas Turbine Systems Technician	543	See Figure 6	1	16-1-466
Gunner's Mate	515	See Figure 6	1	16-1-307
Hospital Corpsman	685	See Figure 6	2	16-1-203
Hull Maintenance Technician	463	See Figure 6	1	16-1-252
Information Security Specialist	379	See Figure 6	1	16-1-326
I.C. Electrician	1160	See Figure 6	2	16-1-308
Illustrator Draftsman	590	See Figure 6	1	16-1-309
Instrumentman	305	See Figure 6	1	16-1-310
Intelligence Specialist	385	See Figure 6	1	16-1-498
Journalist	460	See Figure 6	1	16-1-311
Legalman	485	See Figure 6	2	16-1-389
Lithographer	450	See Figure 7	1	16-1-312
Machinery Repairman	490	See Figure 7	2	16-1-313
Machinist's Mate	740	See Figure 7	1	16-1-205
Master-at-Arms	703	See Figure 7	2	16-1-460
Mess Management Specialist	705	See Figure 7	2	16-1-527
Mineman	680	See Figure 7	1	16-1-314
Missile Technician	425	See Figure 7	1	16-1-315
Molder	645	See Figure 7	2	16-1-316
Musician	510	See Figure 7	1	16-1-317
Navy Counselor	548	See Figure 7	1	16-1-461
Ocean Systems Technician	643	See Figure 8	2	16-1-202
Opticalman	900	See Figure 8	2	16-1-318
Patternmaker	605	See Figure 8	3	16-1-319
Personnelman	745	See Figure 8	1	16-1-320
Photographer's Mate	405	See Figure 8	1	16-1-321
Postal Clerk	751	See Figure 8	2	16-1-322
Quartermaster	590	See Figure 8	1	16-1-323
Operations Specialist	410	See Figure 8	2	16-1-324
Radioman	625	See Figure 8	2	16-1-325

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Table I - Stitch Requirements (Cont'd)

Type and Class	Minimum No. of stitches	Design and dimensions	Background Size Number for Striker Mark 1/	Stitch enlargement drawing No.
Type II, Specialty mark and Striker mark (cont'd)				
Religious Program Specialist	1029	See Figure 8	2	16-1-578
Seaman 2/	936	See Figure 8	4	16-1-581
Ship's Serviceman	355	See Figure 8	1	16-1-327
Signalman	575	See Figure 9	2	16-1-328
Sonar Technician	525	See Figure 9	3	16-1-528
Steelworker	605	See Figure 9	1	16-1-330
Storekeeper	550	See Figure 9	1	16-1-332
Torpedoman's Mate	825	See Figure 9	3	16-1-333
Tradevman	812	See Figure 9	1	16-1-526
Utilities Man	565	See Figure 9	1	16-1-335
Weapons Technician	606	See Figure 9	1	16-1-852
Yeoman	300	See Figure 9	1	16-1-210
Type III, Group Rate Mark				
Class 2 - Two Stripes	4430	See Figure 10	-	16-1-429
Class 3 - Three Stripes	5890	See Figure 10	-	16-1-430
Type IV, Stripe, Service (Rayon)				
One Stripe	4265	See Figure 11	-	16-1-433
Two Stripes	7600	See Figure 11	-	16-1-434
Three Stripes	10887	See Figure 11	-	16-1-435
Four Stripes	14201	See Figure 11	-	16-1-436
Five Stripes	17552	See Figure 11	-	16-1-437
Six Stripes	20908	See Figure 11	-	16-1-438
Seven Stripes	24368	See Figure 11	-	16-1-439
Standard ground effect				
One stripe	4596	See Figure 11	-	16-1-447
Two stripes	9192	See Figure 11	-	16-1-447

1/ Background sizes for striker mark

No. 1	961	1-5/8x1-1/2	16-1-422A
No. 2	1307	2-1/4x1-5/8	16-1-424A
No. 3	1533	2-3/4x1-5/8	16-1-423A
No. 4	2111	2-3/4x2-5/8	16-1-582

2/ Apprentice training mark. Not to be used on Petty Officer Rating Badges or as Striker Mark.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

3.6.1.1 Type I, Classes 1, 2 and 3, Badge, Rating, Petty Officers. The insignia shall be embroidered in accordance with the applicable stitch enlargement (see Table I) and for dimensions specified in Figure 1.

3.6.1.2 Type II, Specialty mark and Striker Mark. The specialty mark shall be positioned to give an equalized and centered appearance when embroidered on the rating badge between the upper chevron and eagles talons. The striker mark shall be centrally positioned and embroidered on the specified size background (see Table I). The striker mark and specialty mark shall be embroidered in accordance with the stitch enlargement specified in Table I and dimensions specified in Figures 2, 3, 4, 5, 6, 7, 8 and 9.

3.6.1.3 Group Rate Mark. The group rate mark shall be embroidered in accordance with the applicable stitch enlargement specified in Table I and dimensions specified in Figure 10.

3.6.1.4 Stripe, Service. The service stripe shall be embroidered in accordance with the applicable stitch enlargement specified in Table I and dimensions specified in Figure 11.

3.7 Workmanship. The finished insignia shall conform to the quality of product established by this specification. The occurence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to acertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1 2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, (see 6.2), the first article, submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. Components listed in Table II shall be tested using methods specified in FED-STD-191, wherever applicable. The lot shall be unacceptable if the average of one or more sample units fail to meet the requirements specified. The sample size for each component shall be as follows:

Lot Size	Sample Size (Units)
800 or less	2
801 thru 22,000	3
22,001 and over	5

The lot size and sample unit shall be expressed as follows:

Component	Lot Size Expressed as	Sample Unit for Component Testing
Base cloth	Yards	1 linear yard
Embroidery yarn (each type)	Holders	1 cone spool or sufficient number of bobbins to total 360 yards

Table II - Component Testing

Component	Characteristic	Requirements Paragraph	Test Method	Determinations Per Sample Unit	Results Reported as
Base cloth (cotton or polyester/ cotton)	Material Ident.	3.3.1	1/	-	-
	Weave	3.3.1	Visual	1	Pass/Fail
	Yarn ply	3.3.1	Visual	1	Pass/Fail
	Weight, oz/yd^2	3.3.1	5041	5	-
	Breaking strength	3.3.1	5100	5	-
	Shrinkage	3.3.1	5550	3	-
	Colorfastness to laundering	3.3.1	5610	1	-
	Presence of sulphur	3.3.1	2020 1/	1	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Table II - Component Testing (cont'd)

Component	Characteristic	Requirements Paragraph	Test Method	Determinations Per Sample Unit	Results Reported as
	Color	3.3.1	Visual	1	Pass/Fail
Embroidery and Overedge Yarn (Texturized Polyester)	Material ident.	3.3.2.1	1/	-	-
	Denier (Texturized)	3.3.2.1	4021	1	-
	Ply	3.3.2.1	Visual	1	Pass/Fail
	Filament count	3.3.2.1	1/	-	-
	Turns/inch	3.3.2.1	1/	-	-
	Twist direction	3.3.2.1	1/	-	-
	Presence of sulphur	3.3.2.1	2020 1/	1	-
	Color	3.3.2.1	Visual	1	Pass/Fail
Bobbin Yarn (cotton or nylon)	Material Ident.	3.3.2.2	1/	-	-
	Ply (Cotton only)	3.3.2.2	Visual	1	Pass/Fail
Embroidery Yarn (Rayon)	Material Ident.	3.3.2.4	1/	-	-
	Denier	3.3.2.4	4021	1	-
	Ply	3.3.2.4	Visual	1	Pass/Fail
	Presence of sulphur	3.3.2.4	2020 1/	1	-
	Color	3.3.2.4	Visual	1	Pass/Fail
Resin Stiffener	Visual or physical effect	3.4.6 1/	-	-	

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for this requirement.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.2. The sample unit shall be one finished insignia. The lot size shall be expressed in units of one insignia. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.4.3.

4.4.2.1 Visual examination. The finished insignia shall be examined for defects in design, material, construction, and workmanship and classified in accordance with the defects listed in Table IV.

* 4.4.2.2 Dimensional examination. The finished insignia shall be examined for defects in dimensions. Any measurement deviating from specified dimensions or tolerances on applicable figure and in Table III shall be scored as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Table III - Tolerances

	Tolerances
Dimensions in inches - up to 15/16 inclusive	± 1/32
1 through 1 15/16	± 1/16
2 through 2 15/16	± 3/32
3 through 3 15/16	± 1/8
4 through 4 15/16	± 5/32
5 through 5 15/16	± 3/16
6 through 6 15/16	± 7/32
7 through 7 15/16	± 1/4
Angles in degrees -	± 3

Table IV - Classification of defects

Examine	Defects
I. Design	a. Any deviation from applicable stitch enlargement, drawing, illustration or guide sample.
	b. Wrong color or color arrangement.
	c. Design poorly defined, distorted or misshapen.
	d. Design not properly positioned and/or centered.
II. Construction	a. Any operation omitted or not performed as specified.
	b. Distortion of surface yarns (face), loose or tight tension.
	c. Traveling stitches on face side (walking or jumping)
	d. Broken, missing or skipped stitches, any
	e. Bobbin thread visible on face
	f. Schrage or Stiele stitching omitted
	g. Unrelated colors or yarn visible on face
	h. Uneven spacing between service stripes or chevrons
	i. Stitching incomplete
	j. Edges of design or patch not finished as specified
	k. Wrong stitch type
	l. Width of Stiele border stitch not 1/16 inch
	m. Stitches not of sufficient closeness or density
	n. Stitches not drawn tight enough
III. Overedging	a. Free end of overedge stitching chain extends less than 1/2 inch or is not taped to backside
	b. Tape less than 1/8 inch from overedging
	c. Stitch bight less than 1/8 inch
	d. Partially obscuring design
	e. Run off, any
	f. Broken or skipped stitches more than 1/4 inch in length
	g. Edges of base cloth or Schrage stitches showing through
	h. Stitch tension not uniform
	i. Stitch density not uniform
	j. Stitch bight not uniform
	k. Finished edges irregular or wavy

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Table IV - Classification of defects (cont'd)

Examine	Defects
IV. Workmanship	a. Spot, stain or foreign matter on face b. Two or more thread ends or stumps longer than 1/16 inch c. Creased or folded, will not flatten with manual pressure d. Bunched, kinked or tangled yarns on face e. Shifted or scuffed surface yarns

4.4.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units for the visual and dimensional examinations shall be as follows:

	Inspection level	AQL
For visual examination in 4.4.2.1	II	4.0
For dimensional examination in 4.4.2.2	S-3	6.5

* 4.4.4 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container or bundle is more or less than required. Number of set-up boxes per shipping container more or less than specified. 1/.

1/ For this defect, one item from each shipping container in sample shall be examined.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

4.4.5 Testing of the end item. The end item shall be tested as specified in Table V. The lot size shall be expressed in units of one insignia of each type or class. The unit of product for tests shall be six insignia. The lot shall be unacceptable if one or more sample units fail to meet requirements referenced in Table V. The sample size shall be as follows:

Lot Size (each)	Sample Size
800 or less	2
801 thru 22,000	3
22,001 and over	5

Table V - End Item Tests

Characteristics	Requirement Paragraph	Test Method	No. Determinations Per Unit of Product	Results Reported as
Polyester and Rayon Yarns				
Shade match	3.3.2.1 and 3.3.2.4	2/ Visual	1	Pass or Fail
1/ Colorfastness to:				
Light	3.3.2.5	5660	1	Pass or Fail
Wet-dry cleaning	3.3.2.5	5622	1	Pass or Fail
Laundering	3.3.2.5	5614	1	Pass or Fail
Crocking	3.3.2.5	5651	1	Pass or Fail
Wet and Dry Heat (hot pressing)	3.3.2.5	5640	1	Pass or Fail

1/ Test reports shall be furnished for each color of yarn used in the initial shipping lot of finished insignia. A contractor's certificate of compliance will be accepted for each color for each subsequent lot of insignia on the same contract provided the contractor certifies that the dyer or dye formulation has not been changed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

2/ Except that the test specimens shall be the finished embroidered insignia.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Quantity per set-up box.

5.1.1.1.1 Type I, Badge, Rating, Classes 1, 2 and 3. Insignia of one type and class only shall be put up in bundles of 10 each and securely held together with string(s) or elastic band(s). Insignia put up as shown below shall be preserved in a set-up box that conforms to the requirements of 5.1.1.2.1.

Class 1 - 4 bundles of 10 each (40)
Class 2 - 4 bundles of 10 each (40)
Class 3 - 6 bundles of 10 each (60)

* 5.1.1.1.2 Type II, Striker mark. Striker marks of one size only shall be put up in bundles of 10 each and securely held together with string(s) or elastic band(s). Insignia put up as shown below shall be preserved in a set-up box that conforms to the requirements of 5.1.1.2.1 (size No. 1, 2 or 3 only) or 5.1.1.2.2 (size No. 4 only).

Size No. 3 - 24 bundles of 10 each (240)
Size No. 2 - 30 bundles of 10 each (300)
Size No. 1 - 36 bundles of 10 each (360)
Size No. 4 - 40 bundles of 10 each (400)

5.1.1.1.3 Type III, Group Rate Mark, Classes 2 and 3. Group rate marks of one type and class only shall be put up in bundles of 10 each and securely held together with string(s) or elastic band(s). Insignia put up as shown below shall be preserved in a set-up box that conforms to the requirements of 5.1.1.2.2.

Class 2 (two stripes) - 40 bundles of 10 each (400)
Class 3 (three stripes) - 30 bundles of 10 each (300)

* 5.1.1.1.4 Type IV Stripe, Service. Service stripes of one size only shall be put up in bundles of 10 each and securely held together with string(s) or elastic band(s). Insignia put up as shown below shall be preserved in a set-up box that conforms to the requirements of 5.1.1.2.2.

7 stripes - 6 bundles of 10 each (60)
6 stripes - 6 bundles of 10 each (60)
5 stripes - 12 bundles of 10 each (120)
4 stripes - 12 bundles of 10 each (120)
3 stripes - 16 bundles of 10 each (160)
2 stripes - 26 bundles of 10 each (260)
1 stripe - 52 bundles of 10 each (520)

5.1.1.2 Boxes, set-up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

* 5.1.1.2.1 Type I and Type II (sizes 1, 2 and 3) Insignia. Insignia of one type, class or size only, packaged as specified in 5.1.1.1.1 and 5.1.1.1.2, shall be placed in a two piece telescope style, set-up paperboard box conforming to type I or II, variety 1, class A, style 3 or 4 of PPP-B-676. The outside dimensions of the set-up box shall be 11 1/2 inches in length, 5 inches in width and 2 1/4 inches in depth.

* 5.1.1.2.2 Type II, size 4, Type III and Type IV Insignia. Insignia of one type, class or size only, packaged as specified in 5.1.1.1.2, 5.1.1.1.3 and 5.1.1.1.4, shall be placed in a two piece telescope style, set-up paperboard box conforming to type I or II, variety 1, class A, style 3 or 4 of PPP-B-676. The outside dimensions of the set-up box shall be 15 inches in length, 11 1/2 inches in width and 2 3/16 inches in depth.

5.1.2 Commercial. The insignia shall be packed to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C (see 6.2).

5.2.1 Level A.

* 5.2.1.1 Type I and Type II (Sizes 1,2 and 3) Insignia. Nine (9) set-up boxes packaged as specified in 5.1.1.1.1 and 5.1.1.1.2 shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c size 1 of MIL-B-17757. Each shipping container shall be waterproofed, in accordance with the appendix of the box specification.

* 5.2.1.2 Type II, size 4, Type III and IV Insignia. Three (3) set-up boxes packaged as specified in 5.1.1.1.2, 5.1.1.1.3 and 5.1.1.1.4 shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather resistant, variety DW, grade V15c size 1 of MIL-B-17757. Each shipping container shall be waterproofed in accordance with the appendix of the box specification.

5.2.2 Level B.

* 5.2.2.1 Type I and II (sizes 1,2 and 3) Insignia. Nine (9) set-up boxes packaged as specified in 5.1.1.1.1 and 5.1.1.1.2 shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 200 size 1 of MIL-B-17757.

* 5.2.2.2 Type II, size 4, Type III and IV Insignia. Three (3) set-up boxes packaged as specified in 5.1.1.1.2, 5.1.1.1.3 and 5.1.1.1.4 shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 200 size 1 of MIL-B-17757.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual,

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.2.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type IA of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K, and L or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood groups I, II, III, or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

* 6.1 Intended use. The items are intended for wear by Navy enlisted personnel.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type, class and size required (see 1.2).
c Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d When first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity and testing and approval.
e. Levels of packaging and packing required (see 5.1 and 5.2).
f. When palletization is required (see 5.2.4).
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Recycled materials. It is encouraged that recycled materials be used

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

when practical as long as it meets the requirements of this specification.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.
Badge, rating
Insignia, embroidered
Mark, rate, group
Mark, specialty and striker
Schiffli
Stripe, service


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8455-N363

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

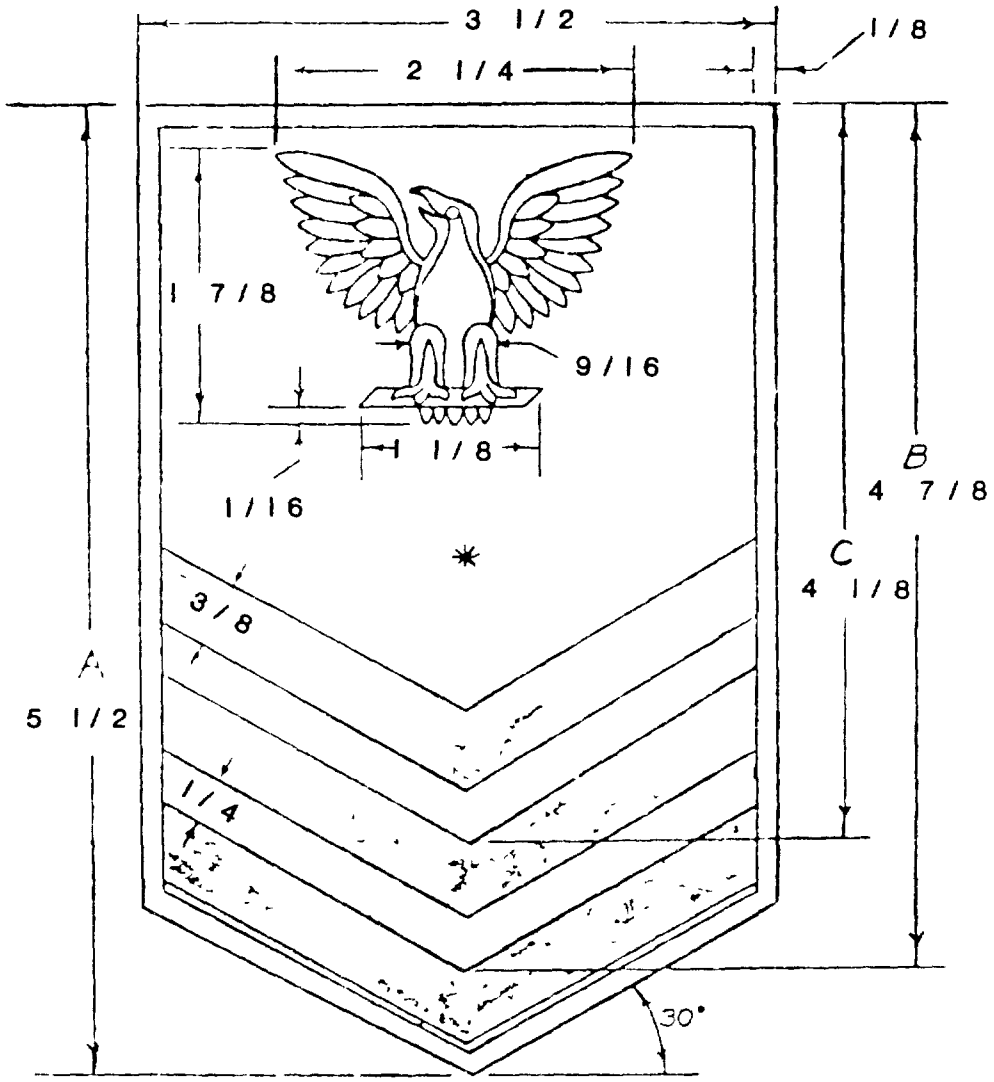


A = Class 1 - P.O. 1st Class
B = Class 2 - P.O. 2nd Class
C = Class 3 - P O 3rd Class

* Applicable Specialty Mark


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 1 - Badge, Rating (Petty Officer)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

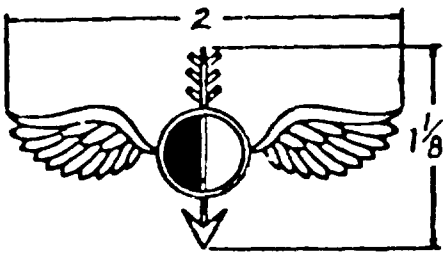


AEROGRAPHER'S MATE (AG)

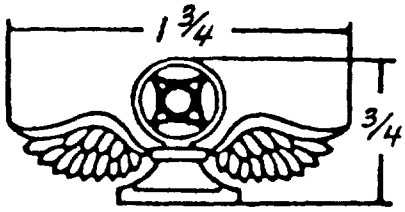


AIR CONTROLMAN (AC)

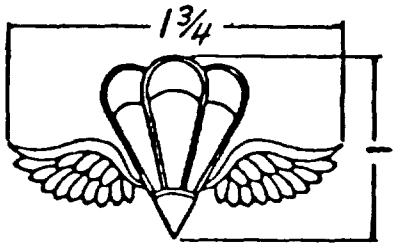


AIRCREW SURVIVAL EQUIPMENTMAN (PR)

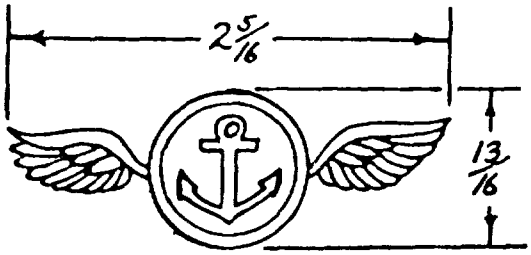

AIRMAN *

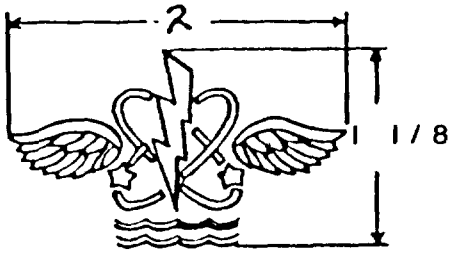

AVIATION ANTISUBMARINE WARFARE OPERATOR (AW)

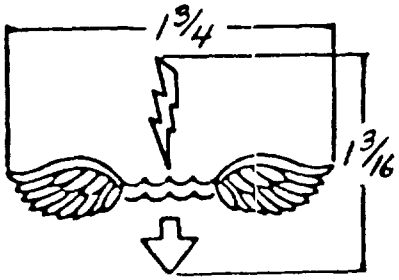


AVIATION ANTISUBMARINE WARFARE TECHNICIAN (AX)

* NOT APPLICABLE TO RATING BADGES

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 2 - Type II Specialty Mark And Striker Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

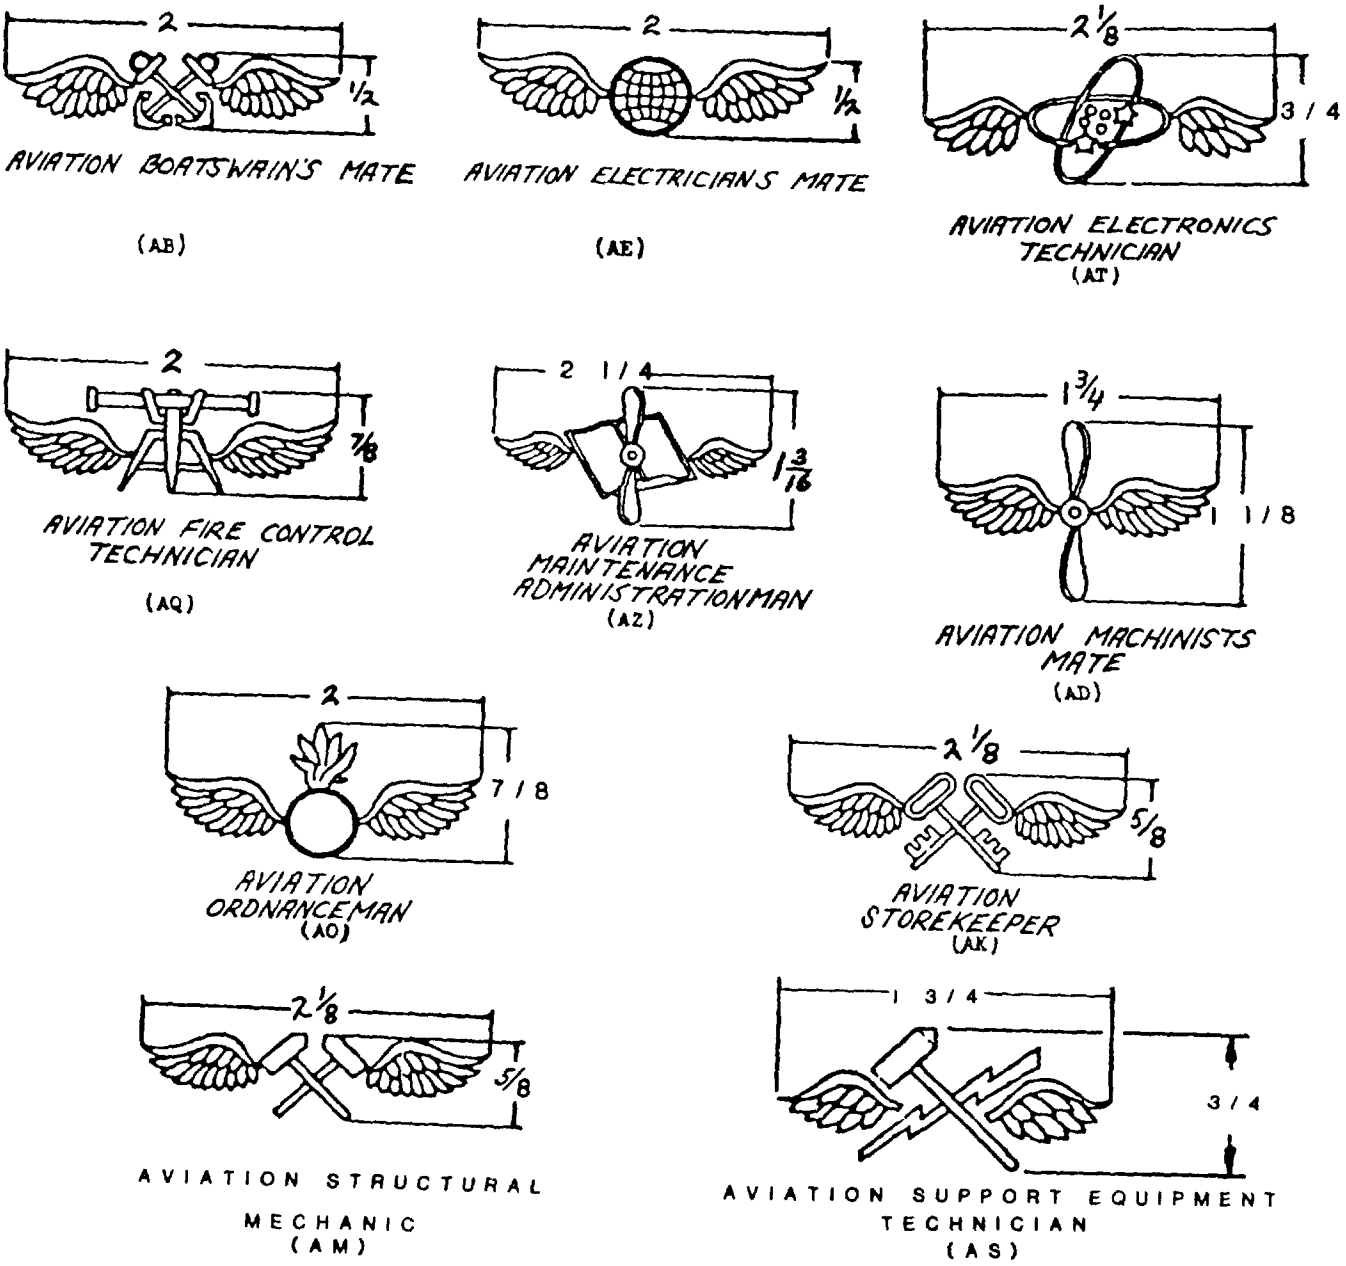

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES

Figure 3 - Type II Specialty Mark And Striker Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

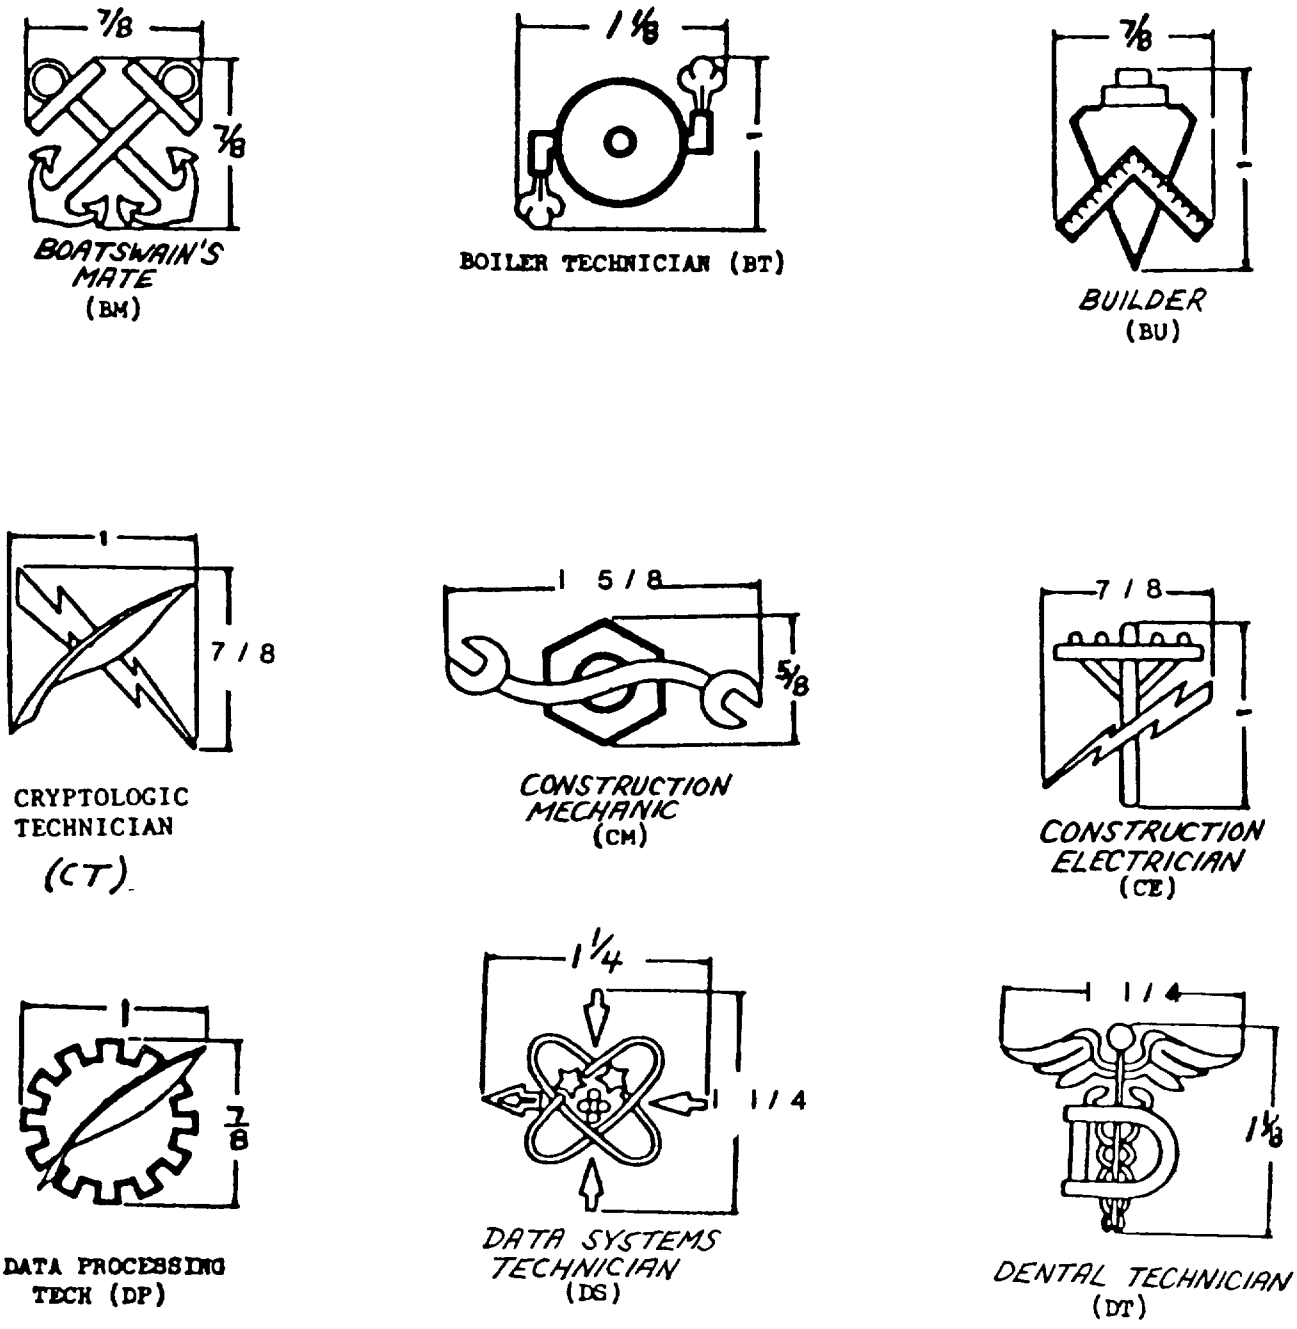


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 4 - Type II Specialty Mark And Striker Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.




DISBURSING CLERK
(DK)




ELECTRONIC'S TECHNICIAN
(ET)




ELECTRONIC WARFARE TECH
(EW)




ELECTRICIAN'S MATE
(EM)




ENGINEMAN (EN)




ENGINEERING AID
(EA)




EQUIPMENT OPERATOR
(EO)

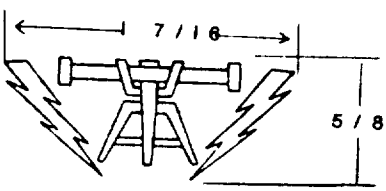

FIRE CONTROLMAN
(FC)



FIRE CONTROL TECHNICIAN
(FT)




FIREMAN *

* NOT APPLICABLE TO RATING BADGES

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 5 - Type II Specialty Mark And Striker Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

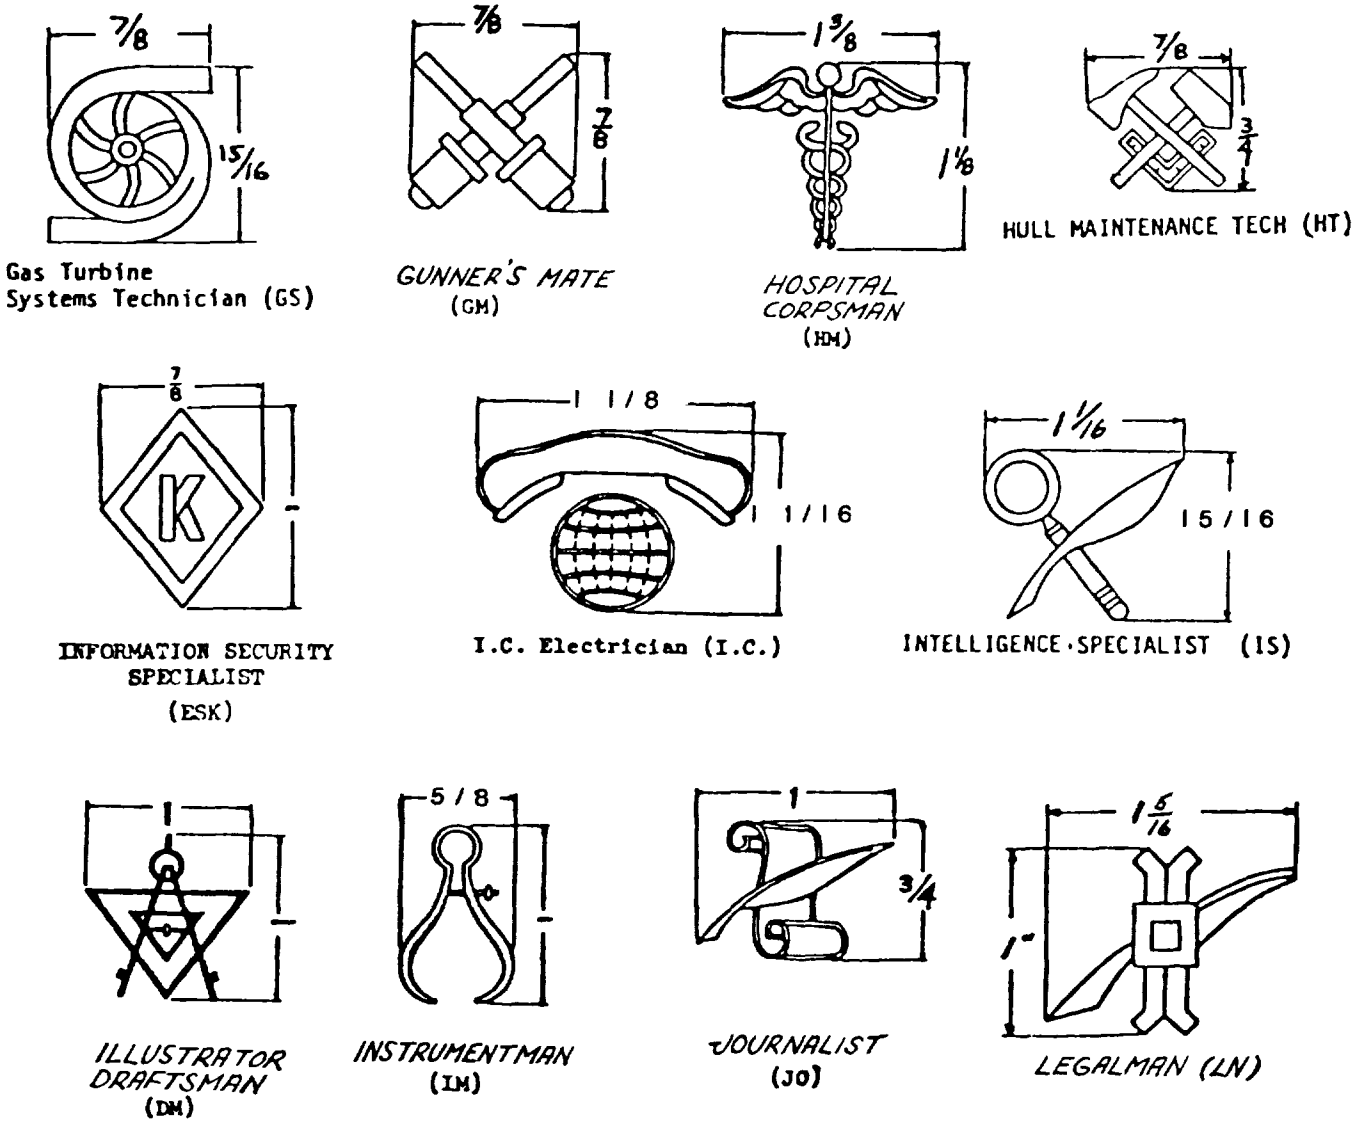


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 6 - Type II Specialty Mark And Striker Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.




LITHOGRAPHER
(LI)




MACHINERY
REPAIRMAN
(MR)




MACHINIST'S
MATE
(MM)




MASTER-AT-ARMS (MA)

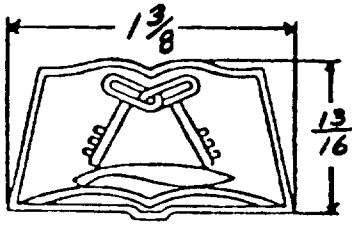


MESS MANAGEMENT
SPECIALIST (MS)




MINEMAN
(MN)




MISSLE
TECHNICIAN
(MT)



MOLDER
(ML)



MUSICIAN
(MU)




Navy Counselor (NC)

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 7 - Type II Specialty Mark And Striker Mark

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

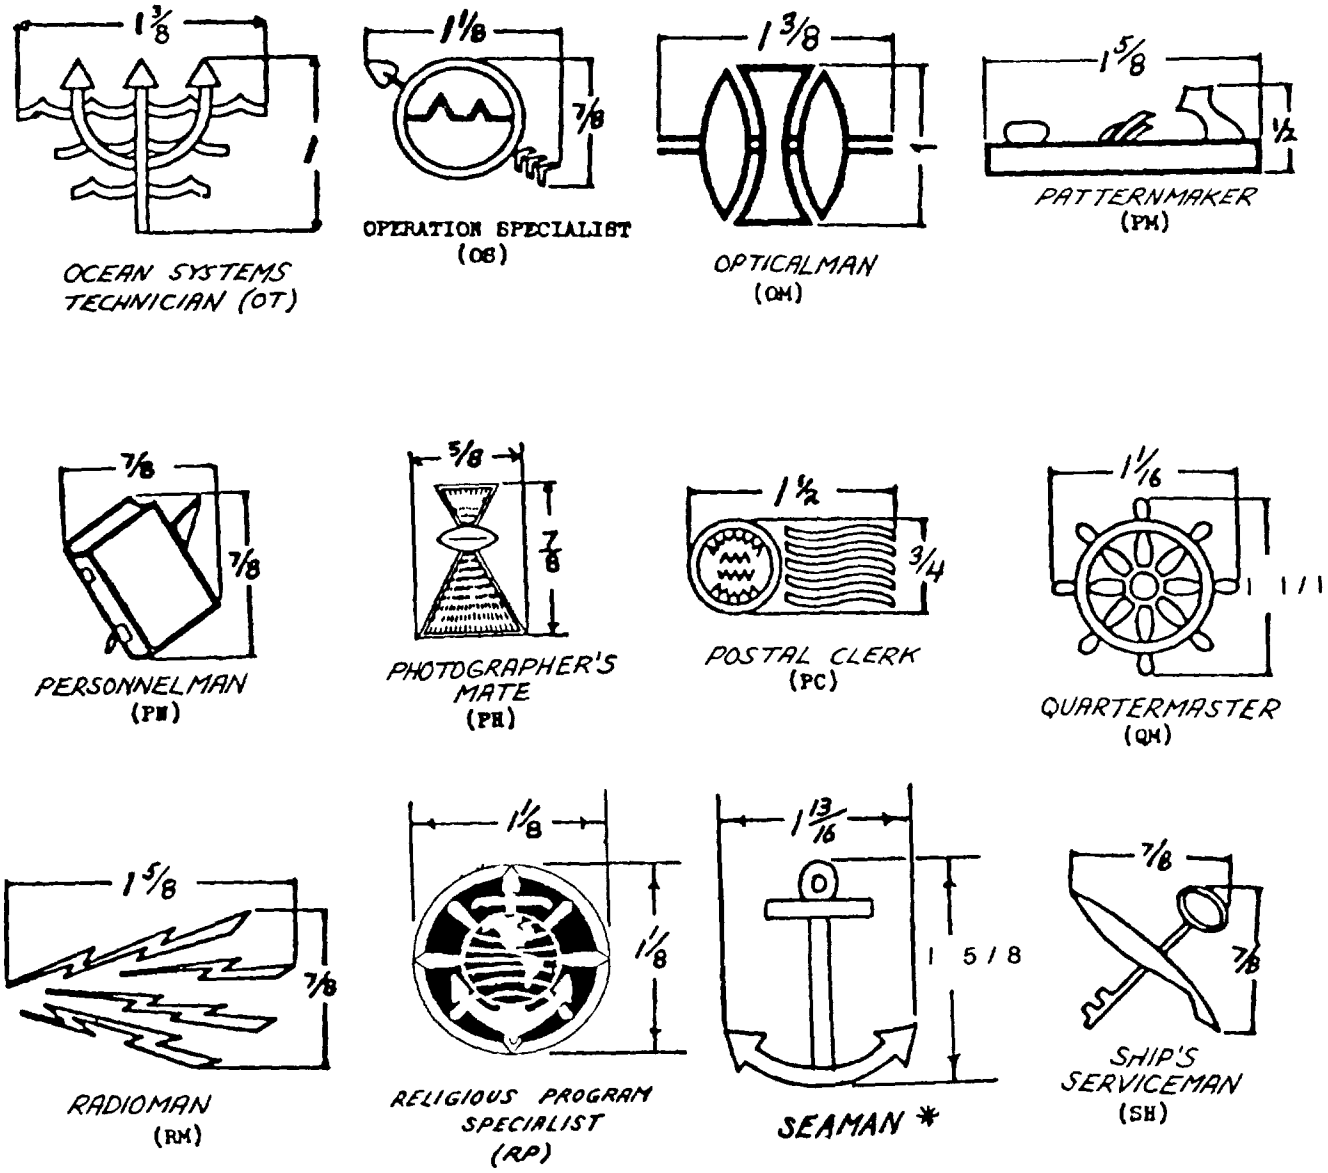


* NOT APPLICABLE TO RATING BADGES


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES

Figure 8 - Type II Specialty Mark And Striker Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

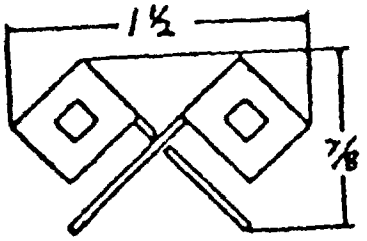


SIGNALMAN
(SM)

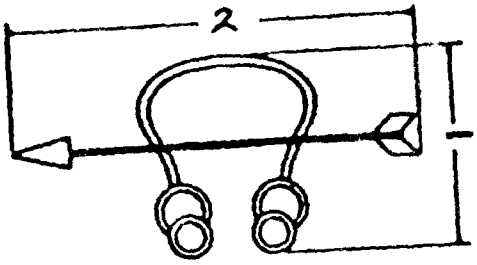


SONAR TECHNICIAN (ST)




STEELWORKER
(SW)




STOREKEEPER
(SK)

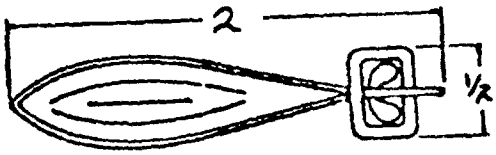


TORPEDOMAN'S MATE
(TM)




TRADEVMAN
(TD)



UTILITIES MAN
(UT)



WEAPONS TECHNICIAN (WT)




YEOMAN
(YN)

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 9 - Type II Specialty Mark And Striker Mark

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

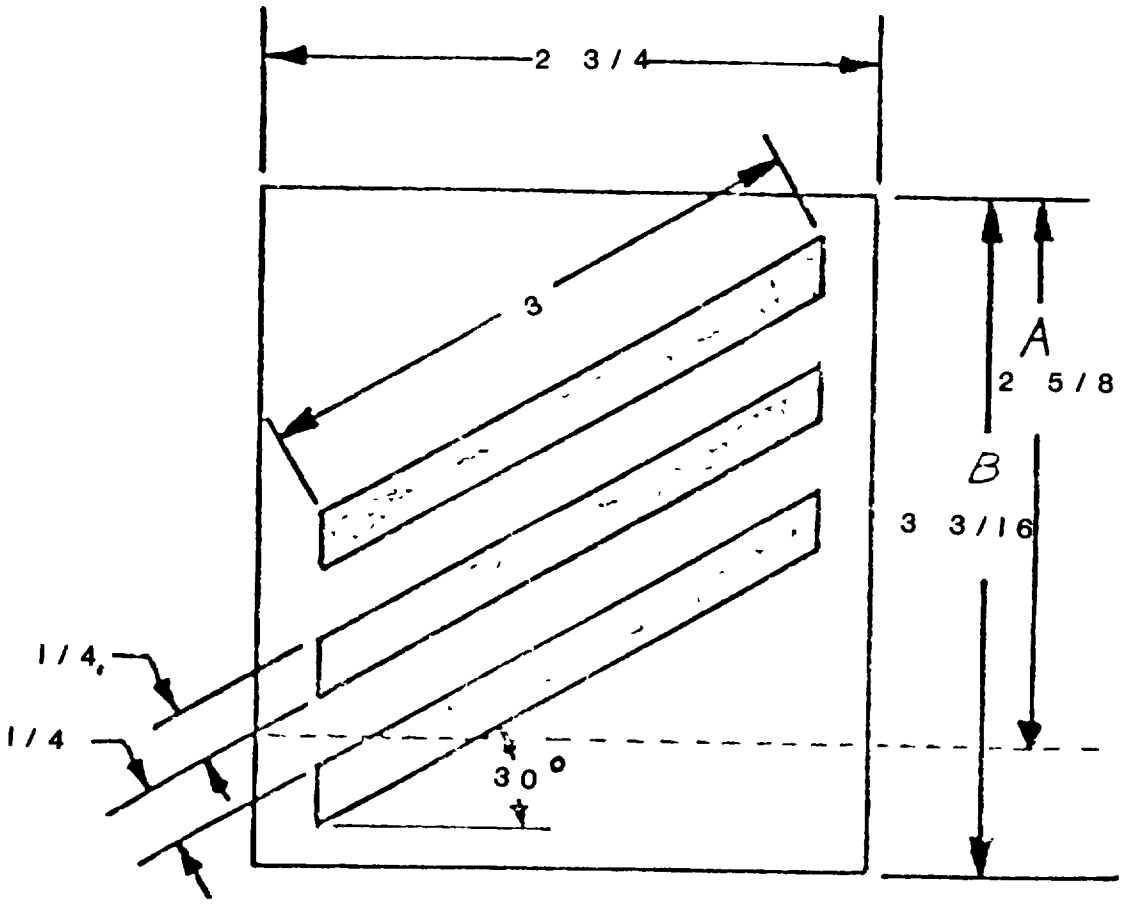


A - Class 2 (two stripes)

B - Class 3 (three stripes)

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 10 - Group Rate Mark

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

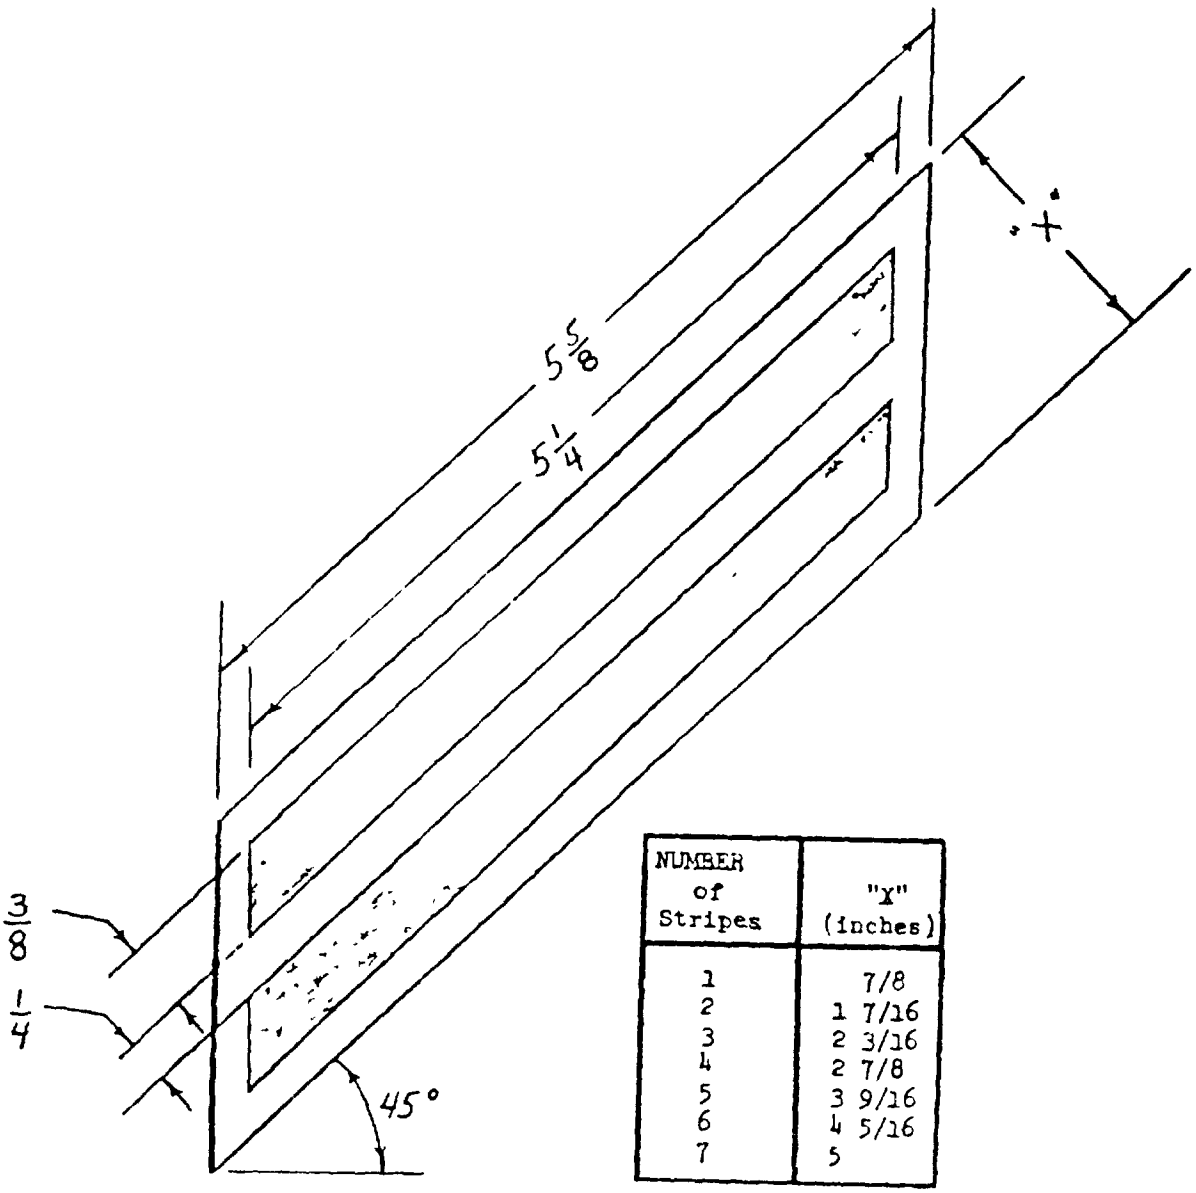

NUMBER of Stripes	"X" (inches)
1	7/8
2	1 7/16
3	2 3/16
4	2 7/8
5	3 9/16
6	4 5/16
7	5

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 11 - Stripe, Service

☆U S GOVERNMENT PRINTING OFFICE 1989 604 033/13714

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Code 50
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:40Z
Check the source to verify that this is the current version before use.