MIL-S-29120A(SA)
31 December 1975
SUPERSEDING
MIL-S-29120(SA)
18 March 1973

MILITARY SPECIFICATION

SKIRT, WOMAN'S, SERVICE, WHITE

* This specification is approved for use by the Naval Supply Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the requirements for a white service skirt fabricated of a polyester/rayon tropical fabric.

1.2 Classification.- The skirt shall be of one type only in the following sizes and lengths (see 6.2):

Sizes: 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20, and 22
Lengths: Short, Regular and Long

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for propsal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-B-871	-Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	-Fasteners, Slide, Interlocking
V-T-276	-Thread, Cotton
V-T-280	-Thread, Cotton Gimp, Buttonhole
DDD-L-20	-Label; For Clothing, Equipage, and Tentage (General Use)
DDD-T-86	-Tape, Textile; Cotton, General Purpose (Unbleached, Bleached or Dyed)
PPP-B-636	-Boxes, Shipping Fiberboard
PPP-T-45	-Tape, Gummed, Paper Reinforced and Plain for Sealing and Securing

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-368	-Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-17757	-Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-29104	-Cloth, Tropical, Polyester and Rayon
MIL-T-43548	-Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-191	-Textile, Test Methods
FED-STD-751	-Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-Marking for Shipment and Storage
MIL-STD-1609	-Provisions for Evaluating Quality of Women's Skirts

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of this manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W. Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the samples, in which case this specification shall govern.

* 3.2 First article.- When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

3.3 Materials.-

3.3.1 Cloth, tropical, polyester and rayon.- The basic material for the skirt shall be a polyester/rayon blend, shade White 3053, conforming to MIL-C-29104.

3.3.2 Cloth, twill, rayon.- The material for lining the skirt shall be a rayon twill, shade White 3001, conforming to class 1 of MIL-C-368.

3.3.3 Tape, rayon.- The tape for finishing the bottom edge of the skirt (see Table I, operation 13.b) shall be a plain weave continuous filament rayon tape with selvage edges, shade White, conforming to the following requirements when tested as specified in Table IV:

Width - 1/2 (±1/16) inches (12.70 ±1.58mm)
Weight - 5 oz. (140 grams) per gross yards (140 grams per 43.2 meters) (Min.)
Yarns per inch - 66 ends full width (Min.)
- 52 picks per inch (20 picks per cm) (Min.)

* 3.3.4 Slide fastener.- The slide fastener shall conform to either 3.3.4.1 or 3.3.4.2.

3.3.4.1 Slide fastener.- The slide fastener shall be type 1, 3 or 4, short tab pull, size LS, brass, 7 inches (17.78 cm) in length, conforming to V-F-106, except that the salt spray test shall not be required. The color of the tape shall be White. All metal components of the slide fastener shall be brass and shall be from the same supplier.

3.3.4.2 Plastic coil slide fastener.- The slide fastener shall be manufactured of polyester or nylon consisting of a pin or cam lock and shall be equal to commercial size No. 2. The tape shall be a blend of nylon and cotton or polyester and cotton, and shall have a minimum width (one side) of 7/16 to 1/2 inch (11.11 to 12.70mm). The tape and coil shall be White. The complete slide fastener shall not shrink more than 2 percent when tested as specified in 4.3.1.2.

3.3.5 Button.- The button for the waistband closure shall conform to type II, class D, style 20 and 21, 24-line of V-B-871 and the color shall be White BA, Cable No. 62031.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

3.3.6 Threads.-

3.3.6.1 Thread cotton.- The cotton thread for seaming and stitching the skirt shall be bleached to match shade White AH, Cable No. 66050, and shall conform to V-T-276 as follows:

Use	Type	Ticket No.	Ply
Assembling	1C1	00	3
Buttonholes	1C1	A	3
Button sewing:			
hand	1B2	12 or 16	4
machine	1A2	20	4

3.3.6.2 Thread, polyester, cotton-covered.- As an alternate, the following polyester cotton-covered threads may be used: When this option is exercised, the threads shall match shade White AH, Cable No. 66050, and shall conform to MIL-T-43548.

Use	Ticket No.	Ply
Assembling, buttonholes	50	2
Button sewing:		
hand	30	2 or 3
machine	50	2

3.3.7 Thread, cotton gimp, buttonhole.- The cotton gimp thread for reinforcing the buttonholes shall be bleached White AH, Cable No. 66050 and shall conform to type I or II, size No. 8 of V-T-280.

3.3.8 Tape, cotton.- The cotton tape for the skirt hanger loops shall be bleached and shall conform to type III, class 2, 3/8 inch (9.52 mm) wide of DDD-T-86.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

* 3.3.9 Combination label.- Each skirt shall have a combination identification/size/instruction label conforming to type I, classes 1, 2, 3, and 10 of DDD-L-20. The label shall measure not more than 1 7/8 inches (4.76 cm) in width by 3 1/4 inches (8.25 cm) in length. The printing on the labels shall show fastness to dry cleaning. The label shall bear the following inscription:

NAME:
SERVICE NO:
SKIRT, WOMAN'S, SERVICE, WHITE (65% Polyester/35% Rayon)
CONTRACT NO: DSA 100-00-0-0000 (Example)
STOCK NO: 8410-00-000-0000 (Example)
SIZE: 14 R (Example)
NAME OF SUPPLIER:

DRY CLEAN ONLY

NOTE: Abbreviations for applicable lengths (Short, Regular, Long) are S, R, and L.

3.4 Design.- The skirt shall be six gore with a two gore full lining, a one-piece waistband, button/buttonhole waist tab extension, and slide fastener side closure with placket. The bottom of the skirt shall be unhemmed (see figure 1).

3.5 Figure.- The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.6 Patterns.- Standard patterns to be used for cutting the suppliers working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the standard patterns and shall not be altered in any way. The seam allowance for joining gores are 3/4 inch (19.05 mm), waistband 3/8 ±1/16 inch (9.52 ±1.58 mm) and sides of lining 1 1/4 (±1/8) inch (31.75 ±3.17 mm).

3.6.1 Pattern parts.- The component parts shall be cut from the materials specified and in accordance with the following pattern parts:

Material	Pattern Parts	Cut Parts
Cloth, tropical, polyester and rayon	Center front	1
	Side front	2
	Center back	1
	Side back	2
	Waistband	1
	Placket (side opening)	1
Cloth, twill, rayon	Front	1
	Back	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

3.7 Construction.-

3.7.1 Stitches, seams and stitchings.- Stitch, seam, and stitching types specified in table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one may be used. Unless otherwise specified, top stitching and edge stitching shall be 1/16 inch (1.58 mm) from the folded edge.

3.7.2 Thread breaks and ends of seams.- Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch (9.52 mm). The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch (12.70 mm). Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch (12.70 mm). Skipped stitches or thread breaks may be repaired by using 301 stitch type.

3.7.3 Stitches per inch.- The minimum and maximum number of stitches shall be as specified in table I.

3.8 Manufacturing operations requirements.- The skirt shall be manufactured in accordance with operation requirements as specified in table I. The supplier is not required to follow the exact sequence of operations provided the finished skirt is identical to that produced by following the sequence listed in table I.

3.8.1 Shade and size marking.- The component parts shall be marked or ticketed to insure a uniform shade and size throughout the skirt. Any method of shade and size marking may be used except:

1. Corrosive metal fastening devices
2. Sew-on shade tickets
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

3.8.2 Pressing.- All pressing as required by table I shall be performed with a heated pressing iron or machine at a suitable temperature for synthetics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the skirt in strict accordance with patterns furnished, which shall show size, directional warp lines for cutting, and instructions and notches for the proper assembly of all component parts. b. Cut the component parts of the skirt from the same piece of material, except placket piece (side opening) which may be cut from ends. The placket piece shall approximate the shade of the skirt. c. Cut the front and back lining from the same piece of material. d. Cut the rayon tape for the bottom edge of the skirt not less than 72 inches (183 cm) in length.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1609 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking Mark, ticket, or bundle all parts except those cut from ends to insure a uniform shade and proper assembly of the skirt.					
*4.	Assemble panels (gores) a. Stitch the side front gores to center front gores as indicated by notches on patterns.	301 or 401	SSa-1	10-14	00/3	00/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Assemble panels (gores) (cont'd)					
	b. Stitch the side back gores to center back gore as indicated by pattern notches.	301 or 401	SSa-1	10-14	00/3	00/3
	c. Pink sides and bottom of gores.					
	d. Press seams open and flat.					
	e. Stitch, face to face, front and back at sides leaving an opening for placket on the left side.	301 or 401	SSa-1	10-14	00/3	00/3
	f. Press seams open and flat.					
5.	Attach slide fastener and placket					
	a. Finished appearance.- Exercise care not to stretch fabric when assembling slide fastener. The stops at the top of fastener shall be not more than 1/2 inch (12.70 mm) below waistband on the finished skirt. The welt on front skirt shall completely cover the slide fastener when fastener is closed. The stitching shall not interfere with the operation of the slider and the welt shall be uniform in width.					
	b. Fold the placket piece in half lengthwise and pink the side and bottom raw edges.					
	c. Position back half of slide fastener tape on placket piece 1/4 to 3/8 inch (6.35 to 9.52 mm) in from the pinked side edge and stitch 1/8 to 3/16 inch (3.17 to 4.76 mm) in from tape edge.	301	SSab-1	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Attach slide fastener and placket (cont'd) d. Place pinked placket side even with the pinked (outside) edge of left side back. Stitch 1/4 to 5/16 inch (6.35 to 7.93 mm) from chain edge. Turn placket to finished position to coincide with outseam allowance at bottom of placket opening. Topstitch 1/16 inch (1.58 mm) with fastener chain approximately 1/8 to 3/16 inch (3.17 to 4.76 mm) from edge of the folded seam.	301	LSq-2(a) and LSq-2(b) (shows finished seam)	10-14	00/3	00/3
	e. Place front half of slide fastener tape even with the pinked (outseam) edge of left side front and stitch 1/8 to 3/16 inch (3.17 to 4.76 mm) in from the tape edge.	301	SSa1-2(a)	10-14	00/3	00/3
6	f. Fold left front opening, as indicated by pattern notch, at top and in line with the side seamline at bottom. Stitch left front opening to fastener tape forming a welt 1/2 to 5/8 inch (12.70 to 15.87 mm) wide. Stitch across bottom of welt and placket piece to side seam catching the fastener tape in the stitching. The welt stitching shall be 3/16 to 1/4 inch (4.76 to 6.35 mm) from the chain edge. Care shall be taken so that the placket extension is not caught in the front of the slide fastener when forming the 1/2 to 5/8 inch (12.70 to 15.87 mm) welt.	301	SSa1-2(b)	10-14	00/3	00/3
*6.	Prepare lining a. Stitch, the two front darts as indicated by pattern notches tapering to a point 1/2 inch (12.70 mm) below drill hole. Press darts flat with the fold towards the center front.	301 or 401	OSf-1	10-14	00/3	00/3

NCTR Form 1, 15 Sep 1967

MIL-S-29120A(SA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Prepare lining (cont'd) b. Stitch the two back darts as indicated by pattern notches tapering to a point 1/2 inch (12.70 mm) below drill hole. Press darts flat with the fold towards the center back.	301 or 401	OSf-1	10-14	00/3	00/3
	c. Stitch front to back at sides as indicated by pattern notches leaving an opening on left side for placket.	301 or 401	SSa-1	10-14	00/3	00/3
	d. Pink sides and bottom edges.					
	e. Press seams open and flat.					
10	f. Fold front and back lining at top of left side opening as indicated by pattern notch and in line with side seam opening. Stitch left side opening 1/2 to 5/8 inch (12.70 to 15.87 mm) from folded edge, across open width of seam at bottom and continue stitching other side of opening.	301	EFa-1 and SSv-1	10-14	00/3	00/3
7.	Attach lining a. Position the lining to the inside of skirt (back to back) with the folded edge (welt) on the left front opening overlapping the inner edge of the slide fastener tape approximately 1/4 inch (6.35 mm).					
	b. The bottom of the lining's side opening shall extend to or slightly beyond the bottom pinked edge of the placket piece.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Attach lining (cont'd) c. Stitch, 1/8 to 3/16 inch (3.17 to 4.76 mm) from raw edge the two assemblies at the waist edge, easing in excess fullness of lining as provided by the pattern and matching side seams.	301	SSa-1	10-14	00/3	00/3
8.	Attach waistband, loops and combination label a. Join, 3/8 inch (9.52 mm) from raw edge, the underply of waistband to the top of skirt on the inside, placing the front notch at the folded edge of the welt (left front opening) and the back notch in line with the slide fastener, simultaneously inserting and securing the edges of a folded hanger tape loop, ends of slide fastener tape, placket piece and the top edge of the combination label. The label shall be centered between the lining darts on the back. Hanger loops shall be positioned 1 (±1/2) inch (25.40, ±12.70 mm) from side seams on back.	301	BSg-2(a)	10-14	00/3	00/3
	b. Fold waistband in half lengthwise, seam straight and pointed end, trim, turn, and work out corners and point. or	301	SSe-2(a)	10-14	00/3	00/3
	c. As an alternate, pointed and straight ends of waistband may be seamed, trimmed, turned and edge-stitched prior to setting to waist.	301	SSe-2	10-14	00/3	00/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Attach waistband, loops and combination label (cont'd)					
	d. The front extension of the waistband shall measure 2 (±1/4) inches (50.80, ±6.35 mm) beyond fold of welt to the finished point of tab. The back extension shall measure 1 1/8 (±1/4) inches (28.57, ±6.35 mm) beyond fold of placket piece to the finished square end of tab.					
	e. Turn under free edge of waistband and edgestitch to skirt on outside; continue edgestitching along tab ends (except when edge stitched in 8.c) and top of waistband. The edge stitching shall be 1/16 inch (1.52 mm) gauge.	301 and 301 and 301	BSg-2(b) SSe-2(b) OSf-1	10-14 10-14 10-14	00/3 00/3 00/3	00/3 00/3 00/3
	f. The finished waistband shall measure 1 (±1/8) inch (25.40, ±3.17 mm) in width.					
	g. The finished hanger loops shall have a free opening of 1 1/2 to 2 inches (38.10 to 50.80 mm).					
9.	Buttonhole					
	a. The buttonhole shall be eyelet end, taper bar type, cut after, reinforced with gimp, and shall be correctly positioned with the purling on the outside and the stitching securely caught in the fabric.					
	b. Center and sew a 5/8 to 3/4 inch (15.87 to 19.05 mm) cut length horizontal buttonhole with the inside purled edge of eyelet end 5/8 (±1/8) inch (15.87, ±3.17 mm) in from the pointed end of tab.	Button-hole		44-46	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Button a. Mark and sew a 24-line button to the outside back end of waistband centered and aligned with buttonhole eyelet in pointed end of tab. Button shall be sewn through both plies. When the button is sewn by hand the thread ends shall be hidden and securely tacked off with not less than 2 stitches.	Hand or 301 or 101		4 per button double thread 14-16 per button 14-16 per button	12/4 or 16/4 20/4 or 20/4	20/4
11.	Clean skirt a. Trim thread ends and remove all loose thread spots and stains and basting threads. b. Remove all shade tickets.					
12.	Press skirt Press the entire skirt neatly (see 3.8.2).					
13.	Close side opening and attach rayon tape a. Close slide fastener and button waistband. b. Attach by string, to the right hanger loop, an envelope containing the 2 yards (183 cm) of rayon tape (see 3.3.3 and table I, operation 1.d.)					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

3.9 Measurements.- The unhemmed skirt shall conform to the finished measurements in Table II.

Table II - Finished measurements in inches (cm)

Size	(A) Waist	(B) Hip	(C) Unhemmed Length Short	Regular	Long	(D) Sweep
7	24-1/2 (62.23)	37-1/2 (95.25)	26 (66.04)	28 (71.12)	30 (76.21)	41 (104.14)
8	25 (63.50)	38 (96.52)	26 (66.04)	28 (71.12)	30 (76.21)	41-1/2 (105.41)
9	25-1/2 (64.77)	38-1/2 (97.79)	26 (66.04)	28 (71.12)	30 (76.21)	42 (106.68)
10	26 (66.04)	39 (99.06)	26 (66.04)	28 (71.12)	30 (76.21)	42-1/2 (107.95)
11	26-1/2 (67.31)	39-1/2 (100.03)	26 (66.04)	28 (71.12)	30 (76.21)	43 (109.22)
12	27 (68.58)	40 (101.60)	26 (66.04)	28 (71.12)	30 (76.21)	43-1/2 (110.49)
13	27-3/4 (70.48)	40-3/4 (102.87)	26 (66.04)	28 (71.12)	30 (76.21)	44-1/4 (112.39)
14	28-1/2 (72.39)	41-1/2 (105.41)	26 (66.04)	28 (71.12)	30 (76.21)	45 (114.30)
15	29-1/4 (74.93)	42-1/4 (107.31)	26 (66.04)	28 (71.12)	30 (76.21)	45-3/4 (116.20)
16	30 (76.20)	43 (109.22)	26 (66.04)	28 (71.12)	30 (76.21)	46-1/2 (118.11)
18	32 (81.28)	45 (114.30)	26 (66.04)	28 (71.12)	30 (76.21)	48-1/2 (123.19)
20	34 (86.36)	47 (119.38)	26 (66.04)	28 (71.12)	30 (76.21)	50-1/2 (128.27)
22	36 (91.44)	49 (124.46)	26 (66.04)	28 (71.12)	30 (76.21)	52-1/2 (133.35)
Tolerance	+1 (2.54) -1/2(1.27)	±1 (2.54)	±1/2(1.27)	±1/2(1.27)	±1/2(1.27)	±1(2.54)

NOTE: Waist and hip measurements of skirt shall be taken with slide fastener fully closed and waistband buttoned. All measurements shall be taken with skirt placed smooth and flat. (see figure 1).

(A) Waist - Twice the measurement taken across top edge of waistband from folded edge to folded edge.

(B) Hip - Twice the measurement taken across the front from folded edge to folded edge approximately 7-3/4 inches (19.68 cm) below the bottom of waistband.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

3.9 Measurements.- (cont'd)

(C) Length of skirt - Measurement taken along center back from bottom of waistband to bottom unhemmed edge of skirt.

(D) Sweep - Twice the measurement taken on a straight line across the width of bottom from folded edge to folded edge.

* 3.10 Workmanship.- The finished skirt shall conform to the quality established by this specification. As a final step in the supplier's production control plan, before formation of a lot, each skirt shall have slide fastener fully closed and waistband buttoned and shall be examined for selected defects. A skirt containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in Table VI of MIL-STD-1609. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance.- Where certificate of compliance are submitted the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

* 4.3 Inspection.- Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated in MIL-STD-1609.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise amended, excluded, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

* 4.3.1.1 Testing of components.- In addition to the quality assurance provisions of the referenced specifications, components listed below shall be tested for the characteristics shown in table IV. The methods of testing specified in FED-STD-191 wherever applicable and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with table III and the lot shall be unacceptable if one or more units fail to meet any requirements specified. The sample unit and basis for lot size shall be expressed as follows:

Component	Lot Size Expressed As	Sample Unit Per Testing
Rayon Tape	Yard (Meter)	12 continuous yards (10.8 Meters
Slide Fastener	Each	One slide fastener

Table III - Sample Sizes

Lot Sizes	Sample Sizes
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table IV - Component Tests

Component	Characteristic	Requirement Paragraph	Test Method
Tape, rayon (hemming)	Width	3.3.3	5020
	Weight	3.3.3	5040 1/
	Yarns per inch	3.3.3	5050
Slide fastener	Shrinkage	3.3.4.2	4.3.1.2

1/ Five determinations for ounces per linear yard shall be determined for each sample unit and the results averaged. The average shall be multiplied by 144 to yield ounces per gross yards.

* 4.3.1.2 Test procedure for testing shrinkage of slide fastener.- The completed slide fastener shall be tested for shrinkage as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

* 4.3.1.2.1 Preparation of specimens.- Each slide fastener shall be exposed to Standard Conditions for Testing Textiles until equilibrium is reached. The chain shall be closed and the specimen marked as follows:

(a) The closed slide fastener shall be laid flat without tension on a smooth surface.
(b) Two lines shall be marked 18 inches (45.72 cm) apart crosswise (from selvage edge to back of chain) on both tapes with laundry proof ink.

* 4.3.1.2.2 Procedure.- The test specimens shall be subjected to one laundering cycle using the apparatus specified in 4.3.1.3 and the following procedures for laundering and drying. The closed slide fastener test specimens shall be placed in the washer with dummy pieces (see 4.3.1.3.1d) bringing the washing load to 4 pounds (1.8 kg). Fill the full water level of the washer with water of a hardness not to exceed 50 parts per million and at a temperature of 140 ±5 degrees F (60 ±2.7 degrees C). Add 140 grams of detergent. Set the washer for a 12 minute cycle on the Normal setting. Allow the washing to proceed automatically through the final spin cycle. Remove the load immediately at the completion of the final spin and separate the specimens and dummy pieces when required if tangled. Place the complete washed load in the dryer and dry at the Normal cycle and at a setting which generates an exhaust temperature rate of 140 to 160 degrees F (60 to 71 degrees C). Operate the dryer until the load is dry and continue tumbling 5 minutes with the heat turned off (cool-down cycle). Remove the load immediately after the machine stops. The laundered and dryed slide fasteners shall be exposed again to Standard Conditions for Testing Textiles until equilibrium is reached.

* 4.3.1.2.3 Evaluation.- The shrinkage shall be evaluated as follows:

(a) The closed slide fastener shall be laid on a flat, smooth surface with no tension.
(b) The distance between the ink marks on both tapes shall be measured and recorded to the nearest 1/32 of an inch (.79 mm).
(c) The percent shrinkage shall be calculated for both tapes and recorded separately as the percent of the original measurement. Both tapes shall meet the requirement specified (see 3.3.8.2).

* 4.3.2 Examination of the end item.- The end item examination provisions for the finished skirt shall be as specified for Dress Skirt ("D") in MIL-STD-1609.

* 4.3.3 Dimensional examination.- The dimensional examination provisions for the finished skirt shall be as specified in MIL-STD-1609.

* 4.3.4 Examination of preparation of delivery requirements.- The examination for compliance with packaging, packing and marking requirement shall be as specified in MIL-STD-1609.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Unit packaging.- Each skirt shall be folded in half along the length and then folded in thirds across the length. The completely folded skirt shall measure approximately 11 inches (27.94 cm) in length by 12 inches (30.48 cm) in width. Each folded skirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125-inch (0.03175 mm) thickness (±20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch (6.35 mm) diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

5.1.1.2 Intermediate packaging.- Six skirts of one size and length only, packaged as specified in 5.1.1.1 and alternated top to bottom shall be placed in a fiberboard box conforming to style OPF, type CF, variety SW, class domestic, grade 175 of PPP-B-636. The outside dimension of each fiberboard box shall be 15-3/8 inches (39.05 cm) in length, 11-5/8 inches (29.52 cm) in width and 3-3/8 inches (8.57 cm) in depth. The box closure shall be secured by taping all seams and corners with a minimum 2 inch (5.08 cm) gummed paper tape conforming to type III, grade B of PPP-T-45. The tape shall be centered over the seam formed by the closure of the outer flaps of the top and bottom and shall extend over the end panels by not less than 1 inch (2.54 cm).

5.1.2 Level C (Commercial packing).- The skirt shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Twenty-four skirts of one size and length only, packaged as specified in 5.1 shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type SF, class weather resistant, grade V2s, size 2 of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and two in depth within the shipping container. Toward the end of the contract or order, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B.- Twenty-four skirts of one size and length only, packaged as specified in 5.1 shall be packed in a fiberboard shipping container assembled closed and reinforced conforming to Type CF, class domestic, grade 275, size 2 of MIL-B-17757. Level A packages shall be packed flat two in length, one in width and two in depth within the shipping container. Toward the end of the contract or order, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with appendix of the box specification.

5.2.3 Level C (Commercial packing).- The skirts packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed or stamped in black, bold letters 1/4 inch (6.35 mm) in height, directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
ITEM DESCRIPTION
SIZE
QUANTITY

5.3.2 Labels, mixed sizes.- Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (12.70 by 10.16 cm) with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use.- The summer dress white skirt is intended to be worn by female personnel of the Navy in conjunction with the summer dress white coat.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2).
c. Whether the first article sample is required (see 3.2).
d. Levels of packaging and packing required (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1),

6.3 Samples and patterns.- For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

* 6.4 Changes from previous issue.- The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - SA

Preparing Activity:
Navy - SA

Project No. 8410-N324

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

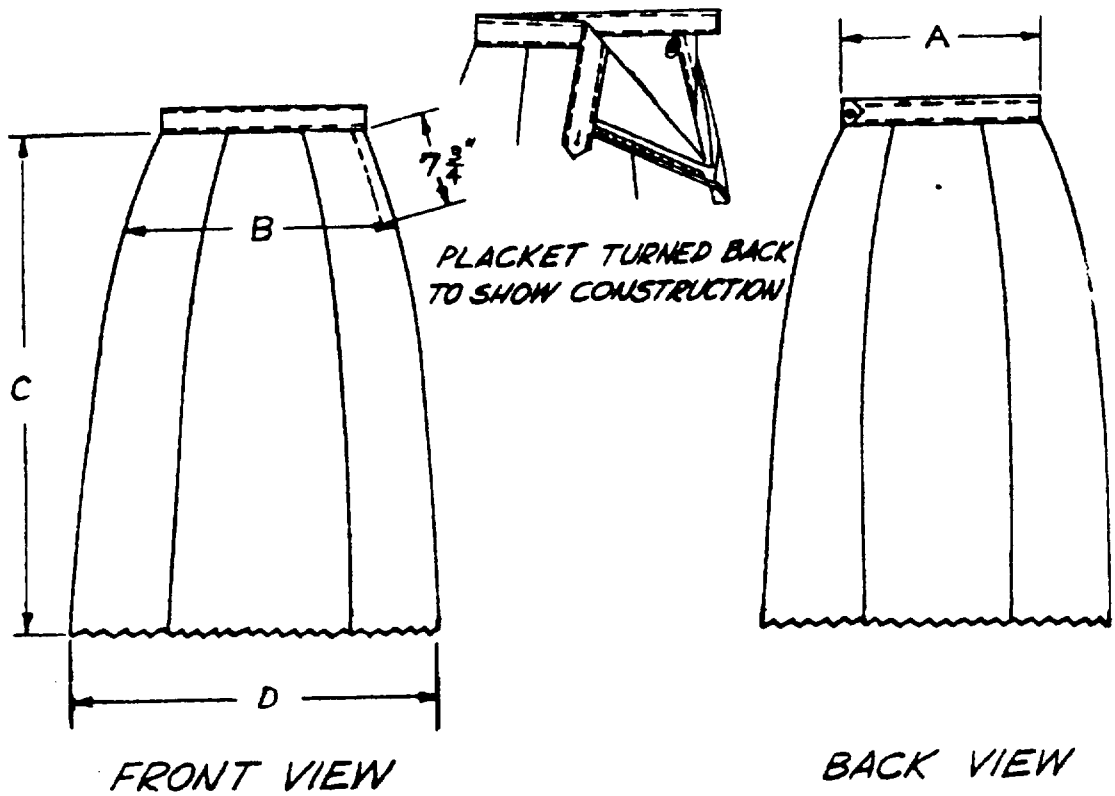


FIG. 1 SKIRT, WOMAN'S, SERVICE, WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-S-29120A(SA) SKIRT, WOMAN'S, SERVICE WHITE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH UNIT
21 STRATHMORE ROAD
NATICK, MA 01760

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH UNIT
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:35Z
Check the source to verify that this is the current version before use.