MIL-S-29122C(NU)
10 February 1986
SUPERSEDING
MIL-S-29122B(SA)
5 April 1978

MILITARY SPECIFICATION

# SKIRT, WOMAN'S, BLUE, DRESS

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the requirements for a year round weight dress skirt fabricated of a 10 ounce polyester/wool blend fabric.

1.2 Classification. The skirt shall be of one type and class only and in the following sizes and lengths as specified (see 6.2).

1.2.1 Sizes. 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20 and 22.

1.2.2 Lengths. Short, regular, and long.

## 2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

AMSC: N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| V-B-871 | - Button, Sewing Hole, and Button, Staple (Plastic) |
| V-F-106 | - Fasteners, Slide, Interlocking |
| V-T-276 | - Thread, Cotton |
| V-T-280 | - Thread, Cotton, Gimp, Buttonhole |
| NN-P-71 | - Pallet, Material Handling, Wood Stringer Construction, 2 Way and 4 Way |
| DDD-L-20 | - Label; For Clothing, Equipage, and Tentage (General Use) |
| DDD-T-86 | - Tape, Textile; Cotton, General Purpose (Unbleached, Bleached or Dyed) |

MILITARY

| | |
|---|---|
| MIL-C-368 | - Cloth, Satin, Rayon and Cloth, Twill, Rayon |
| MIL-P-15011 | - Pallet, Material Handling, Wood, Post Construction, 4 Way Entry |
| MIL-B-17757 | - Box, Shipping, Fiberboard, Corrugated (Modular Sizes) |
| MIL-C-21115 | - Cloth, Tropical, Wool, Polyester/Wool |
| MIL-T-43548 | - Thread, Polyester, Cotton Covered and Rayon Covered |
| MIL-C-43718 | - Cloth, Twill, Polyester, Polyester and Cotton, Polyester and Rayon |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-191 | - Textile Test Methods |
| FED-STD-751 | - Stitches, Seams, and Stitchings |

MILITARY

| | |
|---|---|
| MIL-STD-105 | - Sampling Procedures and Tables for Inspection by Attribute |
| MIL-STD-129 | - Marking for Shipment and Storage |
| MIL-STD-147 | - Palletized Unit Loads |
| MIL-STD-1609 | - Provisions for Evaluating Quality of Women's Skirts |

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

* LAWS AND REGULATIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR SEWING THREAD

DEPARTMENT OF DEFENSE STANDARD SHADES FOR BUTTONS

(Application for copies may be obtained from the Color Association of the United States, Inc., 24 East 38th Street, New York, NY 10016)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

* 3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for the skirt shall be a polyester/wool blend, 10 ounce, shade Blue 3346, conforming to type III, class 3 of MIL-C-21115. The piece number for the Standard Sample is 4001369.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

* 3.3.2 Lining material. The material for lining the skirt shall be a rayon twill, 3.7 ounce, shade Black 3202, conforming to Class 1 of MIL-C-368 the piece number for the Standard Sample is 79221 and applies to shade and finish.

* 3.3.3 Pocketing. The material for the front and back plys of the pockets shall be a polyester/cotton blend twill fabric conforming to class 1 of MIL-C-43718. The color of the pocketing shall be black.

3.3.4 Fusible interlining. The skirt waistband and pocket welts shall be fused with a woven or nonwoven thermal bonded consisting of 85-100% polyester with the remaining fiber being nylon. The material shall be free of chemical binders. The fusible adhesive system shall be a polyester paste dot uniformly distributed over one side of the material. The color shall be black or approximate the shade of the base fabric. The total weight of the nonwoven fusible shall be 1.1 $\pm$ .2 oz/yd$^2$. The fused sample, consisting of fusible interlining and base fabric, shall conform to the requirements stated below when tested as specified in Table IV.

Component Testing Requirements

Appearance of fused samples 1/
Initial 2/ - No evidence of bubbling or delamination of the bond, change of color, or strike through.

After 5 dry cleanings 2/ - No evidence of bubbling or delamination of the bond, change of color, or strike through.

Bond strength
22 oz. minimum - initially
18 oz. after 5 dry cleanings

Shrinkage
After 3 dry cleanings 2.5% max.

1/ Applies to quality conformance and in-process tests.
2/ After evaluation for initial appearance and shrinkage, samples may be used for the remainder of appearance tests.

3.3.4.1 Colorfastness. All dyed, finished, fusible interlining materials shall show fastness to dry cleaning (3 cycles), equal to or better than the Standard Sample. When no Standard Sample is available the finished, dyed fusibles shall show a minimum of "fair" fastness after 3 dry cleanings (see Table IV).

3.3.5 Tapes.

3.3.5.1 Tape, rayon. The tape for finishing the bottom edge of the skirt (see Table I, operation 17) shall be a plain weave continuous filament rayon with selvage edges, dyed black, and shall conform to the following requirements when tested as specified in 4.4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

| Width inch | Weight (min) oz/gross yd | Yarn/inch (min)(full width) Warp | Filling | Colorfastness to Wet-dry cleaning |
|---|---|---|---|---|
| 1/2 (± 1/16) | 5 | 66 | 52 | Good |

3.3.5.2 Tape, woven. The tape shall be cotton, preshrunk, type I, class 3, 3/8 inch wide (for the skirt hanger loops), conforming to DDD-T-86, except that the only colorfastness requirements applicable shall be to wet-dry cleaning. The tape shall be dyed black.

3.3.5.3 Tape, waistband, non-slip. The woven non-slip tape for the waistband shall be made of polyester or a blend of polyester/nylon, natural or white in color, 1/2 to 7/8 inch in width with two or three rows of nitrile or chloroprene rubber thread woven or stitched to the tape. The rows of rubber thread shall be positioned a minimum of 3/16 inch from edges of tape. The finished tape shall not shrink more than 2.0 percent in length direction when subjected to the manufacturer's standard procedures for determining dimensional stability to dry cleaning for the end item (see 4.4.1 and 6.4).

3.3.6 Thread.

* 3.3.6.1 Thread, polyester-covered. The thread for seaming and stitching the skirt shall be polyester, cotton-covered or rayon covered dyed Black AA, C.A. 66043, conforming to MIL-T-43548 as follows:

| Use | Ply | Ticket No. |
|---|---|---|
| Machine stitching | 2 or 3 | 50, 70 |
| Overedging | 2 or 3 | 70 |
| Button sewing: | | |
| Hand | 2 or 3 | 16 |
| Machine | 2 or 3 | 20 |

3.3.6.2 Thread, cotton. As an alternate, a cotton thread, dyed Black AA, CA 66043, conforming to V-T-276 and in the following types and sizes, may be used:

| Use | Type | Ply | Ticket No. |
|---|---|---|---|
| Machine stitching | 1A3 | 3 | 30 |
| Overedging | 1A3 | 2 | 50 |
| Button sewing: | | | |
| Hand | 1B3 | 4 | 12 or 16 |
| Machine | 1A3 | 4 | 20 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.3.6.3 Colorfastness of threads. The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. When no standard sample is available, the dyed threads shall show a minimum of "good" colorfastness to wet-dry cleaning and light when tested as specified in V-T-276 or MIL-T-43548.

3.3.7 Gimp. The gimp for reinforcing the buttonholes shall be thread cotton, gimp, buttonhole, conforming to type I or II, size No. 8 of V-T-280. The gimp shall be dyed Black AA, CA 66043.

3.3.7.1 Colorfastness. The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show a minimum of "good" fastness to wet-dry cleaning when tested as specified in V-T-280.

3.3.8 Labels.

3.3.8.1 Combination label. Each skirt shall have a combination personal/identification/instruction label conforming to type VI, Classes 10 and 15 of DDD-L-20. The printing shall show good fastness to dry cleaning and shall bear the following inscription:

NAME:
SERVICE NO:
SKIRT, WOMAN'S, BLUE, DRESS:
FIBER CONTENT: 55% Polyester 45% Wool
CONTRACT NO.: DLA-100-00-0-0000 (Example)
NAME OF CONTRACTOR;

DRY CLEAN ONLY

3.3.8.2 Size label. Each skirt shall have a separate size label conforming to Type VI, Class 2 and shall bear the following inscription:

SIZE: 14R (Example)
STOCK NO.: 8410-00-000-000 (Example)

The length (short, regular or long) may be abbreviated as S, R, or L.

3.3.9 Button, plastic. The button for the waistband closure shall conform to type II, class D, style 20-21, 24-line of V-B-871. The color shall be Black BT, Cable No. 62001.

3.3.10 Slide fastener. The slide fastener shall be Type I, Style 3, Size LS, 7 inches long of V-F-106. The tape shall be woven from 100% polyester or blends of nylon/cotton, polyester/cotton or polyester/rayon. The slide fastener chain shall be a continuous monofilament nylon or polyester coil. The slider shall have an automatic lock with a short tab pull. The color of all components shall be black. Zipper tapes shall be tested for color fastness as specified in V-F-106 and shall show good fastness to light and wet-dry cleaning. The complete slide fastener shall not shrink more than 2 percent when tested as specified in V-F-106.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.4 Description. The skirt shall be unhemmed, six gore, with 2 diagonal welt pockets, one on each of the front seams, slide fastener and placket closure on left side seam, a non-slip sewn-on waistband buttoned by a tab extension. The skirt is fully lined with a six gore lining.

3.4.1 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns provide a 3/8 inch seam allowance for waistband joining seams and 3/4 inch allowance for gore joining seams of skirt and lining and as otherwise indicated in Table I.

3.5.1 Pattern parts. The component parts of the skirt shall be cut from the materials specified and in accordance with the following pattern parts:

| Material | Pattern Parts | Cut Parts |
|---|---|---|
| Cloth, Tropical, Polyester/Wool | Center front | 1 |
| | Side front | 2 |
| | Center back | 1 |
| | Side back | 2 |
| | Waistband | 1 |
| | Placket | 1 |
| | Pocket facing | 2 |
| | Pocket welt | 2 |
| Cloth, Rayon Twill Lining | Center front lining | 1 |
| | Side front lining | 2 |
| | Center back lining | 1 |
| | Side back lining | 2 |
| Cloth, Twill Polyester/Cotton | Pocket (front ply) | 2 |
| | Pocket (back ply) | 2 |
| Fusible Interlining | Pocket welt interlining | 2 |
| | Waistband interlining | 1 |
| Template | Pocket marker | - |

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitches, seams and stitching types as specified in Table I, shall conform to FED-STD-751. Whenever two or more methods for seams or stitches are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the skirt. Unless otherwise specified, topstitching and edgestitching shall be 1/16 from folded edge.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type. When stitch type 401 is permitted, as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The skirt shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished skirt is identical to that produced by following the sequence as listed in Table I.

3.7.1 Shade and size marking. The component parts of the skirt shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

a. corrosive metal fastening devices
b. sew-on shade tickets
c. adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

* 3.7.2 Pressing. All pressing as required by Table I shall be performed with a heated pressing iron or machine at a suitable temperature for synthetics.

* 3.7.3 All fusing of the fusible to the basic material shall be on a single ply basis (no stacking allowed).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

* 3.7.4 The statement "press fusible to various cut parts in accordance with the fusible manufacturer's recommendation" refers to time, temperature, and pressure.

3.8 Abbreviations in table of operations. The abbreviations used in table I are as follows:

| | | |
|---|---|---|
| Stch | - | Stitch |
| in | - | inch |
| Ndl | - | Needle |
| Bob | - | Bobbin |
| Lpr | - | Looper |
| Mchne | - | Machine |
| Brtck | - | Bartack |
| Comrcl | - | Commercial |
| smlr | - | similar |
| Btnhl | - | Buttonhole |
| incl | - | including |
| dbl | - | double |
| chnstch | - | chainstitch |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| 1. | Cutting. | | | | | |
| | a. Spread the material, without tension, face to face. | | | | | |
| | b. Cut the skirt in strict accordance with patterns furnished, which show size, directional warp lines for cutting, and instructions and marks for the proper assembly of all component parts. | | | | | |
| | c. Cut all parts of the skirt out of the same piece of material, except the placket which may be cut from ends. The placket piece shall approximate the shade of the skirt. | | | | | |
| | d. Cut the rayon tape for the bottom edge of the skirt of sufficient length to encircle bottom edge of skirt. | | | | | |
| 2. | Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects that are classified as defects in MIL-STD-1609 shall be removed from production and replaced with non-defective and properly matched components. | | | | | |
| 3. | Marking. Mark or ticket all parts except those parts cut from ends, to insure a uniform shade and size throughout the skirts. | | | | | |
| 4. | Assemble skirt panels (gores). | | | | | |
| | a. Pink the raw edges of the sides of the gores. (May be performed during the seaming of the gores). | | | | | |
| | b. Stitch side front gores to center front gore, as indicated by marks on patterns. | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | c. Stitch side back gores to center back gore as indicated by marks on patterns. | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | d. Press seam open flat. | | | | | |
| 5. | Make welt pockets. | | | | | |
| | a. Position fusible interlining on underside of welt and press in accordance with the directions of the fusible manufacturer. | | | | | |
| | b. Fold welt lengthwise at marks, face to face, and stitch across each end of welt thru all plies 1/4 inch from raw edge. | 301 | SSe-2(a) | 12-14 | 50 | 50 |
| | c. Trim corners, turn welt to finish position and work out seamed edges and corners. | | | | | |
| | d. Position the front pocket ply against the back portion of the welt. Center the welt on the top edge of the pocket, aligning raw edges, overedge stitch together. | 503 504 or 602 | SSa-1 | 8-10 | 50 | 50 |
| | e. Position the front portion of welt assembly, top edge down, on the front of the skirt. Skirt front may be pre-slashed so the lower notched ends meet the end of the stitch line as marked on pattern. Stitch welt assembly to front along stitchline with a 1/4 inch seam allowance, thru all plies. The ends of the stitching shall finish at the welt ends. | 301 | SSa-1 | 12-14 | 50 | 50 |
| | f. Overedge bottom edge of pocket facing except when edge has a selvage, or when contractor exercises the option to turn and stitch facing to pocket (see oper. 5g). | 503 504 or 602 | EFd-1 | 8-10 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | g. Align the lower serged or selvaged pocket facing edge with the marks at the back ply of pocket. Or, turn under raw facing edge 1/4 inch and align folded edge with the marks at the back ply of pocket. Stitch 1/16 to 1/8 inch from folded edge. | 301 or 401 | LSbj-1 or LSd-1 | 12-14 | 50<br>50 | 50<br>70 |
| | h. Stitch combination label on all four sides to the outside of the back ply of pocketing. Label shall be centered on the right pocket with the top edge positioned approximately 1/8 inch below and parallel to the facing piece joining seam. The label inscription shall be upright and shall face the wearer. The stitching shall not be through the printing. | 301 or 401 | LSbj-1 | 12-14 | 50<br>50 | 50<br>70 |
| | i. If not previously slashed, slash front in accordance with marks on pattern about 1/4 inch above stitchline, 3/8 inch short of the welt ends and parallel to welt. Tongue notch opening to ends of stitchline and toward waist. Turn welt through opening to finished position. The marks shall not appear beyond the welt. | | | | | |
| | j. Superimpose the back ply of pocket on the front ply, face to face, matching lower and curved edges. Overedge together the side and bottom edges of pocketing, extending overedging along the raw side edges of the back pocket ply. | 503 or 504 or 602 | SSa-1 and EFd-1 | 8-10 | 50 | 50 |
| | k. Stitch the side and bottom edges of pocketing 3/8 inch from serged edge.<br>OR | 301 or 401 | SSa-1 | 12-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | As an alternate, the side and bottom edges of the pocketing may be stitched with a 1/4-3/8 inch gauge safety stitch.<br><br>NOTE: The top of the back pocketing piece may be smoothed out and stay stitched to the top edge of skirt to assure back pocket ply lies flat when waistband is attached. | 515 or 516<br><br>or 519 | SSa-2 | 12-14 | 50 (chn-stch)<br>50 (over-edge) | 50 |
| | 1. Fold under upper lip of front pocket opening toward the waist and stitch 1/16 inch from the folded edge through the pocket facing and the back ply of pocketing. Tightness, twisting or distortion shall not be present in the facing, skirt, or pocketing. | 301 | LSd-1 | 12-14 | 50 | 50 |
| | m. Edgestitch thru all plies across each end of welt. | 301 | Smlr to LSd-1 | 12-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | n. The finished welt shall measure 1 to 1-1/8 inches high and 4-1/8 to 4-3/8 inches wide for all sizes. | | | | | |
| 6. | Assemble front and back of skirt. | | | | | |
| | a. Pink the raw edges of the front and back. (May be performed when closing the side seams). | | | | | |
| | b. Stitch skirt front to back at sides, as indicated by marks, leaving an opening on left side to accommodate a 7 inch slide fastener (waistband not included). | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | c. Pink the bottom edge of the skirt. | | | | | |
| | d. Press the seams open and flat. | | | | | |
| 7. | Attach slide fastener to skirt. | | | | | |
| | a. Finished appearance - Exercise care not to stretch fabric when attaching slide fastener. The stops at the top of fastener shall be not more than 1/4 inch below waistband on the finished skirt. The welt on front skirt shall completely cover the slide fastener when fastener is closed. The stitching shall not interfere with the operation of the slider and the welt shall be uniform in width. | | | | | |
| | b. Fold the placket piece in half lengthwise and pink the side and bottom raw edges. | | | | | |
| | c. Place back half of slide fastener tape even with the pinked outseam. Stitch 1/8 to 3/16 inch in from tape edge. | 301 | SSab-1 | 12-14 | 50 | 50 |
| | d. Place pinked side edge of placket approximately 5/8 inch in from the pinked (outseam) left side back. Stitch 1/4 to 5/16 inch from chain edge. Turn placket to finished position, roll joining seam to coincide with outseam allowance at bottom of placket opening. Topstitch 1/16 inch from rolled edge with fastener chain approximately 1/8 to 3/16 inch from the rolled seam. | 301 | LSa-1 and LSq-2(b) (shows finished seam) | 12-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | e. Place front half of slide fastener tape approximately 1/8 to 3/16 inch in from the pinked (outseam) left side front. Stitch 1/4 to 5/16 inch in from chain edge. | 301 | SSal-2(a) | 12-14 | 50 | 50 |
| | f. Fold the left skirt front at top as indicated by pattern notch and in line with the side seam line at the bottom. Stitch left front skirt to slide fastener tape forming a 1/2 to 5/8 inch wide welt. The stitching shall be 3/16 to 1/4 inch from the chain edge. The welt shall cover the slide fastener and the stitching on the back opening with no outside pleat at bottom of opening while slide fastener is closed. | 301 | SSal-2(b) | 12-14 | 50 | 50 |
| | g. Stitch across bottom of welt within 1/4 inch of the lower edge of bottom stop, up to sideseam, from outside of skirt, catching ends of tape and back part of placket piece. | 301 | SSv-1 | 12-14 | 50 | 50 |
| 8. | Make lining. | | | | | |
| | a. Pink the raw edges of the sides of the gores. (May be performed during the seaming of the gores). | | | | | |
| | b. Stitch side front gores to center front gore, as indicated by marks on patterns. | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | c. Stitch side back gores to center back gore as indicated by marks on patterns. | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | d. Press seams open and flat. | | | | | |
| 9. | Assemble front and back of skirt lining. | | | | | |
| | a. Pink the raw edges of the front and back. (May be performed when closing the side seams). | | | | | |
| | b. Stitch skirt front to back at sides, as indicated by marks, leaving an opening on left side to correspond with slide fastener closure. | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | c. Finish top opening of left side by turning under the seam allowance and top stitching each side and across bottom of opening approximately 1/4 inch from folded edges. | 301 | EFa-1 and SSv-1 | 12-14 | 50 | 50 |
| | d. Pink bottom edge of skirt lining. | | | | | |
| | e. Press the seams open and flat. | | | | | |
| 10. | Attach lining to skirt. | | | | | |
| | a. Pull assembled lining over assembled skirt, back to back, with slide fastener, front and back gores, and side seams of skirt and lining corresponding with each other and waist edges of skirt and lining superimposed. | | | | | |
| | b. Join the two assemblies together along waist, 1/4 to 3/8 inch from raw edge, simultaneously catching and securing the top ends of slide fastener tape, pocket tops, front back and side seams and both plies of folded placket. | 301 | SSa-1 | 12-14 | 50 | 50 |
| 11. | Make waistband. | | | | | |
| | a. Position fusible interfacing to the underside of the waistband and press in accordance with the directions of the fusible manufacturer. | | | | | |
| | b. Overedge stitch the inside bottom edge of the waistband. | 503 504 or 602 | EFd-1 | 8-10 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | c. Center non-slip waistband tape on the outer surface of back ply of waistband and stitch 1/16 inch from edges of tape. The raw ends of tape shall be folded under. The rows of rubber gripper threads shall face the wearer. The ends of tape shall finish as follows when measured from the finished folded ends of waistband:<br><br>From pointed end (top ply) - 4 to 4-1/2 inches.<br><br>From squared end (bottom ply) - 2 to 2-1/8 inches. | 301 or 401 | LSbj-1 | 12-14 | 50<br>50 | 50<br>70 |
| 12. | Attach waistband, size label and hanger loops.<br>a. Join 3/8 inch from raw edge bottom of underply portion of waistband to the top of skirt on the inside leaving extensions as indicated by pattern marks, simultaneously catching and securing the top of back pocketing piece, the label at center back 1/2 inch off center tolerance, both plies folded placket, and two skirt loops (3/8 inch wide) folded and positioned with one loop at the right side seam and one loop directly back of placket on left side.<br><br>b. The tape loops shall have a free opening of approximately 1-1/2 to 2 inches.<br><br>NOTE: The top stops should finish within 1/4 inch of the waistband seam, or chain may extend under the waistband and be concealed within the waistband seam. | 301 or 401 | BSp-2(a) | 12-14 | 50<br>50 | 50<br>70 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | c. Fold waistband in half lengthwise; seam straight end and pointed end, trim, turn, and work out corners and point. | 301 | SSe-2(a) | 12-14 | 50 | 50 |
| | OR | | | | | |
| | d. As an alternate, pointed and straight ends of waistband may be seamed, trimmed, turned and edgestitched prior to setting to waist. | 301 | SSe-2(b) | 12-14 | 50 | 50 |
| | e. The front extension of the waistband shall measure 2 (± 1/16) inches beyond fold of welt to the finished point of tab. The back extension shall measure 1 (± 1/16) inches beyond fold of placket piece to the finished square end of tab. | | | | | |
| | f. Turn waistband to finished position, and edgestitch on outside along bottom folded edge, continuing along tab ends and top of waistband. | 301 | BSp-2(b) and SSe-2(b) and EFa-1 | 12-14 | 50 | 50 |
| | g. The finished width of the waistband shall be 1 (± 1/16) inches. | | | | | |
| | h. Press waistband flat. | | | | | |
| 13. | Buttonholes. | | | | | |
| | a. The stitching shall be securely caught in the fabric, and with purling on the outside, worked over gimp and end of buttonhole securely tacked. | | | | | |
| | b. Stitch a 3/4 inch horizontal eyelet end taper bar buttonhole, centered with the inside purled edge 5/8 (± 1/8) inch in from the finished pointed end of the waistband tab. | Button-hole | | 52-54 per buttonhole | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | c. Stitch a 5/8 to 3/4 inch horizontal eyelet end taper bar bottonhole centered with the inside purled edge 5/8 (+ 1/8) inch in from the finished straight end of the waist band tab. | Button-hole | | 52-54 per buttonhole | 50 | 50 |
| 14. | Buttons.<br>a. Close slide fastener, align top edge of waistband even, extend waistband to assure that placket covers slide fastener, and mark placement of buttons through each buttonhole eyelet. | | | | | |
| | b. Sew a 24-line button through both plies of the waistband, centered to correspond with buttonhole eyelet in pointed end of tab. | Hand or Machine | | 4-6 (double thread)<br>14-16 per button | 16<br>24 | <br>24 |
| | c. Sew a 24-line button through underply of waistband centered to correspond with buttonhole eyelet in straight end of tab. | Hand or Machine | | 4-6 (double) thread)<br>14-16 per button | 16<br>24 | <br>24 |
| 15. | Clean skirt.<br>Trim thread ends and remove all loose threads, spots, stains and shade tickets.<br><br>NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result. | | | | | |
| 16. | Pressing.<br>Press neatly. If machine pressed, do not lock machine. | | | | | |
| 17. | Binding tape.<br>Attach by string to the right loop, an envelope containing the rayon tape of sufficient length to cover the bottom edge of the skirt. | | | | | |
| 18. | Close skirt.<br>Close slide fastener and button waistband. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The unhemmed skirt shall conform to the measurements shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Size and Measurements

| Size | A Waist | B Hips | C Unhemmed Length Short | C Unhemmed Length Regular | C Unhemmed Length Long | D Sweep |
|---|---|---|---|---|---|---|
| 6 | 24 | 37-1/2 | 24-3/4 | 26-3/4 | 28-3/4 | 44 |
| 7 | 24-1/2 | 38 | 24-3/4 | 26-3/4 | 28-3/4 | 44-1/2 |
| 8 | 25 | 38-1/2 | 24-3/4 | 26-3/4 | 28-3/4 | 45 |
| 9 | 25-1/2 | 39 | 24-3/4 | 26-3/4 | 28-3/4 | 45-3/4 |
| 10 | 26 | 39-1/2 | 24-3/4 | 26-3/4 | 28-3/4 | 46-1/2 |
| 11 | 26-3/4 | 40-1/4 | 24-3/4 | 26-3/4 | 28-3/4 | 47-1/4 |
| 12 | 27 | 41 | 24-3/4 | 26-3/4 | 28-3/4 | 48 |
| 13 | 28-1/4 | 41-3/4 | 24-3/4 | 26-3/4 | 28-3/4 | 48-3/4 |
| 14 | 29 | 42-1/2 | 24-3/4 | 26-3/4 | 28-3/4 | 49-1/2 |
| 15 | 29-3/4 | 43-1/4 | 24-3/4 | 26-3/4 | 28-3/4 | 50-1/4 |
| 16 | 30-1/4 | 44 | 24-3/4 | 26-3/4 | 28-3/4 | 51 |
| 18 | 32-1/2 | 46 | 24-3/4 | 26-3/4 | 28-3/4 | 53 |
| 20 | 34-1/2 | 48 | 24-3/4 | 26-3/4 | 28-3/4 | 55 |
| 22 | 36-1/2 | 50 | 24-3/4 | 26-3/4 | 28-3/4 | 57 |
| Tolerance | + 1 - 1/2 | ± 1 | ± 1/2 | ± 1/2 | ± 1/2 | ± 1 |

NOTE: Waist and hip measurements of skirt shall be taken with slide fastener fully closed and waistband tabs buttoned. All measurements shall be taken with skirt placed smooth and flat.

A. Waist - Twice the measurement taken across center of waistand from folded edge to opposite folded edge.

B. Hip - Twice the measurement taken across the front of skirt from folded edge to opposite folded edge aproximately 7-3/4 inches below the bottom of the waistband.

C. Length of skirt (unhemmed) - Measurement shall be taken along center back of skirt from bottom of waistband to pinked bottom.

D. Sweep (Unhemmed) - Twice the measurement taken on a straight line across bottom width of skirt, from folded edge to folded edge.

3.9 Workmanship. The finished skirts shall conform to the quality established by this specification. As a final step in the contractor's production control plan before formation of a lot, each skirt shall be buttoned, pressed and laid out flat on a table and examined for selected defects prior to folding for packaging. A skirt containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1609 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable point value or defect limit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).
   a. Component and material inspection (see 4.4.1 and 4.4.1.1).
   b. In process inspection (see 4.4.2).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1609 except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. The contractor shall furnish a certificate of compliance for the waistband tape requirements of 3.3.5.3 and the slide fastener requirements of 3.3.10.

4.4.1.1 Testing of components. In addition, components and material listed in Table IV shall be tested for the characteristics specified and in accordance with the referenced test methods in FED-STD-191. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with Table III and the lot shall be unacceptable if one or more units fail to meet any requirements specified. The sample unit and basis for the lot size shall be expressed as follows:



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

| Component | Lot size expressed as | Sample unit for testing |
|---|---|---|
| Rayon tape | yard | 12 continuous |
| Fusible interlining | yard | two 24x24 inch specimen 1/ |

1/ Prepared by the contractor during the same period and under the same conditions as for the fusing of the end item.

Table III - Sample size

| Lot size | Sample size |
|---|---|
| 800 or less | 2 |
| 801 up to and including 22,000 | 3 |
| 22,001 and over | 5 |

Table IV - Testing of components

| Component | Characteristic | Requirement Paragraph | Test Method |
|---|---|---|---|
| Rayon tape | Width | 3.3.5.1 | Visual |
| | Weight | 3.3.5.1 | 5040 |
| | Yarns per inch | 3.3.5.1 | 5050 |
| | Colorfastness to wet-dry cleaning | 3.3.5.1 | 5622 |
| Interlining fused to basic | Construction | 3.3.4 | 1/ |
| | Appearance | 3.3.4 | Visual |
| | Weight | 3.3.4 | 5041 |
| Bond strength | -initial | 3.3.4 | 5951 |
| | -after 5 dry cleanings | 3.3.4 | 5580 2/ and 5951 |
| | Shrinkage -after 3 dry cleanings | 3.3.4 | 5580 |
| All dyed fusible interlinings | Colorfastness to: -dry cleaning | 3.3.4.1 | 5622 |

1/ A certificate of compliance will be acceptable for this requirement.
2/ Pressing and shrinkage requirements shall not apply.

4.4.2 In-process inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

4.4.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the waistband and pocket welt which are fused at one time on the press.

4.4.2.2 Number of check samples. One check sample (see 4.4.2.1) shall be prepared following fusing of every 1000 waistbands or pocket welts, or once every four hours whichever occurs first, and tested for characteristics in 4.4.2.3.

4.4.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for bubbling, delamination of the band, change of color or strike through. If there is any evidence of these conditions present, the previously fused 1000 waistbands or pocket welts shall be inspected for the above conditions. Any waistband or pocket welt exhibiting any of the conditions shall be removed from the lot.

4.4.3 End item examination. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1609.

4.4.4 Packaging inspection. Packaging inspection shall be in accordance with MIL-STD-1609.

4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

| Examine | Defect |
|---|---|
| Finished dimensions | Length, width, or height exceeds specified maximum requirements. |
| Palletization | Pallet pattern not as specified.<br>Interlocking of loads not as specified.<br>Load not bonded with required straps as specified. |
| Weight | Exceeds maximum load limits. |
| Marking | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |

5. PACKAGING

5.1 Preservation-Packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

* 5.1.1.1 Unit packaging. Each skirt shall be folded in half along the length and then folded in thirds across the length. The completely folded skirt shall measure approximately 11 inches in length by 14 inches in width. Each folded skirt shall be inserted in a snug-fitting clear polyethylene film bag of 0.00125 inch ± 20 percent tolerance thickness. All sealed seams shall be formed with heat. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required (see 5.3.1).

* 5.1.2 Level C. Skirts shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Twelve (12) skirts, of one size and length only, packaged as specified in 5.1 shall be packed in a fiberboard shipping container, assembled, and closed conforming to class weather-resistant, type CF, variety DW, grade V15C, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A packaged skirts shall be stacked flat, one in width, two in length and six in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2 Level B. Twelve (12) skirts of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class domestic, type CF, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to class domestic type CF, variety SW or DW, grade 200, of MIL-B-17757. Level A folded skirts shall be stacked flat, one in width, two in length and twenty-four in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.3 Level C. Skirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers and interior packages shall be marked in accordance with MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

* 5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the following required information legibly printed or stamped in black on a white paper label inserted within the bag so as to permit ready identification.

QUANTITY:
STOCK NO.: 8410-00-000-00 (Example)
SKIRT, WOMAN'S, BLUE, DRESS
SIZE: 14 R (Example)

* 5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, a white paper lable 5 x 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed or stamped the correct quantity of each size and length contained therein."

5.4 Palletization. When specified (see 6.2), skirts packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1, wood group I, II, III or IV, Grade A of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved bythe contracting officer.

6. NOTES

6.1 Intended use. The skirt covered in this specification is intended to be worn by female personnel of the Navy.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2).
c. When first article sample is required (see 3.2 and 4.3) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
d. Selection and applicable levels of packaging and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring office issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

6.4 Tape, waistband. A non-slip waistband tape conforming to the requirements of 3.3.5.3 may be obtained from Empire Bias Binding Co., 18 West 20th St., NY, NY., or Atlantic Bias Products, Inc., 16 West 19th St., NY, NY, or United Elastic (Division of J.P. Stevens) Stuart Plant, Stuart, VA 24171. Style #N3 - 7675 or equal (see 6.5).

6.5 Equal item. Prior to the use of an "or equal" item the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA-CT

Project No. 8410-N580

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

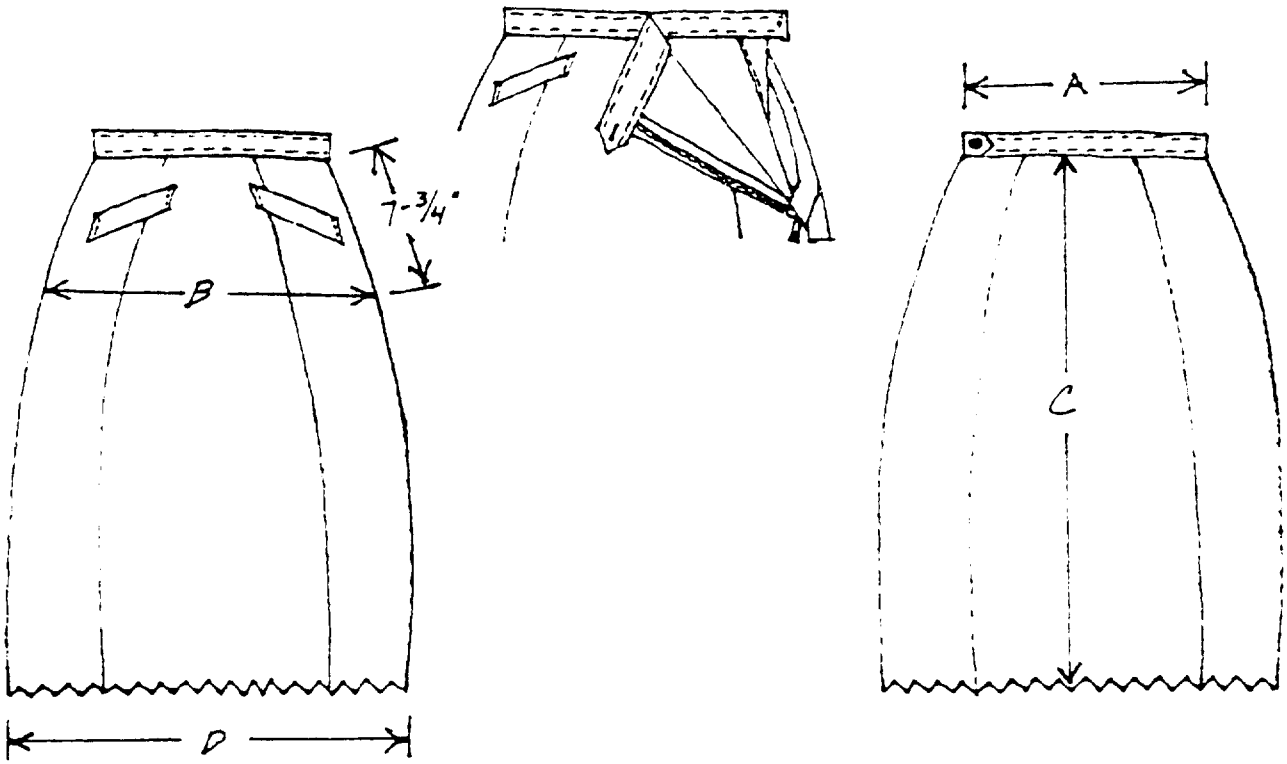


Front View

Back View

Figure 1 - Skirt, Women's, Blue, Dress

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide uggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
Code 50
21 Strathmore Road
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-S-29122C(NU) | SKIRT, WOMAN'S, BLUE, DRESS |

**3a. NAME OF SUBMITTING ORGANIZATION**

**b. ADDRESS** *(Street, City, State, ZIP Code)*

**4. TYPE OF ORGANIZATION** *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

**5. PROBLEM AREAS**

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

**6. REMARKS**

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.