MIL-S-29122D(NU)
18 October 1988
SUPERSEDING
MIL-S-29122C(NU)
10 February 1986

MILITARY SPECIFICATION

SKIRT, WOMAN'S, BLUE, DRESS

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a year round weight dress skirt fabricated of a 10 ounce polyester/wool blend fabric.

1.2 Classification. The skirt shall be of one type and class only and in the following sizes and lengths as specified (see 6.2).

1.2.1 Sizes. 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20 and 22.

1.2.2 Lengths. Short, regular, and long.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified. Unless otherwise specified, the issue of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solication.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fasteners, Slide, Interlocking
V-T-276	- Thread, Cotton
V-T-280	- Thread, Cotton, Gimp, Buttonhole
NN-P-71	- Pallet, Material Handling, Wood Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached, Bleached or Dyed)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxs, Shipping, Fiberboard, Corrugated (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	- Cloth, Twill, Polyester, Polyester and Cotton, Polyester and Rayon for pocketing
MIL-C-44121	- Cloth, Twill, Polyester

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attribute
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1609	- Provisions for Evaluating Quality of Women's Skirts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

* LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issue of documents not listed in the DODISS shall be the issue of the nongovernment document which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

THE COLOR ASSOCIATION OF THE UNITED STATES
DEPARTMENT OF DEFENSE STANDARD SHADES
FOR SEWING THREAD

DEPARTMENT OF DEFENSE STANDARD SHADES FOR BUTTONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

(Application for copies may be obtained from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for the skirt shall be a polyester/wool blend, 10 ounce, shade Blue 3346, conforming to type III, class 3 of MIL-C-21115. The piece number for the Standard Sample is 4001369.

* 3.3.2 Lining material. The material for lining the skirt shall be a rayon twill, 3.7 ounce, shade Black 3202, conforming to Class 1 of MIL-C-368 the piece number for the Standard Sample is 79221 and applies to shade and finish. As an alternate, the material for lining the skirt may be polyester, twill, 2.4 oz/yd, shade Black 3202 conforming to MIL-C-44121.

3.3.3 Pocketing. The material for the front and back plies of the pockets shall be a polyester/cotton blend twill fabric conforming to class 1 of MIL-C-43718. The color of the pocketing shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.3.4 Fusible interlining. The skirt waistband and pocket welts shall be fused with a woven or nonwoven thermal bonded consisting of 85-100% polyester with the remaining fiber being nylon. The material shall be free of chemical binders. The fusible adhesive system shall be a polyester paste dot uniformly distributed over one side of the material. The color shall be black or approximate the shade of the base fabric. The total weight of the nonwoven fusible shall be 1.1 + .2 oz/yd^2. The fused sample, consisting of fusible interlining and base fabric, shall conform to the requirements stated below when tested as specified in Table IV.

Component Testing Requirements

Appearance of fused samples 1/
Initial 2/ - No evidence of bubbling or delamination of the bond, change of color, or strike through.

After 5 dry cleanings 2/ - No evidence of bubbling or delamination of the bond, change of color, or strike through.

Bond strength
22 oz. minimum - initially
18 oz. after 5 dry cleanings

Shrinkage
After 3 dry cleanings 2.5% max.

1/ Applies to quality conformance and in-process tests.
2/ After evaluation for initial appearance and shrinkage, samples may be used for the remainder of appearance tests.
3/ When a nonwoven fusible is used, the item will be accepted if the fusible either splits from itself rather than separates from the outershell material or if it begins to separate from the outershell material higher than the minimal bond strength and than splits from itself.

3.3.4.1 Colorfastness. All dyed, finished, fusible interlining materials shall show fastness to dry cleaning (3 cycles), equal to or better than the Standard Sample. When no Standard Sample is available the finished, dyed fusibles shall show a minimum of "fair" fastness after 3 dry cleanings (see Table IV).

3.3.5 Tapes.

3.3.5.1 Tape, woven. The tape shall be cotton, preshrunk, type I, class 3, 3/8 inch wide (for the skirt hanger loops), conforming to DDD-T-86, except that the only colorfastness requirements applicable shall be to wet-dry cleaning. The tape shall be dyed black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.3.5.2 Tape, waistband, non-slip. The woven non-slip tape for the waistband shall be made of polyester or a blend of polyester/nylon, natural or white in color, 1/2 to 7/8 inch in width with two or three rows of nitrile or chloroprene rubber thread woven or stitched to the tape. The rows of rubber thread shall be positioned a minimum of 3/16 inch from edges of tape. The finished tape shall not shrink more than 2.0 percent in length direction when subjected to the manufacturer's standard procedures for determining dimensional stability to dry cleaning for the end item (see 4.4.1 and 6.4).

3.3.6 Thread.

* 3.3.6.1 Thread, covered. The thread for seaming and stitching the skirt shall be a polyester core thread, except that the polyester covering shall not be used conforming to MIL-T-43548 as follows: The color of the thread shall be Black AA, C.A. 66043 of Department of Defense Standard Shades for Sewing Threads.

Use	Ply	Ticket No.
Machine stitching	2 or 3	50, 70
Overedging	2 or 3	70
Button sewing:		
Machine	2 or 3	24

3.3.6.2 Thread, cotton. As an alternate, a cotton thread conforming to V-T-276 and in the following types and sizes, may be used. The color shall be the same as specified in 3.3.6.1.

Use	Type	Ply	Ticket No.
Machine stitching	1A3	3	30
Overedging	1A3	2	50
Button sewing:			
Machine	1A3	4	20

* 3.3.6.3 Colorfastness of threads. The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. As a limit of acceptability, or when no standard sample is available, the dyed threads shall show a minimum of "good" colorfastness to wet-dry cleaning and light when tested as specified in V-T-276 or MIL-T-43548.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

* 3.3.7 Gimp. The gimp for reinforcing the buttonholes shall be thread cotton, gimp, buttonhole, conforming to type I or II, size No. 8 of V-T-280. The gimp shall be dyed Black AA, CA 66043 of Department of Defense Standard Shade for Seaming Threads.

* 3.3.7.1 Colorfastness. The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. As a limit of acceptability, or when no standard sample is available, the dyed gimp shall show a minimum of "good" fastness to wet-dry cleaning when tested as specified in V-T-280.

3.3.8 Labels.

3.3.8.1 Combination label. Each skirt shall have a combination personal/identification/instruction label conforming to type VI, Classes 10 and 15 of DDD-L-20. The printing shall show good fastness to dry cleaning and shall bear the following inscription:

NAME:
SERVICE NO:
SKIRT, WOMAN'S, BLUE, DRESS:
FIBER CONTENT: 55% Polyester 45% Wool
CONTRACT NO.: DLA-100-00-0-0000 (Example)
NAME OF CONTRACTOR;
NAME OF MANUFACTURER (If other than contractor)

DRY CLEAN ONLY

3.3.8.2 Size label. Each skirt shall have a separate size label conforming to Type VI, Class 2 and shall bear the following inscription:

SIZE: 14R (Example)
STOCK NO.: 8410-00-000-000 (Example)

The length (short, regular or long) may be abbreviated as S, R, or L.

* 3.3.8.3 Removable size ticket. Each skirt shall have a commercial type size ticket attached to the outside of the waistband above the left back gore seam. The ticket shall be three inches long and one inch high, made of a suitable plain, white cardboard. The corners of the ticket may be double perforated for ease in tacking. The size (12-R-Example) shall be printed or stamped on the upper left-hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviations for lengths shall be allowed in accordance with 3.3.8.2.

3.3.9 Button, plastic. The button for the waistband closure shall conform to type II, class D, style 20-21, 24-line of V-B-871. The color shall be Black BT, Cable No. 62001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.3.10 Slide fastener. The slide fastener shall conform to type I, style 1a,(continuous chain) or 3 (pre-assembled), short tab pull, size LS, 7 inches long of V-F-106. The slide fastener shall be continuous monofilament nylon or polyester coil. The complete slide fastener shall not shrink more than 2 percent when tested as specified in V-F-106. The component parts of the slide fastener shall approximate the color of the basic material, or the color of the coil may be clear. The style 1a (continuous chain) requires the application of a slider and bottom stop during production of the skirts.

3.4 Description. The skirt shall be unhemmed, six gore, with 2 diagonal welt pockets, one on each of the front seams, slide fastener and placket closure on left side seam, a non-slip sewn-on waistband buttoned by a tab extension. The skirt is fully lined with a six gore lining.

3.4.1 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way except that additional notches for use during construction are allowed on the working patterns. The patterns provide a 3/8 inch seam allowance for waistband joining seams and 3/4 inch allowance for gore joining seams of skirt and lining and as otherwise indicated in Table I.

* 3.5.1 Pattern parts. The component parts of the skirt shall be cut from the materials specified and in accordance with the following pattern parts:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Material	Pattern Parts	Cut Parts
Cloth, Tropical, Polyester/Wool	Center front	1
	Side front	2
	Center back	1
	Side back	2
	Waistband	1
	Placket	1
	Pocket facing	2
	Pocket welt	2
Cloth, Rayon Twill Lining or Cloth, Twill, Polyester	Center front lining	1
	Side front lining	2
	Center back lining	1
	Side back lining	2
Cloth, Twill Polyester/ Cotton	Pocket (front ply)	2
	Pocket (back ply)	2
Fusible Interlining	Pocket welt interlining	2
	Waistband interlining	1
Template	Pocket marker	-

3.6 Construction.

* 3.6.1 Stitches, seams, and stitchings. Stitches, seams and stitching types as specified in Table I, shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitching are given for the same part of the operation, any one may be used. Seam allowances shall be maintained with seam sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the skirt. Edgestitching and topstitching shall be 1/16 to 1/8 inch from the folded edge except as otherwise specified. The bight of the overedge stitching shall be 3/16 inch. The guide and the knife shall be set to trim only the ravelled ends of the fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

* 3.6.2 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type. When stitch type 401 is permitted, as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The skirt shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished skirt is identical to that produced by following the sequence as listed in Table I.

3.7.1 Shade and size marking. The component parts of the skirt shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

a. corrosive metal fastening devices
b. sew-on shade tickets
c. adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

3.7.2 Pressing. All pressing as required by Table I shall be performed with a heated pressing iron or machine at a suitable temperature for synthetics.

3.7.3 All fusing of the fusible to the basic material shall be on a single ply basis (no stacking allowed).

3.7.4 The statement "press fusible to various cut parts in accordance with the fusible manufacturer's recommendation" refers to time, temperature, and pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

3.8 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting. a. Spread the material, without tension, face to face.					
	b. Cut the skirt in strict accordance with patterns furnished, which show size, directional warp lines for cutting, and instructions and marks for the proper assembly of all component parts.					
	c. Cut all parts of the skirt out of the same piece of material, except the placket which may be cut from ends. The placket piece shall approximate the shade of the skirt.					
	d. Raw edges may be serged as an alternate whenever pinking is required.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects that are classified as defects in MIL-STD-1609 and Section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Marking. Mark or ticket all parts except those parts cut from ends, to insure a uniform shade and size throughout the skirts.					
4.	Assemble skirt panels (gores). a. Pink the raw edges of the sides of the gores. (May be performed during the seaming of the gores).					
	b. Stitch side front gores to center front gore, as indicated by marks on patterns.	301 or 401	SSa-1	12-14	50 50	50 70
	c. Stitch side back gores to center back gore as indicated by marks on patterns.	301 or 401	SSa-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Press seam open flat.					
5.	Make welt pockets.					
	a. Position fusible interlining on underside of welt and press in accordance with the directions of the fusible manufacturer.					
	b. Fold welt lengthwise at marks, face to face, and stitch across each end of welt thru all plies 1/4 inch from raw edge.	301	SSe-2(a)	12-14	50	50
	c. Trim corners, turn welt to finish position and work out seamed edges and corners.					
	d. Position the front pocket ply against the back portion of the welt. Center the welt on the top edge of the pocket, aligning raw edges, overedge stitch together.	503 504 or 602	SSa-1	8-10	70	70
	e. Position the front portion of welt assembly, top edge down, on the front of the skirt. Skirt front may be pre-slashed so the lower notched ends meet the end of the stitch line as marked on pattern. Stitch welt assembly to front along stitchline with a 1/4 inch seam allowance, thru all plies. The ends of the stitching shall finish at the welt ends.	301	SSa-1	12-14	50	50
	f. Overedge bottom edge of pocket facing except when edge has a selvage, or when contractor exercises the option to turn and stitch facing to pocket (see oper. 5g).	503 504 or 602	EFd-1	8-10	70	70
	g. Align the lower serged or selvaged pocket facing edge with the marks at the back ply of pocket. Or, turn under raw facing edge 1/4 inch and align folded edge with the marks at the back ply of pocket. Stitch 1/16 to 1/8 inch from finished edge.	301 or 401	LSbj-1 or LSd-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	h. Stitch combination label on all four sides to the outside of the back ply of pocketing. Label shall be centered on the right pocket with the top edge positioned approximately 1/8 inch below and parallel to the facing piece joining seam. The label inscription shall be upright and shall face the wearer. The stitching shall not be through the printing.	301 or 401	LSbj-1	12-14	50 50	50 70
	i. If not previously slashed, slash front in accordance with marks on pattern about 1/4 inch above stitchline, 3/8 inch short of the welt ends and parallel to welt. Tongue notch opening to ends of stitchline and toward waist. Turn welt through opening to finished position. The notches shall not appear beyond the welt.					
	j. Superimpose the back ply of pocket on the front ply, face to face, matching lower and curved edges. Overedge together the side and bottom edges of pocketing, extending overedging along the raw side edges of the back pocket ply.	503 or 504 or 602	SSa-1 and EFd-1	8-10	70	70
	k. Stitch the side and bottom edges of pocketing 3/8 inch from serged edge.	301 or 401	SSa-1	12-14	50	50
	OR					
	As an alternate, the side and bottom edges of the pocketing may be stitched with a 1/4-3/8 inch gauge safety stitch.	515 or 516	SSa-2	12-14	50 (chn-stch)	50
		or 519			50 (over-edge)	70
	NOTE: The top of the back pocketing piece may be smoothed out and stay stitched to the top edge of skirt to assure back pocket ply lies flat when waistband is attached.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	1. Fold under upper lip of front pocket opening toward the waist and stitch 1/16 inch from the folded edge through the pocket facing and the back ply of pocketing. Tightness, twisting or distortion shall not be present in the facing, skirt, or pocketing.	301	LSd-1	12-14	50	50
	m. Edgestitch thru all plies across each end of welt.	301	Smlr to LSd-1	12-14	50	50
	n. The finished welt shall measure 1 to 1-1/8 inches high and 4-1/8 to 4-3/8 inches wide for all sizes.					
6.	Assemble front and back of skirt.					
	a. Pink the raw edges of the front and back. (May be performed when closing the side seams).					
	b. Stitch skirt front to back at sides, as indicated by marks, leaving an opening on left side to accommodate a 7 inch slide fastener (waistband not included).	301 or 401	SSa-1	12-14	50 50	50 70
	c. Pink the bottom edge of the skirt.					
	d. Press the seams open and flat.					
7.	Attach slide fastener to skirt.					
	a. Finished appearance - Exercise care not to stretch fabric when attaching slide fastener. The welt on front skirt shall completely cover the slide fastener when fastener is closed. The stitching shall not interfere with the operation of the slider and the welt shall be uniform in width.					
	Note: When a style 3 (pre-assembled) slide fastener is used the bottom stop shall finish at the notch at the base of zipper opening and the top stop shall be placed no further than 1/4 inch from waistband joing seam. When a style 1a (continuous chain) slide fastener is used the coil shall extend past the notch at base of zipper opening and extend into the waistband at the top.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Fold the placket piece in half lengthwise and pink the side and bottom raw edges.	301 or 401	SSa-1	12-14	50 50	50 70
	c. Place back half of slide fastener tape even with the pinked outseam. Stitch 1/8 to 3/16 inch in from tape edge.	301	SSab-1	12-14	50	50
	d. Place pinked side edge of placket approximately 5/8 inch in from the pinked (outseam) left side back. Stitch 1/4 to 5/16 inch from chain edge. Turn placket to finished position, roll joining seam to coincide with outseam allowance at bottom of placket opening. Topstitch 1/16 inch from rolled edge with fastener chain approximately 1/8 to 3/16 inch from the rolled seam.	301	LSa-1 and LSq-2(b) (shows finished seam)	12-14	50	50
	e. Place front half of slide fastener tape approximately 1/8 to 3/16 inch in from the pinked (outseam) left side front. Stitch 1/4 to 5/16 inch in from chain edge. For use with style 1a (continuous chain) slide fastener: Attach slide fastener and with chain even apply bottom stop.	301	SSal-2(a)	12-14	50	50
	f. Fold the left skirt front at top as indicated by pattern notch and in line with the side seam line at the bottom. Stitch left front skirt to slide fastener tape forming a 1/2 to 5/8 inch wide welt. The stitching shall be 3/16 to 1/4 inch from the chain edge. The welt shall cover the slide fastener and the stitching on the back opening with no outside pleat at bottom of opening while slide fastener is closed.	301	SSal-2(b)	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	g. Stitch across bottom of welt within 1/4 inch of the lower edge of bottom stop, up to sideseam, from outside of skirt, catching ends of tape and back part of placket piece.	301	SSv-1	12-14	50	50
8.	Make lining.					
	a. Pink the raw edges of the sides of the gores. (May be performed during the seaming of the gores).					
	b. Stitch side front gores to center front gore, as indicated by marks on patterns.	301 or 401	SSa-1	12-14	50 50	50 70
	c. Stitch side back gores to center back gore as indicated by marks on patterns.	301 or 401	SSa-1	12-14	50 50	50 70
	d. Press seams open and flat.					
9.	Assemble front and back of skirt lining.					
	a. Pink the raw edges of the front and back. (May be performed when closing the side seams).					
	b. Stitch skirt front to back at sides, as indicated by marks, leaving an opening on left side to correspond with slide fastener closure.	301 or 401	SSa-1	12-14	50 50	50 70
	c. Finish top opening of left side by turning under the seam allowance and top stitching each side and across bottom of opening approximately 1/4 inch from folded edges.	301	EFa-1 and SSv-1	12-14	50	50
	d. Pink bottom edge of skirt lining.					
	e. Press the seams open and flat.					
10.	Attach lining to skirt.					
	a. Pull assembled lining over assembled skirt, back to back, with slide fastener, front and back gores, and side seams of skirt and lining corresponding with each other and waist edges of skirt and lining superimposed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Join the two assemblies together along waist, 1/4 to 3/8 inch from raw edge, simultaneously catching and securing the top ends of slide fastener tape, pocket tops, front back and side seams and both plies of folded placket.	301	SSa-1	12-14	50	50
11.	Make waistband. a. Position fusible interfacing to the underside of the waistband and press in accordance with the directions of the fusible manufacturer.					
	b. Overedge stitch the inside bottom edge of the waistband.	503 504 or 602	EFd-1	8-10	70	70
	c. Center non-slip waistband tape on the outer surface of back ply of waistband and stitch 1/16 inch from edges of tape. The raw ends of tape shall be folded under. The rows of rubber gripper threads shall face the wearer. The ends of tape shall finish as follows when measured from the finished folded ends of waistband: From pointed end (top ply) - 4 to 4-1/2 inches. From squared end (bottom ply) - 2 to 2-1/8 inches.	301 or 401	LSbj-1	8-10	50 50	50 70
12.	Attach waistband, size label and hanger loops. a. Join 3/8 inch from raw edge bottom of underply portion of waistband to the top of skirt on the outside leaving extensions as indicated by pattern notches, simultaneously catching and securing the top of back pocketing piece, the label at center back 1/2 inch off center tolerance, both plies folded placket, and two skirt loops (3/8 inch wide) folded and positioned with one loop at the right side seam and one loop directly back of placket on left side. b. The tape loops shall have a free opening of approximately 1-1/2 to 2 inches.	301 or 401	BSp-2(a)	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Fold waistband in half lengthwise; seam straight end and pointed end, trim, turn, and work out corners and point.	301	SSe-2(a)	8-10	50	50
	OR					
	d. As an alternate, pointed and straight ends of waistband may be seamed, trimmed, turned and edgestitched prior to setting to waist.	301	SSe-2(a&b)	8-10	50	50
	e. The front extension of the waistband shall measure 2 (± 1/16) inches beyond fold of welt to the finished point of tab. The back extension shall measure 1 (± 1/16) inches beyond fold of placket piece to the finished square end of tab.					
	f. Turn waistband to finished position, and edgestitch on outside along bottom folded edge, continuing along tab ends and top of waistband.	301	BSp-2(b) and SSe-2(b) and EFa-1	8-10	50	50
	g. The finished width of the waistband shall be 1 (± 1/16) inches.					
	h. Press waistband flat.					
13.	Buttonholes. a. The stitching shall be securely caught in the fabric, and with purling on the outside, worked over gimp and end of buttonhole securely tacked.					
	b. Stitch a 3/4 inch horizontal eyelet end taper bar buttonhole, centered with the inside purled edge 5/8 (+ 1/8) inch in from the finished pointed end of the waistband tab.	Button-hole		52-54 per buttonhole	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Stitch a 5/8 to 3/4 inch horizontal eyelet end taper bar bottonhole centered with the inside purled edge 5/8 (+ 1/8) inch in from the finished straight end of the waist band tab.	Button-hole		52-54 per buttonhole	50	50
14.	Buttons. a. Close slide fastener, align top edge of waistband even, extend waistband to assure that placket covers slide fastener, and mark placement of buttons through each buttonhole eyelet.					
	b. Sew a 24-line button through both plies of the waistband, centered to correspond with buttonhole eyelet in pointed end of tab.	101 or 301		20-22 14-16 per button	24 24	 24
	c. Sew a 24-line button through underply of waistband centered to correspond with buttonhole eyelet in straight end of tab.	Hand or Machine		20-22 14-16 per button	24 24	 24
15.	Removable size ticket. Tack all corners of removable size ticket to outside of waistband above the left back gore seam.	Hand or Machine		2-4 stitches per tack 6-8 stitches per tack		
16.	Clean skirt. Trim thread ends and remove all loose threads, spots, stains and shade tickets. NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.					
17.	Pressing. Press neatly. If machine pressed, do not lock machine.					
18.	Close skirt. Close slide fastener and button waistband.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

* 3.8 Measurements. The unhemmed skirt shall conform to the measurements shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Size and Measurements

Size	A Waist	B Hips	C Unhemmed Length Short	Regular	Long	D Sweep
6	24	37-1/2	24-3/4	26-3/4	28-3/4	44
7	24-1/2	38	24-3/4	26-3/4	28-3/4	44-1/2
8	25	38-1/2	24-3/4	26-3/4	28-3/4	45
9	25-1/2	39	24-3/4	26-3/4	28-3/4	45-3/4
10	26	39-1/2	24-3/4	26-3/4	28-3/4	46-1/2
11	26-3/4	40-1/4	24-3/4	26-3/4	28-3/4	47-1/4
12	27-1/2	41	24-3/4	26-3/4	28-3/4	48
13	28-1/4	41-3/4	24-3/4	26-3/4	28-3/4	48-3/4
14	29	42-1/2	24-3/4	26-3/4	28-3/4	49-1/2
15	29-3/4	43-1/4	24-3/4	26-3/4	28-3/4	50-1/4
16	30-1/2	44	24-3/4	26-3/4	28-3/4	51
18	32-1/2	46	24-3/4	26-3/4	28-3/4	53
20	34-1/2	48	24-3/4	26-3/4	28-3/4	55
22	36-1/2	50	24-3/4	26-3/4	28-3/4	57
Tolerance	+ 1 - 1/2	± 1	± 1/2	± 1/2	± 1/2	± 1

NOTE: Waist and hip measurements of skirt shall be taken with slide fastener fully closed and waistband tabs buttoned. All measurements shall be taken with skirt placed smooth and flat.

A. Waist - Twice the measurement taken across center of waistand from folded edge to opposite folded edge.

B. Hip - Twice the measurement taken across the front of skirt from folded edge to opposite folded edge aproximately 7-3/4 inches below the bottom of the waistband at side seam.

C. Length of skirt (unhemmed) - Measurement shall be taken along center back of skirt from bottom of waistband to pinked bottom.

D. Sweep (Unhemmed) - Twice the measurement taken on a straight line across bottom width of skirt, from folded edge to folded edge.

3.9 Workmanship. The finished skirts shall conform to the quality established by this specification. As a final step in the contractor's production control plan before formation of a lot, each skirt shall be buttoned, pressed and laid out flat on a table and examined for selected defects prior to folding for packaging. A skirt containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1609 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable point value or defect limit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must met all requirements of section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Governement for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual nor does it commit the Governement to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4)

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1609 except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. The contractor shall furnish a certificate of compliance for the waistband tape requirements of 3.3.5.3 and the slide fastener requirements of 3.3.10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

4.4.1.1 Testing of components. In addition, components and material listed in Table IV shall be tested for the characteristics specified and in accordance with the referenced test methods in FED-STD-191. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with Table III and the lot shall be unacceptable if one or more units fail to meet any requirements specified. The sample unit and basis for the lot size shall be expressed as follows:

Component	Lot size expressed as	Sample unit for testing
Fusible interlining	yard	two 24x24 inch specimen 1/

1/ Prepared by the contractor during the same period and under the same conditions as for the fusing of the end item.

Table III - Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table IV - Testing of components

Component	Characteristic	Requirement Paragraph	Test Method
Interlining fused to basic	Construction	3.3.4	1/
	Appearance	3.3.4	Visual
	Weight	3.3.4	5041
Bond strength	-initial	3.3.4	5951
	-after 5 dry cleanings	3.3.4	5580 2/ and 5951
	Shrinkage -after 3 dry cleanings	3.3.4	5580
All dyed fusible interlinings	Colorfastness to: -dry cleaning	3.3.4.1	5622

1/ A certificate of compliance will be acceptable for this requirement.
2/ Pressing and shrinkage requirements shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection.

4.4.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the waistband and pocket welt which are fused at one time on the press.

4.4.2.2 Number of check samples. One check sample (see 4.4.2.1) shall be prepared following fusing of every 1000 waistbands or pocket welts, or once every four hours whichever occurs first, and tested for characteristics in 4.4.2.3.

4.4.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for bubbling, delamination of the band, change of color or strike through. If there is any evidence of these conditions present, the previously fused 1000 waistbands or pocket welts shall be inspected for the above conditions. Any waistband or pocket welt exhibiting any of the conditions shall be removed from the lot.

* 4.4.3 End item examination. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1609 and the following defect:

Label	
Removable size ticket missing, incorrect, or illegible	3 points

4.4.4 Packaging inspection. Packaging inspection shall be in accordance with MIL-STD-1609.

4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-Packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each skirt shall be folded in half along the length and then folded in thirds across the length. The completely folded skirt shall measure approximately 11 inches in length by 14 inches in width. Each folded skirt shall be inserted in a snug-fitting clear polyethylene film bag of 0.00125 inch ± 20 percent tolerance thickness. All sealed seams shall be formed with heat. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required (see 5.3.1).

5.1.2 Level C. Skirts shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Sixteen (16) skirts, of one size and length only, packaged as specified in 5.1 shall be packed in a fiberboard shipping container, assembled, and closed conforming to class weather-resistant, type CF, variety DW, grade V15C, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A packaged skirts shall be stacked flat, one in width, two in length and eight in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.2 Level B. Sixteen (16) skirts of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class domestic, type CF, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to class domestic type CF, variety SW or DW, grade 200, of MIL-B-17757. Level A folded skirts shall be stacked flat, one in width, two in length and eight in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Skirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers and interior packages shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the following required information legibly printed or stamped in black on a white paper label inserted within the bag so as to permit ready identification.

QUANTITY:
STOCK NO.: 8410-00-000-00 (Example)
SKIRT, WOMAN'S, BLUE, DRESS
SIZE: 14 R (Example)

5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The skirt covered in this specification is intended to be worn by female personnel of the Navy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2).
c. When first article sample is required (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
d. Selection and applicable levels of packaging and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring office issuing the invitation for bids.

6.4 Tape, waistband. A non-slip waistband tape conforming to the requirements of 3.3.5.3 may be obtained from Empire Bias Binding Co., 18 West 20th St., NY, NY., or Atlantic Bias Products, Inc., 16 West 19th St., NY, NY, or United Elastic (Division of J.P. Stevens) Stuart Plant, Stuart, VA 24171. Style #N3 - 7675 or equal (see 6.5).

6.5 Equal item. Prior to the use of an "or equal" item the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.7 Subject term (key word) listing:

Blue 3346
Fusibles
Lined, fully
Polyester/wool 55/45
Skirt, dress


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA-CT

Project No. 8410-N684

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

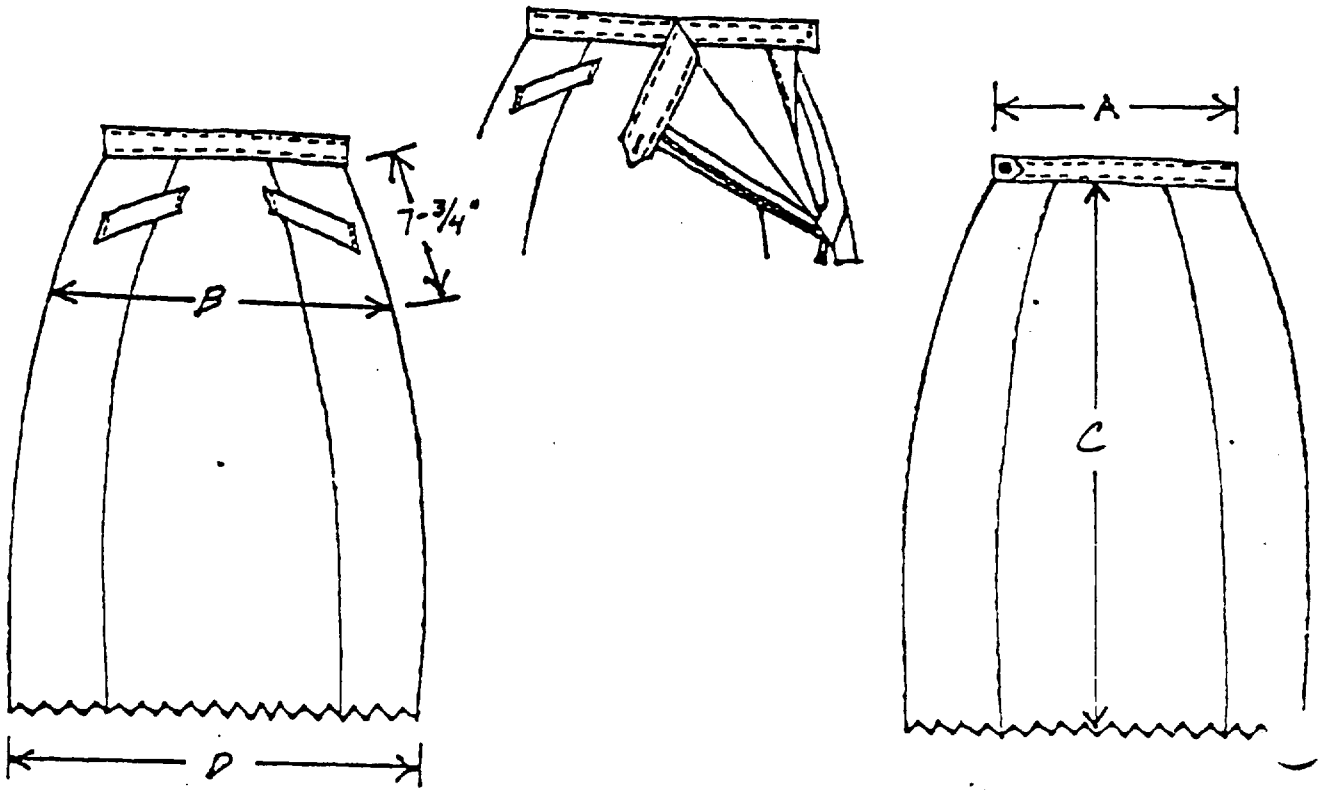

Front View

Back View

Figure 1 - Skirt, Women's, Blue, Dress

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-29122C(NU)	SKIRT, WOMAN'S, BLUE, DRESS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil/ – Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Natick, Mass. 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:36Z
Check the source to verify that this is the current version before use.