MIL-S-29130A
26 July 1978
SUPERSEDING
MIL-S-29130(SA)
21 May 1974

MILITARY SPECIFICATION

SHORTS, MEN'S, POLYESTER/COTTON

This specification is approved for use by Naval Supply Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers shorts made from a polyester and cotton cloth.

* 1.2 Classification. The shorts shall be one type of two classes, in the following sizes (see 6.2):

Class 1 - Khaki
Class 2 - White

Schedule of sizes

Short	26, 28, 30, 32, 34, 36, 38, 40, 42
Regular	26, 28, 30, 32, 34, 36, 38, 40, 42, 44
Long	28, 30, 32, 34, 36, 38, 40, 42, 44

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA., 01760) by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-781	- Button, Sewing Hole and Button, Staple (Plastic)
V-F-106	- Fasteners, Slide, Interlocking
V-T-276	- Thread, Cotton
V-T-280	- Thread, Cotton Gimp, Buttonhole
CCC-C-438	- Cloth, Buckram, Cotton
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-C-326	- Cloth, Silesia, Cotton
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-29127	- Cloth, Twill, Polyester and Cotton, Crease Resistant Finish
MIL-T-43548	- Thread, Polyester, Cotton-Covered
MIL-C-43718	- Cloth, Twill, Polyester, Polyester and Cotton; Polyester and Rayon

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-1488	- Provisions for Evaluating Quality of Trousers

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402).

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

* 3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Material.

3.3.1 Basic material.

3.3.1.1 Class 1 shorts. The basic material for class 1 shorts shall be polyester/cotton, crease-resistant finish cloth, Khaki 2101 conforming to Class 1 of MIL-C-29127.

3.3.1.2 Class 2 shorts. The basic material for class 2 shorts shall be polyester/cotton, crease-resistant finish cloth, White 3006 conforming to Class 2 of MIL-C-29127.

* 3.3.2 Pocketing. The material for pocketing shall be cotton silesia cloth, unbleached, for class 1 and class 3 shorts and bleached white for class 2 shorts, conforming to type III of MIL-C-326. As an alternate, a twill cloth conforming to class 1 of MIL-C-43718 may be used.

* 3.3.3. Lining. The material for waistband lining, right fly lining and left fly interlining shall be cotton silesia cloth, unbleached for class 1 shorts and bleached white for class 2 shorts, conforming to type I of MIL-C-326. As an alternate, a twill cloth conforming to class 1 of MIL-C-43718 may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

3.3.4 Buckram. The material for interlining the waistband shall be cotton buckram cloth, natural in color for class 1 shorts and bleached white for class 2 shorts, conforming to type II, class 1 of CCC-C-438.

3.3.5 Thread and gimp.

3.3.5.1 Thread, polyester, cotton-covered. The thread for seaming and stitching the shorts shall be a polyester cotton-covered thread conforming to MIL-T-43548 in the following sizes may be used:

Use	Ticket No.	Ply
Seaming and tacking	40, 50	2 or 3
Overedging	70	2
Button sewing	20	2 or 3

3.3.5.2 Gimp. The cotton gimp for buttonhole shall conform to No. 8, type I or II of V-T-280.

3.3.5.3 Color of thread and gimp. The thread and gimp shall be dyed Khaki, P-1, Cable No. 66019 for class 1 shorts and shall be bleached white for class 2 shorts.

3.3.5.3.1 Colorfastness.

* 3.3.5.3.1.1 Colorfastness of thread. The dyed thread shall show fastness to laundering, chlorine bleaching and light, equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, chlorine bleaching, and light when tested as specified in V-T-276 or MIL-T-43548.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

* 3.3.5.3.1.2 Colorfastness of gimp. The dyed gimp shall show fastness to laundering and chlorine bleaching equal to or better than the standard sample. When no standard sample is available, the dyed gimp shall show "good" fastness to laundering and chlorine bleaching when tested as specified in V-T-280.

3.3.6 Buttons. The buttons shall be 22-line, conforming to type II, class D, style 4 of V-B-871. The color shall be as follows:

Class 1 - Khaki AL, Cable No. 62026
Class 2 - White BA, Cable No. 62031

* 3.3.7 Combination label. Each pair of shorts shall have a combination personal, size, identification and instruction label conforming to type I, classes 10 and 14 of DDD-L-20. The printing on the label shall show fastness to laundering and the label shall bear the following inscription:

NAME:
SERVICE NO.:
SHORTS, MEN'S, POLYESTER/COTTON
FIBER CONTENT: Polyester (50%) and Cotton (50%)
CONTRACT NO.: DSA 100-00-0-000 (Example)
STOCK NO.: 8405-00-000-0000 (Example)
SIZE: 26R (Example)
NAME OF SUPPLIER:

LAUNDERING INSTRUCTION
Machine Wash - Hot Water
DO NOT USE CHLORINE BLEACH
Tumble Dry - Medium Heat, Remove Promptly

3.3.8 Slide fastener. The slide fastener shall be type I, style 1, cam lock, size LM, short tab pull, conforming to V-F-106, except that all metal components of the slide fastener shall be fabricated of brass and purchased from the same supplier (see 4.3.1).

* 3.3.8.1 Slide fastener tape. The tape shall be dyed Shade P, Cable No. 66516 for Class I shorts and bleached white for Class 2 shorts. The dyed tape shall show "good" fastness to laundering and chlorine bleaching.

* 3.3.9 Hook and eye. The hook and eye for the waistband shall be nickle plated finish, North and Judd (hook Flex H-49, K-50, H-89, and E-90); Universal Button Co., (talon #3, #7, and #8 hook with #8 eye or #85 eye); Akim Co. or Patwin, Inc., Junior Series, type JB; Stimpson (P-536; D-4086, D-4457, D-4288); Rau (OA50, OX1256, 080415); Patwin, Inc. (Slim-Slak with MB eye, and Slik-Slak) or functionally interchangeable equivalent (see 4.4.1 and 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

3.4 Design. The short shall have two side quarter top pockets, two hip pockets, a separate waistband, back darts and hemmed leg bottoms.

* 3.4.1 Figures. The figures are furnished for information purposes only. When inconsistencies exist between the specification and the figures, the written specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow a 1/4 to 3/8 inch (0.6 to 1.0cm) seam allowance for all seams, except hip pocket seams, joining of flies to right and left fronts, where 1/4 inch (0.6cm) allowance is provided, inseams and outseams where 1/2 inch (1.3cm) allowance is provided and seat seam where 7/8 inch (2.2cm) outlet is provided. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 List of pattern parts. The components of the shorts shall be cut from materials as specified in accordance with the pattern parts indicated:

Material	Pattern Nomenclature	Cut Parts
Basic material	Front	2
	Back	2
	Side pocket bearer	2
	Side pocket facing	2
	Hip pocket cord	2
	Hip pocket bearer	2
	Flies (1 right and 1 left)	2
	Waistband (right and left)	2
Cotton silesia cloth or twill cloth	Left fly interlining	1
	Right fly lining	1
	Side pockets	2
	Hip pockets	2

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types, as specified in Table I shall conform to FED-STD-751. When two or more seam or stitch types are given for the same operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shorts.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching shall be backtacked not less than 1/4 inch (0.6cm). Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch (1.3cm). Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type. Ends of a continuous line of stitching shall overlap not less than 1/2 inch (1.3cm).

* 3.6.4 Buttonholes. The buttonholes specified in Table I shall be clean cut, and correctly positioned. The stitching shall be caught in the fabric with the purling on the outside. Buttonholes shall be of the eyelet end, taper bar type, with ends tacked, and worked over gimp. The cut length shall be 5/8 to 3/4 inch (1.6 to 1.9cm). The bar end of buttonhole shall have a minimum of 4 stitches not counting the first cross-over in that it is part of the buttonhole not the bar. Ends of gimp finishing on top of buttonhole should be pulled through to the underside.

3.7 Manufacturing operations requirements. The shorts shall be manufactured in accordance with operation requirements specified in Table I. The supplier is not required to follow the exact sequence of operations.

*. 3.7.1 Shade and size marking. The component parts of the shorts shall be marked to insure a uniform shade and size throughout the garment. Any method may be used except:

(a) Corrosive metal fastening devices
(b) Sew-on type tickets
(c) Adhesive type tickets which show discoloration and the adhesive mass adheres to the material upon removal of the tickets.

* 3.7.2 Pressing. All pressing required in Table I shall be performed with a heated pressing iron or machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting shorts. a. Cut the shorts in strict accordance with patterns furnished which show size, placement of pockets, directional lines and notches for proper assembling of cut parts. Lay fronts and backs so that the directional line is in the warp direction. The directional line may vary from the warp direction by not more than 3/4 inch (1.9cm) on both fronts and backs. Measurements shall be taken from the top and bottom of the directional line on pattern to the selvage edge of the fabric and the difference between the two measurements shall not exceed the tolerance specified. The right waistband may be cut in accordance with notch on pattern or if right and left waistbands are cut together, the end of right waistband may be trimmed to correspond with the right side of waist. b. Cut all parts of the shorts out of one piece of material, except right and left fly including the left fly interlining, side pocket facing, hip pocket bearer and belt loops, which may be cut from ends. As an alternate, side pocket, hip pocket and fly lining (right side) may be cut from cloth, twill. Parts cut from ends shall approximate the shade of the shorts. c. Cut the waistband lining, inlerlining, and right fly lining parts on the bias. The waistband lining and waistband interlining shall be cut sufficiently wide to finish as specified in operation 14. The waistband linings may be a commercial type, using the materials specified in 3.3.3 and 3.3.4.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting shorts (cont'd) d. Cut as many pockets as possible in the warp direction. e. The belt loops may be roll cut and shall be of sufficient width to finish 1/4 to 3/8 inch (0.6 to 1.0cm) in width and of sufficient length to conform to operation 24. NOTE: The cut width of the belt loops will vary depending on which method of operation 13 is used.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1488 shall be removed from production and replaced with non-defective and properly matched components.					
3. *	Shade and size marking (see 3.7.1).. a. All parts shall be marked, ticketed or bundled to insure a uniform shade, size and proper assembly throughout the garment, except those parts cut from ends which shall closely match the shorts. b. The use of ink pad numbering machine, rubber stamp or pencil is acceptable provided the numbers do not show through the outside of the shorts and numbers shall be covered by the seam allowance.					
4.	Overedge stitching. Finished appearance - When a knife is used on overedging machine, set guide so that the edge of fabric is not cut off but only the raw edges is trimmed, when overedged.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Overedge stitching. (cont'd)					
*	a. Overedge inseams and outseams of the back parts and fore parts of shorts. The overedge stitching on outseams of fore parts shall extend from bottom of legs to bottom notch of pocket.	503 or 504 or 602	EFd-1	6-10	70-2	70-2
*	b. Overedge stitch seat seams and crotch seams. The right front shall be overedge stitched from crotch to top edge of waist and left front from crotch to fly notch.	503 or 504 or 602	EFd-1	6-10	70-2	70-2
5.	Make side pockets and attach identification label.					
	a. Stitch the combination label on all sides to the right side pocket, on the outside of pocket (next to the body as worn).	301	LSbj-1	10-14	50-3	50-3
	b. Turn in front edge of bearer and facing respectively and seam to pocket with the stitching continued across bottom edges (see A, Figure 2).	301	LSd-1	10-14	50-3	50-3
	c. Selvage edges need not be turned in or overedge stitched.					
6.	Attach side pockets. Finished appearance - The edges of the pocket openings shall finish smooth and flat without distortion. Pocket openings shall be uniform in appearance and not vary more than 1/4 inch (0.6cm) in length.					
	b. Seam side pockets to fronts as indicated by marks on pattern and notch for pocket opening. Turn with the seam to the back of front edge on underside and stitch 3/16 to 1/4 inch (0.5 to 0.6cm) from edge (see B and C, Figure 2).	301	SSe-2(a) SSe-2(b)	10-14	50-3 0	50-3 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Attach side pockets. (cont'd)					
	c. Fold pocket right side out. Stitch from step to fold edge of pocket. Notch pocket and facing at top of step and turn (see D and E, Figure 2).	301 or 401	SSe-2(a)	10-14	50-3 50-3	50-3 70-2
	d. Tack the ends of opening through bearer with a 1/4 to 3/8 inch (0.6 to 1.0cm) tack. The right and left pocket openings shall not be out of alignment by more than 1/2 inch (1.3cm) (see F, Figure 2).	301		10-14	50-3	50-3
7.	Make flies.					
	a. Double stitch back edge of fastener tape to left fly through fly interlining. The edge of the chain shall be 1/2 to 5/8 inch (1.3 to 1.6cm) from front edge on the finished fly at top, tapering 1/4 to 3/8 inch (0.6 to 1.0cm) at bottom with the buttom ends of scoops not more than 1/2 inch (1.3cm) above the fly notch, when fasteners are cut and scoops removed (see A, Figure 3).	301 or 401	SSau-2	10-14	50-3 50-3	50-3 70-2
*	b. Seam or overedge fastener tape to back edge of right fly, with the bottom end of scoops not more than 1/2 inch (1.3cm) above the fly notch, after fasteners are cut and scoops removed (see B, Figure 3).	301 or 503 or 504 or 602	SSa-1 SSa-1 SSa-1	10-14 6-10 6-10	50-3 70-2 70-2	50-3 70-2 70-2
	c. The right fly shall be one thickness of the basic material, and lined with basic cloth, cotton silesia or twill cloth.					
	d. (1) Seam the lining to the front edge of the right fly, to within 1 (± 1/4) inch (2.5 ± 0.6cm) from top of fly; turn and stitch 1/16 to 1/8 inch (0.2 to 0.3cm) from edge (see C and D, Figure 3).	301 or 401 and 301	SSe-2(a) SSe-2(b)	10-14	50-3 50-3 50-3	50-3 70-2 50-3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Make flies. (cont'd)					
	OR					
	(2) Join the lining and the fly piece and edge stitch in one operation using a folder.	301 or 401	SSc-1	10-14	50-3 50-3	50-3 70-2
*	e. Overedge stitch the back edges of the left fly, and fly interlining together (see E, Figure 3).	503 or 504 or 602	SSa-1	10-14	70-2	70-2
8.	Sew on right and left flies. Finished appearance - Notches at base of fly shall match at crotch seam. The fastener parts shall be so set that there is no twisting or puckering, when fly is closed.					
	a. Sew on right fly (slide fastener attached) with notches matching, catching fastener tape in the seam (see F, Figure 3).	301	SSa-1	10-14	50-3	50-3
	b. The end of the right fly lining shall extend beyond inseam not less than 1/2 inch (1.3cm).					
	c. Sew on left fly (slide fastener attached) with notches matching (see G, Figure 3).	301	SSa-1	10-14	50-3	50-3
	d. Turn left fly to the inside with seam 1/16 to 1/8 inch (0.2 to 0.3cm) back of folded edge and press front edge flat without damage to the slide fastener chain (see H, Figure 3).					
	e. Right fly seam may be pressed open and flat with the fastener tape facing the side seam.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make darts. Finished appearance - The darts shall be folded, not cut, and carefully tapered off and properly pressed. The lower ends of the darts shall finish in the hip pocket openings. Fold of dart shall be toward the seat seam.					
	Fold darts on back, as indicated on patterns, and stitch full length of darts. Press darts smooth and flat. Darts may be stitched across top to the shorts prior to attaching waistband.	301	OSf-1	10-14	50-3	50-3
10.	Make hip pockets Finished appearance - The pockets shall be uniform in width and shall finish 5 3/4 to 6 1/4 inches (14.6 to 15.8cm) deep. Ends of openings, where the cord facings are turned, shall be neatly finished without raw edges or pleats. The right and left pockets shall be in alignment. The top of pocketing shall extend not less than 1/2 inch (1.3cm) into the waistband and be caught in the bottom stiching of the waistband. The pocket openings shall measure 5 to 5 1/4 inches (12.7 to 13.3cm) for sizes 26 through 32 and 5 1/2 to 5 3/4 inches (14.0 to 14.6cm) for sizes 34 through 44.					
*	a. (1) Turn lower raw edge of pocket facing (or bearer) piece and seam to pocket at notches, as indicated on patterns. When facing is cut on selvage, the edge need not be turned in (see A, Figure 4).	301 or 401	LSd-1	10-14	50-3 50-3	50-3 70-2
	(2) Position narrow facing piece, as indicated by patterns, and seam to shorts through pocket on the underside with two rows of stitching (see B, Figure 4)	301	SSv-2	10-14	50-3	50-3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10	Make hip pockets. (cont'd) a. (3) Cut opening through facing, shorts and pockets, turn facing through opening and raise stitch, forming a 1/8 to 3/16 inch (0.3 to 0.5cm) cord on lower edge of opening (see C, D and E, Figure 4).	301	SSe-2 shows finished seam	10-14	0 or 50-3	0 or 50-3
	(4) Turn in raw edge of narrow facing piece and seam to pocket. When cord facing piece is cut with selvage the edge need not be turned in (see E, Figure 4).	301 or 401	LSd-1	10-14	50-3 50-3	50-3 70-2
	(5) Fold pocket, seam side edges and turn to finished position (see F, Figure 4).	301 or 401	SSe-2(a)	10-14	50-3 50-3	50-3 70-2
	(6) Smooth out pocket and single stitch sides 3/16 to 1/4 inch (0.5 to 0.6cm) from edges. Stitching may extend across bottom folded edge of pockets. The ends of the facing and cord facing piece shall be caught in the edge stitching only (see G, Figure 4).	301	SSe-2(b)	10-14	50-3	50-3
*	(7) Form a 1/8 to 3/16 inch (0.3 to 0.5cm) cord of the facing on upper edge of pocket opening and raise stitch the seam through shorts, cord facing piece, pocket bearer and pocket, closing top of pocket (see H, Figure 4).	301	-	10-14	50-3 or 0	50-3 or 0
*	(8) Tack ends of pocket opening 1/4 to 3/8 inch (0.6 to 1.0cm) through cord, bearer and pocket. OR	301	-	10-14	50-3	50-3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Make hip pockets (cont'd)					
	a. (9) Operations (2) and (3) above may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. The joining seam of the bottom welt piece shall be raised stitched through back and welt piece and the joining seam of the top welt piece shall be raised through all plies in the closing of the top of pocket. Ends of pocket opening shall be securely tacked.	101 or 301		10-14 10-14	50-3 0 or 50-3	 0 or 50-3
11.	Join outseams.					
	a. Join outseams with notches matching. Press seams open and flat.	301 or 401	SSa-1	10-14	30-3 30-3	30-3 50-3
	OR					
	b. Join outseams with notches matching by turning back the edge of one part and single stitch to the other part 1/16 to 1/8 inch (0.2 to 0.3cm) from turned edge. The seam pressing may be omitted.	301 or 401	SSr-1	10-14	30-3 30-3	30-3 50-3
12.	Finish side pockets.					
	a. Turn in raw edge and stitch to seam allowance of the back part to end of opening 1/4 inch (0.6cm) from edge; continue edge stitching down back and bottom edge of pocket securely backstitching at front corner (see G, Figure 2).	301 and 301	SSb-1 SSe-2 shows finished seam	10-14 10-14	50-3 50-3	50-3 50-3
	b. Upper portion of pockets shall extend into the waistband, finish smooth, flat and sewn to the seam allowance of shorts.	301	SSa-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13 *	Make belt loops (see operation 1.e).					
	a. Make loops by folding a piece of the basic material to center with the edges abutted and double stitched not less than 1/4 inch (0.6cm) gauge with a covering stitch on the underside. The finished stripping shall measure 5/16 to 3/8 inch (0.8 to 1.0cm) in width.	406	EFh-1	10-14	0	50-3
	OR					
	b. Seam loop pieces, turn, smooth out, and flatten. The seam shall not be exposed on the side edge of the loop.	301	EFu-1	10-14	0	50-3
	OR					
	c. Make loops by abutting folded edges and stitch with the line of stitching covering the abutted edges. The stitching shall now show through to the outside.	105	EFae-1	10-14	50-3	
14	Make waistband linings. Finished appearance - The waistband lining shall be made of silesia or twill cloth and interlined with buckram. The waistband lining shall measure 1 3/4 to 1 7/8 inches (4.4 to 4.7cm) wide in the finished shorts.					
	a. Overlap lining material on buckram 3/4 inch (1.9cm) and stitch 1/8 to 3/16 inch (0.3 to 0.5cm) from edge of silesia. Fold lining over buckram and press.	101 or 301 or 401	LSa-1	6-10	50-3 50-3 50-3	 50-3 70-2
	OR					
	b. Use a commercial, buckram lined, waistband conforming to above requirements.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Seam waistband and set belt loops. Finished appearance - The waistband shall finish smooth and flat without fullness, gathers or pleats. The waistband shall have the belt loops positioned with ends (except the back center loops) inserted not less than 1/2 inch (1.3cm) at bottom of waistband and caught in the stitching. a. There shall be seven loops for sizes up to and including size 36; and eight loops for size 38 and above. The loops shall be positioned as follows: (1) One centered (1/4 inch (0.6cm) tolerance) on each front. (2) One centered (1/8 inch (0.3cm) tolerance on each side seam. (3) One centered (1/4 inch (0.6cm) tolerance on each back part. (4) One on seat seam. (5) The extra loop for larger sizes shall be positioned on right front 1 1/4 to 1 3/4 inches (3.1 to 4.4cm) from edge of left fly, when closed.					
	b. Seam bottom edge of waistband to top edge of shorts catching ends of belt loops in position, except center back loop. The right end of the waistband shall be even with the front edge of the right fly. The left end of the waistband shall be overedged and even with the back edge of the left fly.	301 or 401 and 502 or 503	SSa-1 EFd-1	10-14 6-10	50-3 50-3 70-2 70-2	50-3 70-2 70-2
☆	c. Drop belt loops and securely stitch or bartack the loops 1/4 (± 1/8) inch (0.6 ± 0.8cm) below waistband seam.	301 or bartack or automatic loop tacker		10-12 21-28 per bartack 24-28	50-3 0 0	50-3 0 0

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Seam waistband lining. Finished appearance - The hook and eye shall be attached to the waistband so that, when both parts are engaged, the closure shall not bulge, twist, pucker or be distorted.					
	a. Seam top edge of waistband lining to top edge of waistband (left side) with the end of the lining even with the seam joining left fly to shorts.	301 or 401	SSa-1	10-14	50-3 50-3	50-3 70-2
	b. (1) Seam top edge of waistband lining to top edge of waistband (right side) with the end of the fly lining turned back and caught in the seaming and with the stitching continued across the end of the waistband, catching the right fly lining as described.	301 or 401	SSa-1	10-14	50-3 50-3	50-3 70-2
	OR					
	(2) Join waistband lining to waistband by inserting the top edge of the waistband between the waistband lining and the buckram with the top edge of the lining turned in and seam with a row of imitation hand felled stitching. The front ends of the waistband shall be finished as specified above.	404	LSb-1 except buckram shall be on the underside.	10-14	50-3	50-3
	(3) When imitation hand felling is used, the belt loops (except center back loop) shall be stitched to the seam allowance of waistband prior to felling the lining to the waistband.	301	SSa-1	10-14	50-3	50-3
	c. Attach the hook through left waistband at center (1/4 inch (0.6cm) tolerance permitted) with the rolled edge of hook aligned with slide fastener scoops. Attach through a suitable reinforcement.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Seam waistband lining. (cont'd)					
	d. Attach the eye through right waistband at center and aligned with slide fastener scoops, to correspond with hook on left waistband. Attach through a suitable reinforcement.					
	e. Turn back end of waistband in line with the front folded edge of left fly and stitch across top of waistband the width of fly.	301	SSa-1	10-14	50-3	50-3
	f. Trim corners of waistband at right and left flies, turn and work out points.					
	NOTE: A machine that automatically attaches the hooks and eyes, and feeds reinforcement pieces may be used.					
17.	Finish right and left flies.					
	Finished appearance - The top corner of the right fly shall be neatly and completely forced out. The right fly lining shall lie smooth and flat without pleats. Top of the left fly shall finish smooth and flat. The finished seaming of the left fly shall be uniform in width and the fly smooth and flat, without gathers or pleats with the joining seam not exposed on outside of finished shorts. The base of the fly shall be finished as to avoid twisting, pleating or puckering. The crotch and seat seams shall be spread open when the right fly lining is stitched.					
	a. Smooth out the right fly lining and top stitch 1/16 to 1/8 inch (0.2 to 0.3cm) from front edge. Continue stitching across top edge of waistband to back edge of fly lining (see A, Figure 5).	301	SSe-2 shows finished seam	10-14	50-3	50-3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Finish right and left flies. (cont'd)					
	b. Turn in back edge of right fly lining and top stitch seam of fly through front, fastener tape and fly lining with stitching continued to top of waistband. The finished top stitching shall be 1/16 to 1/8 inch (0.2 to 0.3cm) from the back edge of the slide fastener scoops (see A, Figure 5).	301	LSq-2 shows finished seam	10-14	0	50-3
	c. Smooth out left fly with the front joining seam 1/16 to 1/8 inch (0.2 to 0.3cm) back of the folded edge of forepart and seam and back edge through front, interlining and fly, 1 1/4 to 1 3/8 inches (3.1 to 3.5cm) from front edge with stitching continued to top of waistband (see B, Figure 5).	301	SSa-1	10-14	0	50-3
*18	Join inseams.					
	Finished appearance - The inseams shall be carefully joined to avoid twisting and puckering. The seams shall start and finish evenly.					
	a. Join the inseams with notches matching, as indicated on patterns. Press inseams open and flat.	301 or 401	SSa-1	10-14	30-3 30-3	30-3 50-3
	OR					
	b. Join inseams with notches matching by turning back the edge of one part and single stitch to the other part 1/16 to 1/8 inch (0.2 to 0.3cm) from turned edge. The seam pressing may be omitted.	301 or 401	SSr-1	10-14	30-3 30-3	30-3 50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
19.	Join and measure seat seam. Finished appearance - The seat seam shall be joined with proper tension resulting in sufficient elasticity of seam to meet strain encountered in sitting or stooping. The waist shall be measured before seat seam is joined to assure correct waist size. The outlet may be used for any variance in the manufacturing process. The base of the left fly shall cover the right fly on outside when finished.					
	a. Join the seat seam with a double needle seat seamer, with the two rows of stitching 1/64 to 1/32 inch (0.4 to 0.8mm) apart, from base of fly and continue the stitching completely across waistband lining. The inseams shall not be out of alignment by more than 1/4 inch (0.6cm).	401	SSa-2	8-10 each needle	30-3	50-3
	b. Press open the seat seam from fly tack including waistband lining.					
20.	Finish waistband. Finished appearance - The finished waistband shall be uniform in width and the linings smooth without twisting, pleating or puckering. The lining shall not be exposed beyond the top of waistband.					
	a. Raise stitch waistband 1/16 to 1/8 inch from waistband joining seam, through waistband, waistband lining, belt loops, and top of pockets properly positioned and smooth. The stitching shall extend to, but not beyond the back edge of right and left flies.	301	LSq-2 shows finished seam	10-14	0	50-3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
20.	Finish waistband. (cont'd)					
	b. Bottom edge of waistband lining may be flat hemmed prior to stitching through waistband.	101 or 502 or 301	EFa-1	4-8	70-2 70-2 50-3	 70-2 50-3
21.	Assemble fasteners. Finished appearance - The fasteners shall be so assembled that the ends of the chain are even. Attach slider and staple bottom of fastener together.					
22.	Stitch right fly extension pieces.					
	a. Spread crotch and seat seams open, turn in raw edges of right fly lining extension piece and seam to each side of seam allowance (see C, Figure 5).	301	SSac-3 (b) (c)(d)	10-14	50-3	50-3
	b. The end of the left fly and the right fly shall be caught in the stitching of the seam allowance.					
23.	Hem bottom. Finished appearance - The stitching of each leg hem shall be uniform. The turn-up shall be carefully checked to assure correct inseam length. The finished hem shall measure 1 (± 1/8) inch (2.5 ± 0.3cm) in width.					
	Turn up bottoms, as indicated on patterns, with the raw edges turned in and single stitch through the legs of the shorts, starting and finishing at the inseams.	301	EFb-1	10-14	0	50-3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
24.	Finish belt loops. Finished appearance - All belt loops shall measure 1 3/4 (± 1/8) inches (4.4 ± 0.3cm) from bartack at top of loop to the bottom of folded edge. Bartacks shall extend the width of the loop, not beyond.					
	a. Fold top of loop under (except center back loop) with the folded edge positioned 1/8 (± 1/16) inch (0.3 ± 0.2cm) from the top edge of waistband and bartack through the waistband.	Bartack		21-28 per bartack	0	0
	b. Bartack the center back loop over the seat seam with the unfinished side up and the bottom raw edge adjacent to the waistband seam.	Bartack		21-28 per bartack	0	0
	c. Turn up the center back loop, fold top of loop under so the folded edge is positioned 1/8 (± 1/16) inch (0.3 ± 0.2cm) from the top edge of the waistband and bartack through the waistband.	Bartack		21-28 per bartack	0	0
25.	Bartacking Finished appearance - The bartacks shall be well made and correctly positioned to reinforce points of strain. All bartacks on pockets and at base of fly shall be made by machine and shall be 3/8 to 1/2 inch (1.0 to 1.3cm) long.					
	a. Bartack shorts as follows: (1) All pockets at the end of opening. The bartacks shall be perpendicular to the opening. (2) Base of fly at the junction of the crotch seam and fly in line with the left fly stitching and extending across the crotch seam, or the bartack may be horizontal (see D, Figure 5).	Bartack		28 per bartack	0	0

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

Table I - Construction of shorts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
26.	Make buttonhole. Make a vertical buttonhole in the center of the left hip pocket with the inside edge of eyelet 3/16 to 1/4 inch (0.5 to 0.6cm) from joining seam of cord edge.	Button-hole		52-54 per buttonhole including tack	A	0
27.	Attach button. Finished appearance - Button position shall be marked or gaged, and properly aligned with eyelet of buttonhole to effect a secure, smooth and complete closure without bulging.					
	Sew a button on the bearer of the left hip pocket through all plies to correspond with the buttonhole in pocket.	101 or 301		14-16 per button 14-16 per button	30-3 30-3	 30-3
28.	Cleaning. a. Trim all ends of stitching and remove loose threads from the shorts. b. Remove all spots, stains and marking. c. Close the fly slide fastener and engage hook and eye in the waistband.					
29.	Pressing. Press the tops, including fly, smooth and crease the legs in the center with the seams matching at the bottom and in the crotch; the inseam in the crotch may be slightly back of the outside seam.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

3.8 Measurements - The finished shorts shall conform to measurements as shown in Table II. All measurements and tolerances are expressed in inches and centimeters.

Table II - Table of measurements

Measurements	Size										Tolerance
	26	28	30	32	34	36	38	40	42	44	Plus or Minus
Waist 1/	26 (66.0)	28 (71.1)	30 (76.2)	32 (81.3)	34 (86.4)	36 (91.4)	38 (96.5)	40 (101.6)	42 (106.7)	44 (111.8)	1/2 (1.3)
Inseam 2/											
Short					(all sizes)		8 1/2 (21.6)				1/4 (0.6)
Regular					(all sizes)		9 3/4 (24.8)				1/4 (0.6)
Long					(all sizes)		11 (27.9)				1/4 (0.6)

1/ Measured along center of waistband from folded edge to folded edge with front secured and double the measurement obtained.

2/ Measured from crotch seam to bottom edge of leg hem.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

* 3.9 Workmanship. The finished shorts shall conform to the quality and grade of product established by this specification. As a final step in the suppliers product control plan before formation of a lot, each dress pair of shorts shall be examined after pressing and prior to folding for packaging, and a pair of shorts containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1488 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable acceptable point value of defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all in - spection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1488. The shorts shall be classified as dress ("D") for the purpose of inspection.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise amended, excluded, modified or qualified in this specification or applicable purchase document. In addition, the supplier shall furnish a certificate of compliance stating that the hooks and eyes conform to the requirements in 3.3.9 and all components of slide fastener shall be furnished by the same supplier (see 3.3.8).

* 4.4.2 End item examination. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1488. The shorts shall be classified as dress ("D") for the purpose of inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of shorts shall be neatly folded to measure approximately 11 by 14 inches (27.9 by 35.6cm). For the larger sizes it may be necessary to adjust the seat area to achieve the desired width of approximately 14 inches (35.6cm). Each folded pair of shorts shall be inserted in a snug-fitting, flat, clear polyethylene film bag of 0.00125-inch (0.03mm) thickness (± 20% tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the seal made as close as possible to the open end. A 1/4 inch (0.6cm) diamater hole shall be made at one corner of each bag to allow the excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent holes are not required (see 5.3.1).

5.1.2 Level C (Commercial packaging). Shorts shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Fifty (50) pairs of shorts of one class and size only, packaged as specified in 5.1, shall be packed flat in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, type SF, grade V2s, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat two in length, one in width and twenty-five in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Inspection shall be in accordance with MIL-STD-1488. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed within the same container.

5.2.2 Level B. Fifty (50) pairs of shorts of one class and size only, packaged as specified in 5.1, shall be packed flat in a fiberboard shipping container assembled, closed and reinforced conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety SW, grade 200 of MIL-B-17757. Level A packages shall be packed flat two in length, one in width and twenty-five in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Inspection shall be in accordance with MIL-STD-1488. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed with the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified, (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification. Inspection shall be in accordance with MIL-STD-1488.

5.2.3 Level C (Commercial packing). Shorts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transporation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers, shall comply with the U. S. Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
CLASS AND SIZE
QUANTITY

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes of one class only shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches (12.7 by 10.2cm) with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The shorts are intended for wear by male military personnel of the Department of Defense as a component of the summer uniform.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Class and sizes required (see 1.2).
c. When first article sample is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns. For access to samples and patterns, address the procuring office issuing the invitation for bids.

* 6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


* 6.5 Equal item. Prior to the use of an "interchangeable" item, the supplier shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

Custodian:
Navy - SA


Preparing activity:
Navy - SA
Project No. 8405-0720

Review activities:
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

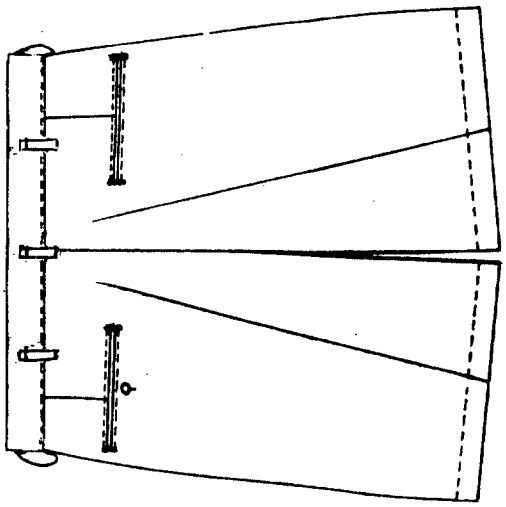


BACK VIEW

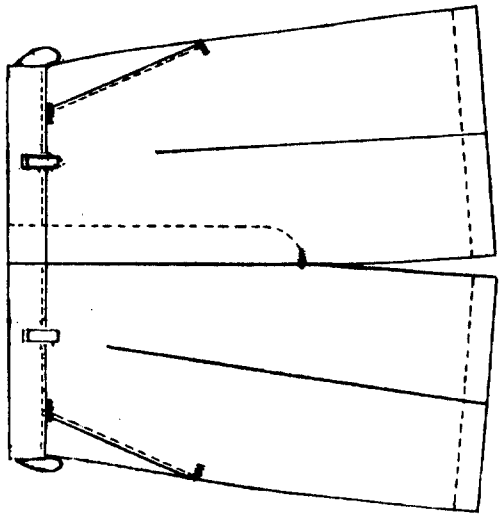

FRONT VIEW

FIGURE 1. SHORTS, MEN'S, COTTON
BASIC CONSTRUCTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

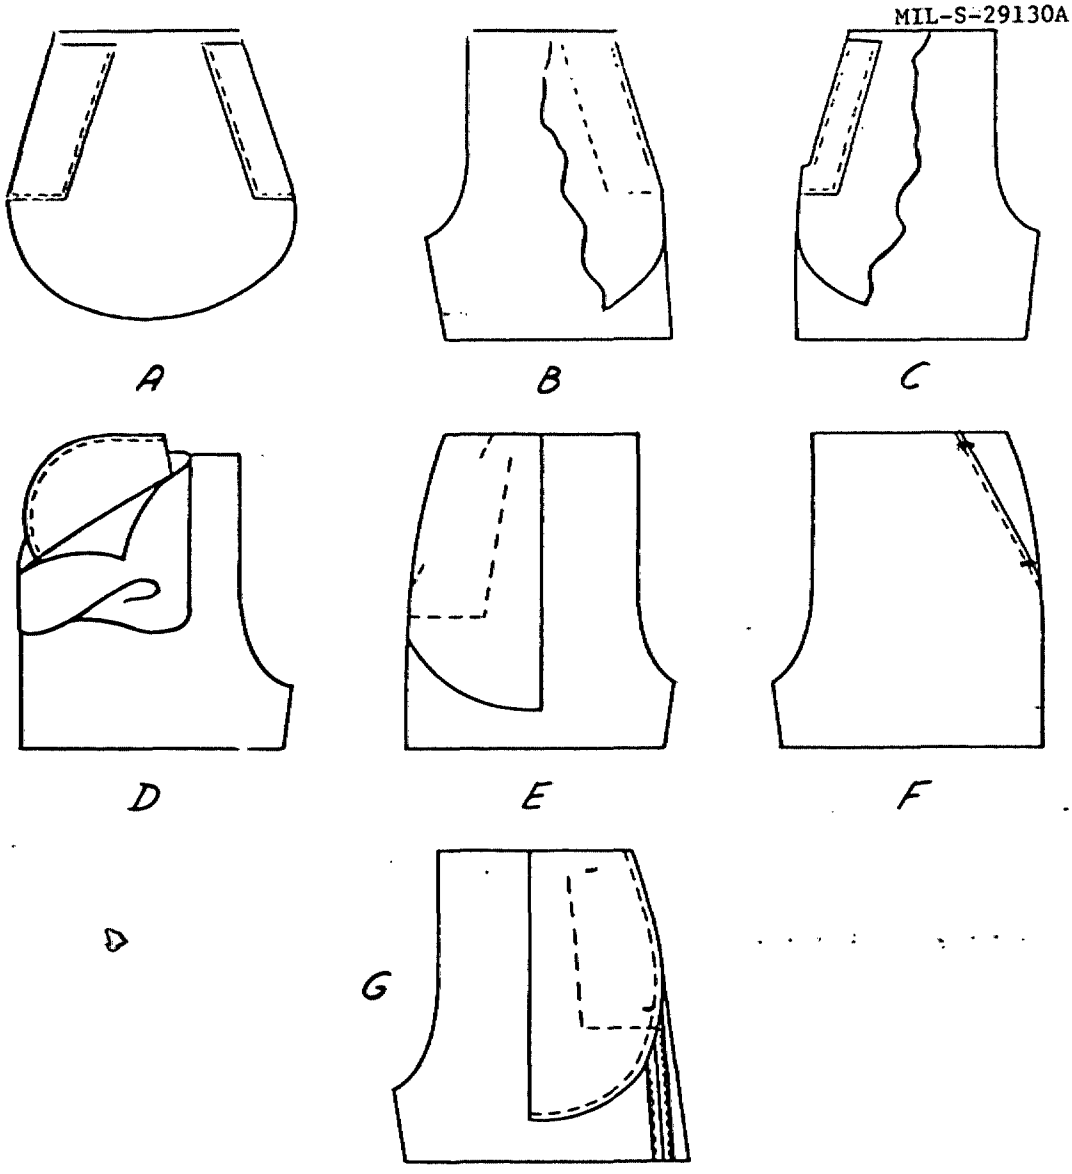


SIDE POCKET

A - STITCH FACING AND BEARER TO POCKET
B - STITCH POCKET TO FRONT
C - TURN POCKET AND TOP STITCH
D & E - SEAMED, TURNED AND TACKED TO BEARER
F - BARTACK ON OUTSIDE OF FINISHD POCKET
G - FINISHED POCKET

FIGURE – 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

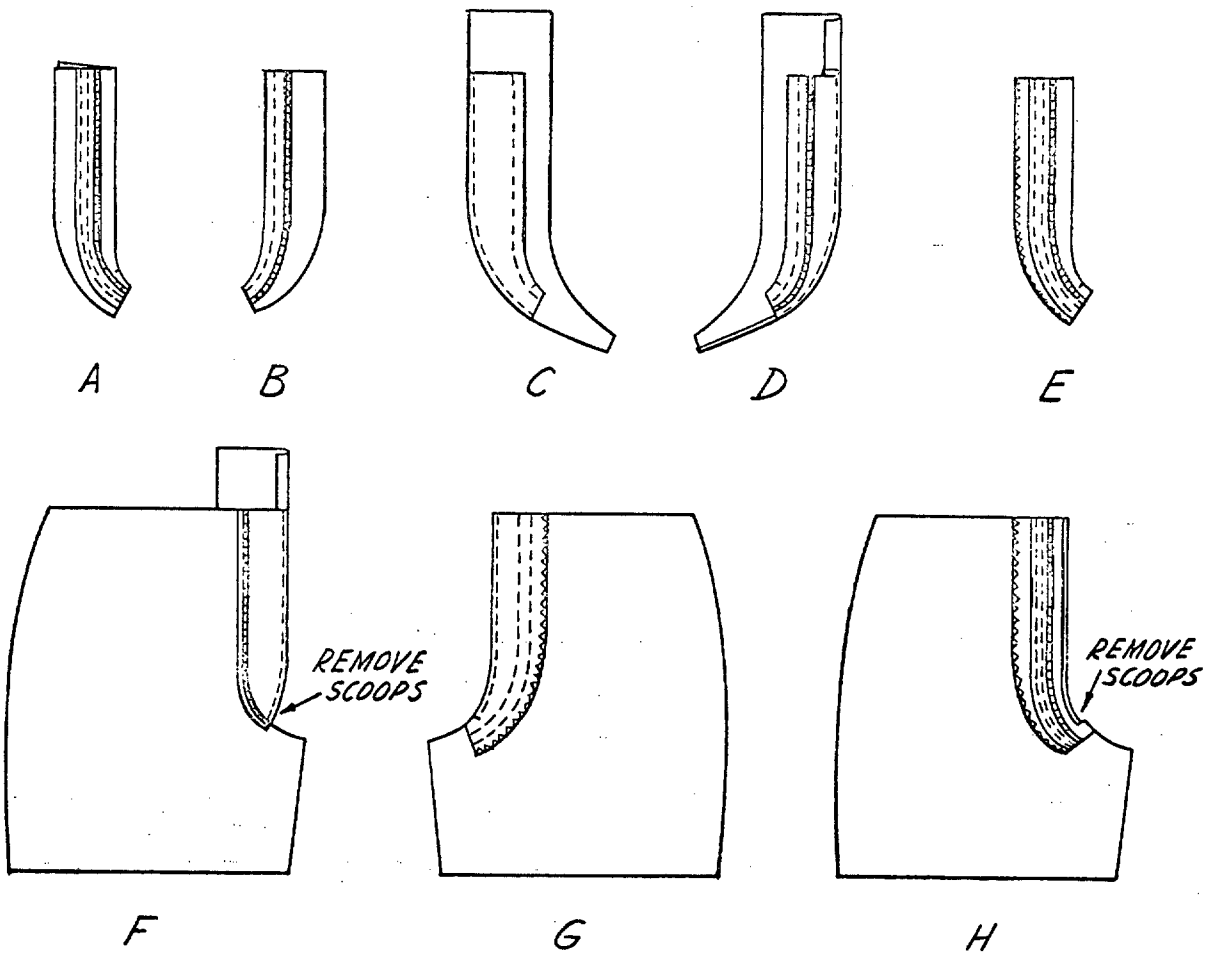

FLY (RIGHT AND LEFT)

A - DOUBLE STITCH FASTENER TAPE TO LEFT FLY THROUGH LINING
B - SEAM FASTENER TAPE TO RIGHT FLY
C & D - SEAM LINING TO RIGHT FLY, TURN AND RAISE STITCH
E - OVEREDGE LEFT FLY
F - JOIN RIGHT FLY TO TROUSERS
G & H - JOIN LEFT FLY TO TROUSERS AND PRESS

FIGURE-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.


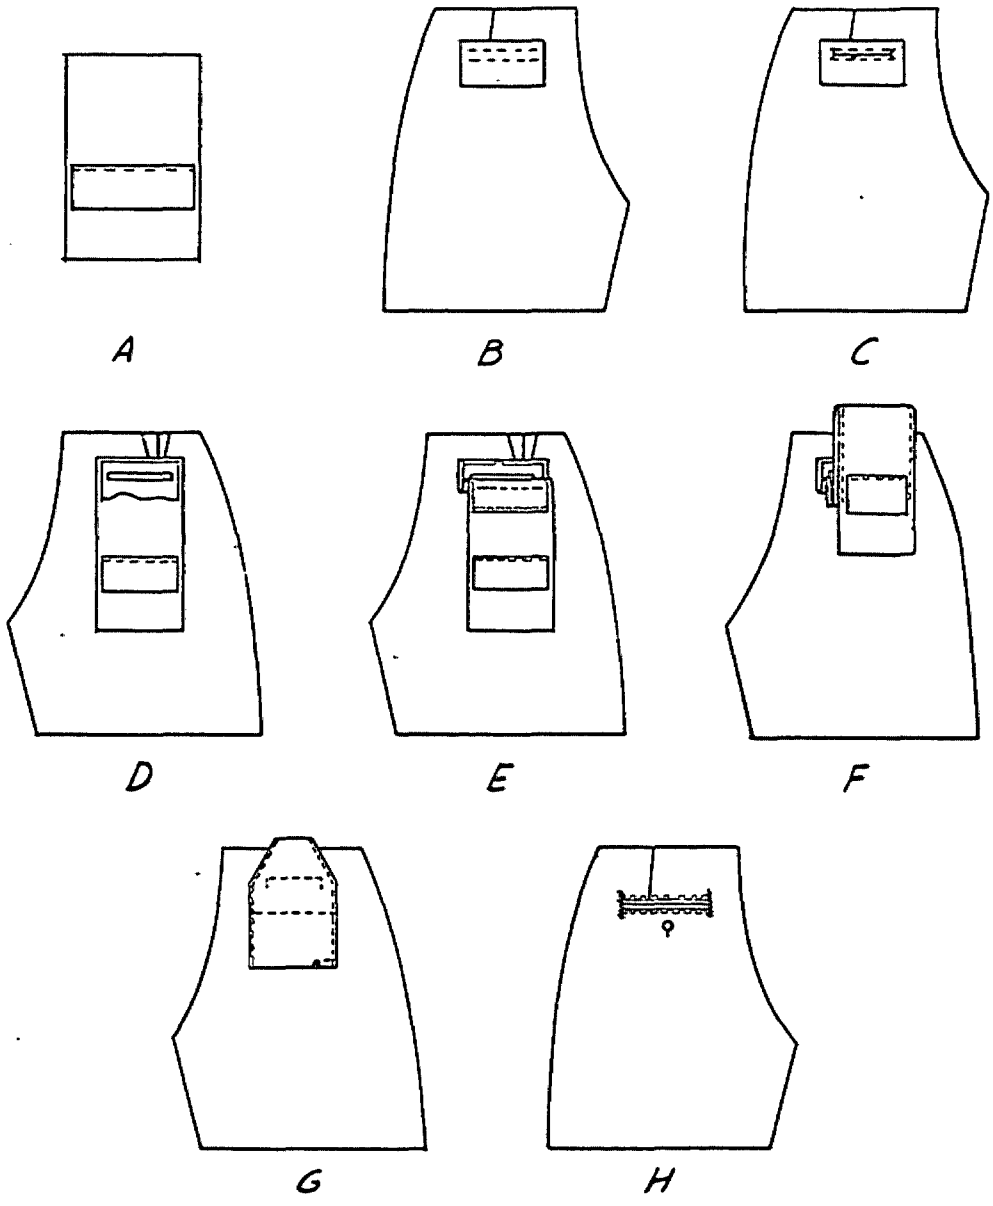


FIG. 4 HIP POCKET

A - BEARER ON POCKET
B - CORD FACING PIECE ON OUTSIDE OF TROUSERS
C - CUT THROUGH CORD PIECE AND NOTCH
D - CORD PIECE TURNED INSIDE
E - MAKE CORD
F - POCKET PULLED THROUGH AND CLOSED
G - POCKET PULLED THROUGH TO INSIDE & TOP STITCHED ON SIDES
H - TOP POCKET OPENING STITCHED THROUGH POCKET AND FACING PIECE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

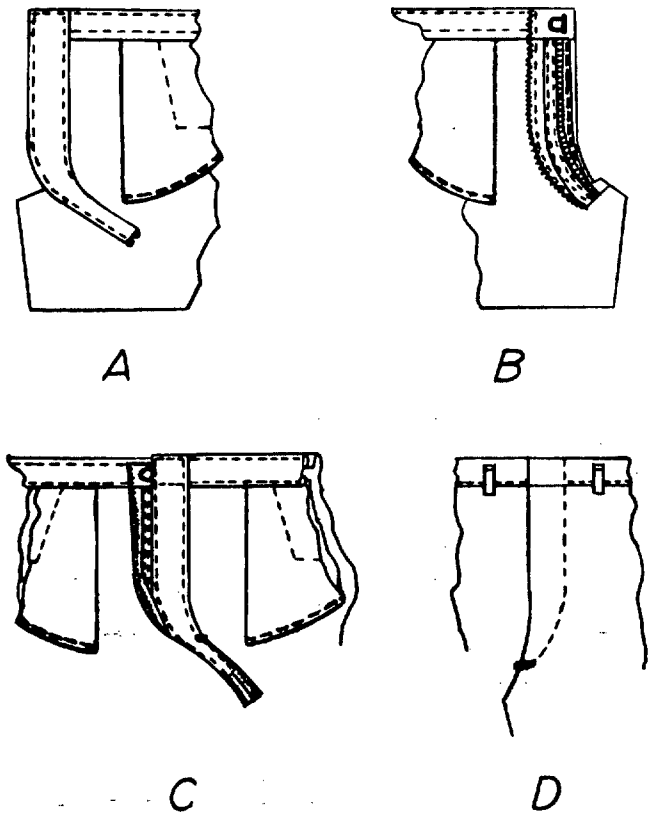

A- TOP STITCH RIGHT FLY CATCHING LINING

B- TOP STITCH BACK EDGE OF LEFT FLY THROUGH TROUSERS

C-FINISHED FLY INSIDE

D-FINISHED FLY OUTSIDE

FIGURE 5 FINISH FLY (RIGHT AND LEFT)

☆U.S. GOVERNMENT PRINTING OFFICE: 1978 — 703-122/3820

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-29130A SHORTS, MEN'S, POLYESTER/COTTON

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:38Z
Check the source to verify that this is the current version before use.