MIL-S-29134A(NU)
7 April 1981
SUPERSEDING
MIL-S-29134(SA)
30 August 1974

MILITARY SPECIFICATION

SHAPE, DAY, MARITIME, DIAMOND AND DOUBLE FRUSTRUM

This specification is approved for use by Navy Clothing and Textile Research Facility, Department of the Navy and is available for use by all Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a collapsible, diamond and double frustrum shape, day maritime signal of the type and class specified (see 1.2 and 6.2).

1.2 Classification The maritime day signal covered by this specification shall be of the following types and class:

Type I Diamond Shape
Type II Double Frustrum

Class 1 - Red
Class 2 - Black and White

2. APPLICABLE DOCUMENTS

2.1 Issue of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-285	- Thread, Polyester
V-T-295	- Thread, Nylon
QQ-A-225/8	- Aluminum Alloy Bar, Rod, Wire and Special Shapes: Rolled, Drawn or Cold Finished
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied Yarn, Army and Numbered

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:39Z
Check the source to verify that this is the current version before use.

CCC-D-950	- Dyeing and Aftertreating Processes for Cotton Cloths
DDD-L-20	- Label for Clothing, Equipage and Tentage (General Purpose)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural and in Colors
MIL-T-5608	- Tape, Textile, Webbing
MIL-F-10884	- Fasteners, Snap
MIL-H-15021	- Hooks, Snap Bolt, Swivel Eye and Rings
MIL-G-16491	- Grommet, Metallic
MIL-R-17343	- Rope, Nylon
MIL-R-24049	- Rope, Polypropylene
MIL-R-30500	- Rope, Polyester
MIL-C-43307	- Cord, Nylon, Solid Braid General Purpose
MIL-T-43566	- Tape, Textile, Cotton, General Purpose, Natural and in Colors

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-27980	- Fasteners, Snap

DRAWINGS

US Navy Clothing and Textile Research Facility
16-1-440 Shape, Day Signal, Maritime (Diamond Shape)
16-1-587 Shape, Day Signal, Maritime Double Frustrum Assembly and Details
16-1-588 Shape, Day Signal, Maritime, Double Frustrum Details
(Figures 1. 2 and 3 are miniature reproductions of Drawing No. 16-1-440, 16-1-587 and 16-1-588 are attached for information only).

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2. Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Attn: Traffic Department, 1616 P Street, N.W., Washington DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, South Riverside Plaza, Chicago, IL 60606.)

UNITED STATES ARMY COLOR CARD FOR BRANCHES, AGENCIES, ETC.

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York, NY 10016.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified the contractor shall furnish sample unit(s) for the first article inspection and approval (see 4.2 and 6.2).

3.3 Materials.

3.3.1 Covers. The covers shall be made of cotton duck material conforming to Type III, 9.85 ounces per square yard, of CCC-C-419 and shall be treated in accordance with Type I, Class B of CCC-D-950.

3.3.1.1 Color The color for the Type I cover shall be Black, Cable No. 65018. The color for Type II covers shall be Black, Cable No. 65018, Scarlet, Cable No. 65006 and Bleach White.

3.3.2 Grommet facing. The grommet facing for Type I covers shall be cotton, conforming to Type I, any class of MIL-T-43566 or Type IIa, any class of MIL-W-530. The width shall be 1 inch. The facing for Type II covers shall be self fabric (see figure 3).

3.3.3 Cord, lacing. The cord for type I covers used for lacing the cover closure and securing the ends of the cover to the support rope shall be 3/32 inch diameter, natural in color, conforming to MIL-C-43307. The cord for Type II cover closures shall conform to MIL-R-17343 and shall be approximately 1/4 inch in diameter.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T21:39Z
Check the source to verify that this is the currentversion before use.

* 3.3.4 Rope, support. The center support rope of the day signal shall be made of the materials specified in either 3.3.4.1, 3.3.4.2, or 3.3.4.3. The color shall be natural.

* 3.3.4.1 Rope, Polypropylene. The polypropylene rope shall conform to Type I or II of MIL-R-24049 and the approximate diameter shall be 3/8 inches.

* 3.3.4.2 Rope, polyester. The polyester rope shall conform to MIL-R-30500. The approximate diameter shall be 5/16 inches.

* 3.3.4.3 Rope, nylon. The nylon rope shall conform to MIL-R-17343 and shall be approximately 3/8 inches in diameter.

3.3.5 Thread. The thread used for sewing the covers shall be cotton, polyester or nylon. The color shall approximate the color of the fabric.

3.3.5.1 Thread, cotton. The cotton thread shall conform to type IIIB of V-T-276 and shall be mildew resistant. The bobbin shall be size 10/4 and the needle 10/6.

3.3.5.2 Thread, nylon. The nylon thread shall conform to type III, size FF-1 of V-T-295.

3.3.5.3 Thread, polyester. The polyester thread shall conform to Type I, class 1, subclass A, size FF, 3 ply of V-T-285.

3.3.6 Grommets The grommets for Type I covers shall conform to Type I, classes 1 or 3, size 0 or 00 of MIL-G-16491 and for Type II shall conform to Type I, class 1, size 3.

3.3.7 Base Metal

3.3.7.1 Support ring. The support ring used with the Type I cover shall be 24 inches outside diameter. The ring stock shall be 1/2 inches in diameter and shall be made of solid aluminum 6061-T6 of QQ-A-225/8. The ring shall be split with approximately 1/16 to 1/8 inches opening between the ends of the support ring to facilitate insertion of the finished cover.

3.3.7.2 Cone, cone plate, rib and center rod metal (Type II frame) The cone, cone plate, rib and center rod shall be fabricated from commercial grade steel not less than C-1018, zinc electroplated. The plating shall be not less than 0.010 inch thick. The cone and cone base shall be not less than .018 inch thick (see figure 3).

3.3.8 Snap hook and ring. The snap hook shall conform to Type I, regular of MIL-H-15021. The ring shall conform to requirements and measurements specified in MIL-H-15021.

* 3.3.9 Thimbles. The thimbles used at the spliced ends of the support rope shall be made of brass and be a split type. The outside diameter shall be approximately 1 inch and the inside diameter approximately 5/8 inch. The grooved width shall be sufficient to hold the diameter of rope used. Inspection shall be as specified in 4.4.3.1.

3.3.10 Snap fastener The snap fastener used on the securing strap for Type II covers shall be 20 to 24 line finish 1 or 2, of MIL-F-10884, MS27980 except that a cupped eyelet shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

3.4 Design. The Type I signal shall be a collapsible type with a single metal center support ring and center support rope with a snap fastener and ring. The cover shall be detachable and furnished with grommets and cord for closing and securing the cover to the ring and rope. (See figure 1). The Type II signal shall be collapsible with center rod/end cones and reinforcement rods. The cones shall be non-detachable and furnished with grommets and cord for closing (see figures 2 and 3).

3.4.1 Figures. The figure is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the specification shall govern.

* 3.5 Patterns. Standard patterns will be furnished for Type I signals by the Government. The standard patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard pattern (See 6.3). For Type II signals, the contractor shall furnish patterns to comply with Drawings 16-1-587 and 16-1-588.

3.5.1 Pattern parts. The component parts of Type I cover shall be cut from the materials specified, in accordance with list below:

Materials	Nomenclature of pattern parts	Cut Parts
Duck, cotton	Typical segment (w/o grommet row)	4
	Lacing segment w/grommet row	4

3.6 Construction

3.6.1 Seams and Stitch types. Seams and stitch types specified in Tables I and II, shall conform to FED-STD-751. Seams shall be properly sewn so that no raw edges, runoffs, twists, pleats or open seam will result. Thread breaks shall be backstitched not less than 1/2 inch. Skipped or broken stitches shall be repaired using stitch type 301. The minimum and maximum number of stitches per inch shall be as specified in applicable Table.

3.7 Manufacturing operation requirements. The cover shall be manufactured in accordance with the operation requirements specified in Table I and drawing No. 16-1-440 for Type I or in Table II and Drawings No. 16-1-587 and 16-1-588 for type II. The contractor is not required to follow the exact sequence of operations as specified provided that the finished item is identical to that produced by following the sequence of operations as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:39Z
Check the source to verify that this is the current version before use.

Table I - Construction of Type I shape cover

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. All component parts shall be cut in strict accordance with Government patterns which show shape, directional lines for cutting and notches for proper assembly for all parts.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Make cover (top and bottom sections) a. Stitch the top typical segments together with two rows of stitching according to marker on pattern. Gauge between rows of stitching shall be 1/16 to 1/8 inch.	301 or 401	SSa-2 SSa-2	6-8 6-8	10/6 or FF-1	10/4 or FF-1
	b. Stitch top lacing segments together with two rows of stitching according to notches on pattern. Gauge between rows of stitching shall be 1/16 to 1/8 inch.	301 or 401	SSa-2 SSa-2	6-8 6-8	10/6 or FF-1	10/4 or FF-1
	c. Turn under grommet rows of lacing segment 1/2 inch Stitch grommet facing to turn under approximately 1/8 inch from folded edge of turn under, with two rows of stitching starting at bottom of panel to notch, turn forming a point at seam and continue stitching to opposite panel to bottom. Stitching shall be 1/16 to 1/8 inch from each edge of facing.	301 or 401	SSt-2 SSt-2	6-8 6-8	10/6 or FF-1	10/4 or FF-1

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 20261020T21:39Z
Check the source to verify that this is the current version before use.

Table I - Construction of Type I shape cover (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Make cover (cont'd)					
	d. Stitch, 1/2 to 5/8 bartack, at turn point of facing to reinforce seam (see figure 1).	bartack		24 per bartack	10/6 or FF-1	10/4 or FF-1
	e. Stitch lacing segments to typical segments with two rows of stitching according to marker and notches on patterns. Gauge between rows of stitching shall be 1/16 to 1/8 inch.	301 or 401	SSa-2 SSa-2	6-8 6-8	10/6 or FF-1	10/4 or FF-1
	f. Turn over top ends of panels at notches and stitch all around 1/2 inch from folded edge forming a lacing tunnel. Insert lacing during this operation. Lacing shall be cut 22 (± 1) inches long. Ends shall be fused to prevent raveling.	301 or 401	SSa-1 SSa-1	6-8 608	10/6 or FF-1	10/4 or FF-1
	g. The bottom section of the cover shall be made according to 3a to 3f (inclusive).					
	h. Attach grommets: Attach 15 grommets to each facing of the lacing segments according to marks on patterns.					
	i. Stitch top and bottom sections with two rows of stitching according to marks on patterns, forming a tunnel for center support ring.	301 or 401	SSa-2 SSa-2	6-8 2-8	10/6 or FF-1	10/4 or FF-1

Source: https://assist.dla.mil -- Downloaded: 20261O-20T21:39Z
Check the source to verify that this is the current version before use.

Table I - Construction of Type I shape cover (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Make center support rope: The center support rope shall conform to the finished measurements specified in figure 1. The splice at each end shall be 3 (+ 1/2) inches in length. When a synthetic rope material is used, the ends of the plies in the splice shall be dressed, taped or fused to prevent unraveling.					
5.	Assemble center support rope to cover Insert ends of center support rope through ends of cover and insert ends of lacing through splice (see figure 1). Secure knot.					
6.	Assembly of support ring Insert center split support ring through tunnel of finished cover.					
7.	Prepare lacing cord The cord used for lacing the cover shall be cut 124 (+ 2) inches long. The ends shall be fused to prevent unraveling. The cord shall be evenly laced through the grommets of the cover.					
8.	Marking Mark inside of one lacing segment as specified in 3.9.					
9.	Finishing Trim and remove all thread ends and loose threads from cover.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 20261020T21:39Z
Check the source to verify that this is the current version before use.

Table II - Construction of Type II shape cover

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting All component parts shall be cut in accordance with contractor furnished patterns. The patterns shall have proper allowances for materials, seams, and construction to comply with drawings 16-1-587 and 16-1-588. NOTE: Component parts to be fabricated from cotton duck specified in 3.3.1 may be cut in either the warp or filling direction.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damage that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Make strip fabric for Class 2 covers The fabric shall have alternate color strip, black, white, black, white, black, white. The finished measurement of each color strip shall be 7 3/8 inches and the total length of the combined six strips, when assembled on the frame, shall be 44 to 44 1/4 inches. The gage between rows of stitching shall be 1/4 to 3/4 inch from edge. NOTE: When the segments are sewn and laced together each color strip shall be continuously for the perimeter.	301	SSa-2	7-9		

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

Table II - Construction of Type II shape cover (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Make cover					
	a. Stitch six segments together with two rows of stitching. Leave the opening for assembly of facing. Gage between rows of stitching shall be 1/4 to 3/8 from edge.	301	SSa-2	7-9		
	b. Sew reinforcement patch on each end of marker two rows of stitching, 1/4 inch from each side of the piece.	301	SSa-1	7-9		
	c. Reinforce each end of the marker with an over-casting stitch.	Over-casting				
	d. Sew on facing piece on each side of the segment that will be laced together, 3/8 inch back from edge of seam. Check assembly so all rough seams will be inside of the marker when completed.	301	SSa-1	7-9		
	e. Using the facing seam as a guide, double fold the facing so the seam will be under the fold and inside of the cover with 1 1/2 inch parallel along the segment contour.					
	f. A single row stitch 1/8 to 3/16 inch back from outer edge, following the contour of the segment.					
	g. Lay the steel rod in place under the fold and stitch parallel 7/16 to 1/2 inch back from outer edge. This will secure the rib, in place in the cover.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]
Check the source to verify that this is the current version before use.

Table II - Construction of Type II shape cover (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Make cover (cont'd) h. Stitch facing 1 3/8 inches back from outer edge and back stitch final seam 1 inch.	301	SSa-1	7-9		
5.	Assembly snap dot fasteners a. Snap dot fasteners together on each strap to form a strap fold line (15 piece each cover.)					
	b. Inside cover, on each exposed inner seam 2 1/2 inches from each end and one on the horizontal center line, secure a snap fastener assembly with a 1 inch bartack (see section A drawing 16-1-588).	Bartack				
6.	Attach grommets Attach 9 grommets, centered and equally spaced, to each facing. One on the horizontal center line and approximately 5 1/4 inches on center symmetrically.					
7.	Assembly of frustrom a. In the cone base assembly, locate five consecutive ribs, in line vertically.					
	b. Cover ribs and locate the final two ribs that have been sewn in the cover, underfacing. Snap strips in place on ribs.					
8.	Prepare lacing cord a. The cord used for the cover shall be 1/4 inch nylon, cut 108 to 112 inches long. The ends shall be fused to prevent unravelling.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

Table II - Construction of Type II shape cover (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Prepare lacing cord (cont'd) b. Attach cord tie one end of cord lacing through a end grommet, make a loose skein out of the excess and tie in place with opposite end of cord.					
9.	Marking Mark inside of one lacing segment as specified in 3.9.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 20261020T21:39Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished day signal shall conform to the measurements and tolerance specified on Drawing No. 16-1-440, 16-1-587 and 16-1-588 as applicable.

3.9 Marking. The finished covers shall be marked on the inside of one lacing segment with a label conforming to Type IV, class 5 of DDD-L-20. The label shall contain the following information:

SHAPE, DAY MARITIME DIAMOND AND DOUBLE FRUSTRUM
CONTRACT NO: DSA 100-00-0-0000 (Example)
STOCK NO.: 8345-00-000-0000 (Example)
NAME OF CONTRACTOR

3.10 Workmanship. The finished Type I and Type II signals shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification. A certificate of compliance will be accepted for the requirements specified in 3.3.9.

* 4.2 Classification of inspection. The inspection requirements specified herein are as follows:

1. First Article Inspection (see 4.3)
2. Quality Conformance Inspection (see 4.4)

4.3 First article approval. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality Conformance Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or services for which in-process inspection had indicated noncomformance.

4.4.3 Examination of the end item. Examinations of the end item shall be in accordance with 4.4.3.1, 4.4.3.2 and 4.4.3.3. The applicable inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.4.3.4. The sample unit shall be one finished shaped signal (cover, support ring and support rope) or one finished cover (when procured separately Type I). The lot size shall be expressed in terms of the sample unit.

4.4.3.1 Visual examination. The finished day signals (cover, support ring, frame and support rope) or finished covers shall be examined for the defects classified in accordance with the list below. When covers are procured separately, examination of covers shall be in accordance with the list below and 4.4.3.3.

Examine	Defect	Major	Minor
Cotton duck	Material not as specified	X	
	Color not as specified		X
	Hole, cut, tear, weak spot, smash	X	
	Spot, stain, dirt, or other foreign matter		X
	Floats 1/2 inch or more in combined warp and fill	X	
	Floats less 1/2 inch in combined warp and filling		X
	Splices of support rope:		
	Less than 2 1/2 inches	X	
	More than 3 1/2 inches		X
Cord, (Lacing) or Rope (center support)	Not material specified	X	
	Cut, break or other imperfection	X	
	Spot, stain, soiled		X
	Not braided firmly or uneven		X
	Not continuous length		X
	Ends of support rope not dressed, taped or fused	X	
Securing strap	Not material specified	X	
	Not cut to proper length		X

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	Minor
Workmanship and Assembly	Color thread does not approximate fabric		X
	Any component not of material specified	X	
	Rope or cord not cut to proper length	X	
	Ends of cord do not pass through grommets freely	X	
	Cover formed with less than specified number of segments	X	
	Any component not cut in accordance with pattern or omitted	X	
	All segments of cover not same width	X	
	Operation omitted or not performed as specified	X	
	Any component missing or broken	X	
	Edges of closing segments not faced	X	
	Improper cover closure		X
Cover, hardware	Grommets not type or size specified	X	
	Less than number of grommets required	X	
	Grommets not spaced as specified		X
	Grommets do not align properly when cover is closed	X	
	Grommets not attached properly	X	
	Grommets attached beyond edge of closure		X
	Grommets clinched too tightly, cutting fabric or insecurely attached	X	
	Grommets improperly set - rotates in hole	X	
	Grommets cracked or broken	X	
Seams and stitching	Seam type or stitch type not as specified		X
	Any open seam	X	

NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or runoffs occur.

Needle chews	X	

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T21:39Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	Minor
Seams and stitching (cont'd)	Less than number of stitches per inch specified	X	
	More than number of stitches per inch specified		X
	Any row of stitching omitted	X	
	Wrong stitching gage or margin		X
	Raw edge two inches or more	X	
	Raw edge less than two inches		X
	Improper stitch tension		X
	Seam twisted, puckered, pleated	X	
	Thread breaks not backstitched or backstitches less than 1/2 inch		X
	Any bartack missing	X	
	Thread ends not trimmed		X
Marking	Missing, misspelled, illegible, incorrect type or size, not applied in specified location, wrong color		X
Supporting ring	Not made of material specified	X	
Snap hook, rings and thimbles	Support ring dented, bowed, sprung, burred, bent, broken, malformed or otherwise impaired	X	
	Frame not made as specified	X	
	Snap hook not type specified	X	
	Snap hook does not operate as required	X	
	Snap hook ring not seamless	X	
	Thimbles not as specified		X
Snap fastener	Fastener not as specified	X	
	Fastener not positioned properly		X
Center rod and rib (metal)	Material not as specified	X	
	Ribs incorrect shape		X
Cone (metal)	Material not as specified	X	
	Dimensions not as specified		X

4.4.3.2 Dimensional examination. The finished day signal frame and cover shall be examined for defects in dimension. Any dimension that is not within the established tolerance shall be scored as a defect. The sample unit shall be one frame and cover. The inspection level and the acceptable quality level (AWL) shall be as specified in 4.4.3.4.

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:39Z
Check the source to verify that this is the current version before use.

4.4.3.3 Examination of day signal cover for fit. The finished covers (Type I) shall be examined for defects in fitting. Any cover that does not fit the frame properly in any respect shall be scored as a defect. The sample unit shall be one finished cover. The inspection level and acceptable quality level (AQL) shall be as specified in 4.4.3.4. When covers (Type I) are procured separately, the Government will furnish the support ring for this examination (see 6.2).

4.4.3.4 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units (dhu), shall be as follows:

	Inspection Level	AQL Major	AQL Total
For defects applicable to 4.4.3.1	II	6.5	15.0
For defects applicable to 4.4.3.2	S-3	One class	4.0
For defects applicable to 4.4.3.3	S-1	One class	2.5

4.4.4 Examination of packaging requirements. An examination shall be made to determine that the packaging, packing, and marking complies with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulged or distorted containers.
Content	Number of day signals or separately procured cover component per interior package (bundle) or shipping container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:39Z
Check the source to verify that this is the currentversion before use.

5. PACKAGING

5.1 Preservation-packaging. Packaging for Type I shall be level A or C as specified (see 6.2). Packaging for Type II shall be Level C.

5.1.1 Level A. The cover component of Type I day signal shall be compactly arranged, folded and securely tied with cotton tape or twine. Each complete day signal (support ring, cover and center support rope) shall be inserted in a fiberboard box conforming to style OPF, type CF (variety SW), class domestic, grade 200 of PPP-B-636. Inside dimensions of each box shall approximate 24 1/8 inches in length, 24 1/8 inches in width, and 1 5/8 inches in depth. Approximate dimensions are furnished as a guide only. Each box shall be closed by taping all seams with minimum 2 inch wide tape.

5.1.1.1 Cover for Type I (when procured separately) . When Type I shape day signal covers are procured separately, ten covers shall be neatly stacked to form an even bundle. Each bundle shall be securely tied with cotton tape or twine.

5.1.2 Level C (Commercial packaging). Finished complete day signals, Type II, or cover for Type I, when procured separately, shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:39Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing for Type I shall be level A, B or C as specified (see 6.2). Packing for Type II shall be Level C.

5.2.1 Level A. Ten complete Type I day signals, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A packages shall be packed on edge, one in length, ten in width, and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24 3/4 inches in length, 19 1/2 inches in width and 24 1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636.

5.2.1.1 Cover for Type I (when procured separately). Sixty covers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636.

5.2.2 Level B. Ten complete Type I day signals, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed on edge, one in length, ten in width and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24 3/4 inches in length, 19 1/2 inches in width and 24 1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

5.2.2.1 Cover for Type I (when procured separately). Sixty covers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T21:39Z
Check the source to verify that this is the current version before use.

5.2.2.2 When specified (see 6.2) the fiberboard shipping container shall be a grade V3c, V3s of V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

5.2.3 Level C (Commercial packing). Finished complete day signals, type I, Type II or covers for Type I when procured separately, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages, shipping containers, shall be marked in accordance with MIL-STD-129. Each bundle of separately procured cover components shall have attached a manila colored paper shipping tag for the identification information:

Stock Number
Cover, Day Signal Maritime, Type I (Example)
Quantity

6. NOTES

6.1 Intended use. The day signals are intended for use as displays on ships to warn other vessels to stay clear of operations being conducted, such as: underwater operations, towing, etc.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:39Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Type required (see 1.2).
c. When first article is required (see 3.2).
d. Selection of applicable levels of packaging and packing required (see 5.1 and 5.2).
e. When separate procurement of the cover component of the day signal is required (see 4.4.3.3, 5.1.1.1, 5.1.2, 5.2.1.1, 5.2.2.1 and 5.2.3).
f. When weather-resistant grade fiberboard shipping containers are required for Level B packing (see 5.2.2.2).

6.3 Samples and patterns. For access to patterns for Type I and samples for Type I and Type II, address the procuring activity issuing the invitation for bids.

Custodian:
Navy - NU

Preparing activity:
Navy - NU

Review activity:
Navy - SH
DLA-CT
Army-IOH

Project No. 8345-N136

User activity:
Navy - CG

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:39Z
Check the source to verify that this is the currentversion before use.

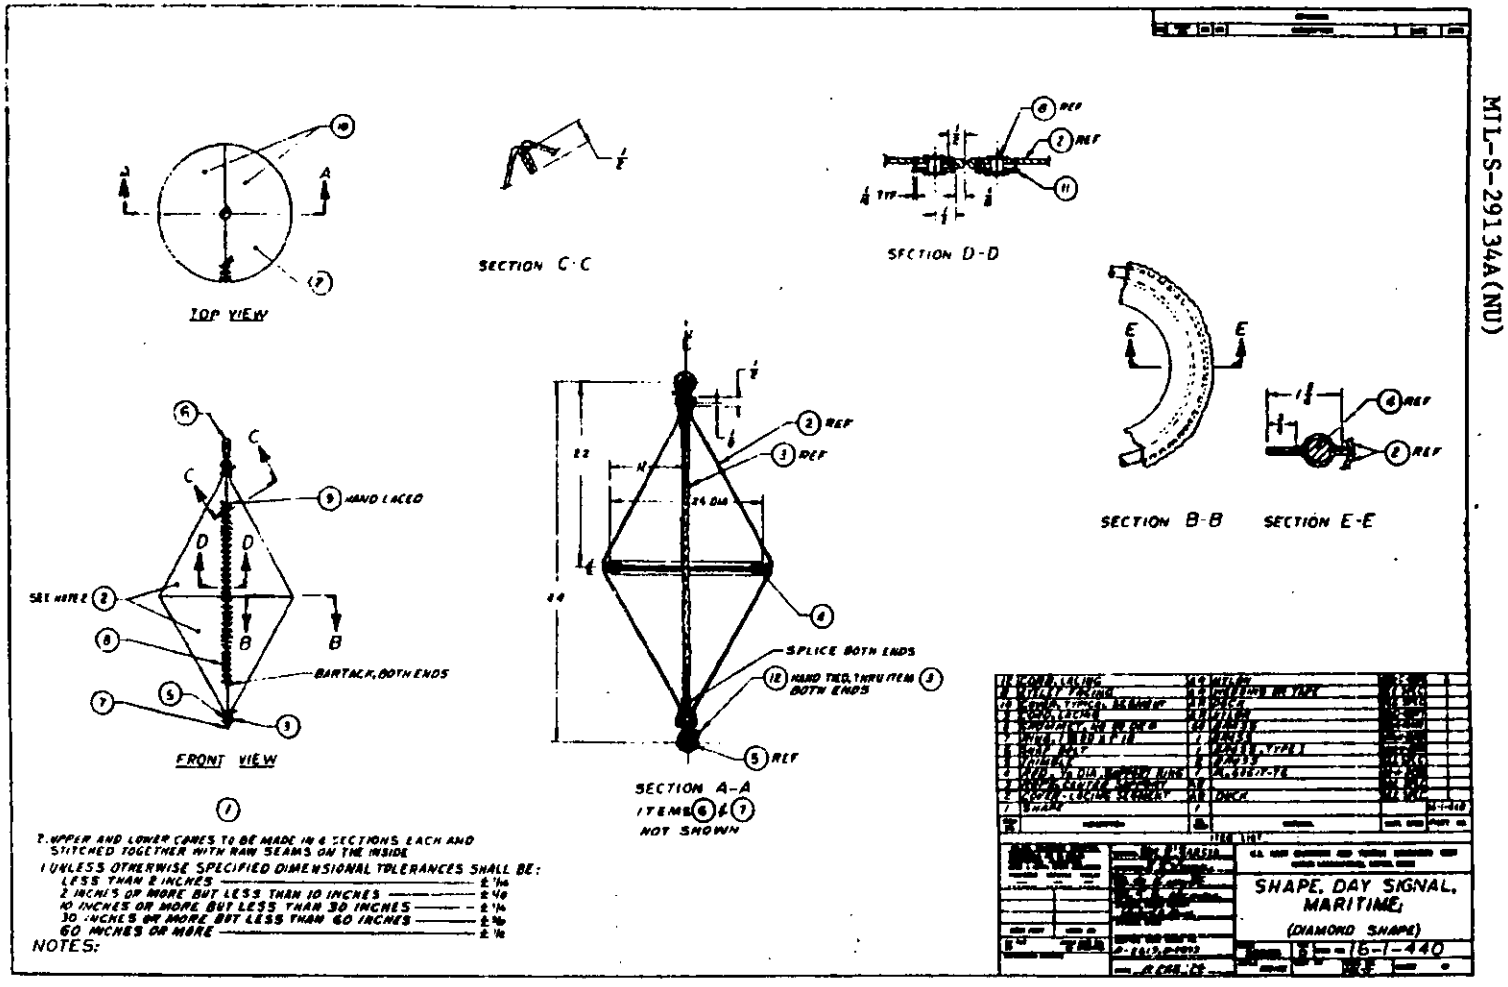


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-04-20T21:39Z
Check the source to verify that this is the current version before use.

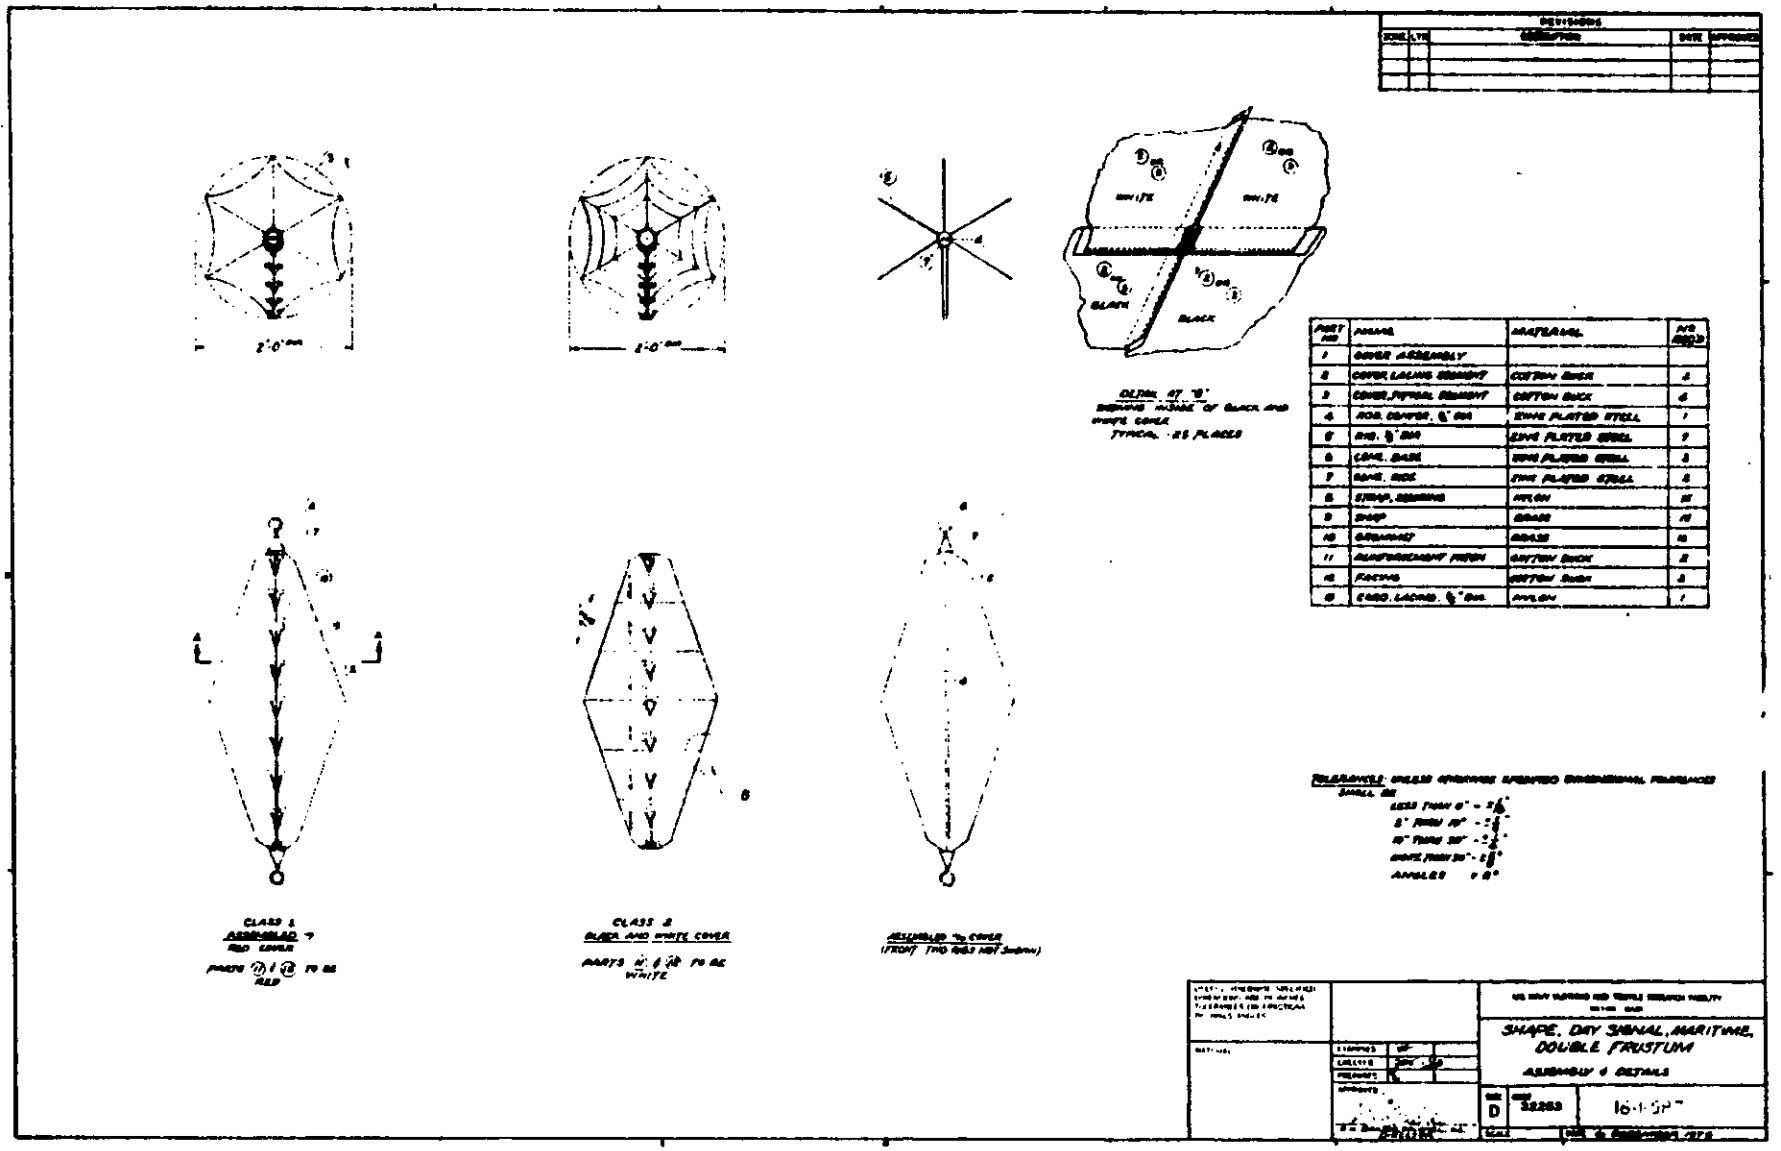


FIGURE 2
23

MIL-S-29134A(NU)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:39Z
Check the source to verify that this is the current version before use.

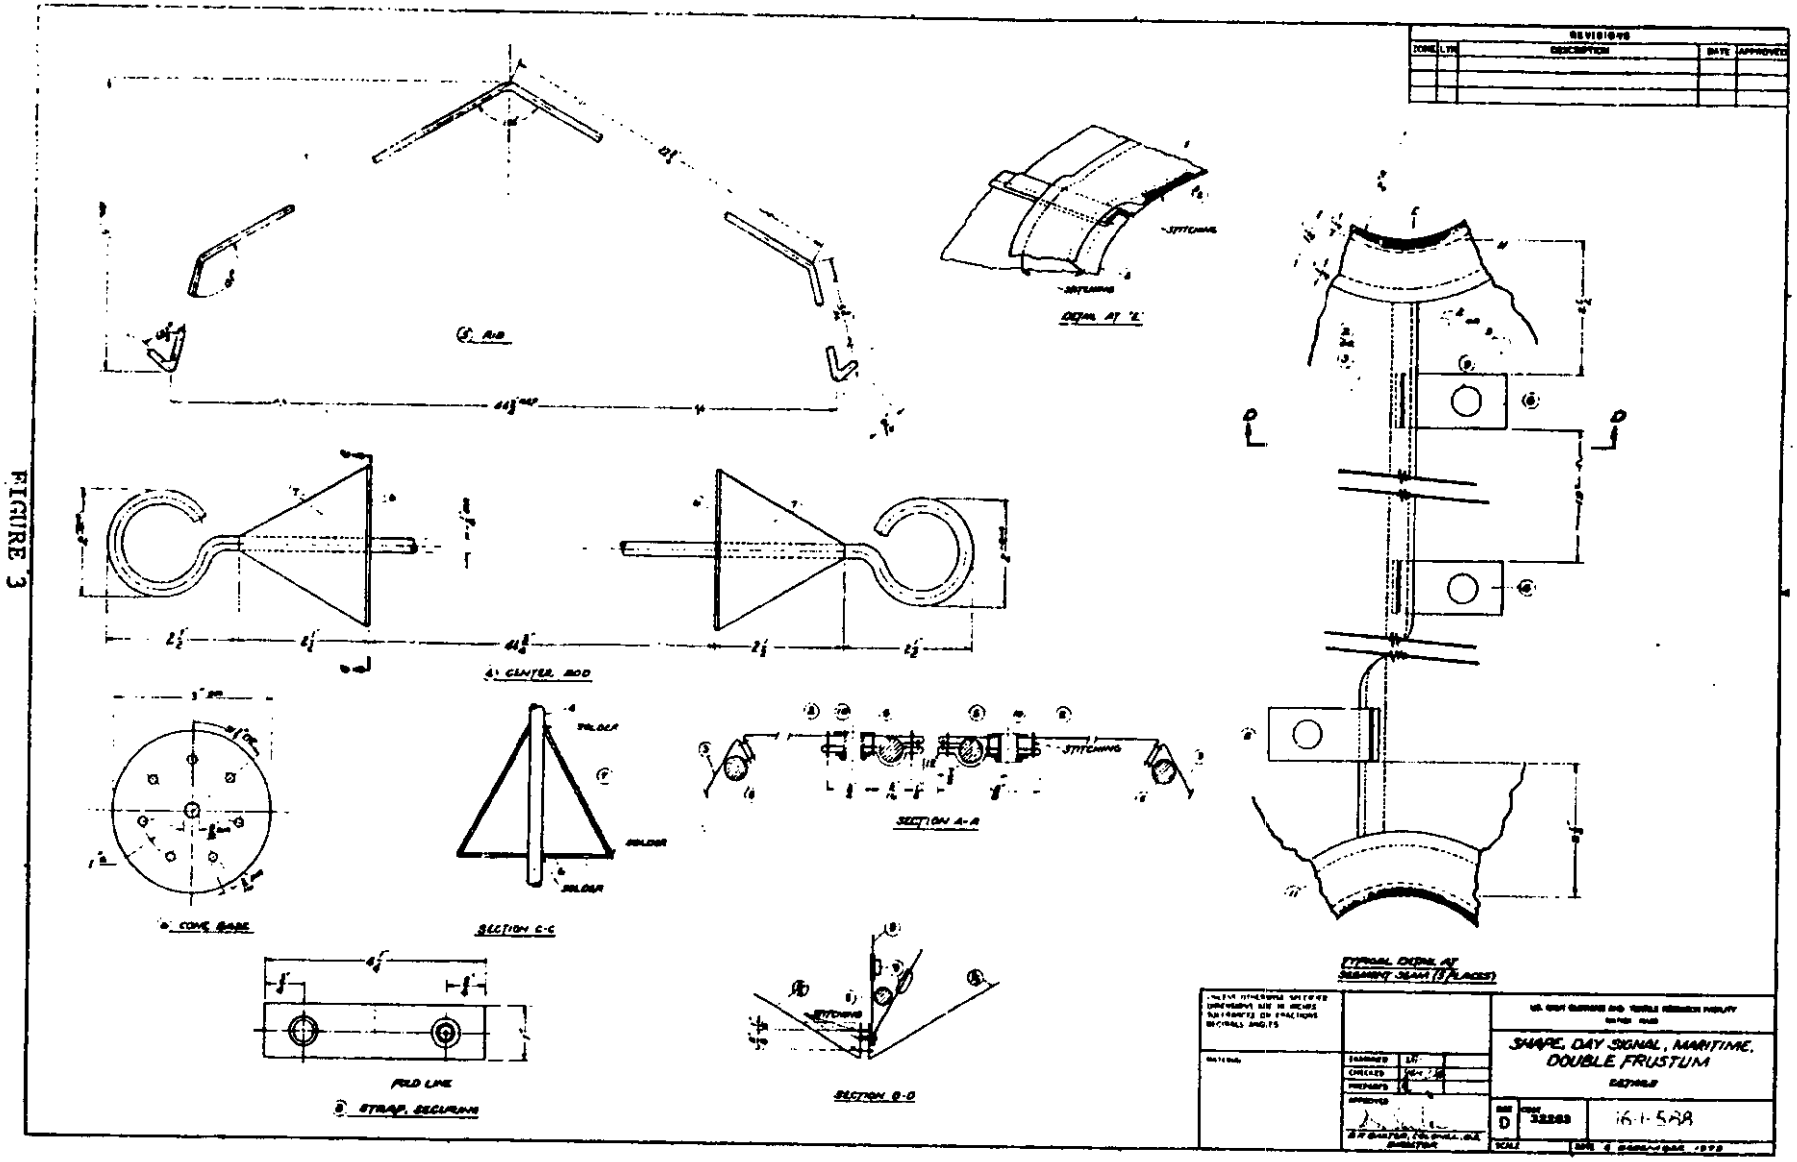


FIGURE 3
24

Source: https://assist.dla.mil -- Downloaded: 2026-04-20T21:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-29134A(NU) SHAPE, DAY, MARITIME, DIAMOND AND DOUBLE FRUSTRUM

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address – Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:39Z
Check the source to verify that this is the current version before use.