MIL-S-29149C(NU)
12 July 1988
SUPERSEDING
MIL-S-29149B(NU)
29 November 1985

MILITARY SPECIFICATION

SHIRT, MAN'S, POLYESTER AND WOOL, LONG SLEEVE

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a man's dark blue polyester/wool shirt.

1.2 Classification. The shirts shall be of one type only, in the following sizes and sleeve lengths (see 6.2).

1.2.1 Schedule of sizes. The shirts shall be furnished in the following neck sizes:

12, 12-1/2, 13, 13-1/2, 14, 14-1/2, 15, 15-1/2, 16, 16-1/2, 17, 17-1/2, 18

1.2.2 Schedule of sleeve lengths. The shirts shall be furnished in sleeve lengths of 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37 and 38.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17143	- Button, Insignia (Anchor, Plastic, Black)
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-24910	- Cloth, Tropical: Polyester and Wool
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon- or Polyester-Covered
MIL-C-43594	- Cloth, Interlining, Polyester
MIL-P-55010	- Plastic Sheet, Polyethylene Terephthalate

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-105	- Sampling Procedures and Tables For Inspection by Attributes
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1492	- Provisions for Evaluating Quality of Men's Shirts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies shall be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department Of Defense Standard Shades For Sewing Threads

Department Of Defense Standard Shades For Buttons

(Applications for copies shall be addressed to the Color Association of The United States, 343 Lexington Ave. New York, NY 10016.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

3.3 Material.

* 3.3.1 Basic cloth. The basic material for the shirt shall be a tropical polyester and wool blend, 10.0 ± .5 oz/yd^2, shade Blue 3346 conforming to MIL-C-24910.

3.3.2 Interlining. The material for interlining the left front plait, collar, collarstand, cuffs and pocket flaps shall be polyester fiber cloth conforming to MIL-C-43594 except that the color shall be black.

* 3.3.3 Thread. The thread for seaming, stitching, buttonholes, and button sewing shall be covered polyester-core thread, ticket No. 50, 2 or 3 ply and 70, 2 or 3 ply conforming to MIL-T-43548. The polyester core, polyester covered thread is not allowed. The thread shall be dyed to match Black AA, Cable No. 66043 in accordance with the Department of Defense Standard Shades for Threads.

* 3.3.3.1 Colorfastness of thread. The finished thread shall show colorfastness to laundering, perspiration and light equal to or better than the standard sample when tested as specified in MIL-T-43548. As a limit of acceptability or when no standard sample is available, the finished thread shall show a minimum of "good" fastness to laundering, perspiration and light when tested as specified in MIL-T-43548.

* 3.3.4 Buttons. The buttons shall be 25 line anchor insignia type conforming to class 1 of MIL-B-17143. The buttons shall match Shade Black, BT Cable No. 62001, in accordance with the Department of Defense Standard Shades for Buttons and shall have a glossy finish.

* 3.3.5 Collar stays. The collar stays shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.010 (± 0.001) inch, the color shall be natural (clear or opaque) and the transparency and optical properties shall not apply. The stay shall measure not less than 1/4 inch or more than 3/8 inch wide and 2-3/4 (± 1/16) inches in length when tested as specified in 4.4.1. Both ends shall be round, pointed, cut on an angle or any combination thereof. When other than round, points shall be rounded.

3.3.6 Labels.

* 3.3.6.1 Personal/identification/instruction label. Each shirt shall have a combination personal/identification/instruction label conforming to type IV or VI, classes 10 and 15 of DDD-L-20. When type IV is used, the printing shall be white. The printing shall show fastness to laundering and shall bear the following inscription:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

NAME:
SERVICE NO:
NAME OF ITEM: SHIRT, MAN'S (POLYESTER AND WOOL LONG SLEEVE)
FIBER CONTENT: 75% POLYESTER 25% WOOL
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (IF OTHER THAN CONTRACTOR)

LAUNDERING INSTRUCTIONS

MACHINE WASH, PERMANENT PRESS CYCLE,
WARM WATER (120°F MAX.). DO NOT BLEACH,
TUMBLE DRY, MEDIUM HEAT, REMOVE IMMEDIATELY.
MAY ALSO BE DRY CLEANED.

OR

FOLLOW NAVEDTRA 414-01-45-81, FORMULA III

* 3.3.6.2 Size label. Each shirt shall have a size label conforming to type IV or VI, class 2 of DDD-L-20. The inscription shall be as follows:

12 - 27 SL (Example)
STOCK NO. 8405-00-000-0000 (Example)

The abbreviation for sleeve length shall be SL.

3.4 Design. The shirt shall be a six button, turned back button stay, front plait, dress style shirt. It shall have a superimposed yoke on a full back, collar leaf, collar stand and two patch pockets with buttoned down flaps. The sleeves shall have a placket at the cuff opening with two buttons on each cuff for adjustment (see Figure 1).

3.4.1 Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification. The standard patterns provide an allowance of 1/4 inch for regular seams and 1/2 inch for double-lapped and double-stitched seams and safety-stitched seams. Unless otherwise indicated in Table II, seams shall be in accordance with these seam allowances.

3.5.1 List of pattern parts. The component parts of the shirt shall be cut from the materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

Table I - List of pattern parts

Material	Nomenclature of Pattern Part	Cut Part
Cloth, Polyester, Wool	Back	1
	Front, left	1
	Front, right	1
	Sleeves	2
	Back yoke	1
	Collar leaf	2
	Collar stand	2
	Cuffs	2 1/
	Patch pocket	2
	Pocket flap (top ply)	2 2/
	(bottom ply)	2 2/
	Sleeve placket	2
	Sleeve facing	2
	Plait (left front)	1
	Collar piece	2
	Pencil pocket	1
Interlining cloth	Collar stand interlining	1
	Cuff interlining	2
	Collar leaf interlining	1
	Pocket flap interlining	2
	Plait interlining (left front)	1
Templates	Pocket	-
	Pocket flap	-

1/ Cuff may be cut in two pieces. When doing so, seam must be added to meet required measurement. Then cut 4 pattern parts.
2/ Pocket flaps may be cut in one piece. When used, delete seam allowance on top edge of flap.

3.6 Construction.

* 3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types, as specified in Table II shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shirt. Unless otherwise specified, all double needle stitching shall be double lapped, and shall be not less than 1/4 inch nor more than 5/16 inch gauge with row of stitching nearest folded edge not more than 1/16 inch from edge. Seam edges shall be turned under approximately 3/8 inch on the top and underside of the seam. Unless otherwise specified, edgestitching shall be 1/16 inch and topstitching shall be not less than 3/16 inch nor more than 1/4 inch from folded edge. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. The guides and knives on the safety stitch machine shall be set to trim only the ravelled ends of the fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

* 3.6.2 Thread breaks and ends of seams. Ends of all seams and stitching, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

* 3.6.4 Buttonholes. The buttonholes shall be straight style with both ends securely barred. Buttonholes shall be cut clean and the stitching shall be securely caught in the fabric. The finished cut length shall be 3/4 (± 1/16) inch.

3.7 Manufacturing operations requirements. The shirt shall be manufactured in accordance with operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations provided the finished shirt is identical to that produced by following the sequence as listed in Table II. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.7.1 Shade and size marking. The component parts of the shirt shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Corrosive metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

3.7.2 Abbreviations in table of operations. The abbreviations used in Table II are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting. a. Cut the shirt in strict accordance with patterns furnished which show size, shape, directional lines, placement of pockets and flaps, and instructions and marks for proper assembly of all parts. b. All component parts shall be cut from one piece of material except the sleeve facing, underply of pocket flaps, underply of collar leaf, collar stand, pencil pocket and underply of cuffs (when 4 parts are cut), which may be cut from ends. When cut from ends, these parts shall approximate the shade of the shirt. c. Cut the stripping (if alternate method is used) for the sleeve placket and sleeve facing of sufficient width to comply with operations 14 and 15. The stripping may be placed on rolls, however, there shall be no piecing visible on the shirt and the stripping shall approximate the shade of the shirt.					
2.	Replacement of defective components. * During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1492 and 4.4, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade marking. Mark or ticket all parts of the shirt to insure a uniform shade and proper assembly throughout the garment (see 3.7.1). Parts cut from ends need not be shade marked.					
4.	Make left front plait and attach combination label.					
*	a. Position the plait (with interlining) with both edges turned under 3/8 to 1/2 inch to the left shirt front with the row of stitching 1/8 to 3/16 inch from edge. Double stitch with 1 (± 1/16) inch gauge.	301 or 401 LSm-2		10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Place combination personal/identification/ instruction label on outside of left front so that on the finished shirt the bottom of the label is 3/4 to 1-1/4 inches from the hemmed bottom and the side of the label is 1/2 to 1-1/4 inches from the edge of plait. Stitch all four sides 3/16 inch from edge.	301	LSbj-1	10-14	50	50
	or					
	c. The combination personal/identification/ instruction marking shall be legibly stamped on the outside of the left front bottom. No part of marking shall extend into the area above the bottom of the side seam.					
	d. The left front plait shall extend 3/16 (± 1/16) inch beyond the edge of the shirt front and the finished left front plait shall measure 1-1/2 (± 1/8) inches wide.					
5.	Make right front. Turn right front under 1/4 inch from edge, fold over button stay according to marks on pattern and stitch 1/16 inch from inside edge. The button stays shall measure 3/4 (± 1/16) inch in width.	301	EFb-1	10-14	50	50
6.	Make pocket flaps.					
	a. Join the plies of the pocket flaps and interlining along sides and pointed edge, 1/4 (± 1/16) inch from edge. Turn to finished position, working out points and seams out to edge.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	b. Stitch sides and pointed edge 3/16 to 1/4 inch from turned edge.	301	SSe-2(b)	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
7.	Attach pocket flaps.					
	a. Stitch flaps on each shirt front in accordance with marks on patterns 1/8 to 3/16 inch from the raw edge.	301	LSbl-2(a)	10-14	50	50
	b. Turn flaps down and stitch 3/16 to 1/4 inch from folded edge. The raw edge of the flap shall not be exposed.	301	LSbl-2(b)	10-14	50	50
	or					
	c. As an alternate, when one piece pocket flaps are used, stitch flaps to shirt fronts in accordance with marks on patterns, 3/16 to 1/4 inch from folded edge.	301	Smlr to LSd-1	10-14	50	50
	d. The finished flap for the sizes 12 to 14-1/2 shirts shall measure 4-7/8 (± 1/8) inches wide, 1-3/4 (± 1/8) inches at the sides and 2-5/8 (± 1/8) inches deep at the center. For the sizes 15 to 18 shirts, the flaps shall measure 5-3/8 (± 1/8) inches wide, 1-3/4 (± 1/8) inches deep at the sides and 2-3/4 (± 1/8) inches deep at the center.					
	NOTE: The finished flap shall be checked for size and uniformity against the flap template.					
8.	Make patch pockets and pencil pocket.					
	a. Form a hem at the top of patch pocket according to pattern marks with raw edge turned under 3/16 to 1/4 inch with row of stitching 1/16 inch from edge.	301	EFb-1	10-14	50	50
	or					
	b. As an alternate, overedge top raw edge of patch pocket and fold under as indicated by pattern marks.	503, 504 or 602	EFd-1	10-14	50	50
	c. Turn down the top edge of the pencil pocket 3/4 (± 1/4) inch and stitch 1/16 to 1/8 inch from the raw edge.	301	EFa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Turn in the side edges of the pencil pocket 3/8 inch and stitch to the left front of the shirt as indicated by marks on the pattern. Tack the ends of the seam by backstitching. The finished pencil pocket shall be 2 (± 1/8) inches wide.	301	LSd-1	10-14	50	50
	e. Form two compartments with a row of vertical stitching at the center (± 1/8) inch through the shirt.	301	SSv-1	10-14	50	50
9.	Attach pockets.					
	a. Set pockets to shirt 3/8 to 1/2 inch below the seam of flaps, stitching sides and bottom 3/16 to 1/4 inch from the turned edge with a turn under of 3/8 inch to 1/2 inch. Tack ends of seam by stitching 1/16 inch from the folded side edges for 1/2 inch.	301	LSd-1	10-14	50	50
	or					
	b. As an alternate, the top corners of pockets may be tacked with a triangle stitching. The base of the triangle shall be at top corner of pocket and apex at lower corner of the hem. The base of the triangle shall measure 1/8 to 3/16 inch wide.	301	LSd-1	10-14	50	50
	c. The finished pocket for the sizes 12 to 14-1/2 shirts shall measure 5-5/8 (± 1/8) inches long and 4-3/4 (± 1/8) inches wide. For the sizes 15 to 18 shirts, the finished pockets shall measure 6 (± 1/8) inches long and 5-1/4 (± 1/8) inches wide.					
	NOTE: The finished pocket shall be checked for size and uniformity against the pocket template.					
	d. The pockets may be creased in an edge creasing machine to insure uniformity of shape and size before stitching to the shirt.					
10.	Join yoke, back, and fronts.					
	a. Sandwich fronts between the yoke and the back and stitch 3/8 to 1/2 inch from the raw edge at the shoulders.	301 or 401	SSq-2(a)	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Turn the yoke and back to the finished position and stitch the shoulder seams 1/16 inch from folded edge.	301 or 401	SSq-2(b)	10-14	50 50	50 70
	or					
	c. Fold inward the raw edges of the yoke and back 3/8 to 1/2 inch. Insert raw edge of front between yoke and back 3/8 to 1/2 inch and stitch through all plies 1/16 inch from folded edge.	301	LSe-1	10-14	50	50
	d. Stitch the yoke to the shirt back with the raw edge of the yoke turned under 3/8 to 1/2 inch.	301	LSd-1	10-14	50	50
	e. The finished yoke shall measure 2-5/8 (± 1/4) inches long at the sides and center back.					
11.	Make collar leaf. a. The stays shall be positioned so that on the finished shirt they are at a 25 to 30 degree angle from the front edge of the collar and the tapered ends are fitted into the collar points. The construction shall be as follows:					
*	1. Stitch stays to the undercollar piece. When stitch type 101 is used, the stitching shall straddle the center bar of the stay and shall not penetrate the stay material. When stitch type 301 is used, the stitching shall be centered down the length of the stay.	101 (zig-zag)		20-24	70	70
		or 301	SSv-2	10-14	50	50
	or					
	2. Form a tunnel for the collar stays by stitching the collar piece to the interlining and undercollar with two rows of stitching 3/8 inch apart. The collar points shall be aligned with the center of the two rows of stitching and the stitching shall extend to the raw edges. Insert collar stays into the tunnels.	301	SSv-2	10-14	50	50
	or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	3. Spot laminate both tips of the collar stay piece to the interlining. Spot lamination shall not extend more than 3/8 inch from either tip.					
*	b. Join the three plies of collar together along outside edges, 3/16 to 1/4 inch from raw edge, with the top and bottom collar face to face. For options (1) and (3), the interlining and collar piece shall be next to the top collar and for option (2) they shall be next to the undercollar.	301	SSe-2(a)	10-14	50	50
*	c. Trim corners, turn, work out edges and points, and edge stitch 3/16 to 1/4 inch from the turned edges.	301	SSe-2(b)	10-14	50	50
12.	Make collar stand and attach collar leaf.					
	a. Join interlining to undercollar stand with a row of horizontal stitching at the center of the collar stand.	301 or 401	SSv-1	10-14	50 50	50 70
	b. Place collar leaf between the top and undercollar stand (with attached interlining) as indicated by notches on pattern and stitch from end to end along top edge of collarstand, 3/16 to 1/4 inch from edge.	301 or 401	SSq-2(a)	10-14	50 50	50 70
	c. Turn down collar stand to finished position and topstitch 1/16 inch from turned edge, continuing around the curved ends of the stand.	301	Similar to SSq-2(b)	10-14	50	50
	or					
	The curved ends of the stand may be topstitched when performing operation 13b.	301	SSc-1	10-14	50	50
	d. The finished collar leaf shall measure 2 (+ 1/8) inches at the center back and 3-1/4 (+ 1/8) inches at the front ends. The front ends of the collar leaf shall be the same distance from the ends of the collar stand.					
	e. Stamp the Type IV size label, (when applicable) centered on top collar stand.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THRD NDL	THRD BOB/ LPR
13.	Attach collar to shirt.					
	a. Stitch the neck edge of the under ply (with attached interlining) of the collar stand to the neck edge of the shirt, 1/4 to 5/16 inch from the edge.	301	SSa-1	10-14	50	50
	b. Turn to finished position and stitch 1/16 inch from the turned edge, the top ply of the collar stand to the shirt with the raw edge of the collar stand turned under 3/16 to 1/4 inch. Simultaneously center and catch the Type VI size label (when applicable) in the seaming.	301	LSb-1	10-14	50	50
	c. The finished collar stand shall measure 1-1/4 (± 1/8) inches wide at center back.					
14.	Attach sleeve facings.					
*	a. Clip a V-notch at the end of sleeve opening. Stitch the facing to the edge of the underside of the sleeve opening, 1/8 to 3/16 inch from the raw edges.	301 or 401	BSq-2(a)	10-14	50 50	50 70
	b. Turn the facing to the outside and topstitch, 1/16 inch from folded edge, with the raw edge turned under 5/16 to 3/8 inch.	301 or 401	BSq-2(b)	10-14	50 50	50 70
	or					
*	c. Clip V-notch as described in 14a. Bind the edge of the underside of the sleeve opening with the raw edges of the facing turned under 3/16 to 1/4 inch.	301 or 401	BSc-1	10-14	50 50	50 70
*	d. With end of facing on outside of sleeve, fold V-notch toward facing and stitch through notch and facing 1/16 inch from folded edge.	301 or 401	LSd-1	10-14	50 50	50 70
	e. The finished sleeve facing shall measure 1/2 (± 1/8) inch wide.					
15.	Attach sleeve placket.					
	a. Fold placket piece according to marks on pattern and stitch 1/16 inch from folded edge.	301	OSf-1	10-14	50	50
*	b. Stitch small side of placket piece to underside of sleeve opening, with raw edges even, 1/8 to 3/16 inch from raw edge.	301 or 401	SSa-1	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Turn the placket to outside of sleeve, turn under 3/16 to 1/4 inch and stitch 1/16 inch from folded edge to the point. Continue stitching 1/16 inch around the point and down the outside edge of the placket to 1-1/2 to 1-5/8 inches from the point. Place one row of horizontal stitching across the placket 1-1/2 to 1-5/8 inches from the pointed end.	301	LSd-1 and SSa-1	10-14	50	50
	or					
	d. As an alternate, fold placket (cut from stripping) in half lengthwise and stitch 1/16 inch from folded edge.	301	OSf-1	10-14	50	50
	e. Stitch the underside of placket piece to underside of sleeve opening, 1/8 to 3/16 inch from raw edge.	301 or 401	SSa-1	10-14	50 50	50 70
	f. Turn to finished position, turn raw edge under 3/16 to 1/4 inch and stitch 1/16 inch from folded edge to the point. Continue stitching 1/16 inch around the point and down the outside edge of the placket to 1-1/2 to 1-5/8 inches from the point. Place one row of horizontal stitches across the placket 1-1/2 to 1-5/8 inches from the point.	301	LSd-1 and SSa-1	10-14	50	50
	or					
	g. As an alternate to d and e above: Using a folder, stitch placket to sleeve opening with a double row of stitching.	301 or 401	BSc-2	10-14	50 50	50 70
	h. The finished sleeve placket shall measure 1-1/4 (± 1/8) inches wide and 6 (± 1/2) inches long. The finished sleeve placket shall be measured from the top edge of the cuff to the pointed end.					
	NOTE: Placket lengths shall not vary more than 1/2 inch between sleeves on any one shirt.					
16.	Attach sleeves.					
	a. Double stitch sleeves in armholes with the body lapped over the sleeve on the outside of shirt.	301 or 401	LSc-2	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. For alternate construction: Join sleeves to armholes by seaming and overedging the raw edges in one operation. The width of the overedge stitching shall be 3/16 to 1/4 inch.	515 or 516 or 519	SSa-2	10-14	50 (chain-stitch-ing) 70 (over-edge stitch-ing)	70 70
17.	Join sides and sleeve seams.					
	a. Join the side seams and sleeve seams with double lapped and double stitched seams. The seams may be lapped front over back on one side and back over front on the other side. Ends of armhole seam shall not be staggered more than 3/8 inch at armpit.	301 or 401	Lsc-2	10-14	50 50	50 70
	b. For alternate construction: Join side seams and sleeve seams by seaming and overedging the raw edges in one operation. Ends of armhole seam shall not be staggered more than 3/8 inch at armpit. The width of the overedge stitching shall be 3/16 to 1/4 inch.	515 or 516 or 519	SSa-2	10-14	50 (chain-stitch-ing) 70 (over-edge stitch-ing)	70 70
18.	Hem bottom.					
	a. Turn under bottom of shirt and seam.	301	EFb-1	10-14	50	50
	b. The finished hem shall measure 1/4 to 3/8 inch wide.					
19.	Make cuffs.					
	a. Fold cuff in half lengthwise, superimpose interlining and stitch sides together 5/16 to 3/8 inch from raw edge.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	b. Turn and stitch bottom and side edges of cuff 3/16 to 1/4 inch from folded edge. The stitching on the side of the cuff shall finish 1/2 (± 1/8) inch from top edge of finished cuff or edge stitching may taper to edge of cuff. Ends of stitching need not be backtacked.	301	SSe-2(b)	10-14	50	50
	or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. When a two piece cuff is used, fold top edge of the outer ply of the cuff over and even with top edge of interlining and single stitch, 1/4 to 5/16 inch from folded edge catching interlining in the stitching.	301 or 401	SSbc-1	10-14	50 50	50 70
	d. Join plies of cuff and interlining. Turn and single stitch 3/16 to 1/4 inch from edge. The edgestitching shall finish 1/2 (± 1/8) inch from top edge of finished cuff.	301 or 401 and 301	SSe-2(a) and SSe-2(b)	10-14 10-14	50 50 50	50 70 50
	or					
	e. In lieu of operation "b" or "d" above, the precreased edge of inner ply of cuff and precreased outerply of cuff (with interlining superimposed) shall be stitched together with one row of stitching 3/16 to 1/4 inch from edge. The edge stitching shall finish 1/2 (± 1/8) inch from top of finished cuff.	301	SSc-1	10-14	50	50
20.	Attach cuffs.					
	a. Stitch the top edge of the inner ply of cuff to the bottom edge of sleeve 3/16 to 1/4 inch from edge.	301	SSa-1	10-14	50	50
	b. Fullness of the sleeve bottom shall be taken up with one pleat facing the buttonhole side approximately 2-1/4 inches from the outer edge of the cuff on the outside of the shirt.					
	c. Turn cuff to finished position and stitch 1/16 to 1/8 inch from the folded top edge to bottom of sleeve on the outside.	301	LSb-1	10-14	50	50
	d. The finished cuff shall measure 2 1/2 (± 1/8) inches wide.					
21. *	Make buttonholes (see 3.6.4). a. Make one horizontal buttonhole centered in left end of the collar stand with the front end of the buttonhole 5/8 (± 1/8) inch from the end of the collar stand.	Btnhl		44-46 per btnhl	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Make one horizontal buttonhole centered in each cuff, with the front end of the buttonhole 3/8 to 1/2 inch from the end of the cuff.	Btnhl		44-46 per btnhl	50	50
	c. Make one vertical buttonhole centered in each pocket flap with the lower end of the buttonhole 3/8 to 1/2 inch above the center point.	Btnhl		44-46 per btnhl	50	50
	d. Make five vertical buttonholes centered in the center plait on the left front as follows:	Btnhl		44-46 per btnhl	50	50
	(1) The second buttonhole shall be placed in direct line with the pocket flap buttonholes.					
	(2) The first buttonhole shall be placed midway between the second buttonhole and the collar stand buttonhole.					
	(3) The three other buttonholes shall be equally spaced as determined by the distance between the first and second buttonhole.					
	e. All thread ends shall be trimmed and buttonholes clean.					
22.	Sew on buttons. Sew on buttons to correspond with the buttonholes placed as follows:					
*	NOTE: The crown of the anchor shall point downward. The stitching shall follow the sewing guide grooves of the buttons.					
*	a. One centered in the right end of the collar stand with the center of the button 3/4 (± 1/8) inch from the end. All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.	101 or 301		14-16 per button	50	
				14-16 per button	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*	b. Five centered on the right front edge (button stay). The center of the buttons shall be 5/8 (± 1/8) inch from the edge. All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.	101 or 301		14-16 per button	50	
				14-16 per button	50	50
*	c. One centered in each pocket to correspond with buttonhole in flap. All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.	101 or 301		14-16 per button	50	
				14-16 per button	50	50
	NOTE: The button shall be sewn through all plies of the pocket hem.					
*	d. Two centered in each cuff with the center of the buttons 1/2 (± 1/8) inch and 1-1/2 (± 1/8) inches respectively from the end of the cuff. All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.	101 or 301		14-16 per button	50	
				14-16 per button	50	50

23. Clean shirt.

(1) Trim all ends of threads and remove loose threads.

(2) Remove all spots and stains.

(3) Remove all shade tickets.

* NOTE: Care shall be taken when trimming thread ends so that damage to the fabric does not result.

24. Pressing.

Press entire shirt neatly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished shirt shall be shown in Table III (see Figure 1). All measurements and tolerance are expressed in inches.

Table III - Sizes and finished measurements

Size	A Chest	B Length	C Collar stand
12	38	27-7/8	12-1/2
12-1/2	38-3/4	28-1/8	13
13	39-1/2	28-3/8	13-1/2
13-1/2	41	28-3/4	14
14	42-1/2	29-1/8	14-1/2
14-1/2	44	29-1/2	15
15	45-1/2	29-7/8	15-1/2
15-1/2	47	30-1/4	16
16	49	30-5/8	16-1/2
16-1/2	51	31	17
17	53	31-3/8	17-1/2
17-1/2	55	31-3/4	18
18	57	32	18-1/2
Tolerance	+1 - 1/2	± 1/2	+ 1/4 - 1/8

Size	D Sleeve length											
12	27	28	29	30	31	32	33					
12-1/2	27	28	29	30	31	32	33					
13	27	28	29	39	31	32	33					
13-1/2	27	28	29	30	31	32	33	34	35			
14	27	28	29	30	31	32	33	34	35			
14-1/2		28	29	30	31	32	33	34	35	36	37	
15				30	31	32	33	34	35	36	37	38
15-1/2				30	31	32	33	34	35	36	37	38
16					31	32	33	34	35	36	37	
16-1/2					31	32	33	34	35	36	37	
17						32	33	34	35	36	37	
17-1/2						32	33	34	35	36	37	
18						32	33	34	35	36		
Tolerance	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2

NOTE: Except where otherwise specified, the shirt shall be buttoned and laid flat and smooth when measurements are taken.

(A) Chest - Twice the measurement taken across the chest at base of the armhole from folded edge to folded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

(B) Length - Measure from the neckline seam to the bottom of the shirt along the center back.

(C) Collar stand - With the shirt unbuttoned and the collar laid flat and smooth, measure across the inside length of the collar stand from the center of the collar button to the far-end of the corresponding buttonhole.

(D) Sleeve length - With sleeve extended, measure from the center back at lower edge of collar stand seam to bottom edge of cuff.

3.9 Workmanship. The finished shirts shall conform to the quality established by this specification. As a final step in the contractor's production control plan before formation of a lot, each shirt shall be buttoned, pressed and laid out flat on a table and examined for selected defects prior to folding for packaging. A shirt containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1492 indicated by an asterisk(*). The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

* 4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-1492, and in accordance with the following:

Defect	Point value D	SD	U
III. CLEANNESS			
b. Thread ends			
1. Three or more on outside more than 1/4 inch	3	3	3
2. Five or more inside, 1/2 inch or more	2	2	2
VIII. BUTTONHOLE			
c. Ragged edges, i.e., yarns or thread ends on inside of buttonholes not trimmed to less than 1/4 inch or basic fabric not caught by buttonhole stitching			
1. One or more but less than 6	1	1	1
2. Six or more	2	2	2
IX. BUTTON - one or more			
d. Not specified type, size or color	2	2	2
e. Stitching not caught through all plies	1	1	1
f. Bottom of anchor not pointing down	2	2	2
g. Button stitching (other than cross-over stitch) not in grooves	2	2	2
XX. ARMHOLE AND SLEEVE			
d.			
8. Fullness of sleeve bottom not taken up as specified	1	1	1
9. Placket length varies 1/2 inch or more between sleeves on any one shirt	1	1	1

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, testing shall be performed on the component listed in Table IV for characteristics noted. The sample unit for the collar stays (see 3.3.5) shall be 4 each and the lot shall be expressed in "Gross". All requirements are applicable to the sample unit and the lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be as specified in 4.4.1.1.

4.4.1.1 Sampling for testing. Unless otherwise specified, the sampling for testing shall be as specified below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

Lot size	Sample size (sample unit)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Table IV - Test methods

Component	Characteristic	Requirement paragraph	Test method
Collar stays	Width	3.3.5	Visual
	Length	3.3.5	Visual

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with the provisions for Dress Shirts (D) in MIL-STD-1492.

4.4.3 Packaging inspection. Packaging inspection shall be in accordance with MIL-STD-1492.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5, in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be neatly folded to measure approximately 14-1/2 inches by 10-1/2 inches. The folded shirt shall be secured with stainless steel (AISI type 304 or 316) pins, aluminum clips, or plastic fasteners. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (+ 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type in which case a heat seal closure and corner vent hole are not required.

5.1.2 Level C. Shirts shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Forty shirts of one size and sleeve length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, Size 3A of MIL-B-17757. The fiberboard used for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, front up, collars alternated front to rear, two in length, one in width, and twenty in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.2 Level B. Forty shirts of one size and sleeve length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled closed and reinforced conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, front up, collars alternated front to rear, two in length, one in width and twenty in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.2.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K, and L or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III, or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

be approved by the contracting officer.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

SHIRT, MAN'S, POLYESTER AND WOOL, LONG SLEEVE
STOCK NUMBER:
SIZE:
QUANTITY:

6. NOTES

* 6.1 Intended use. The shirts are intended for wear by male Navy personnel as part of the winter working blue uniform.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and sleeve lengths required (see 1.2).
c. When first article inspection is required (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity and testing and approval.
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.2.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

* 6.6 Subject term (key word) listing.
Material, poly/wool blend
Interlining, polyester
Shirt, Man's, dress
Sleeve, long
Uniform, winter working blue
Yoke

Custodian:
Navy - NU

Review activity
DLA - CT

Preparing activity:
Navy - NU

Project No. 8405-N068

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

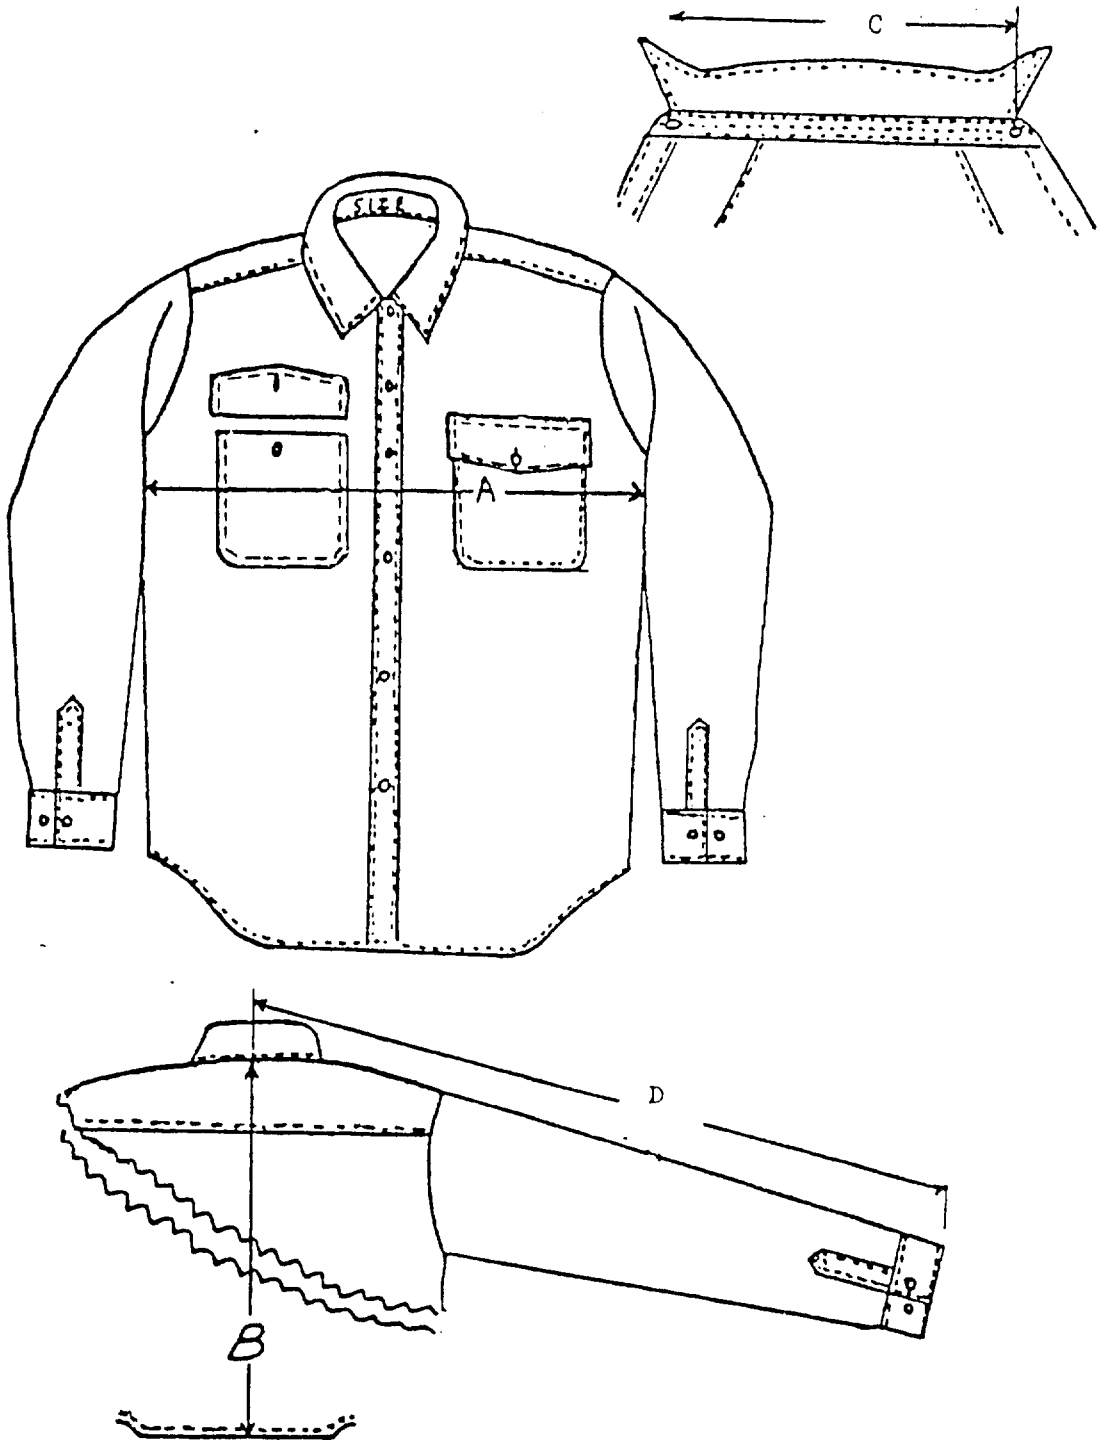


Figure 1 - Shirt, Man's Polyester/Wool, Long Sleeve

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-29149C(NU)	SHIRT, MAN'S, POLYESTER AND WOOL, LONG SLEEVE

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)* and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer In Charge
Navy Clothing And Textile Research Facility
21 Strathmore Rd.
Natick, Ma. 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:43Z
Check the source to verify that this is the current version before use.