MIL-T-29146B
2 July 1984

SUPERSEDING
MIL-T-29146A
3 January 1977

MILITARY SPECIFICATION

TROUSERS, FIREMEN'S, ALUMINIZED, PROXIMITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for the heat protective trousers constructed from an aluminized aramid outer fabric and with a snap-in-liner.

1.2 Classification The trousers covered by this specification shall be of one type only and in the following sizes (see 6.2):

Small	(30-33)	Large	(38-41)
Medium	(34-37)	X-Large	(42-45)

2. APPLICABLE DOCUMENTS

* 2.1 Government documents

* 2.1.1 Specifications, standards, and handbooks Unless otherwise specified, the following specifications, standards and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the soliciation form a part of this specification to the extent specified.

SPECIFICATION

FEDERAL

V-T-295 - Thread, Nylon
KK-L-2004 - Leather, Cattlehide, Deerskin and Horsehide Chrome Tanned
CCC-C-419 - Cloth, Duck, Cotton, Unbleached, Plied-Yarn; Army Numbered
DDD-L-20 - Label; for Clothing, Equipage, and Tentage (General Use)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-W-5664 - Webbing, Textile, Elastic, Cotton
MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-19699 - Cloth, Coated (Nylon Taffeta)
MIL-T-43636 - Thread, Aramid
MIL-T-44100 - Thread, Para-Aramid, Spun, Intermediate Modulus
MIL-B-87002 - Batting, Synthetic Fibers, Quilted, Aramid
MIL-C-87076 - Cloth, Coated, Aramid, Aluminized

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-1666 - Classification of Defects for Evaluating Quality of Aluminized Firemen's Clothing
MS 27980 - Fasteners, Snap, Style 2

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

RULES AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

* 2.2 Other publications The following documents form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the samples, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

3.3 Materials.

* 3.3.1 Basic material. The basic material for the outer shell of the trousers shall be an aramid material coated with a vacuum deposited aluminized face conforming to Type I or II of MIL-C-87076.

3.3.2 Quilted liner. The material for the quilted liner shall be aramid quilted batting conforming to type I of MIL-B-87002 except the outer covering cloth conforming to MIL-C-43774 shall have 69 filling yarns and the dimensional stability for warp and filling shall be 3 percent.

3.3.3 Lining. The material for the lining and binding, and the waist facing shall be a coated nylon taffeta conforming to type II of MIL-C-19699. The binding shall be bias-cut in strips 1 1/8 (± 1/8) inches wide and it may be spliced.

* 3.3.4 Leather. The leather strip for reinforcing the bottom of the trousers and for the patches used for reinforcing fasteners shall be a flesh split cattlehide, natural color of tannage, of not less than 2 3/4 nor more than 3 1/2 ounce thickness conforming to Type IV, Class 2 of KK-L-2004 after silicone treatment specified in 3.3.4.1, except for the following:

(a) Shrinkage temperature shall be not less then 105°C.
(b) Tests for percent ash and chloroform soluble material are not required.

*3.3.4.1 Silicone treatment. The leather shall be treated with an approved durable silicone compound to lower its water absorption (see 4.3.1, 6.2 and 6.4).

* 3.3.5 Thread. The thread for assembling the outershell and for joining the outershell to the lining shall be non melting nylon (Aramid), natural shade, conforming to Size B of MIL-T-43636. As an alternate, a thread conforming to size T-50 of MIL-T-44100, natural in color may be used. The thread for the liner shall be Type 1, Class A, Size A of V-T-295. The shade shall approximate that of the outershell.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

3.3.6 Snap fasteners. The snap fasteners for fastening the removable liner to outershell and the front fly of the trousers shall consist of two separate components (button and socket) that constitute the female half of the fastener and two separate components (stud and eyelet) that constitute the male half of the fastener. The fasteners shall be style 2, 24-line, size 1 conforming to MS 27980 in the following part numbers:

Button - 1N or 1C	Socket - 6N or 6C
Stud - 7N or 7C	Eyelet - 8N or 8C

3.3.7 Suspender assembly.

3.3.7.1 Buckle. The front of the clamp type buckle shall be made from 0.020 inch, 3 temper, SAE 1010 cold-rolled steel. The back of the buckle shall be made from 0.058 inch soft basic steel wire. The buckle shall be zinc plated and lacquered black or shall have a nickel or chrome finish (see Figure 3).

3.3.7.2 Slide. The slide for the suspender strap shall be die cast zinc and shall be lacquered black or shall have a chrome or nickle finish. It shall be 0.125 inch thick with two 1 1/2 by 3/16 inch openings (slots). Overall dimension shall be 1 3/4 by 13/16 inch(see 6.4).

3.3.7.3 Webbing. The webbing shall be cotton elastic 1 1/2 inches wide conforming to class 2 of MIL-W-5664. The color of the webbing shall be natural, white, black or olive drab.

3.3.8 Labels.

* 3.3.8.1 Identification label (Trouser). Each pair of trousers shall have an identification label conforming to type VI, class 1 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription:

TROUSERS, FIREMEN'S, ALUMINIZED, PROXIMITY
BASE FABRIC: ARAMID
CONTRACT NO.: DLA-100-00-0-0000 (EXAMPLE)
NAME OF SUPPLIER:

* 3.3.8.2 Size and stock number label (Trouser). Each pair of trousers shall have a size and stock number label conforming to type VI, class 2 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription:

SIZE: MEDIUM (34-37) (Example)
STOCK NUMBER: 8415-00-000-0000 (Example)

* 3.3.8.3 Instruction label. Each pair of trousers shall have an instruction label conforming to type VI, class 3 of DDD-L-20, except that the colorfastness requirement shall not apply. The label shall bear the following inscription:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS

1. CAUTION: MUST BE WORN WITH LINER
2. Hang to dry and store trousers properly to prevent damage to aluminized surface.
3. Clean by gently rubbing surface with cloth using mild soap, PERCHLORETHYLENE or ISOPROPANOL.
4. To maintain reflective properties and extend service life, use trousers for fire fighting only.
5. Do not use aluminized paint to repair worn out surface as it will not provide protection.

NOTE: Aluminized coating is damaged by contact with fire extinguishing agent Potassium Bicarbonate Powder (PKP). Before storing garment with PKP residue present, the following is recommended:

1. Dry powder should be removed with clean soft brush or blower.
2. Wet powder should be removed by throughly flushing with water and wiping the surface down with a clean soft cloth. Damp or wet garments should be hung to dry.

* 3.3.8.4 Identification and instruction label liner. Each trouser liner shall have a combination identification and instruction label conforming to type VI, class 15 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription.

LINER, TROUSER, FIREMAN'S ALUMINIZED PROXIMITY
BASE FABRIC: ARAMID (100%)
CONTRACT NO: DLA-100-00-0-0000 (Example)
NAME OF SUPPLIER:

CLEANING INSTRUCTION

1. Wash liner in warm water (100 to 120°F) using detergent.
2. Rinse thoroughly to remove all soap residue.
3. Dry liner for 20 to 30 minutes in a tumble dryer at 140 to 160°F.

OR
USE NAVY FORMULAR III

* 3.3.8.5 Size and stock number label (liner). Each trouser liner shall have a size and stock number conforming to type VI, class 2 of DDD-L-20, except that the colorfastness requirements shall not apply. The label shall bear the following inscription:

SIZE: MEDIUM (34-37) (Example)
STOCK NUMBER: 8415-00-000-0000 (Example)

* 3.3.8.6 Warning label (Trousers). Each pair of trousers shall have a warning label conforming to type IV, class 9 of DDD-L-20 applied to the inside back lining. The label shall be applied to the lining by a red marking medium. The label shall be printed with block, sansserif type with letters 3/4 to 1 inch in height. The label shall contain the following inscription:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

WARNING
MUST BE WORN WITH LINER IN PLACE

Two lines may be used for warning inscription.

*3.3.8.7 Warning label (liner). Each liner shall have a warning label conforming to type VI, Class 9 of DDD-L-20 stitched to the inside back of the liner. The label shall be printed with a red marking medium. The label shall be printed with block sansserif type with letters 1/2 inch in height. The label shall bear the following inscription:

WARNING
MUST BE WORN THIS SIDE TOWARDS BODY

Two lines may be used for warning inscription.

* 3.3.9 Repair of aluminum film. The aluminum film used for patches for repairing exposed or cracked areas on the finished trousers shall be the same as specified for coating the aramid base fabric. The uncoated area shall not exceed 1 inch in the longest dimension. The patch shall be completely bonded onto the aluminum film of the trousers and shall be so placed that it extends not less than 1/2 inch beyond all edges of the uncoated area and not more than three patches per trousers shall be allowed. The patch shall not exceed 2 inches in any direction. The unsupported aluminum film and self-curing adhesive used for repairing shall be obtained from the basic material supplier (see 3.3.1).

* 3.3.10 Facing. As an alternate to the aluminized material, the waist facing for the removable liner may be fabricated from an unbleached cotton duck, size number 6, medium texture conforming to Type I of CCC-C-419.

* 3.3.11 Binding. The binding for the raw edges of the removable liner shall be a commercial grade bias-cut rayon binding with a minimum width of 2 5/8 inches.

* 3.4 Design. The trousers shall consist of an outershell fabricated from a highly reflective aluminized coated aramid cloth outer surface of vacumn deposited aluminum and the leg bottoms shall be bound with leather. The outershell shall be fastened to a removable quilted lining innershell which provides thermal insulation and waterproofness. The front fly closure shall be secured by means of 3 snap fasteners. Adjustable elastic suspender straps shall be stitched to the waistband at front and back (see Figures 1, 2 and 3).

3.4.1 Figures. Figures are furnished for information purposes only. When inconsistencies exist between the written specification and the Figures, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow a 1/2 (± 1/16) inch seam for outershell assembly and 3/8 to 1/2 inch seam for lining assembly and removable liner except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

* 3.5.1 Pattern parts. The component parts shall be cut from the material specified in the following pattern parts:

Material	Pattern Parts	Cut Parts
Cloth, Coated, Aramid, Aluminized (Outershell)	Back	2
	Front	2
	Left fly (bottom ply)	1
	Left fly (top ply)	1
	Right fly	2
	Waist facing	2
	Waist facing (removable liner) 1/	2
Cloth, Coated, Nylon Taffeta (lining)	Back	2
	Front	2
Quilted lining (removable liner)	Back	2
	Front	2
Templates	Suspender Strap (Back) marker	-
	Waist facing (snap) marker	-
	Leg Tab (snap) marker	-
	Left Fly (snap) marker	-

1/ May be cut from alternate duck material specified in 3.3.10

3.6 Construction.

3.6.1 Stitch, seam and stitching types. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the ends of stitching shall be caught in other seams or rows of stitching and the looper (under thread) shall be on the inside of the trousers. In order to minimize the size of needle hole in the fabric, the needle used in the seaming operations shall be of the smallest size which will accommodate the specified size of thread. Wherever LSq-2 stitch type is specified, the top ply shall not be turned back sharply over the first row of stitching but turned in such a manner that a loose welt is formed. The bight of the overedge stitching shall be 3/16 to 1/4 inch. A knife shall be used on the overedging machine with the guide set so that the edges of fabric are not cut off but only the ravelled edges are trimmed.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backstitched or overstitched not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks or skipped stitches (301 or 401) stitch types may be repaired by 301 stitch type with the stitching anchoring both ends of the break or skipped stitches not less than 1/2 inch.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

3.7 Manufacturing operations requirements. The trousers shall be manufactured in accordance with the operation requirements specified in Table I. The supplier is not required to follow the exact sequence of operations listed provided that the finished trousers are identical to those produced by following the sequence of operations as listed in Table I.

3.7.1 Size marking. The component parts of the trousers shall be bundled, marked or ticketed to assure proper size assembly. The use of metal fastening devices or sewn-on tickets for marking is prohibited. Adhesive tickets, when used, shall not discolor the material and the adhesive mass shall not adhere to the material upon removal of the tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Mark each component part in the top of the main lay with the size of the garment. b. The trousers shall be cut in strict accordance with patterns furnished which show size, placement of component parts, directional lines and notches to assure proper assembly. A maximum swing of 2 1/2 inches from the directional line is permitted. Drill holes for positioning are permitted provided they are covered in the finished trousers. c. The component parts of the aluminized material may be cut from ends and when so cut shall finish with the aluminized side exposed. d. The component parts of the removable quilted liner may be cut from ends and cut in such a manner so that the aramid cloth is against the uncoated side of the nylon taffeta interlining. e. The component parts of the coated nylon taffeta lining may be cut from ends and shall be cut in such a manner so that the coated side of the material is against the uncoated side of the outer shell. f. All snap fasteners on the aluminized outershell, except sockets on leg tabs, shall be reinforced with a piece of cut leather that extends not less than 1/8 inch beyond their outer edges. Stud snap fasteners on removable liner shall not be reinforced with leather.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1666 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Size marking (see 3.7.1) Mark, bundle or ticket the component parts to assure proper size assembly.					
4.	Make removable quilted liner a. The aramid side shall be considered as the back side of the lining material.					
	b. Join, face to face, 3/8 to 1/2 inch the outseams with notches matching.	301 or 401	SSa-1	6-8	A	A
	c. Overedge stitch the raw edges together.	502 or 503	SSa-1	6-8	A	A
	d. Join, face to face, the seat seam, 3/8 to 1/2 inch from the raw edge.	301 or 401	SSa-1	6-8	A	A
	e. Overedge stitch the raw edges together.	502 or 503	SSa-1	6-8	A	A
	f. Join, face to face, the crotch seam, 3/8 to 1/2 inch from raw edge.	301 or 401	SSa-1	6-8	A	A
	g. Overedge stitch the raw edges together.	502 or 503	SSa-1	6-8	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Make removable quilted liner (cont'd)					
	h. Join, face to face, the inseams, 3/8 to 1/2 inch from raw edge in one continuous operation, catching the seat and crotch seams in the stitching.	301 or 401	SSa-1	6-8	A	A
	i. Overedge stitch the raw edges together.	502 or 503	SSa-1	6-8	A	A
	OR					
	j. As an alternate, operations 4.b and c., d., and e., f., and g., and h. and i., may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	SSa-2	6-8	A	A
5.	Make and attach waist facing to removable quilted liner					
	a. Stitch waist facings, face to face, at center back 3/8 inch from raw edges.	301	SSa-1	6-8	A	A
	b. Stitch 3/16 inch from raw edge, the back side of waist facing piece and front side of the removable liner at top of quilted liner.	301	SSa-1	6-8	A	A
	c. Turn under 3/8 inch the lower raw edge of waist facing and topstitch through all plies.	301	LSd-1	6-8	A	A
	d. Bind the edges of waist, fly opening and leg bottoms of removable liner with a 2 5/8 inch minimum width strip of rayon binding. All raw edges of the binding shall be turned under and the finished dimension from the outside folded edge to turned edge shall be 1 + 1/8 inch. Stitching shall be 7/8 + 1/16 inch from folded edge. On leg bottoms overlap the ends of binding 3/4 to 1 1/4 inches. The raw edges of lining assembly shall extend within and to the foldline of the binding.	301	BSa-1	6-8	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make and attach waist facing to removable quilted liner (cont'd)					
*	e. Center the combination identification and instruction label on the seat seam (rayon side) with the top edge of label 1 to 1 1/2 inches below the waist facing. Stitch all four sides of label 1/16-1/8 inch from edge	301	LSbj-1	6-8	A	A
	f. Center the size and stock number label directly below the identification, label and stitch all four sides of label 1/16-1/8 inch from edge. Lower edge stitching of identification label may be used to secure top edge of size and stock number label.	301	LSbj-1	6-8	A	A
	g. Center the warning label (see 3.3.8.7) approximately 1 1/2 inches below size and stock number label and stitch all four sides of label 1/16 to 1/8 inch from edge.	301	LSbj-1	6-8	A	A
	h. Position and attach nine stud snap fasteners, as indicated by marks on patterns, to the aluminized waistband of the removable liner. Studs shall face the inside of the liner (towards the wearer).					
	i. Position and attach two stud snap fasteners to each leg bottom, one on inseam and one on the outseam. Studs shall face towards the outside of removable liner. Center of stud shall be 1/2 to 5/8 inches from bound edge.					
6.	Prepare aluminized outer shell assembly					
	a. Stitch 3/16 to 3/8 inch from the raw edge, face to face, the inner edge of the right top fly piece to the fly edge of the right forepart; the length indicated by the pattern notches.	301 or 401	LSq-2(a)	6-8	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Prepare aluminized outer shell assembly (cont'd)					
	b. Turn outershell back and topstitch 1/16 to 1/8 inch from folded edge.	301	LSq-2(b)	6-8	B	B
	c. Stitch 5/16 to 3/8 inch from the raw edge, face to face, the inner edge of the left fly (top ply) piece to the fly edge of left forepart; the length indicated by the pattern notches.	301 or 401	LSq-2(a)	6-8	B	B
	d. Turn outershell back and topstitch 1/16 to 1/8 inch from folded edge.	301	LSq-2(b)	6-8	B	B
	e. Stitch 1/2 (± 1/16) inch from the raw edge, the crotch seam, seat seam, outseam and inseam. Turn seam face side up to form a loose welt and stitch 3/16 to 1/4 inch from folded edge. An adjustable hinged raising foot may be used in forming the loose welt seam. NOTE: The inseams shall be joined in one continuous operation with the crotch seam and seat seam junction staggered not more than 1/2 inch from center of seam to center of seam.	301 or 401	LSq-2(a&b)	6-8	B	B
	f. The direction of the joining seams shall be lapped as follows: Fronts over backs at inseams and outseams. Left back over right back at seat and left front over right front at crotch.					
7.	Make aluminized waist facing					
	a. Stitch the two aluminized waist facing pieces, face to face, at center back, 3/8 inch from raw edge.	301	SSz-3(a)	6-8	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Make aluminized waist facing (cont'd)					
	b. Stitch down both sides of center back seam of waist facing 1/8 to 3/16 inch from seamline.	301	SSz-3(b)	6-8	B	B
	c. Turn under each end, 3/8 inch and edgestitch 1/8 inch from folded edge.	301	EFa-1	6-8	B	B
	d. Bind one raw edge of waist facing with coated nylon binding.	301	BSa-1	6-8	B	B
	e. Center the identification label 7 to 7 1/2 inches from the center back seam on the right side of facing, midway between the two snap fastener position markings so that the top edge is below the top edge of facing on the finished trousers. Stitch all four sides of label 1/16 inch from edge.	301	LSbj-1	6-8	B	B
	f. Center the size and stock number label directly below the identification label. Stitch all four sides of label 1/16 inch from edge. Stitching of lower edge of identification label may be used to secure top edge of size and stock number label.	301	LSbj-1	6-8	B	B
	g. Center the instruction label 7 to 7 1/2 inches from the center back seam on the left side of facing, midway between the two snap fastener position markings so that the top edge is below the top edge of facing on the finished trousers. Stitch all four sides of label 1/16 inch from edge.	301	LSbj-1	6-8	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Make coated nylon taffeta lining and attach waist					
	a. Stitch 5/16 to 3/8 inch from raw edge, the inner edge of the right bottom fly piece to the fly edge of the right forepart, aluminized side to uncoated side, the length indicated by pattern notch.	301	SSa-1	6-8	B	B
	b. Stitch 5/16 to 3/8 inch from raw edge, the inner edge of the left fly (bottom ply) piece to the fly edge of the left forepart, aluminized side to uncoated side the length indicated by pattern notch.	301	SSa-1	6-8	B	B
	c. Stitch 3/8 to 1/2 inch from raw edge, the crotch seam, seat seam, outseam and inseam, uncoated side to uncoated side.	301 or 401	LSq-2(a)	6-8	B	B
	d. Turn one ply back sharply over the first row of stitching and stitch 1/8 to 3/16 inch from folded edge.	301	LSq-2(b)	6-8	B	B
	e. As an alternate, operations 8c and 8d may be performed in one operation by joining with a double lapped and double stitched seam, 1/4 inch gauge.	301 or 401	LSc-2	6-8	B	B
	f. Stitch 5/16 to 3/8 inch from raw edge, the waist facing to top of coated nylon taffeta lining.	301	SSa-1	6-8	B	B
*	g. Apply warning label, see 3.3.8.6, horizontally at back of lining so that the top edge of label will finish 6 to 6 1/2 inches below top edge of finished trousers. Label shall be applied immediately to the right of the seat seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make suspender strap assembly a. The cut length of elastic suspender straps shall be 43 ± 1/4 inches for all sizes.					
	b. The cut length of the front attachment straps shall be 4 1/2 ± 1/4 inches.					
	c. Thread strap through wire part of clamp type buckle for a distance of 1 1/4 ± 1/8 inches and stitch full width of strap with 3/4 to 1 inch boxstitch.	301	Boxstitch	6-8	B	B
	d. Thread free end of strap through slide and back through buckle.					
	e. The front attachment strap shall be threaded thru one side of the slide then turned onto itself and stay stitched.					
	f. Cross the straps at a distance of 7 1/2 (+ 1/2, -0) inches from the raw free end of the straps and join with a diamond stitch as shown in Figure 3. Outer row of stitching shall be 1/8 inch from edges of webbing.	301	SSa-1	6-8	B	B
	g. Reinforce the two ends of the diamond stitch with 1/2 to 5/8 inch horizontal bartack as shown in Figure 3.	301	Bartack	26-30 per bartack	B	B
10.	Join outershell assembly and coated nylon taffeta lining a. Position outershell and assembled lining even at the waist and fly edge with the aluminized side of the facing and fly fronts against the aluminized side of the outershell.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Join outershell assembly and coated nylon taffeta lining (cont'd)					
	b. Join assemblies in one continuous operation commencing from the bottom inner edge of the right fly, up right fly 5/16 to 3/8 inch from the raw edge, along the waist edge 1/2 (± 1/16) inch from the raw edge catching front attachment straps between front and side seams in accordance with notches, leaving a sufficient opening across the back for turning trouser to finished position and down left fly terminating the seam at the bottom inner edge of the left fly 5/16 to 3/8 inch from raw edge.	301 or 401	SSe-2(a)	6-8	B	B
	c. Trim corners of flies and turn trousers to finished position, working out curved edge and corners of flies. NOTE: When trousers are turned to finished position the coated side of lining shall be against the back side of aluminized outershell.					
	d. Stitch 1/8 to 3/16 inch from the folded edge, the outer edges of the right and left flies.	301	SSe-2(b)	6-8	B	B
	e. Stitch 3/16 (± 1/16) inch from the folded edge, the waist edge of trousers, simultaneously catching the rear suspender straps in the position and depth indicated by the pattern template. Continue stitching and close opening across the back.	301	SSe-2(b)	6-8	B	B
	f. The finished attached length of each strap shall be 40 (± 1/2) inches when measured along center of strap from the top folded edge of waist to the outer folded end with buckle clamped in its maximum extended position.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Join outershell assembly and coated nylon taffeta lining (cont'd)					
	g. Stitch waist facing through all plies 1 3/4 (+ 1/8 - 1/4) inches from finished folded top edge of waist facing. Continue the stitching on trouser portion along the back edge of right and left flies up to finished top edge of waist facing.	301	LSbj-1 and LSb-1	6-8	B	B
	h. Stitch with a 1 1/8 (± 1/16) inch slanted box-stitch, the rear suspender strap through all plies.	301	Boxstitch	6-8	B	B
	i. Stitch with a 1 1/8 (± 1/16) inch boxstitch, the front suspender attachment strap through all plies.	301	Boxstitch	6-8	B	B
	j. The front attachment strap shall finish 3/8 to 1/2 inch above top of waistband.					
	k. Overlap the left fly onto the right fly with the top edges at the waist even to present a proper and smooth closure when fly is fastened. Stitch thru all plies across bottom of fly, 1/4 to 5/16 inch from folded edge, forming a 1/2 inch horizontal rectangular box. Continue stitching up back edge of fly for a distance of 1 inch and then diagonally down across fly to top of box at front of fly, across top of box to back edge of fly and then downwards forming a 1/2 by 1 inch vertical rectangular box over the crotch seam just below the bottom folded edge of fly (see Figure 1)	301		6-8	B	B
11.*	Stay stitch leg bottoms Join the outershell material and the interlining 1/4 inch from the bottom raw edge around leg bottom edge.	301	SSa-1	6-8	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Make and attach inside leg tab fasteners					
	a. Strips of the aluminized fabric shall be cut 2 inches wide.					
	b. Fold strip lengthwise overlapping the sides equally forming a tab 5/8 (± 1/16) inch wide. Stitch one row of stitching down the center and lengthwise of tab thru all plies.	301	EFy-1	6-8	B	B
	OR					
	c. Fold strip of aluminized fabric to center with edges abutted and double stitch 1/4 inch gauge with a covering stitch on the underside.	406	EFh-1	6-8	B	B
	OR					
	d. Fold strip of aluminized fabric to center with edges turned under and abutted. Stitch with a line of stitching covering the abutted folded edges.	105	EFae-1	6-8	B	B
	e. Cut strips into 3 inch lengths.					
	f. Attach a socket snap fastener thru all plies of material. Center of socket shall be 5/8 to 3/4 inch from one end of tab.					
	g. Turn under free end of tab 3/8 inch. Place one on inseam and on outseam so that folded edge of tab is towards the bottom and is 10 1/4 (± 1/4) inches from finished leg bottom. With the tab in this upward position the socket shall face the quilted lining. Tack or bartack to trouser leg thru all plies full width of tab 1/8 inch from folded edge.	301 or Bartack	LSd-1	6-8 26-30 per bartack	B B	B B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Attach snap fasteners (see operation 1.f) a. Position and attach nine socket fasteners to the lower edge of inside waist facing as indicated by patterns marker (sockets shall face away from wearer). b. Position and attach two socket fasteners on left fly as indicated by pattern marker. c. Position and attach one stud fastener at top of right fly. Center of stud shall be positioned 1 inch down from top folded edge of waist and 1 inch in from folded edge of fly. d. Position and attach two stud fasteners on right front to correspond with two socket fasteners on left fly. e. Position and attach one socket fastener on waist portion of left front to correspond with stud fastener at top of right fly.					
14.	Bind legbottoms a. Position a two inch wide leather strip onto the inside of leg opening approximately 7/8 inch in from each leg opening. Stitch 1/8 to 3/16 inch from the edge thru all plies o fmaterial, overlapping ends of the strip approximately 1 to 1 1/2 inches near the inseam. Turn strip to the outside of leg opening and stitch 1/8 to 3/16 inch from the edge along free edge and across the overlapped portion thru all plies of material. OR	301	LSa-1 (each edge)	6-8	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Bind legbottoms (cont'd) b. As an option, fold leather strip in half lengthwise and using a folder, stitch each leg opening with a single or double row of stitching 1/8 to 3/16 inch from edges of leather strip, thru all plies of material, overlapping ends of strip approximately 1 to 1 1/2 inches near the inseam. The ends of the legs shall extend within and to the folded edge of the leather strips.	301	BSa-1 or BSa-2	6-8	B	B
15.	Clean trouser a. Trim all thread ends. b. Remove all loose thread. c. Remove all spots, stains, and size tickets. NOTE: Care shall be taken in the use of solvents for cleaning to assure that aluminized coating is not damaged.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished trousers and removable liner shall be as shown in Tables II and III (see Figures 1 and 2). All measurements and tolerances are expressed in inches.

Table II - Sizes and Finished Measurements for Trousers

Sizes	A Waist	B Seat	C Inseam
Small (30-33)	34	47	27
Medium (34-37)	38	51	28
Large (38-41)	42	55	28
X-Large (42-45)	46	59	29
Tolerance	± 1	± 1	± 1/2

Table III - Sizes and Finished Measurements for Removable Liner

Sizes	A Waist	B Seat	C Inseam
Small (30-33)	34	46	17
Medium (34-37)	38	50	18
Large (38-41)	42	54	18
X-Large (42-45)	46	58	19
Tolerance	± 1	± 1	± 1/2

NOTE: Trousers shall be laid flat and smooth with fronts facing up and the fly snap fastener completely closed.
Removable liner shall be laid flat and smooth with the top edges of fly opening abutting.

Waist (A) - Double the measurement taken straight across the front of trousers 3/4 inch down from top of waistband, from folded edge to folded edge.
Double the measurement taken straight across the front of removable liner 1 1/4 inches down from top of waistband from folded edge to folded edge with the front edges abutted.

Seat (B) - Double the measurement taken straight across the front of trousers folded edge to folded edge 1 inch above the bottom of fly.
Double the measurement taken straight across the front of removable liner from inside stitch line to inside stitch line 1 inch above bottom of fly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Inseam (C) - The measurement shall be taken along the inseam from the junction of the front center seam and the seat seam to the bottom of the trousers or removable liner legs.

3.9 Workmanship The finished trousers and removable liner shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection The first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, and dimensional requirements.

* 4.4 Quality conformance inspection Sampling for inspection shall be performed in accordance with MIL-STD-1666.

* 4.4.1 Component and material inspection In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, the supplier shall furnish a certificate of compliance for the buckle requirements of 3.3.7.1 and the slide requirements of 3.3.7.2 and the identification of silicone treatment of 3.3.4.1.

4.4.2 Examination of the end item Sampling and examination of the end item shall be in accordance with MIL-STD-1666.

4.4.3 Palletization examination An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PARKAGING

5.1 Preservation-packaging Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A

5.1.1.1 Trouser Each pair of trousers shall be folded as follows:

1. Close snap fasteners on fly.
2. Place fastened suspenders inside trousers.
3. Fold trousers in half lengthwise with the snap fasteners on the outside of the fold.
4. Fold in half across the length by bringing the bottom of trousers up to the top.

The folded trousers shall measure approximately 15 inches by 23 1/4 inches. Each folded trouser shall be individually packaged in a snug-fitting clear polyethylene film bag having a film thickness of not less than 0.003 inch thickness. The bag may be fabricated from polyethylene film tubing or sheeting. All seams and closures shall be formed by heat sealing. One corner of each bag shall have a hole of not more than 1/4 inch in diameter to allow excess air within the bag to escape. Alternately, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap, in which a heat seal closure and corner hole are not required.

5.1.1.2 Liners Each liner shall be folded as follows:

1. Fold liners in half lengthwise with the fly on the inside.
2. Fold liners in half again by bringing the bottom of liner up to the top.

The folded liners shall measure approximately 15 inches by 15 inches. Each folded liner shall be individually packaged in a snug-fitting, clear polyethylene film bag having a film thickness of not less than 0.00125 inch. The bag may be fabricated from polyethylene film tubing or sheeting. All seams and closures shall be formed by heat sealing. A 1/4 inch diameter hole shall be made at one corner of each bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner hole are not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

5.1.2 Level C (commercial packaging) Each trouser and liner shall be packaged separately to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A

* 5.2.1.1 Trousers Ten pair of trousers, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, variety DW, type CF, grade V15c, size 3A of MIL-B-17757. The fiberboard used for the liner shall conform to type CF, class domestic comforing to MIL-B-17757. Level A folded trousers shall be stacked flat with each pair of trousers reversed end to end, ten in depth within the shipping container. The length of the trousers shall be parallel to the side panels of the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed with the same shipping container.

* 5.2.1.2 Liner Ten liners of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, type CF, grade V15c, variety DW, size 3A of MIL-B-17757. The fiberboard used for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A folded liners shall be stacked on edge within the shipping container with the face of the packages parallel to the end panels within the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B

* 5.2.2.1 Trousers Ten pair of trousers, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class domestic, type CF, grade 275, variety DW, size 3A of MIL-B-17757. The fiberboard used for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A packages shall be stacked flat with each pair of trousers reversed end to end, ten in depth within the shipping container. The length of the trousers shall be parallel to the side panels of the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2.2 Liner Ten liners of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class domestic, type CF, grade 275, size 3A, variety DW of MIL-B-17757. The fiberboard used for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A folded liners shall be stacked on edge within the shipping container with the face of the packages parallel to the end panels within the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

5.2.3 Level C (Commercial Packing) Trousers and liners, separately packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Palletization When specified (see 6.2), trousers and liners, separately packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or bonding means O. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.4.1 Polyethylene bagged packages Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall only indicate the following information:

STOCK NUMBER
NOMENCLATURE
SIZE
QUANTITY

5.4.2 Labels, mixed sizes Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use The trousers are intended to be used in conjunction with the Coat, Hood, and Gloves, Firemen's, Aluminized. The trousers, coat, hood and gloves rely on the simultaneous use of water or foam and other fire fighting equipment to provide maximum protection while the wearer approaches and operates close to aircraft fires.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

* 6.2 Ordering data Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes required (see 1.2).
c. When first article is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity and testing and approval of the first article.
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. List of approved silicone compounds (see 3.3.4.1).
f. When palletizetion is required (see 5.3).

6.3 Samples and patterns For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 A suitable slide for the suspender assembly (see 3.3.7.2) has been obtained from "North and Judd Division of Gulf and Western Manufacturing Company, P.O. Box 1111, Middletown, CN 06457," style number Z-2300, size 1 1/2 inch.

6.5 Silicone compounds Only those silicone compounds approved by the Natick Army Research and Development Center, Natick, MA 01760, and the appropriate medical service and so listed in the invitation for bids or request for proposal, shall be considered acceptable for the related procurement (see 3.3.4.1).

* 6.6 Changes from previous issue The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evalute the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - NU
Army - GL
Air Force - 99


Review activities:
Navy - MC
Army - MD
Air Force - 82
DLA - CT

User activities:
Navy - AS, SH, CG
Air Force - 45


Preparing activity:
Navy - NU

Project No. 8415-0289


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

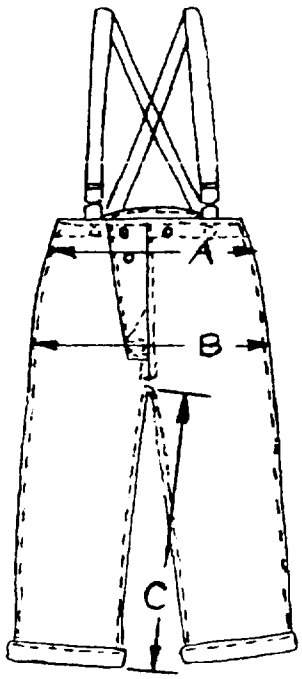

FRONT

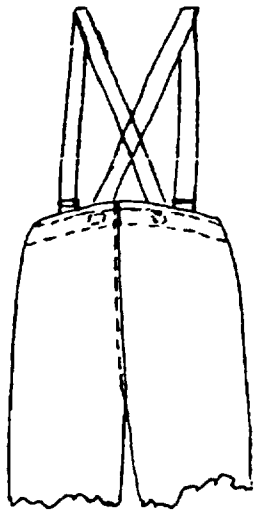

BACK

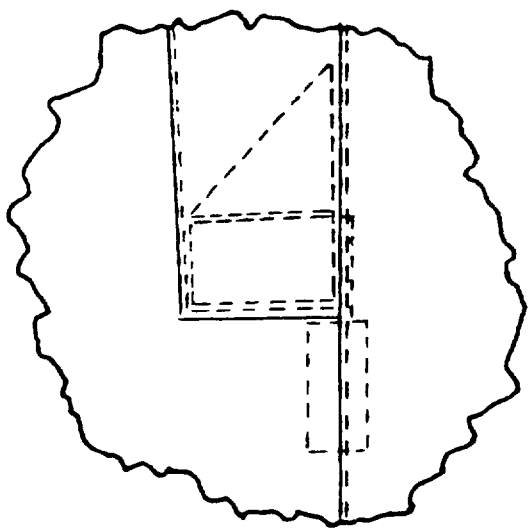

DETAILS OF
OPERATION 10k

FIG. 1 - FIREMEN'S ALUMINIZED TROUSERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.


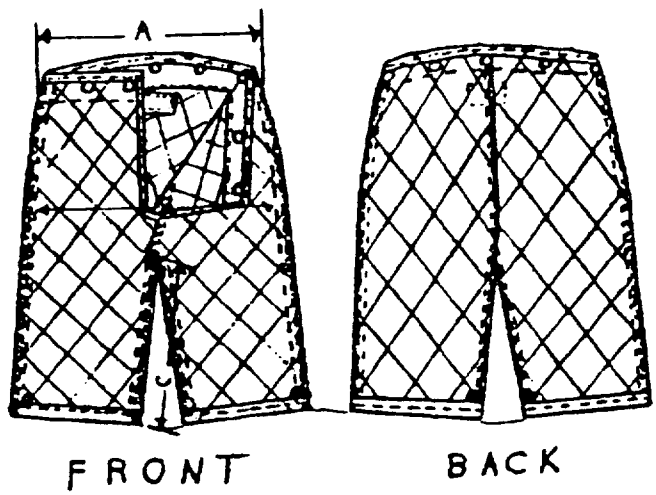


FIG. 2 SNAP-IN-LINER

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

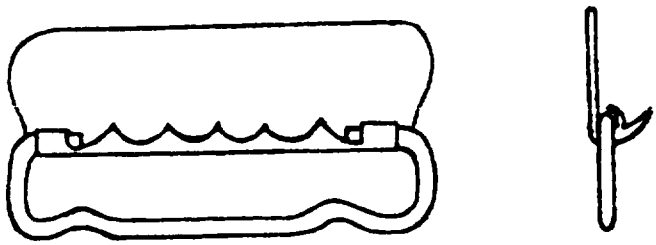

BUCKLE, CLAMP TYPE

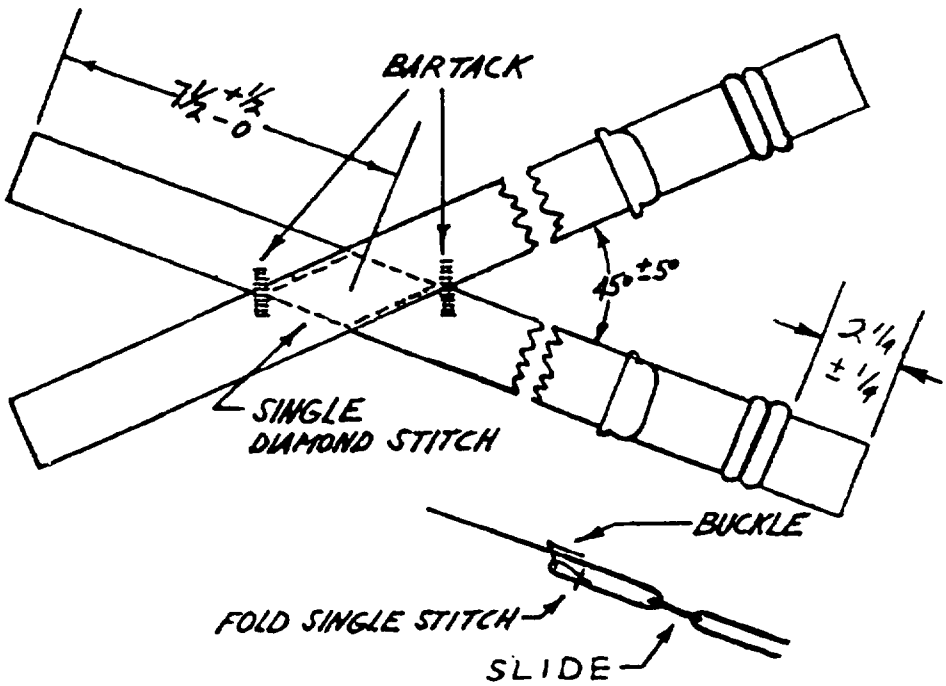


FIG. 3 - SUSPENDERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
Code 50
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-29146B	TROUSERS, FIREMEN'S, ALUMINIZED, PROXIMITY

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:42Z
Check the source to verify that this is the current version before use.