[INCH-POUND]

MIL-M-38510/338A
22 MAY 1990
SUPERSEDING
MIL-M-38510/338
24 FEBRUARY 1987

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED SCHOTTKY TTL, ARITHMETIC LOGIC UNITS, MONOLITHIC SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, Advanced Schottky TTL arithmetic logic units. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete part number.

1.2 Part or identifying number (PIN). The part or identifying number shall be in accordance with MIL-M-38510, and as specified herein.

1.2.1 Device types. The device types shall be as follows:

Device type	Circuit
01	4-bit arithmetic logic unit
02	Carry lookahead generator
03	4-bit arithmetic logic unit
04	4-bit arithmetic logic unit

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outlines. The case outlines shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
E	D-2 (16-lead, 1/4" x 7/8"), dual-in-line package
F	F-5 (16-lead, 1/4" x 3/8"), flat package
J	D-3 (24-lead, 1/2" x 1-1/4"), dual-in-line package
K	F-6 (24-lead, 3/8" x 5/8"), flat package
L	D-9 (24-lead, 1/4" x 1-1/4"), dual-in-line package
R	D-8 (20-lead, 1/4" x 1-1/16"), dual-in-line package
S	F-9 (20-lead, 1/4" x 1/2"), flat package
3	C-4 (28-terminal, .450" x .450"), square chip carrier package
2	C-2 (20-terminal, .350" x .350"), square chip carrier package

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
FSC 5962

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V dc to +7.0 V dc
Input voltage range	-1.2 V dc at -18 mA to +7.0 V dc
Storage temperature range	-65°C to +150°C
Maximum power dissipation (P_D) 1/:	
Device type 01	358 mW
Device type 02	198 mW
Device type 03	490 mW
Device type 04	446 mW
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case (θ_{JC}):	
Cases E, F, J, K, L, R, S	(See MIL-M-38510, appendix C)
Cases 3, 2 2/	60°C/W
Junction temperature (T_J) 3/	+175°C

1.4 Recommended operating conditions.

Supply voltage (V_{CC})	4.5 V dc minimum to 5.5 V dc maximum
Minimum high-level input voltage (V_{IH})	2.0 V dc
Maximum low-level input voltage (V_{IL})	0.8 V dc
Normalized fanout (each output) 4/:	
Low level	33 maximum
High level	50 maximum
Case operating temperature range (T_C)	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification and standard. The following specification and standard form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Unless otherwise indicated, copies of federal and military specifications and standards are available from Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

1/ Must withstand the added P_D due to short circuit test (e.g., I_{OS}).
2/ When a thermal resistance value is included in MIL-M-38510, appendix C, it shall supersede the value stated herein.
3/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions in accordance with method 5004 of MIL-STD-883.
4/ The device shall fanout in both high and low levels to the specified number of inputs of the same device type as that being tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Truth tables. The truth tables shall be as specified on figure 2.

3.2.3 Logic diagrams. The logic diagrams shall be as specified on figure 3.

3.2.4 Schematic circuits. Schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in this specification and shall be submitted to the qualifying activity and agent activity (DESC-ECC), as a prerequisite for qualification. All qualified manufacturers schematics shall be maintained by the agent activity and will be available upon request.

3.2.5 Case outlines. The case outlines shall be as specified in 1.2.3.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 and 6.4 herein.

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 11 (see MIL-M-38510, appendix E).

Source: https://assist.dla.mil -- Downloaded: 20261O-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55°C \le T_C \le 125°C$	Device type	Limits		Unit
				Min	Max	
High level output voltage	V_{OH}	V_{CC} = 4.5 V, I_{OH} = -1.0 mA, V_{IL} = 0.8 V, V_{IH} = 2.0 V	All	2.5		V
Low level output voltage	V_{OL}	V_{CC} = 4.5 V, I_{OH} = 20 mA, V_{IL} = 0.8 V, V_{IH} = 2.0 V	All		0.5	V
Input clamp voltage	V_{IC}	V_{CC} = 4.5 V, I_{IN} = -18 mA T_C = +25°C	All		-1.2	V
High level input current	I_{IH1}, I_{IH2}	V_{CC} = 5.5 V, V_{IN} = 2.7 V V_{CC} = 5.5 V, V_{IN} = 7.0 V	All		20 100	µA µA
Low level input current	I_{IL1}	V_{CC} = 5.5 V, V_{IL} = 0.5 V	01 02 03,04	-0.03 -0.12 -0.12	-0.6 -1.2 -0.6	mA
	I_{IL2}		01 02,03, 04	-0.09 -0.10	-2.4 -2.4	mA
	I_{IL3}		01 02	-0.12 -0.48	-3.6 -3.6	mA
	I_{IL4}		01 02	-0.15 -0.6	-4.8 -4.8	mA
	I_{IL5}		02	-3.5	-8.4	mA
	I_{IL6}		02	-4.0	-9.6	mA
Short circuit output current 1/	I_{OS}	V_{CC} = 5.5 V, V_{OS} = 0.0 V	All	-60	-150	mA
Supply current	I_{CCL}	V_{CC} = 5.5 V	01		65	mA
	I_{CCH}		01		65	mA
	I_{CCL}		02		36	mA
	I_{CCH}		02		28	mA
	I_{CC}		03		89	mA
	I_{CC}		04		89	mA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55°C \le T_C \le 125°C$	Device type	Limits		Unit
				Min	Max	
Propagation delay time, low to high level 2/		V_{CC} = 5.0 V, C_L = 50 pF ±10% See figure 4				
$\overline{A}_i$ or $\overline{B}_i$ to $\overline{F}_i$ mode = sum	t_{PLH1}		01	3.0	14.5	ns
Any $\overline{A}$ or $\overline{B}$ to any $\overline{F}$ mode = sum	t_{PLH2}		01	3.0	16.5	ns
$\overline{A}$ or $\overline{B}$ to C_{n+4} mode = sum	t_{PLH3}		01	5.0	17.0	ns
$\overline{A}$ or $\overline{B}$ to $\overline{P}$ mode = sum	t_{PLH4}		01	2.5	9.5	ns
C_n to $\overline{F}$	t_{PLH5}		01	2.5	16.0	ns
$\overline{A}$ or $\overline{B}$ to $\overline{G}$ mode = sum	t_{PLH6}		01	2.5	10.0	ns
C_n to C_{n+4}	t_{PLH7}		01	3.0	11.5	ns
$\overline{A}_i$ or $\overline{B}_i$ to $\overline{F}_i$ mode = dif	t_{PLH8}		01	3.0	17.5	ns
$\overline{A}$ or $\overline{B}$ to $\overline{F}$ mode = logic	t_{PLH9}		01	3.0	14.5	ns
Any $\overline{A}$ or $\overline{B}$ to any $\overline{F}$ mode = dif	t_{PLH10}		01	3.0	17.5	ns
$\overline{A}$ or $\overline{B}$ to $\overline{G}$ mode = dif	t_{PLH11}		01	2.5	11.5	ns
$\overline{A}$ or $\overline{B}$ to C_{n+4} mode = dif	t_{PLH12}		01	5.0	18.5	ns
$\overline{A}$ or $\overline{B}$ to $\overline{P}$ mode = dif	t_{PLH13}		01	2.5	11.0	ns
$\overline{A}$ or $\overline{B}$ to A = B mode = dif	t_{PLH14}		01	8.0	35.0	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55^{\circ}C \leq T_C \leq 125^{\circ}C$	Device type	Limits		Unit
				Min	Max	
C_n to C_{n+x}, C_{n+4}, C_{n+z}	t_{PLH1}	V_{CC} = 5.0 V, C_L = 50 pF ±10% See figure 4	02	3.0	11.5	ns
$\overline{P}_0$, $\overline{P}_1$ or $\overline{P}_2$ to C_{n+x}, C_{n+y}, or C_{n+z}	t_{PLH2}		02	2.0	10.5	ns
$\overline{G}_0$, $\overline{G}_1$ or $\overline{G}_2$ to C_{n+x}, C_{n+y}, or C_{n+z}	t_{PLH3}		02	2.0	11.0	ns
$\overline{P}_1$, $\overline{P}_2$ or $\overline{P}_3$ to $\overline{G}$	t_{PLH4}		02	2.0	12.0	ns
$\overline{G}_n$ to $\overline{G}$	t_{PLH5}		02	2.5	12.0	ns
$\overline{P}_n$ to $\overline{P}$	t_{PLH6}		02	2.5	10.0	ns
C_i to F_i	t_{PLH1}		03	2.5	15.0	ns
A_i to F_i	t_{PLH2}		03	3.0	17.0	ns
B_i to F_i	t_{PLH3}		03	3.0	17.0	ns
S_i to F_i	t_{PLH4}		03	3.0	21.0	ns
A_i to $\overline{G}$	t_{PLH5}		03	3.0	13.5	ns
B_i to $\overline{G}$	t_{PLH6}		03	3.0	13.0	ns
A_i to $\overline{P}$	t_{PLH7}		03	2.0	14.0	ns
B_i to $\overline{P}$	t_{PLH8}		03	2.0	14.0	ns
S_i to $\overline{G}$	t_{PLH9}		03	3.0	17.0	ns
S_i to $\overline{P}$	t_{PLH10}		03	3.0	16.0	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55°C \le T_C \le 125°C$	Device type	Limits		Unit
				Min	Max	
C_n to F_i	t_{PLH1}	V_{CC} = 5.0 V, C_L = 50 pF ±10% See figure 4	04	3.0	15.0	ns
A_i to F_i	t_{PLH2}		04	4.0	18.0	ns
B_i to F_i	t_{PLH3}		04	4.0	18.0	ns
S_i to F_i	t_{PLH4}		04	4.0	23.5	ns
A_i to OVR	t_{PLH5}		04	6.0	18.5	ns
B_i to OVR	t_{PLH6}		04	6.0	18.5	ns
A_i to C_{n+4}	t_{PLH7}		04	3.5	11.5	ns
B_i to C_{n+4}	t_{PLH8}		04	3.5	11.5	ns
S_i to OVR	t_{PLH9}		04	5.0	19.5	ns
S_i to C_{n+4}	t_{PLH10}		04	6.5	19.5	ns
C_n to C_{n+4}	t_{PLH11}		04	2.0	11.0	ns
C_n to OVR	t_{PLH12}		04	3.0	14.0	ns
Propagation delay time, high to low level 2/						
$\overline{A}_i$ or $\overline{B}_i$ to $\overline{F}_i$ mode = sum	t_{PHL1}		01	3.0	14.5	ns
Any $\overline{A}$ or $\overline{B}$ to any $\overline{F}$ mode = sum	t_{PHL2}		01	3.0	14.0	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55°C \leq T_C \leq 125°C$	Device type	Limits		Unit
				Min	Max	
$\overline{A}$ or $\overline{B}$ to C_{n+4} mode = sum	t_{PHL3}	V_{CC} = 5.0 V, C_L = 50 pF ±10% See figure 4	01	3.5	16.5	ns
$\overline{A}$ or $\overline{B}$ to $\overline{P}$ mode = sum	t_{PHL4}		01	3.0	10.0	ns
C_n to $\overline{F}$	t_{PHL5}		01	2.5	12.0	ns
$\overline{A}$ or $\overline{B}$ to $\overline{G}$ mode = sum	t_{PHL6}		01	2.5	10.0	ns
C_n to C_{n+4}	t_{PHL7}		01	3.0	10.0	ns
$\overline{A}_i$ or $\overline{B}_i$ to $\overline{F}_i$ mode = dif	t_{PHL8}		01	3.0	14.5	ns
$\overline{A}$ or $\overline{B}$ to $\overline{F}$ mode = logic	t_{PHL9}		01	3.0	15.5	ns
Any $\overline{A}$ or $\overline{B}$ to any $\overline{F}$ mode = dif	t_{PHL10}		01	3.0	16.0	ns
$\overline{A}$ or $\overline{B}$ to $\overline{G}$ mode = dif	t_{PHL11}		01	2.5	12.5	ns
$\overline{A}$ or $\overline{B}$ to C_{n+4} mode = dif	t_{PHL12}		01	4.0	17.0	ns
$\overline{A}$ or $\overline{B}$ to $\overline{P}$ mode = dif	t_{PHL13}		01	2.5	11.5	ns
$\overline{A}$ or $\overline{B}$ to A = B mode = dif	t_{PHL14}		01	5.5	21.0	ns
C_n to C_{n+x}, C_{n+4}, C_{n+z}	t_{PHL1}		02	2.5	11.0	ns
$\overline{P}_0$, $\overline{P}_1$ or $\overline{P}_2$ to C_{n+x}, C_{n+4}, or C_{n+z}	t_{PHL2}		02	1.0	7.0	ns
$\overline{G}_0$, $\overline{G}_1$ or $\overline{G}_2$ to C_{n+x}, C_{n+4}, or C_{n+z}	t_{PHL3}		02	1.0	7.0	ns
$\overline{P}_1$, $\overline{P}_2$ or $\overline{P}_3$ to $\overline{G}$	t_{PHL4}		02	2.5	10.0	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55°C \le T_C \le 125°C$	Device type	Limits		Unit
				Min	Max	
$\overline{G}_n$ to $\overline{G}$	t_{PHL5}	V_{CC} = 5.0 V, C_L = 50 pF ±10% See figure 4	02	2.5	10.0	ns
$\overline{P}_n$ to $\overline{P}$	t_{PHL6}		02	1.5	8.0	ns
C_i to F_i	t_{PHL1}		03	2.5	12.0	ns
A_i to F_i	t_{PHL2}		03	3.0	15.0	ns
B_i to F_i	t_{PHL3}		03	3.0	16.0	ns
S_i to F_i	t_{PHL4}		03	3.0	16.0	ns
A_i to $\overline{G}$	t_{PHL5}		03	3.0	13.5	ns
B_i to $\overline{G}$	t_{PHL6}		03	3.0	13.5	ns
A_i to $\overline{P}$	t_{PHL7}		03	3.0	12.5	ns
B_i to $\overline{P}$	t_{PHL8}		03	3.0	12.5	ns
S_i to $\overline{G}$	t_{PHL9}		03	3.0	18.0	ns
S_i to $\overline{P}$	t_{PHL10}		03	3.0	18.0	ns
C_n to F_i	t_{PHL1}		04	2.5	11.0	ns
A_i to F_i	t_{PHL2}		04	3.5	14.0	ns
B_i to F_i	t_{PHL3}		04	3.5	14.0	ns
S_i to F_i	t_{PHL4}		04	4.0	16.5	ns
A_i to OVR	t_{PHL5}		04	5.0	14.5	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55^{\circ}C \leq T_C \leq 125^{\circ}C$	Device type	Limits		Unit
				Min	Max	
B_i to OVR	t_{PHL6}	V_{CC} = 5.0 V, C_L = 50 pF ±10% See figure 4	04	5.0	14.5	ns
A_i to C_{n+4}	t_{PHL7}		04	3.5	14.5	ns
B_i to C_{n+4}	t_{PHL8}		04	3.5	14.5	ns
S_i to OVR	t_{PHL9}		04	5.0	19.0	ns
S_i to C_{n+4}	t_{PHL10}		04	5.0	17.5	ns
C_n to C_{n+4}	t_{PHL11}		04	2.0	12.0	ns
C_n to OVR	t_{PHL12}		04	2.5	13.0	ns

1/ Not more than one output should be shorted at a time.

2/ In A_i, B_i, F_i, and S_i, i = 0, 1, 2, or 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters (method 5004)	1	1
Final electrical test parameters (method 5004)	1*, 2, 3, 7, 9, 10, 11	1*, 2, 3, 7, 9
Group A test requirements (method 5005)	1, 2, 3, 7, 8, 9, 10, 11	1, 2, 3, 7, 8, 9, 10, 11
Group B test requirements (method 5005) subgroup 5	1, 2, 3, 7, 8, 9, 10, 11	N/A
Group C end-point electrical parameters (method 5005)	N/A	1, 2, 3
Additional electrical subgroups for group C periodic inspections	N/A	None
Group D end-point electrical parameters (method 5005)	1, 2, 3	1, 2, 3

*PDA applies to subgroup 1 (see 4.2c).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in (method 1015 of MIL-STD-883).

(1) Test condition D, E, or F, using the circuit shown on figure 5, or equivalent.

(2) T_A = +125°C minimum.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.


c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 01

Cases J, K and L

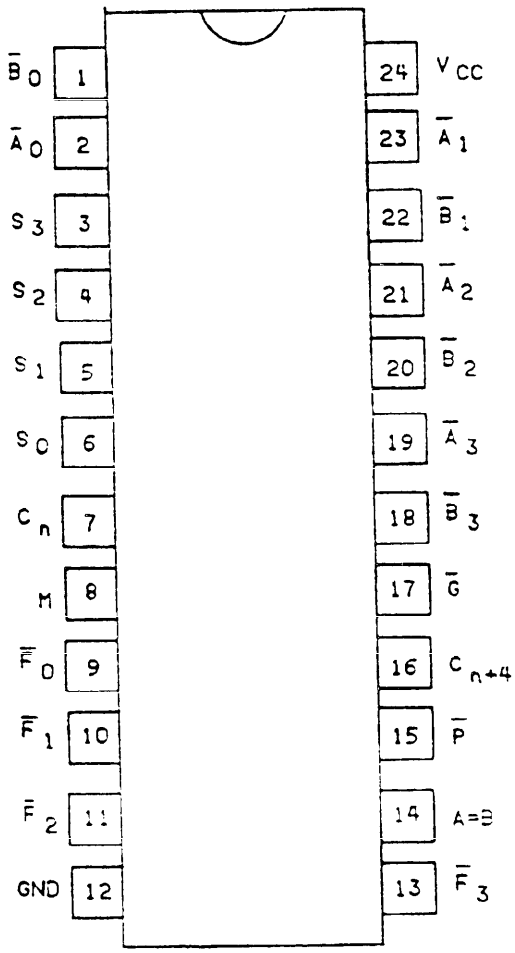

Device type 01

Case 3


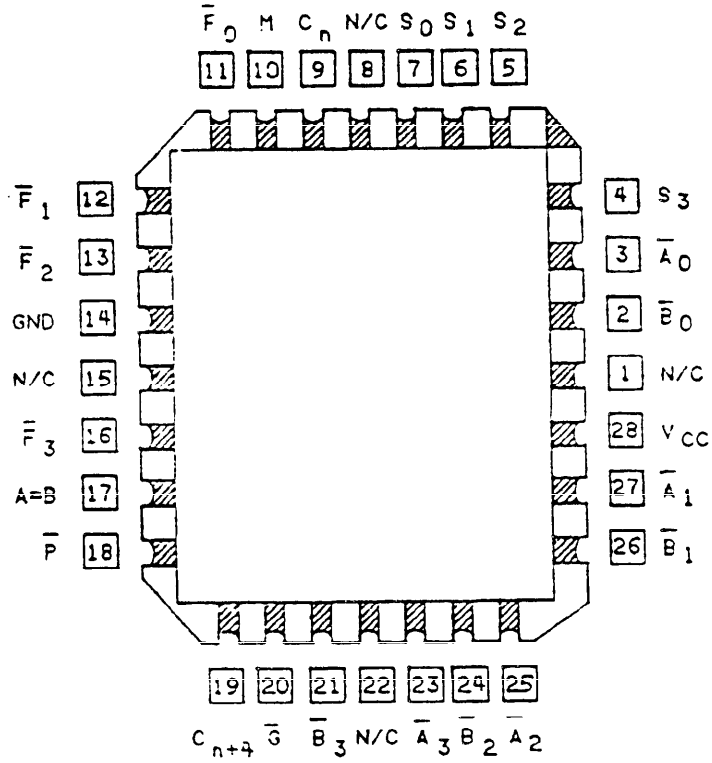


FIGURE 1. Terminal connections (top view).

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.


Device type 02

Cases E and F

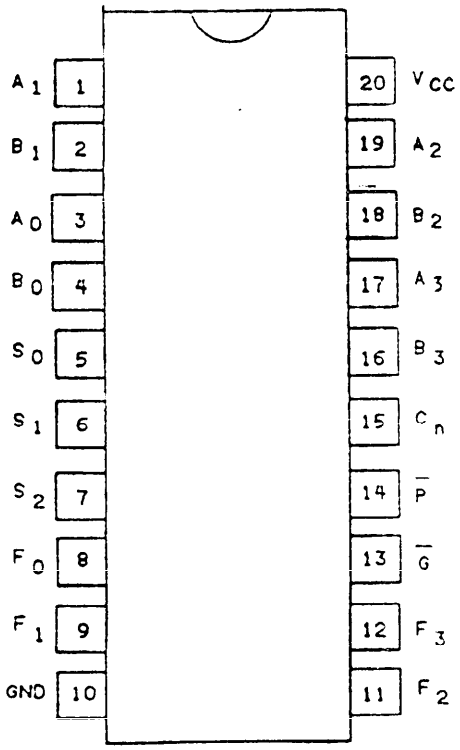


Device type 02

Case 2

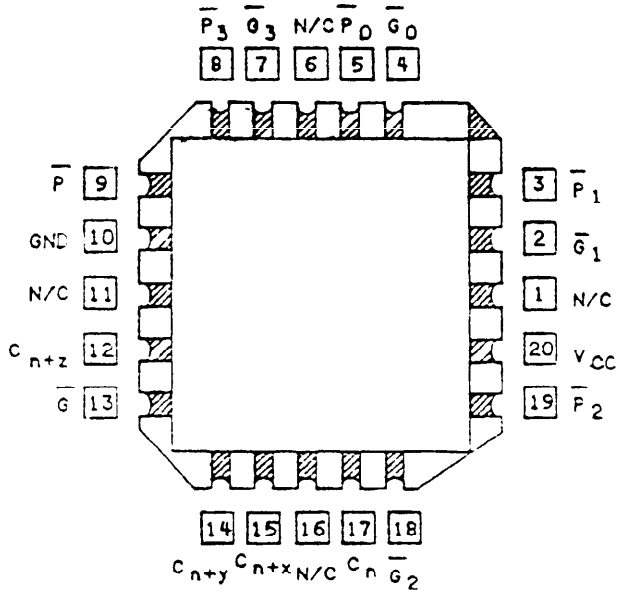

Device type 03

Cases R and S

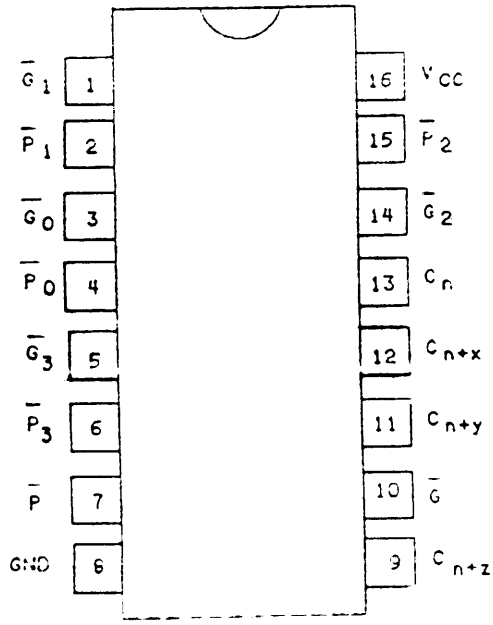

Device type 03

Case 2


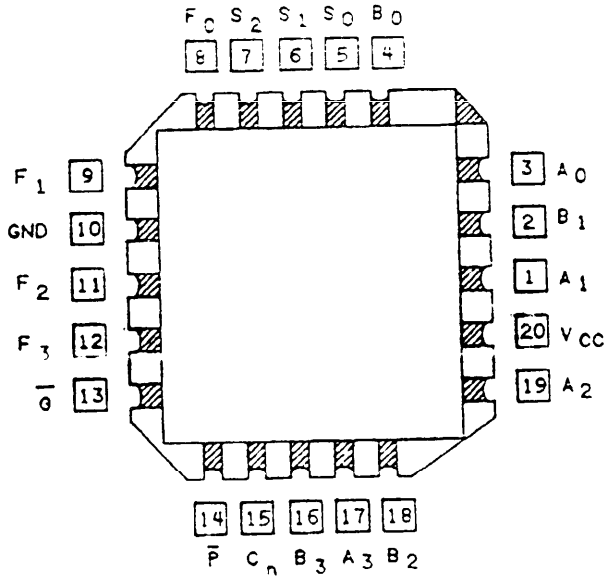


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 04

Cases R and S

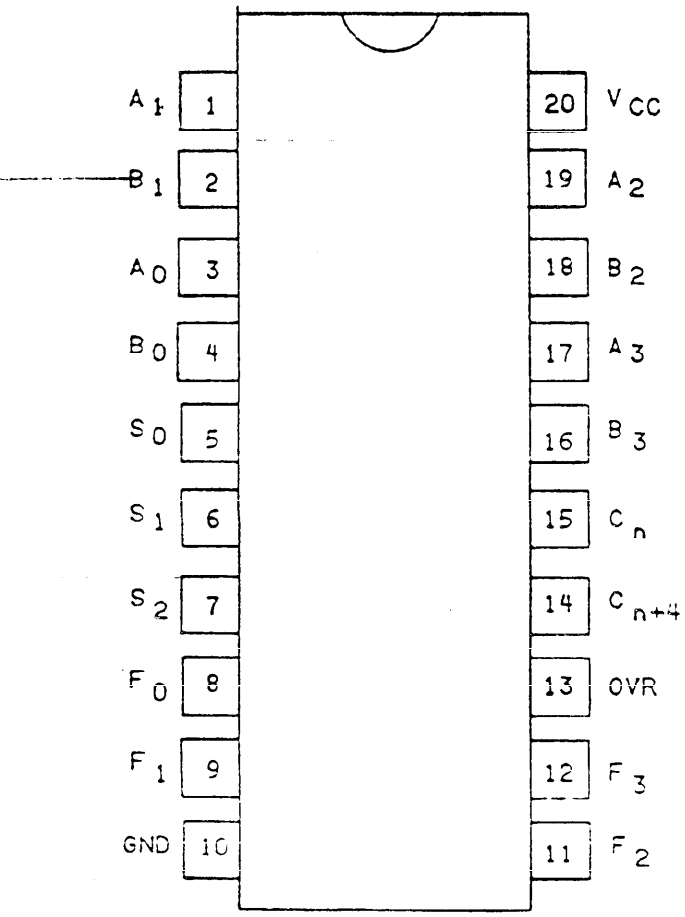

Device type 04

Case 2

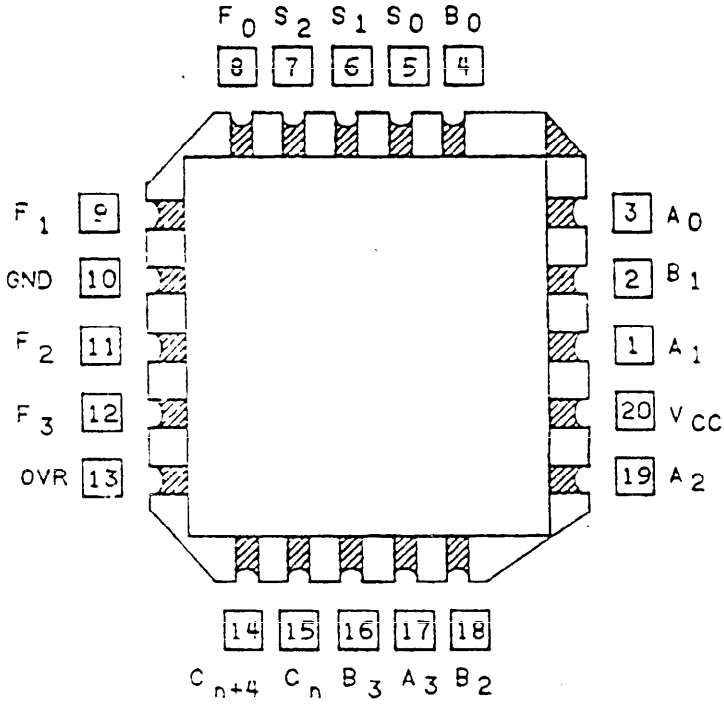


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 01

Mode select inputs				Active LOW operands & F_n Outputs		Active HIGH operands & F_n Outputs	
S_3	S_2	S_1	S_0	Logic (M = H)	Arithmetic** (M = L) (C_n = L)	Logic (M = H)	Arithmetic** (M = L) (C_n = H)
L	L	L	L	$\overline{A}$	A minus 1	$\overline{A}$	A
L	L	L	H	$\overline{AB}$	AB minus 1	$\overline{A + B}$	A + B
L	L	H	L	$\overline{A} + B$	$A\overline{B}$ minus 1	$\overline{AB}$	$A + \overline{B}$
L	L	H	H	Logic 1	minus 1	Logic 0	minus 1
L	H	L	L	$\overline{A + B}$	A plus $(A + \overline{B})$	$\overline{AB}$	A plus $A\overline{B}$
L	H	L	H	$\overline{B}$	AB plus $(A + \overline{B})$	$\overline{B}$	(A + B) plus $A\overline{B}$
L	H	H	L	$\overline{A \oplus B}$	A minus B minus 1	$A \oplus B$	A minus B minus 1
L	H	H	H	$A + \overline{B}$	$A + \overline{B}$	$A\overline{B}$	$A\overline{B}$ minus 1
H	L	L	L	$\overline{AB}$	A plus (A + B)	$\overline{A} + B$	A plus AB
H	L	L	H	$A \oplus B$	A plus B	$\overline{A \oplus B}$	A plus B
H	L	H	L	B	$A\overline{B}$ plus (A + B)	B	$(A + \overline{B})$ plus AB
H	L	H	H	A + B	A + B	AB	AB minus 1
H	H	L	L	Logic 0	A plus A*	Logic 1	A plus A*
H	H	L	H	$A\overline{B}$	AB plus A	$A + \overline{B}$	$(A + B)$ plus A
H	H	H	L	AB	$A\overline{B}$ minus A	A + B	$(A + \overline{B})$ plus A
H	H	H	H	A	A	A	A minus 1

* Each bit is shifted to the next more significant position.
** Arithmetic operations expressed is 2's complement notation.
H = HIGH voltage level
L = LOW voltage level

FIGURE 2. Truth table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 02

Inputs									Outputs				
C_n	G_0	P_0	G_1	P_1	G_2	P_2	G_3	P_3	C_{n+x}	C_{n+y}	C_{n+z}	G	P
X	H	H							L				
L	H	X							L				
X	L	X							H				
H	X	L							H				
X	X	X	H	H						L			
X	H	H	H	X						L			
L	H	X	H	X						L			
X	X	X	L	X						H			
X	L	X	X	L						H			
H	X	L	X	L						H			
X	X	X	X	X	H	H					L		
X	X	X	H	H	H	X					L		
X	H	H	H	X	H	X					L		
L	H	X	H	X	H	X					L		
X	X	X	X	X	L	X					H		
X	X	X	L	X	X	L					H		
X	L	X	X	L	X	L					H		
H	X	L	X	L	X	L					H		
	X		X	X	X	X	H	H				H	
	X		X	X	H	H	H	X				H	
	X		H	H	H	X	H	X				H	
	H		H	X	H	X	H	X				H	
	X		X	X	X	X	L	X				L	
	X		X	X	L	X	X	L				L	
	X		L	X	X	L	X	L				L	
	L		X	L	X	L	X	L				L	
		H		X		X		X					H
		X		H		X		X					H
		X		X		H		X					H
		X		X		X		H					H
		L		L		L		L					L

H = HIGH voltage level
L = LOW voltage level
X = Immaterial

FIGURE 2. Truth table - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 03

Function	Inputs						Outputs					
	S_0	S_1	S_2	C_n	A_n	B_n	F_0	F_1	F_2	F_3	$\overline{G}$	$\overline{P}$
Clear	0	0	0	X	X	X	0	0	0	0	0	0
B minus A	1	0	0	0	0	0	1	1	1	1	1	0
				0	0	1	0	1	1	1	0	0
				0	1	0	0	0	0	0	1	1
				0	1	1	1	1	1	1	1	0
				1	0	0	0	0	0	0	1	0
				1	0	1	1	1	1	1	0	0
				1	1	0	1	0	0	0	1	1
				1	1	1	0	0	0	0	1	0
A minus B	0	1	0	0	0	0	1	1	1	1	1	0
				0	0	1	0	0	0	0	1	1
				0	1	0	0	1	1	1	0	0
				0	1	1	1	1	1	1	1	0
				1	0	0	0	0	0	0	1	0
				1	0	1	1	0	0	0	1	1
				1	1	0	1	1	1	1	0	0
				1	1	1	0	0	0	0	1	0
A plus B	1	1	0	0	0	0	0	0	0	0	1	1
				0	0	1	1	1	1	1	1	0
				0	1	0	1	1	1	1	1	0
				0	1	1	0	1	1	1	0	0
				1	0	0	1	0	0	0	1	1
				1	0	1	0	1	1	1	1	0
				1	1	0	0	0	0	0	1	0
				1	1	1	1	1	1	1	0	0
A ⊕ B	0	0	1	X	0	0	0	0	0	0	1	1
				X	0	1	1	1	1	1	1	1
				X	1	0	1	1	1	1	1	0
				X	1	1	0	0	0	0	0	0
A + B	1	0	1	X	0	0	0	0	0	0	1	1
				X	0	1	1	1	1	1	1	1
				X	1	0	1	1	1	1	1	1
				X	1	1	1	1	1	1	1	0
AB	0	1	1	X	0	0	0	0	0	0	0	0
				X	0	1	0	0	0	0	1	1
				X	1	0	0	0	0	0	0	0
				X	1	1	1	1	1	1	1	0
Preset	1	1	1	X	0	0	1	1	1	1	1	1
				X	0	1	1	1	1	1	1	1
				X	1	0	1	1	1	1	1	1
				X	1	1	1	1	1	1	1	0

1 = HIGH voltage level
0 = LOW voltage level
X = Immaterial

FIGURE 2. Truth table - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 04

Function	Inputs						Outputs					
	S_0	S_1	S_2	C_n	A_n	B_n	F_0	F_1	F_2	F_3	OVR	C_{n+4}
Clear	0	0	0	0	X	X	0	0	0	0	1	1
				1	X	X	0	0	0	0	1	1
B minus A	1	0	0	0	0	0	1	1	1	1	0	0
				0	0	1	0	1	1	1	0	1
				0	1	0	0	0	0	0	0	0
				0	1	1	1	1	1	1	0	0
				1	0	0	0	0	0	0	0	1
				1	0	1	1	1	1	1	0	1
				1	1	0	1	0	0	0	0	0
				1	1	1	0	0	0	0	0	1
A minus B	0	1	0	0	0	0	1	1	1	1	0	0
				0	0	1	0	0	0	0	0	0
				0	1	0	0	1	1	1	0	1
				0	1	1	1	1	1	1	0	0
				1	0	0	0	1	0	0	0	1
				1	0	1	1	0	0	0	0	0
				1	1	0	1	1	1	1	0	1
				1	1	1	0	0	0	0	0	1
A plus B	1	1	0	0	0	0	0	0	0	0	0	0
				0	0	1	1	1	1	1	0	0
				0	1	0	1	1	1	1	0	0
				0	1	1	0	1	1	1	0	1
				1	0	0	1	0	0	0	0	0
				1	0	1	0	0	0	0	0	1
				1	1	0	0	0	0	0	0	1
				1	1	1	1	1	1	1	0	1
A ⊕ B	0	0	1	X	0	0	0	0	0	0	0	0
				X	0	1	1	1	1	1	0	0
				0	1	0	1	1	1	1	0	0
				X	1	1	0	0	0	0	1	1
				1	1	0	1	1	1	1	1	1
A + B	1	0	1	X	0	0	0	0	0	0	0	0
				X	0	1	1	1	1	1	0	0
				X	1	0	1	1	1	1	0	0
				0	1	1	1	1	1	1	0	0
				1	1	1	1	1	1	1	1	1
AB	0	1	1	X	0	0	0	0	0	0	1	1
				X	0	1	0	0	0	0	0	0
				X	1	0	0	0	0	0	1	1
				0	1	1	1	1	1	1	0	0
				1	1	1	1	1	1	1	1	1
Preset	1	1	1	X	0	0	1	1	1	1	0	0
				X	0	1	1	1	1	1	0	0
				X	1	0	1	1	1	1	0	0
				0	1	1	1	1	1	1	0	0
				1	1	1	1	1	1	1	1	1

1 = HIGH voltage level 0 = LOW voltage level X = Immaterial

FIGURE 2. Truth table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 01

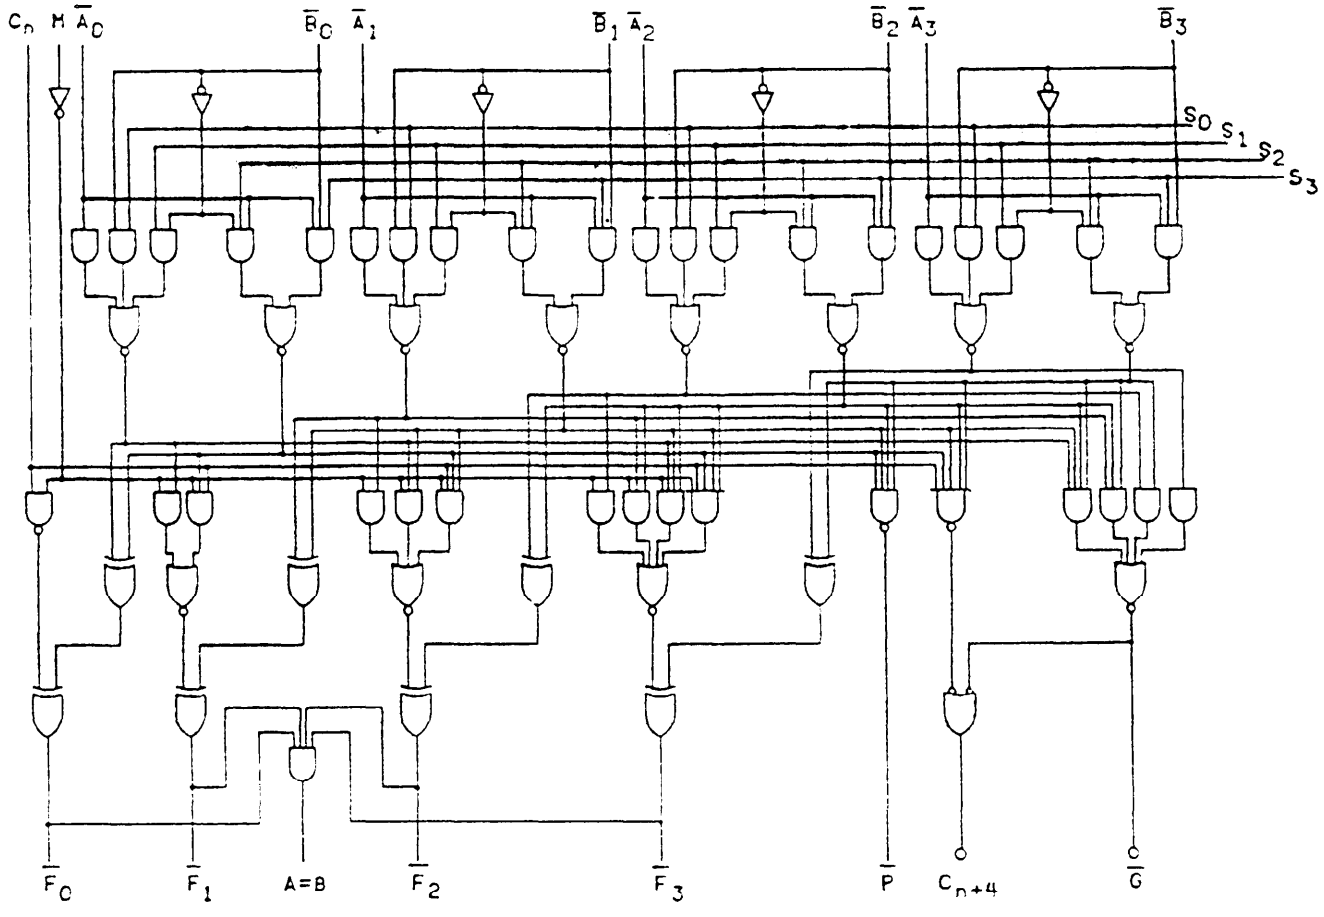


FIGURE 3. Logic diagram.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the currentversion before use.

Device type 02

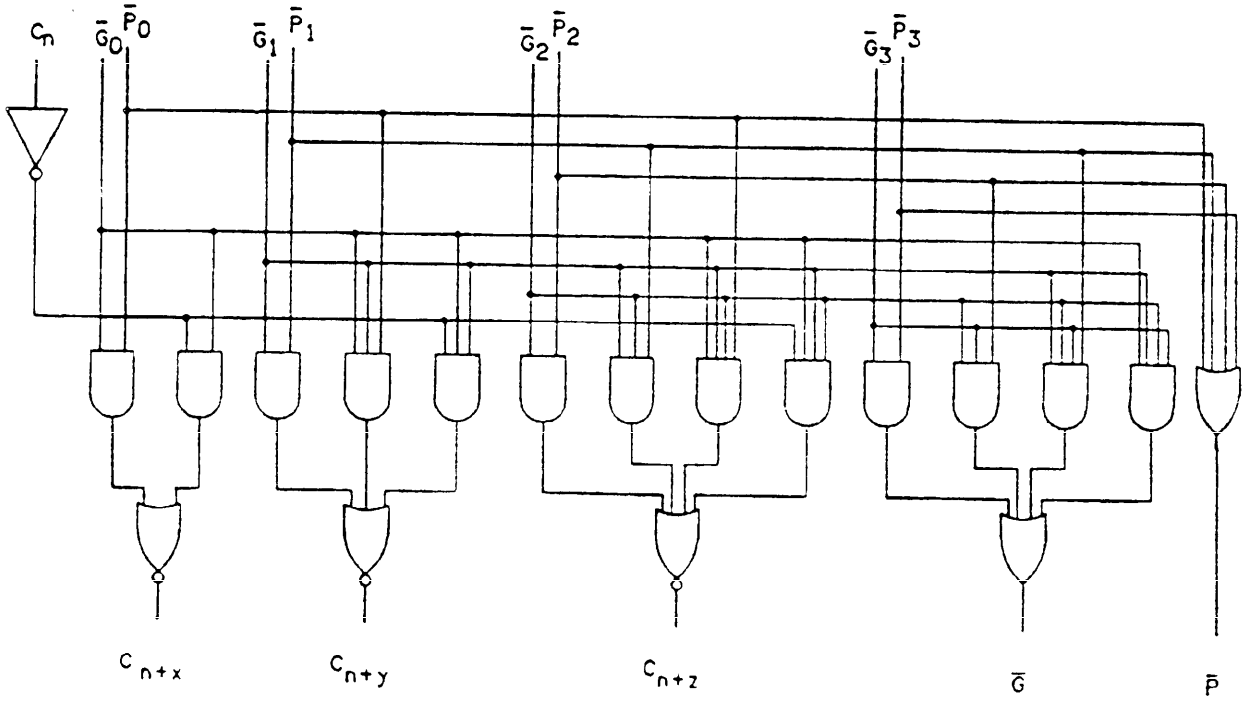


FIGURE 3. Logic diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

Device types 03 and 04



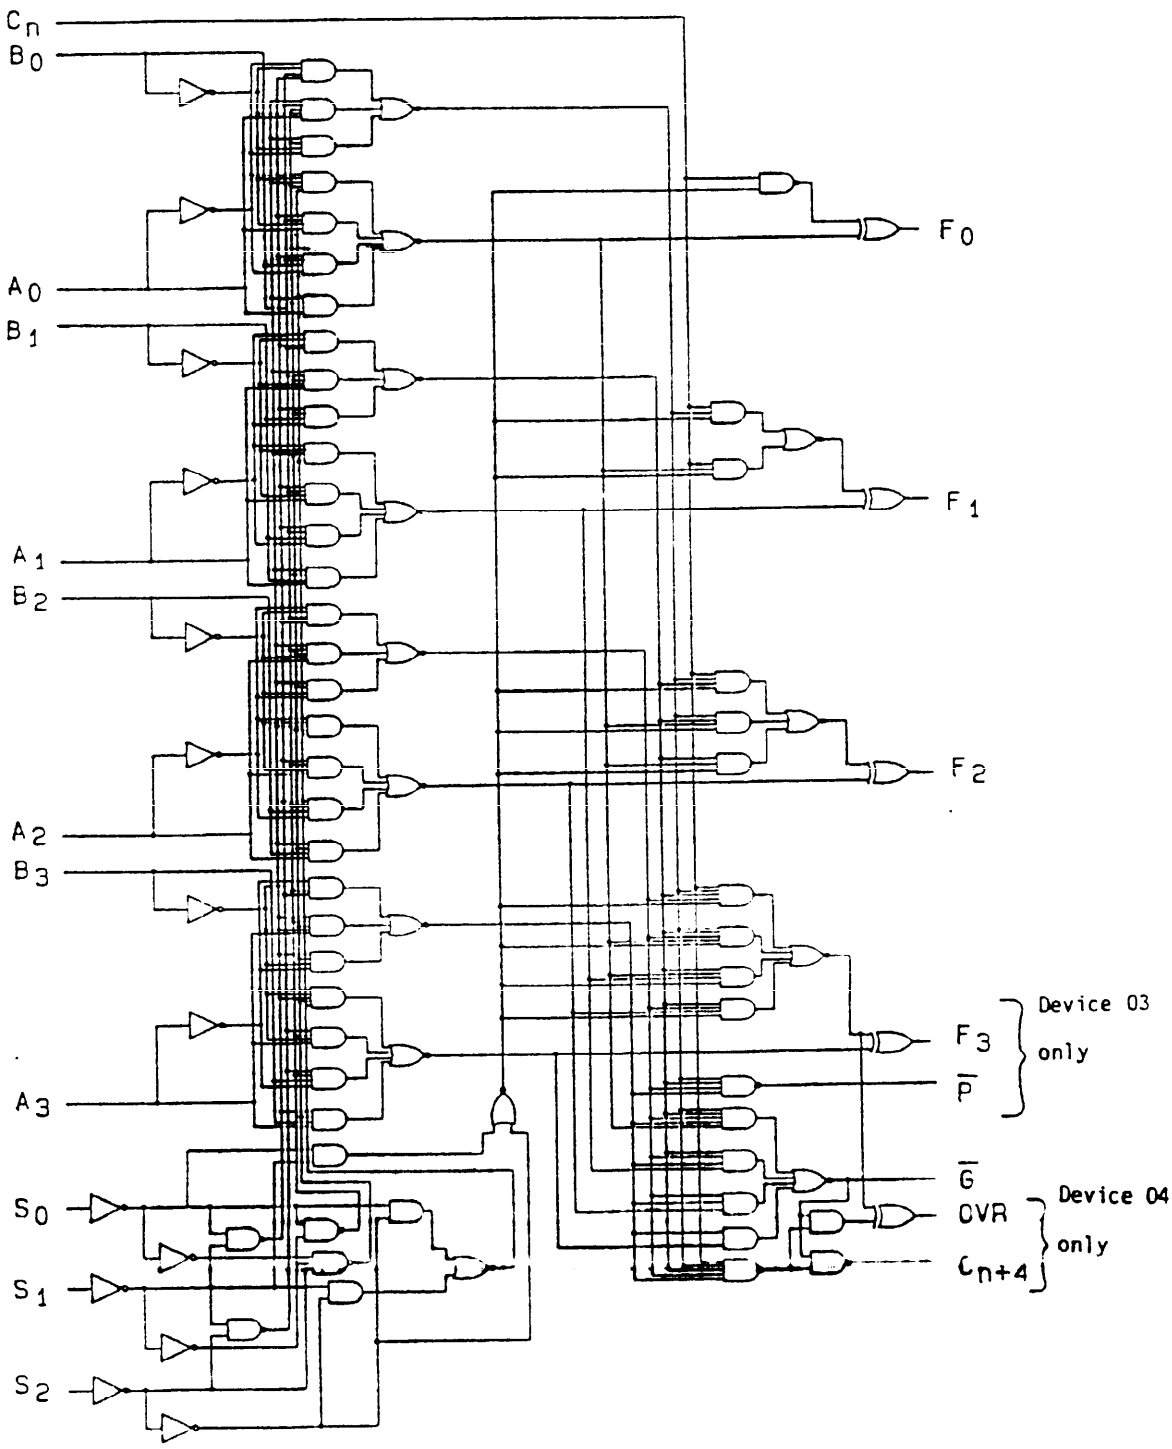


FIGURE 3. Logic diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

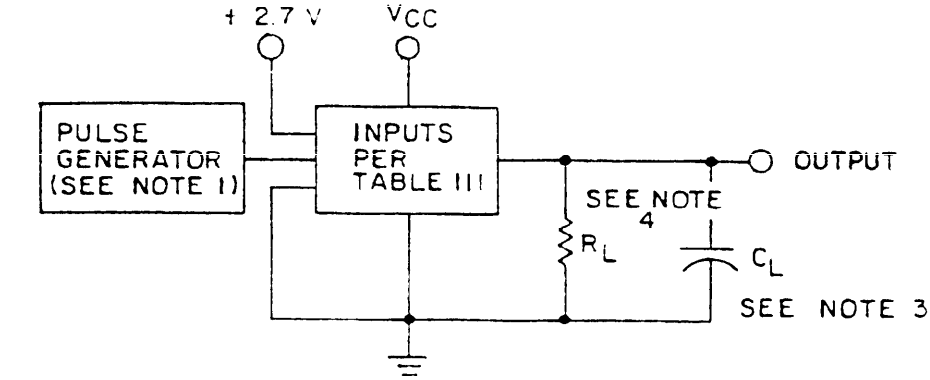

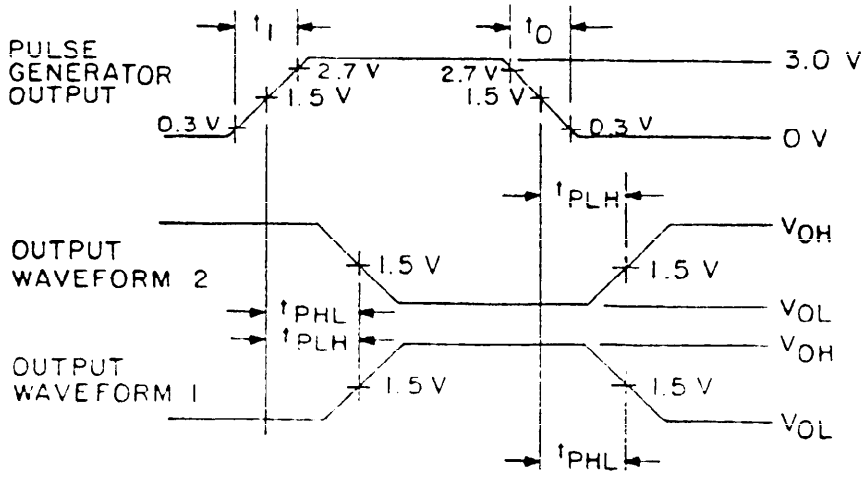


NOTES:
1. Pulse generator has the following characteristics: $t_I = t_O \leq 2.5$ ns, ≤ 1 MHz, $Z_{OUT} \cong 50\Omega$.
2. Inputs under test are at ground.
3. $C_L = 50$ pF ±10%.
4. $R_L = 499\Omega$ ±5%.
5. Voltage measurements are to be made with respect to network ground terminal.

FIGURE 4. Waveforms for progazation delay time and test circuit for all device types.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 01

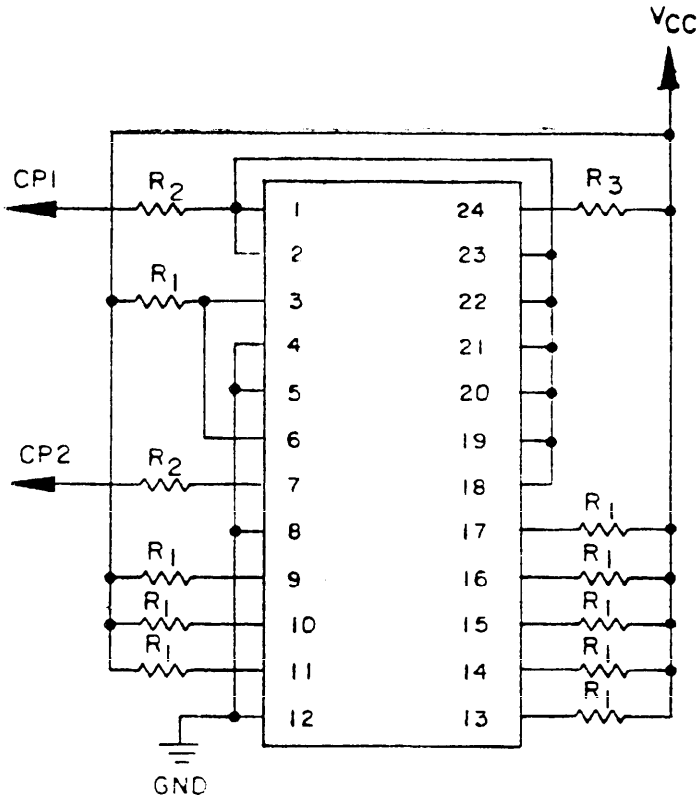


NOTES:
1. CP_1 = 100 kHz ±50% square wave; duty cycle = 50% ±15%; $CP_2 = CP_1 \div 2$; V_{IL} = 0.5 V minimum to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.
2. R_1 = 270Ω ±5%; R_2 = 51Ω ±5%.
3. V_{CC} and R_3 shall be chosen to ensure 5.5 V minimum is present at device V_{CC} terminal.

FIGURE 5. Burn-in and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

Device type 02

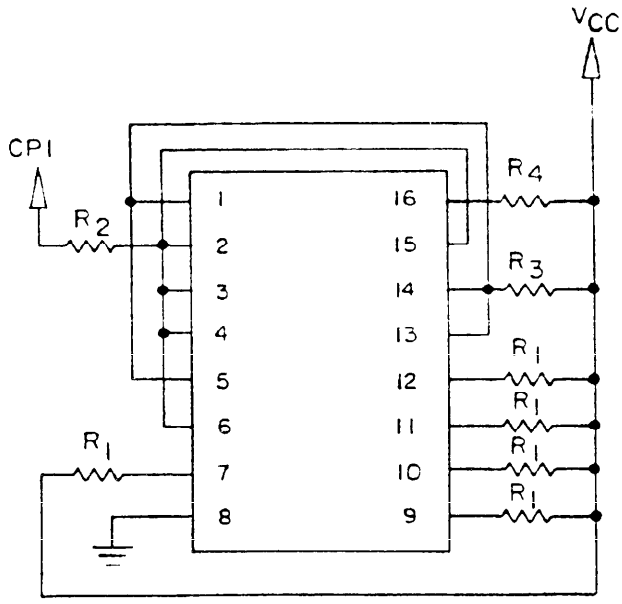


NOTES:
1. CP_1 = 100 kHz ±50% square wave; duty cycle = 50% ±15%; V_{IL} = -0.5 V minimim to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.
2. R_1 = 260Ω ±5%; R_2 = 51Ω ±5%; R_3 = 1 kΩ ±5%.
3. V_{CC} and R_4 shall be chosen to ensure 5.5 V minimum is present at device V_{CC} terminal.

FIGURE 5. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.

Device types 03 and 04

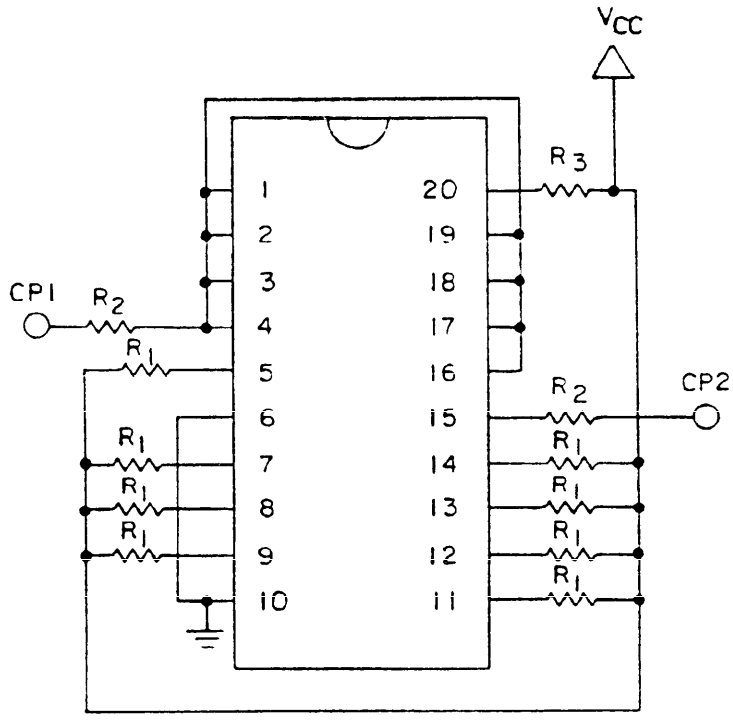

NOTES:
1. CP_1 = 100 kHz ±50% square wave; duty cycle = 50% ±15%; $CP_2 = CP_1 \div 2$; V_{IL} = 0.5 V minimum to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.
2. R_1 = 270Ω ±5%; R_2 = 51Ω ±5%.
3. V_{CC} and R_3 shall be chosen to ensure 5.5 V minimum is present at device V_{CC} terminal.

FIGURE 5. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

(External connections not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases, J, K, L	1	2	3	4	5	6	7	8	9	10	11	12	13	14
			Case 3 1/	2	3	4	5	6	7	9	10	11	12	13	14	16	17
			Test no.	$\overline{B}_0$	$\overline{A}_0$	S_3	S_2	S_1	SO	C_n	M	F_0	F_1	F_2	GND	F_3	A=B
1 T_C, T_A = 25°C	V_{OH}	3006	1	0.8 V	0.8 V	2.0 V	0.8 V	0.8 V	0.8 V						GND		
			2	2.0 V	2.0 V	"	2.0 V	0.8 V	0.8 V	0.8 V					"		
			3	2.0 V	"	"	"	2.0 V	2.0 V						"		
			4	0.8 V	"	"	"	"	"	0.8 V	2.0 V	-1.0 mA			"		
			5	"	"	"	"	"	"	"	"		-1.0 mA		"		
			6	"	"	"	"	"	"	"	"			-1.0 mA	"		
			7	"	"	"	"	"	"	"	"				"	-1.0 mA	
	V_{OL}	3007	8	2.0 V	"	"	"	0.8 V	"						"		
			9	"	"	"	0.6 V	0.8 V	0.8 V	0.8 V					"		
			10	"	"	0.8 V	2.0 V	2.0 V	2.0 V						"		
			11	"	0.8 V	2.0 V	"	"	"	2.0 V	2.0 V	20 mA			"		
			12	"	"	"	"	"	"	"	"		20 mA		"		
			13	"	"	"	"	"	"	"	"			20 mA	"		
			14	"	"	"	"	"	"	"	"				"	20 mA	
			15	"	"	"	"	"	"	"	"				"		20 mA
	V_{IC}		16	-18 mA													
			17		-18 mA												
			18			-18 mA											
			19				-18 mA										
			20					-18 mA									
			21						-18 mA								
			22							-18 mA							
			23								-18 mA						
			24														
			25														
			26														
			27														
			28														
			29														
	I_{IH1}	3010	30	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	2.7 V						
			31	"	2.7 V	"	"	"	"	"	0.0 V						
			32	"	0.0 V	"	"	"	"	"	"						
			33	"	"	"	"	"	"	"	"						
			34	"	"	"	"	"	"	"	"						
			35	2.7 V	"	"	"	"	"	"	"						
			36	0.0 V	"	"	"	"	"	"	"						
			37	"	"	"	"	"	"	"	"						
			38	"	"	"	"	"	"	"	"						
			39	"	"	"	"	"	2.7 V	"	"						
			40	"	"	2.7 V	"	"	0.0 V	"	"						
			41	5.5 V	"	0.0 V	"	2.7 V	"	"	"						
			42	"	"	0.0 V	2.7 V	0.0 V	"	"	"						
			43	"	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	2.7 V	5.5 V						
	I_{IH2}		44	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	7.0 V						
			45	"	7.0 V	"	"	"	"	"	0.0 V						
			46	"	0.0 V	"	"	"	"	"	"						
			47	"	"	"	"	"	"	"	"						
			48	"	"	"	"	"	"	"	"						
			49	7.0 V	"	"	"	"	"	"	"						
			50	0.0 V	"	"	"	"	"	"	"						
			51	"	"	"	"	"	"	"	"						
			52	"	"	"	"	"	"	"	"						
			53	"	"	"	"	"	7.0 V	"	"						
			54	"	"	7.0 V	"	"	0.0 V	"	"						
			55	5.5 V	"	0.0 V	"	7.0 V	"	"	"						
			56	"	"	0.0 V	7.0 V	0.0 V	"	"	"						
			57	"	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	7.0 V	5.5 V						

1/ Footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type (ntinued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases K,L 3 1/	15	16	17	18	19	20	21	22	23	24	Measured terminal	Test limits Min	Test limits Max	Unit
				18	19	20	21	22	24	25	26	27	28				
			Test no.	P	C_{n+4}	G	B_0	A_3	B_2	A_2	B_1	A_1	V_{CC}				
T_A = 25°C	V_{OH}	3006	1		-1.0 mA	-1.0 mA	2.0 V	2.0 V	0.8 V	0.8 V	0.8 V	0.8 V	4.5 V	G	2.5		V
			2				"	0.8 V	2.0 V	2.0 V	2.0 V	2.0 V	"	C_{n+4}	"		"
			3	-1.0 mA			"	2.0 V	2.0 V	"	2.0 V	"	"	P	"		"
			4				0.8 V	"	0.8 V	"	0.8 V	"	"	F_0	"		"
			5				"	"	"	"	"	"	"	F_1	"		"
			6				"	"	"	"	"	"	"	F_2	"		"
			7				"	"	"	"	"	"	"	F_3	"		"
	V_{OL}	3007	8				"	0.8 V	2.0 V	"	2.0 V	"	"	G		0.5	"
			9		20 mA	20 mA	"	2.0 V	0.8 V	"	0.8 V	"	"	C_{n+4}		"	"
			10	20 mA			2.0 V	2.0 V	2.0 V	"	2.0 V	"	"	P		"	"
			11				"	0.8 V	"	0.8 V	"	0.8 V	"	F_0		"	"
			12				"	"	"	"	"	"	"	F_1		"	"
			13				"	"	"	"	"	"	"	F_2		"	"
			14				"	"	"	"	"	"	"	F_3		"	"
			15				"	2.0 V	"	2.0 V	"	2.0 V	"	A=B		"	"
	V_{IC}		16										"	B		-1.2	"
			17										"	A_0		"	"
			18										"	S_3		"	"
			19										"	S_2		"	"
			20										"	S_1		"	"
			21										"	S_0		"	"
			22										"	C_n		"	"
			23										"	M		"	"
			24				-18 mA						"	B_3		"	"
			25					-18 mA					"	A_3		"	"
			26						-18 mA				"	B_2		"	"
			27							-18 mA			"	A_2		"	"
			28								-18 mA		"	B_1		"	"
			29									-18 mA	"	A_1		"	"
	I_{IH1}	3010	30				0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.5 V	B		20	uA
			31				"	"	"	"	"	0.0 V	"	A_0		"	"
			32				"	"	"	"	"	2.7 V	"	A_1		"	"
			33				"	"	"	2.7 V	"	0.0 V	"	A_2		"	"
			34				"	2.7 V	"	0.0 V	"	"	"	A_3		"	"
			35				"	0.0 V	"	"	"	"	"	B_0		"	"
			36				"	"	"	"	2.7 V	"	"	B_1		"	"
			37				"	"	2.7 V	"	0.0 V	"	"	B_2		"	"
			38				2.7 V	"	0.0 V	"	"	"	"	B_3		"	"
			39				0.0 V	"	"	"	"	"	"	S_0		"	"
			40				0.0 V	"	"	"	"	"	"	S_3		"	"
			41				5.5 V	"	5.5 V	"	5.5 V	"	"	S_1		"	"
			42				"	"	"	"	"	"	"	S_2		"	"
			43				"	5.5 V	"	5.5 V	"	5.5 V	"	C_n		"	"
	I_{IH2}		44				0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	"	M		100	"
			45				"	"	"	"	"	0.0 V	"	A_0		"	"
			46				"	"	"	"	"	7.0 V	"	A_1		"	"
			47				"	"	"	7.0 V	"	0.0 V	"	A_2		"	"
			48				"	7.0 V	"	0.0 V	"	"	"	A_3		"	"
			49				"	0.0 V	"	"	"	"	"	B_0		"	"
			50				"	"	"	"	7.0 V	"	"	B_1		"	"
			51				"	"	7.0 V	"	0.0 V	"	"	B_2		"	"
			52				7.0 V	"	0.0 V	"	"	"	"	B_3		"	"
			53				0.0 V	"	"	"	"	"	"	S_0		"	"
			54				0.0 V	"	"	"	"	"	"	S_3		"	"
			55				5.5 V	"	5.5 V	"	5.5 V	"	"	S_1		"	"
			56				"	"	"	"	"	"	"	S_2		"	"
			57				"	5.5 V	"	5.5 V	"	5.5 V	"	C_n		"	"

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J, L, 3 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
			Cases F, 2	2	3	4	5	6	7	9	10	11	12	13	14	15	16	17	18	19
			Test no.	$\overline{B}_0$	$\overline{A}_0$	S_3	S_2	S_1	S_0	C_n	M	$\overline{F}_0$	$\overline{F}_1$	$\overline{F}_2$	GND	$\overline{F}_3$	A=B			
1 T_C = 25°C	I_{IL1}	3009	58	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	0.5 V				GND					
	I_{IL2}	3009	59	0.5 V	"	"	"	"	"	"	5.5 V				"					
			60	5.5 V	"	"	"	"	"	"	"				"					
			61	"	"	"	"	"	"	"	"				"					
			62	"	"	"	"	"	"	"	"				"					
			63	"	0.5 V	"	"	"	"	"	"				"					
			64	"	5.5 V	"	"	"	"	"	"				"					
			65	"	"	"	"	"	"	"	"				"					
			66	"	"	"	"	"	"	"	"				"					
	I_{IL3}	3009	67	"	"	"	"	"	0.5 V	"	"				"					
			69	"	"	0.5 V	"	"	5.5 V	"	"				"					
			69	0.0 V	"	5.5 V	"	0.5 V	"	"	"				"					
			70	"	"	0.0 V	0.5 V	0.0 V	0.0 V	0.0 V	0.0 V				"					
	I_{IL4}	3009	71	"	0.0 V	0.0 V	0.0 V	"	"	0.5 V	0.0 V				"					
	I_{OS}	3011	72	"	"	5.5 V	"	"	"						"					
			73	"	"	0.0 V	"	"	"	0.0 V					"					
			74	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	0.0 V			"					
			75	"	"	"	"	"	"	"	"		0.0 V		"					
			76	"	"	"	"	"	"	"	"			0.0 V	"					
			77	"	"	"	"	"	"	"	"				"	0.0 V				
			78	"	"	"	"	"	"	"	"				"		0.0 V			
	I_{OD}		79	4.5 V	4.5 V	4.5 V	4.5 V	GND	4.5 V						"					
			80	"	"	"	GND	GND	GND	GND					"					
			81	"	"	GND	4.5 V	4.5 V	4.5 V						"					
			82	"	GND	4.5 V	"	"	"	4.5 V	4.5 V	2.5 V			"					
			83	"	"	"	"	"	"	"	"		2.5 V		"					
			84	"	"	"	"	"	"	"	"			2.5 V	"					
			85	"	"	"	"	"	"	"	"				"		2.5 V			
			86	"	"	"	"	"	"	"	"				"					2.5 V
	I_{CCL}	3005	87	0.0 V	0.0 V	5.5 V	5.5 V	5.5 V	5.5 V	0.0 V	5.5 V				"					
	I_{CCH}	3005	89	0.0 V	5.5 V	"	"	"	5.5 V	0.0 V	"				"					
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																			
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																			

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J,K,L Case 3 1/	15	16	17	18	19	20	21	22	23	24	Measured terminal	Test limits Min	Test limits Max	Unit
				18	19	20	21	23	24	25	26	27	28				
			Test no.	P	C_{n+4}	$\overline{S}$	$\overline{B}_3$	$\overline{A}_3$	$\overline{B}_2$	$\overline{A}_2$	$\overline{B}_1$	$\overline{A}_1$	V_{CC}				
1 T_A = 25°C	I_{IL1}	3009	58				5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	M	2/	2/	mA
	I_{IL2}		59				"	"	"	"	5.5 V	"	"	$\overline{B}_0$	"	"	"
			60				"	"	"	"	0.5 V	"	"	$\overline{B}_1$	"	"	"
			61				"	"	0.5 V	"	5.5 V	"	"	$\overline{B}_2$	"	"	"
			62				0.5 V	"	5.5 V	"	"	"	"	$\overline{B}_3$	"	"	"
			63				5.5 V	"	"	"	"	"	"	$\overline{A}_0$	"	"	"
			64				"	"	"	"	"	0.5 V	"	$\overline{A}_1$	"	"	"
			65				"	"	"	0.5 V	"	5.5 V	"	$\overline{A}_2$	"	"	"
			66				"	0.5 V	"	5.5 V	"	"	"	$\overline{A}_3$	"	"	"
	I_{IL3}		67				"	5.5 V	"	"	"	"	"	S_0	"	"	"
			68				"	"	"	"	"	"	"	S_3	"	"	"
			69				0.0 V	"	0.0 V	"	0.0 V	"	"	S_1	"	"	"
			70				"	"	"	"	"	"	"	S_2	"	"	"
	I_{IL4}		71				"	0.0 V	"	0.0 V	"	0.0 V	"	C_n	"	"	"
	I_{OS}	3011	72				5.5 V	5.5 V	"	"	"	"	"	$\overline{G}$	-60	-150	"
			73				0.0 V	0.0 V	"	"	"	"	"	C_{n+4}	"	"	"
			74	0.0 V	0.0 V	0.0 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	"	$\overline{P}$	"	"	"
			75				"	"	"	"	"	"	"	$\overline{F}_0$	"	"	"
			76				"	"	"	"	"	"	"	$\overline{F}_1$	"	"	"
			77				"	"	"	"	"	"	"	$\overline{F}_2$	"	"	"
			78				"	"	"	"	"	"	"	$\overline{F}_3$	"	"	"
	I_{OD}		79				GND	GND	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	$\overline{G}$	60		"
			80				"	4.5 V	GND	"	GND	"	"	C_{n+4}	"		"
			81	2.5 V	2.5 V	2.5 V	4.5 V	"	4.5 V	"	4.5 V	"	"	$\overline{P}$	"		"
			82				"	GND	"	GND	"	GND	"	$\overline{F}_0$	"		"
			83				"	"	"	"	"	4.5 V	"	$\overline{F}_1$	"		"
			84				"	"	"	"	"	"	"	$\overline{F}_2$	"		"
			85				"	"	"	"	"	"	"	$\overline{F}_3$	"		"
			86				"	4.5 V	"	4.5 V	"	"	"	A=B	"		"
	I_{CCL}	3005	87				0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.5 V	V_{CC}		65	"
	I_{CCH}	3005	88				0.0 V	5.5 V	0.0 V	5.5 V	0.0 V	5.5 V	5.5 V	V_{CC}		65	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J, K, L	1	2	3	4	5	6	7	8	9	10	11	12	13	14
			Case 3 1/	2	3	4	5	6	7	9	10	11	12	13	14	16	17
			Test no.	$\overline{B}_0$	$\overline{A}_0$	S_3	S_2	S_1	S0	C_n	M	F_0	F_1	F_2	GND	F_3	A=B
7 T_C = 25°C	Functional 3/	3014	89	A	B	A	B	B	B	B	B	H	L	L	GND	L	L
			90	B	"	A	A	"	"	A	"	L	L	L	"	"	"
			91	A	"	B	B	"	"	B	"	H	H	H	"	"	"
			92	B	A	A	B	"	"	B	"	L	H	L	"	"	"
			93	A	B	B	A	"	"	A	"	L	L	"	"	H	"
			94	B	"	A	B	"	"	A	"	H	H	"	"	H	"
			95	"	"	B	R	"	"	B	"	H	H	"	"	L	"
			96	"	"	"	A	"	"	"	"	"	L	"	"	L	"
			97	"	A	"	A	"	"	"	"	"	"	H	"	H	"
			98	"	B	"	B	"	A	"	"	"	"	L	"	H	"
			99	A	"	"	A	"	B	"	"	"	"	H	"	L	"
			100	B	"	A	B	"	B	"	"	"	H	L	"	L	"
			101	A	"	B	B	"	A	"	"	"	L	H	"	H	"
			102	A	"	B	A	"	B	"	"	"	H	L	"	H	"
			103	B	"	A	B	"	B	A	"	"	L	H	"	L	"
			104	B	"	B	"	"	A	B	"	"	H	L	"	L	"
			105	A	A	"	"	"	B	B	"	"	L	H	"	H	"
			106	B	A	"	"	"	"	A	"	"	H	H	"	L	"
			107	"	B	"	"	"	"	B	"	"	L	H	"	H	"
			108	"	"	"	"	"	"	"	"	"	"	L	"	L	"
			109	A	"	"	"	"	"	"	"	"	"	"	"	H	"
			110	B	"	"	"	A	"	"	"	"	L	"	"	L	"
			111	A	A	"	"	A	"	"	"	"	"	H	"	H	"
			112	"	B	A	"	B	"	A	"	"	H	L	"	H	"
			113	"	A	B	A	"	"	"	"	"	H	"	"	L	"
			114	B	A	"	B	"	A	"	"	"	H	"	"	H	"
			115	"	B	"	A	"	B	"	"	"	L	"	"	H	"
			116	"	"	"	B	A	"	B	"	"	L	"	"	L	"
			117	A	"	"	"	A	"	"	"	"	H	H	"	H	H
			118	A	A	"	"	B	"	"	A	"	L	"	"	L	L
			119	B	B	"	"	A	"	A	B	"	H	H	"	H	H
			120	A	B	"	"	B	"	A	"	"	L	"	"	L	L
			121	"	A	A	"	"	"	B	"	"	H	H	"	H	H
			122	"	B	A	"	"	"	"	A	"	H	"	"	"	L
			123	B	A	B	"	A	"	"	B	"	L	H	"	L	"
			124	A	A	"	"	A	"	A	"	"	H	L	"	H	"
			125	A	B	"	"	B	A	B	"	"	L	L	"	L	"
			126	B	A	"	"	B	A	B	"	"	L	L	"	L	"
			127	B	B	"	A	A	B	A	"	"	H	H	"	H	H
			128	A	A	"	A	A	B	A	"	"	H	H	"	H	H
8	Repeat subgroups 7 at T_C = +125°C and T_C = -55°C.																

See footnote at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J, K, L	15	16	17	18	19	20	21	22	23	24	Measured terminal	Test limits		Unit
			Case 3 1/	18	19	20	21	23	24	25	26	27	28		Min	Max	
			Test no.	$\overline{P}$	C_{n+4}	$\overline{G}$	$\overline{B}_3$	$\overline{A}_3$	$\overline{B}_2$	$\overline{A}_2$	$\overline{B}_1$	$\overline{A}_1$	V_{CC}				
7 T_A = 25°C	Functional 3/	3014	89	L	H	L	A	B	B	B	B	B	4/	All outputs			
			90	"	"	"	"	"	B	B	"	B	"	"			
			91	"	"	"	"	"	A	A	"	A	"	"			
			92	"	"	"	"	"	B	B	A	B	"	"			
			93	"	"	"	"	A	B	"	B	B	"	"			
			94	"	"	"	B	A	A	"	"	A	"	"			
			95	"	"	"	A	B	A	"	"	A	"	"			
			96	"	"	"	B	B	B	"	"	B	"	"			
			97	H	"	"	A	A	A	"	A	A	"	"			
			98	L	"	"	"	A	B	"	B	B	"	"			
			99	H	"	"	"	B	A	"	"	A	"	"			
			100	H	L	H	B	A	A	A	"	A	"	"			
			101	L	H	L	"	"	B	"	"	B	"	"			
			102	H	L	H	"	"	"	"	"	"	"	"			
			103	L	H	L	A	B	"	"	"	"	"	"			
			104	"	"	"	B	B	"	B	"	"	"	"			
			105	"	"	"	A	A	"	"	A	"	"	"			
			106	"	"	"	A	B	A	"	A	A	"	"			
			107	"	"	"	B	A	B	A	B	B	"	"			
			108	"	"	"	B	B	"	B	B	B	"	"			
			109	"	"	"	A	A	"	B	A	"	"	"			
			110	"	L	"	B	"	A	A	B	A	"	"			
			111	"	H	L	A	"	"	B	A	"	"	"			
			112	H	L	H	"	"	"	A	B	"	"	"			
			113	L	H	"	"	B	"	B	A	"	"	"			
			114	L	"	"	"	"	B	B	A	B	"	"			
			115	H	"	"	"	"	A	A	B	A	"	"			
			116	L	L	H	B	"	B	B	"	B	"	"			
			117	"	H	L	"	A	B	"	"	B	"	"			
			118	"	"	"	"	"	A	"	A	A	"	"			
			119	"	"	H	"	"	B	A	B	B	"	"			
			120	"	"	L	"	"	A	B	B	A	"	"			
			121	H	H	H	"	"	"	B	A	"	"	"			
			122	H	L	L	A	"	"	A	B	"	"	"			
			123	L	H	H	A	B	B	B	A	B	"	"			
			124	"	H	L	B	A	B	"	A	B	"	"			
			125	"	L	H	B	A	A	"	B	A	"	"			
			126	"	L	L	A	B	A	"	A	A	"	"			
			127	"	H	H	B	B	A	"	B	B	"	"			
			128	"	"	"	A	A	A	A	A	A	"	"			
8	Repeat subgroups 7 at T_C = +125°C and T_C = -55°C.																

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J,K,L Case 3 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14
				2	3	4	5	6	7	9	10	11	12	13	14	16	17
			Test no.	B_0	A_0	S_3	S_2	S_1	S0	C_n	M	F_0	F_1	F_2	GND	F_3	A=B
9 T_C = 25°C	t_{PHL1}	3003 Fig. 4	129	0.0 V	IN	2.7 V	0.0 V	0.0 V	2.7 V	0.0 V	0.0 V	OUT			GND		
			130	"	0.0 V	"	"	"	"	"	"		OUT		"		
			131	"	"	"	"	"	"	"	"			OUT	"		
			132	"	"	"	"	"	"	"	"				"	OUT	
			133	IN	"	"	"	"	"	"	"	OUT			"		
			134	0.0 V	"	"	"	"	"	"	"		OUT		"		
			135	"	"	"	"	"	"	"	"			OUT	"		
			136	"	"	"	"	"	"	"	"				"	OUT	
	t_{PLH1}		137	"	IN	"	"	"	"	"	"	OUT			"		
			138	"	0.0 V	"	"	"	"	"	"		OUT		"		
			139	"	"	"	"	"	"	"	"			OUT	"		
			140	"	"	"	"	"	"	"	"				"	OUT	
			141	IN	"	"	"	"	"	"	"	OUT			"		
			142	0.0 V	"	"	"	"	"	"	"		OUT		"		
			143	"	"	"	"	"	"	"	"			OUT	"		
			144	"	"	"	"	"	"	"	"				"	OUT	
	t_{PHL2}		145	IN	2.7 V	"	"	"	"	2.7 V	"				"	OUT	
			146	0.0 V	IN	"	"	"	"	0.0 V	"		OUT		"		
			147	"	"	"	"	"	"	"	"			OUT	"		
			148	"	"	"	"	"	"	"	"				"	OUT	
			149	"	2.7 V	"	"	"	"	"	"				"	OUT	
			150	"	"	"	"	"	"	"	"			OUT	"		
			151	"	"	"	"	"	"	"	"				"	OUT	
	t_{PLH2}		152	IN	"	"	"	"	"	2.7 V	"				"	OUT	
			153	0.0 V	IN	"	"	"	"	0.0 V	"		OUT		"		
			154	"	"	"	"	"	"	"	"			OUT	"		
			155	"	"	"	"	"	"	"	"				"	OUT	
			156	"	2.7 V	"	"	"	"	"	"				"	OUT	
			157	"	"	"	"	"	"	"	"			OUT	"		
			158	"	"	"	"	"	"	"	"				"	OUT	
	t_{PHL3}		159	0.0 V	IN	"	"	"	"	"	"				"		
			160	2.7 V	0.0 V	"	"	"	"	"	"				"		
			161	"	"	"	"	"	"	"	"				"		
			162	"	"	"	"	"	"	"	"				"		
			163	IN	"	"	"	"	"	"	"				"		
			164	2.7 V	"	"	"	"	"	"	"				"		
			165	"	"	"	"	"	"	"	"				"		
			166	"	"	"	"	"	"	"	"				"		
	t_{PLH3}		167	0.0 V	IN	"	"	"	"	"	"				"		
			168	2.7 V	0.0 V	"	"	"	"	"	"				"		
			169	"	"	"	"	"	"	"	"				"		
			170	"	"	"	"	"	"	"	"				"		
			171	IN	"	"	"	"	"	"	"				"		
			172	2.7 V	"	"	"	"	"	"	"				"		
			173	"	"	"	"	"	"	"	"				"		
			174	"	"	"	"	"	"	"	"				"		

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J, K, L Case 3 1/	15	16	17	18	19	20	21	22	23	24	Measured terminal	Test limits Min	Test limits Max	Unit
				18	19	20	21	23	24	25	26	27	28				
			Test no.	$\overline{P}$	C_{n+4}	$\overline{G}$	B_3	A_3	B_2	A_2	B_1	A_1	V_{CC}				
9 T_A = 25°C	t_{PHL1}	3003 Fig. 4	129				0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.0 V	A_0 to F_0	3.0	10.0	ns
			130				"	"	"	0.0 V	"	IN	"	A_1 to F_1	"	"	"
			131				"	"	"	IN	"	0.0 V	"	A_2 to F_2	"	"	"
			132				"	IN	"	0.0 V	"	"	"	A_3 to F_3	"	"	"
			133				"	0.0 V	"	"	"	"	"	B_0 to F_0	"	"	"
			134				"	"	"	"	IN	"	"	B_1 to F_1	"	"	"
			135				"	"	IN	"	0.0 V	"	"	B_2 to F_2	"	"	"
			136				IN	"	0.0 V	"	"	"	"	B_3 to F_3	"	"	"
	t_{PLH1}		137				0.0 V	"	"	"	"	"	"	A_0 to F_0	"	9.0	"
			138				"	"	"	"	"	IN	"	A_1 to F_1	"	"	"
			139				"	"	"	IN	"	0.0 V	"	A_2 to F_2	"	"	"
			140				"	IN	"	0.0 V	"	"	"	A_3 to F_3	"	"	"
			141				"	0.0 V	"	"	"	"	"	B_0 to F_0	"	"	"
			142				"	"	"	"	IN	"	"	B_1 to F_1	"	"	"
			143				"	"	IN	"	0.0 V	"	"	B_2 to F_2	"	"	"
			144				IN	"	0.0 V	"	"	"	"	B_3 to F_3	"	"	"
	t_{PHL2}		145				0.0 V	2.7 V	"	2.7 V	"	2.7 V	"	B_0 to F_3	4.0	10.0	"
			146				"	0.0 V	"	0.0 V	"	0.0 V	"	A_0 to F_1	"	"	"
			147				"	"	"	0.0 V	"	2.7 V	"	A_0 to F_2	"	"	"
			148				"	"	"	2.7 V	"	"	"	A_0 to F_3	"	"	"
			149				"	"	"	IN	"	"	"	A_2 to F_3	"	"	"
			150				"	"	"	0.0 V	"	IN	"	A_1 to F_2	"	"	"
			151				"	"	"	2.7 V	"	IN	"	A_1 to F_3	"	"	"
	t_{PLH2}		152				0.0 V	2.7 V	"	2.7 V	"	2.7 V	"	B_0 to F_3	"	10.5	"
			153				"	0.0 V	"	0.0 V	"	0.0 V	"	A_0 to F_1	"	"	"
			154				"	"	"	0.0 V	"	2.7 V	"	A_0 to F_2	"	"	"
			155				"	"	"	2.7 V	"	"	"	A_0 to F_3	"	"	"
			156				"	"	"	IN	"	"	"	A_2 to F_3	"	"	"
			157				"	"	"	0.0 V	"	IN	"	A_1 to F_2	"	"	"
			158				"	"	"	2.7 V	"	IN	"	A_1 to F_3	"	"	"
	t_{PHL3}		159		OUT		2.7 V	"	2.7 V	0.0 V	2.7 V	0.0 V	"	A_0 to C_{n+4}	3.5	12.0	"
			160		"		"	"	2.7 V	0.0 V	0.0 V	IN	"	A_1 to C_{n+4}	"	"	"
			161		"		"	"	0.0 V	IN	2.7 V	0.0 V	"	A_2 to C_{n+4}	"	"	"
			162		"		0.0 V	IN	2.7 V	0.0 V	"	"	"	A_3 to C_{n+4}	"	"	"
			163		"		2.7 V	0.0 V	"	"	"	"	"	B_0 to C_{n+4}	"	"	"
			164		"		"	"	"	"	IN	"	"	B_1 to C_{n+4}	"	"	"
			165		"		"	"	IN	"	2.7 V	"	"	B_2 to C_{n+4}	"	"	"
			166		"		IN	"	2.7 V	"	"	"	"	B_3 to C_{n+4}	"	"	"
	t_{PLH3}		167		"		2.7 V	"	"	"	"	"	"	A_0 to C_{n+4}	5.0	13.0	"
			168		"		"	"	"	"	0.0 V	IN	"	A_1 to C_{n+4}	"	"	"
			169		"		"	"	0.0 V	IN	2.7 V	0.0 V	"	A_2 to C_{n+4}	"	"	"
			170		"		0.0 V	IN	2.7 V	0.0 V	"	"	"	A_3 to C_{n+4}	"	"	"
			171		"		2.7 V	0.0 V	"	"	"	"	"	B_0 to C_{n+4}	"	"	"
			172		"		"	"	"	"	IN	"	"	B_1 to C_{n+4}	"	"	"
			173		"		"	"	IN	"	2.7 V	"	"	B_2 to C_{n+4}	"	"	"
			174		"		IN	"	2.7 V	"	2.7 V	"	"	B_3 to C_{n+4}	"	"	"

see footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

Subgroup	Symbol	Mil-STD-883 method	Cases J, L, 2 Case 3 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
				Test no.	V_O	V_O	S_3	S_2	S_1	SO	C_n	M	F_0	F_1	F_2	GND	F_3	A-8		
9 T_C = 25°C	t_{PHL4}	3003 Fig.		175	2.7 V	IN	2.7 V	0.0 V	0.0 V	2.7 V	0.0 V	0.0 V				GND				
				176	0.0 V	0.0 V	"	"	"	"	"	"				"				
				177	"	"	"	"	"	"	"	"				"				
				178	"	"	"	"	"	"	"	"				"				
				179	IN	2.7 V	"	"	"	"	"	"				"				
				180	0.0 V	0.0 V	"	"	"	"	"	"				"				
				181	"	"	"	"	"	"	"	"				"				
				182	"	"	"	"	"	"	"	"				"				
	t_{PLH4}			183	2.7 V	IN	"	"	"	"	"	"				"				
				184	0.0 V	0.0 V	"	"	"	"	"	"				"				
				185	"	"	"	"	"	"	"	"				"				
				186	"	"	"	"	"	"	"	"				"				
				187	IN	2.7 V	"	"	"	"	"	"				"				
				188	0.0 V	0.0 V	"	"	"	"	"	"				"				
				189	"	"	"	"	"	"	"	"				"				
				190	"	"	"	"	"	"	"	"				"				
	t_{PHL5}			191	"	2.7 V	"	"	"	"	IN	"	OUT			"				
	t_{PLH5}			192	"	2.7 V	"	"	"	"	IN	"	OUT			"				
	t_{PHL6}			193	"	IN	"	"	"	"	0.0 V	"				"				
				194	2.7 V	0.0 V	"	"	"	"	"	"				"				
				195	"	"	"	"	"	"	"	"				"				
				196	"	"	"	"	"	"	"	"				"				
				197	IN	"	"	"	"	"	"	"				"				
				198	2.7 V	"	"	"	"	"	"	"				"				
				199	"	"	"	"	"	"	"	"				"				
				200	"	"	"	"	"	"	"	"				"				
	t_{PLH6}			201	0.0 V	IN	"	"	"	"	"	"				"				
				202	2.7 V	0.0 V	"	"	"	"	"	"				"				
				203	"	"	"	"	"	"	"	"				"				
				204	"	"	"	"	"	"	"	"				"				
				205	IN	"	"	"	"	"	"	"				"				
				206	2.7 V	"	"	"	"	"	"	"				"				
				207	"	"	"	"	"	"	"	"				"				
				208	"	"	"	"	"	"	"	"				"				
	t_{PHL7}			209	0.0 V	2.7 V	"	"	"	"	IN	"				"				
	t_{PLH7}			210	"	2.7 V	"	"	"	"	IN	"				"				
	t_{PHL8}			211	"	IN	0.0 V	2.7 V	2.7 V	0.0 V	0.0 V	"	OUT			"				
				212	"	2.7 V	"	"	"	"	"	"		OUT	OUT	"				
				213	"	"	"	"	"	"	"	"				"	OUT			
				214	"	"	"	"	"	"	"	"	OUT			"				
				215	IN	"	"	"	"	"	"	"		OUT		"				
				216	0.0 V	"	"	"	"	"	"	"			OUT	"				
				217	"	"	"	"	"	"	"	"				"	OUT			
				218	"	"	"	"	"	"	"	"				"				
	t_{PLH8}			219	"	IN	"	"	"	"	"	"	OUT			"				
				220	"	2.7 V	"	"	"	"	"	"		OUT	OUT	"				
				221	"	"	"	"	"	"	"	"				"	OUT			
				222	"	"	"	"	"	"	"	"	OUT			"				
				223	IN	"	"	"	"	"	"	"		OUT	OUT	"				
				224	0.0 V	"	"	"	"	"	"	"				"	OUT			
				225	"	"	"	"	"	"	"	"				"				
				226	"	"	"	"	"	"	"	"				"				

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J, K, L Case 3 1/	15	16	17	18	19	20	21	22	23	24	Measured terminal	Test limits Min	Test limits Max	Unit
				18	19	20	21	23	24	25	26	27	28				
			Test no.	P	C_{n+4}	G	B_3	A_3	B_2	A_2	B_1	A_1	V_{CC}				
9 T_A = 25°C	t_{PHL4}	3013 Fig 4	175	OUT			0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.0 V	A_0 to P	3.0	7.5	ns
			176	"			"	"	0.0 V	0.0 V	2.7 V	IN	"	A_1 to P	"	"	"
			177	"			"	"	2.7 V	IN	0.0 V	0.0 V	"	A_2 to P	"	"	"
			178	"			2.7 V	IN	0.0 V	0.0 V	"	"	"	A_3 to P	"	"	"
			179	"			0.0 V	0.0 V	"	"	"	"	"	B_0 to P	"	"	"
			180	"			"	"	"	"	IN	2.7 V	"	B_1 to P	"	"	"
			181	"			"	"	IN	2.7 V	0.0 V	0.0 V	"	B_2 to P	"	"	"
			182	"			IN	2.7 V	0.0 V	0.0 V	"	"	"	B_3 to P	"	"	"
	t_{PLH4}		183	"			0.0 V	0.0 V	"	"	"	"	"	A_0 to P	2.5	"	"
			184	"			"	"	"	"	2.7 V	IN	"	A_1 to P	"	"	"
			185	"			"	"	2.7 V	IN	0.0 V	0.0 V	"	A_2 to P	"	"	"
			186	"			2.7 V	IN	0.0 V	0.0 V	"	"	"	A_3 to P	"	"	"
			187	"			0.0 V	0.0 V	"	"	"	"	"	B_0 to P	"	"	"
			188	"			"	"	"	"	IN	2.7 V	"	B_1 to P	"	"	"
			189	"			"	"	IN	2.7 V	0.0 V	0.0 V	"	B_2 to P	"	"	"
			190	"			IN	2.7 V	0.0 V	0.0 V	"	0.0 V	"	B_3 to P	"	"	"
	t_{PHL5}		191				0.0 V	"	"	2.7 V	"	2.7 V	"	C_n to F_0	3.0	8.5	"
	t_{PLH5}		192				0.0 V	"	"	2.7 V	"	2.7 V	"	C_n to F_0	3.0	8.5	"
	t_{PHL6}		193			OUT	2.7 V	0.0 V	2.7 V	0.0 V	2.7 V	0.0 V	"	A_0 to G	2.5	7.5	"
			194			"	"	"	2.7 V	0.0 V	0.0 V	IN	"	A_1 to G	"	"	"
			195			"	"	"	0.0 V	IN	2.7 V	0.0 V	"	A_2 to G	"	"	"
			196			"	0.0 V	IN	2.7 V	0.0 V	"	"	"	A_3 to G	"	"	"
			197			"	2.7 V	0.0 V	"	"	"	"	"	B_0 to G	"	"	"
			198			"	"	"	"	"	IN	"	"	B_1 to G	"	"	"
			199			"	"	"	IN	"	2.7 V	"	"	B_2 to G	"	"	"
			200			"	IN	"	2.7 V	"	"	"	"	B_3 to G	"	"	"
	t_{PLH6}		201			"	2.7 V	"	"	"	"	"	"	A_0 to G	"	"	"
			202			"	"	"	"	"	0.0 V	IN	"	A_1 to G	"	"	"
			203			"	"	"	0.0 V	IN	2.7 V	0.0 V	"	A_2 to G	"	"	"
			204			"	0.0 V	IN	2.7 V	0.0 V	"	"	"	A_3 to G	"	"	"
			205			"	2.7 V	0.0 V	"	"	"	"	"	B_0 to G	"	"	"
			206			"	"	"	"	"	IN	"	"	B_1 to G	"	"	"
			207			"	"	"	IN	"	2.7 V	"	"	B_2 to G	"	"	"
			208			"	IN	"	2.7 V	"	2.7 V	"	"	B_3 to G	"	"	"
	t_{PHL7}		209		OUT		0.0 V	2.7 V	0.0 V	2.7 V	0.0 V	2.7 V	"	C_n to C_{n+4}	3.0	8.0	"
	t_{PLH7}		210		OUT		"	"	"	"	"	"	"	C_n to C_{n+4}	"	8.5	"
	t_{PHL8}		211				"	"	"	"	"	"	"	A_0 to F_0	"	11.0	"
			212				"	"	"	"	"	IN	"	A_1 to F_1	"	"	"
			213				"	"	"	IN	"	2.7 V	"	A_2 to F_2	"	"	"
			214				"	IN	"	2.7 V	"	"	"	A_3 to F_3	"	"	"
			215				"	2.7 V	"	"	"	"	"	B_0 to F_0	"	"	"
			216				"	"	"	"	IN	"	"	B_1 to F_1	"	"	"
			217				"	"	IN	"	0.0 V	"	"	B_2 to F_2	"	"	"
			218				IN	"	0.0 V	"	"	"	"	B_3 to F_3	"	"	"
	t_{PLH8}		219				0.0 V	"	"	"	"	"	"	A_0 to F_0	"	12.0	"
			220				"	"	"	"	"	IN	"	A_1 to F_1	"	"	"
			221				"	"	"	IN	"	2.7 V	"	A_2 to F_2	"	"	"
			222				"	IN	"	2.7 V	"	"	"	A_3 to F_3	"	"	"
			223				"	2.7 V	"	"	"	"	"	B_0 to F_0	"	"	"
			224				"	"	"	"	IN	"	"	B_1 to F_1	"	"	"
			225				"	"	IN	"	0.0 V	"	"	B_2 to F_2	"	"	"
			226				IN	"	0.0 V	"	0.0 V	"	"	B_3 to F_3	"	"	"

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Cases J, K, L	1	2	3	4	5	6	7	8	9	10	11	12	13	14
			Case 3 1/	2	3	4	5	6	7	9	10	11	12	13	14	16	17
			Test no.	$\overline{S}_0$	$\overline{K}_0$	S_3	S_2	S_1	S0	C_n	M	F_0	F_1	F_2	GND	F_3	A=B
9 T_C = 25°C	t_{PHL9}	3003 Fig. 4	227	0.0 V	IN	0.0 V	2.7 V	2.7 V	0.0 V	0.0 V	2.7 V	OUT			GND		
			228	"	0.0 V	"	"	"	"	"	"		OUT		"		
			229	"	"	"	"	"	"	"	"			OUT	"		
			230	"	"	"	"	"	"	"	"				"	OUT	
			231	IN	"	"	"	"	"	"	"	OUT			"		
			232	0.0 V	"	"	"	"	"	"	"		OUT		"		
			233	"	"	"	"	"	"	"	"			OUT	"		
			234	"	"	"	"	"	"	"	"				"	OUT	
	t_{PLH9}		235	"	IN	"	"	"	"	"	"	OUT			"		
			236	"	0.0 V	"	"	"	"	"	"		OUT		"		
			237	"	"	"	"	"	"	"	"			OUT	"		
			238	"	"	"	"	"	"	"	"				"	OUT	
			239	IN	"	"	"	"	"	"	"	OUT			"		
			240	0.0 V	"	"	"	"	"	"	"		OUT		"		
			241	"	"	"	"	"	"	"	"			OUT	"		
			242	"	"	"	"	"	"	"	"				"	OUT	
	t_{PHL10}		243	IN	2.7 V	"	"	"	"	2.7 V	0.0 V				"	OUT	
			244	2.7 V	IN	"	"	"	"	0.0 V	"		OUT		"		
			245	"	"	"	"	"	"	"	"			OUT	"		
			246	"	"	"	"	"	"	"	"				"	OUT	
			247	"	2.7 V	"	"	"	"	"	"				"	OUT	
			248	0.0 V	"	"	"	"	"	"	"			OUT	"		
			249	0.0 V	"	"	"	"	"	2.7 V	"				"	OUT	
	t_{PLH10}		250	IN	"	"	"	"	"	2.7 V	"				"	OUT	
			251	2.7 V	IN	"	"	"	"	0.0 V	"		OUT		"		
			252	"	"	"	"	"	"	"	"			OUT	"		
			253	"	"	"	"	"	"	"	"				"	OUT	
			254	"	2.7 V	"	"	"	"	"	"				"	OUT	
			255	0.0 V	"	"	"	"	"	"	"			OUT	"		
			256	0.0 V	"	"	"	"	"	2.7 V	"				"	OUT	
	t_{PHL11}		257	2.7 V	IN	"	"	"	"	0.0 V	"				"		
			258	0.0 V	0.0 V	"	"	"	"	"	"				"		
			259	"	"	"	"	"	"	"	"				"		
			260	"	"	"	"	"	"	"	"				"		
			261	IN	"	"	"	"	"	"	"				"		
			262	0.0 V	"	"	"	"	"	"	"				"		
			263	"	"	"	"	"	"	"	"				"		
			264	"	"	"	"	"	"	"	"				"		
	t_{PLH11}		265	2.7 V	IN	"	"	"	"	"	"				"		
			266	0.0 V	0.0 V	"	"	"	"	"	"				"		
			267	"	"	"	"	"	"	"	"				"		
			268	"	"	"	"	"	"	"	"				"		
			269	IN	"	"	"	"	"	"	"				"		
			270	0.0 V	"	"	"	"	"	"	"				"		
			271	"	"	"	"	"	"	"	"				"		
			272	"	"	"	"	"	"	"	"				"		
	t_{PHL12}		273	2.7 V	IN	"	"	"	"	"	"				"		
			274	0.0 V	0.0 V	"	"	"	"	"	"				"		
			275	"	"	"	"	"	"	"	"				"		
			276	"	"	"	"	"	"	"	"				"		
			277	IN	"	"	"	"	"	"	"				"		
			278	0.0 V	"	"	"	"	"	"	"				"		
			279	"	"	"	"	"	"	"	"				"		
			280	"	"	"	"	"	"	"	"				"		
	t_{PLH12}		281	2.7 V	IN	"	"	"	"	"	"				"		
			282	0.0 V	0.0 V	"	"	"	"	"	"				"		
			283	"	"	"	"	"	"	"	"				"		
			284	"	"	"	"	"	"	"	"				"		
			285	IN	"	"	"	"	"	"	"				"		
			286	0.0 V	"	"	"	"	"	"	"				"		
			287	"	"	"	"	"	"	"	"				"		
			288	"	"	"	"	"	"	"	"				"		

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection for device type 01. Continued.

Terminal conditions (pins not designated may be high ≥ 2.4 V, low ≤ 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 Method	Cases J,K,L Case 3 1/	15	16	17	18	19	20	21	22	23	24	Measured terminal	Test limits Min	Test limits Max	Unit
			Test no.	P	C_{n+4}	G	B_3	A_3	B_2	A_2	B_1	A_1	V_{CC}				
9 T_A = 25°C	t_{PHL9}	3003 Fig. 4	227				0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.0 V	A_0 to F_0	3.0	10.0	ns
			228				"	"	"	0.0 V	"	IN	"	A_1 to F_1	"	"	"
			229				"	"	"	IN	"	0.0 V	"	A_2 to F_2	"	"	"
			230				"	IN	"	0.0 V	"	"	"	A_3 to F_3	"	"	"
			231				"	0.0 V	"	"	"	"	"	B_0 to F_0	"	"	"
			232				"	"	"	"	IN	"	"	B_1 to F_1	"	"	"
			233				"	"	IN	"	0.0 V	"	"	B_2 to F_2	"	"	"
			234				IN	"	0.0 V	"	"	"	"	B_3 to F_3	"	"	"
	t_{PLH9}		235				0.0 V	"	"	"	"	"	"	A_0 to F_0	3.5	9.5	"
			236				"	"	"	"	"	IN	"	A_1 to F_1	"	"	"
			237				"	"	"	IN	"	0.0 V	"	A_2 to F_2	"	"	"
			238				"	IN	"	0.0 V	"	"	"	A_3 to F_3	"	"	"
			239				"	0.0 V	"	"	"	"	"	B_0 to F_0	"	"	"
			240				"	"	"	"	IN	"	"	B_1 to F_1	"	"	"
			241				"	"	IN	"	0.0 V	"	"	B_2 to F_2	"	"	"
			242				IN	"	0.0 V	"	"	"	"	B_3 to F_3	"	"	"
	t_{PHL10}		243				0.0 V	2.7 V	"	"	"	"	"	B_0 to F_3	3.0	12.0	"
			244				"	0.0 V	"	"	2.7 V	"	"	A_0 to F_1	"	"	"
			245				"	"	2.7 V	"	"	2.7 V	"	A_0 to F_2	"	"	"
			246				2.7 V	"	"	2.7 V	"	"	"	A_0 to F_3	"	"	"
			247				2.7 V	"	"	IN	"	"	"	A_2 to F_3	"	"	"
			248				0.0 V	"	"	0.0 V	"	IN	"	A_1 to F_2	"	"	"
			249				"	"	0.0 V	"	"	IN	"	A_1 to F_1	"	"	"
	t_{PLH10}		250				"	2.7 V	"	"	0.0 V	0.0 V	"	B_0 to F_3	4.0	"	"
			251				"	0.0 V	"	"	2.7 V	0.0 V	"	A_0 to F_1	"	"	"
			252				"	"	2.7 V	"	"	2.7 V	"	A_0 to F_2	"	"	"
			253				2.7 V	"	"	2.7 V	"	"	"	A_0 to F_3	"	"	"
			254				2.7 V	"	"	IN	"	"	"	A_2 to F_3	"	"	"
			255				0.0 V	"	"	0.0 V	"	IN	"	A_1 to F_2	"	"	"
			256				"	"	0.0 V	"	"	IN	"	A_1 to F_1	"	"	"
	t_{PHL11}		257			OUT	"	"	"	"	0.0 V	0.0 V	"	A_0 to G	2.5	10.0	"
			258			"	"	"	"	"	2.7 V	IN	"	A_1 to G	"	"	"
			259			"	"	"	2.7 V	IN	0.0 V	0.0 V	"	A_2 to G	"	"	"
			260			"	2.7 V	IN	0.0 V	0.0 V	"	"	"	A_3 to G	"	"	"
			261			"	0.0 V	0.0 V	"	"	"	"	"	B_0 to G	"	"	"
			262			"	"	"	"	"	IN	"	"	B_1 to G	"	"	"
			263			"	"	"	IN	"	0.0 V	"	"	B_2 to G	"	"	"
			264			"	IN	"	0.0 V	"	"	"	"	B_3 to G	"	"	"
	t_{PLH11}		265			"	0.0 V	"	"	"	"	"	"	A_0 to G	3.0	9.0	"
			266			"	"	"	"	"	2.7 V	IN	"	A_1 to G	"	"	"
			267			"	"	"	2.7 V	IN	0.0 V	0.0 V	"	A_2 to G	"	"	"
			268			"	2.7 V	IN	0.0 V	0.0 V	"	"	"	A_3 to G	"	"	"
			269			"	0.0 V	0.0 V	"	"	"	"	"	B_0 to G	"	"	"
			270			"	"	"	"	"	IN	"	"	B_1 to G	"	"	"
			271			"	"	"	IN	"	0.0 V	"	"	B_2 to G	"	"	"
			272			"	IN	"	0.0 V	"	"	"	"	B_3 to G	"	"	"
	t_{PHL12}		273		OUT		0.0 V	"	"	"	"	"	"	A_0 to C_{n+4}	5.0	13.0	"
			274		"		"	"	"	"	2.7 V	IN	"	A_1 to C_{n+4}	"	"	"
			275		"		"	"	2.7 V	IN	0.0 V	0.0 V	"	A_2 to C_{n+4}	"	"	"
			276		"		2.7 V	IN	0.0 V	0.0 V	"	"	"	A_3 to C_{n+4}	"	"	"
			277		"		0.0 V	0.0 V	"	"	"	"	"	B_0 to C_{n+4}	"	"	"
			278		"		"	"	"	"	IN	"	"	B_1 to C_{n+4}	"	"	"
			279		"		"	"	IN	"	0.0 V	"	"	B_2 to C_{n+4}	"	"	"
			280		"		IN	"	0.0 V	"	"	"	"	B_3 to C_{n+4}	"	"	"
	t_{PLH12}		281		"		0.0 V	"	"	"	"	"	"	A_0 to C_{n+4}	"	14.0	"
			282		"		"	"	"	"	2.7 V	IN	"	A_1 to C_{n+4}	"	"	"
			283		"		"	"	2.7 V	IN	0.0 V	0.0 V	"	A_2 to C_{n+4}	"	"	"
			284		"		2.7 V	IN	0.0 V	0.0 V	"	"	"	A_3 to C_{n+4}	"	"	"
			285		"		0.0 V	0.0 V	"	"	"	"	"	B_0 to C_{n+4}	"	"	"
			286		"		"	"	"	"	IN	"	"	B_1 to C_{n+4}	"	"	"
			287		"		"	"	IN	"	0.0 V	"	"	B_2 to C_{n+4}	"	"	"
			288		"		IN	"	0.0 V	"	0.0 V	"	"	B_3 to C_{n+4}	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J, K, L	1	2	3	4	5	6	7	8	9	10	11	12	13	14
			Case 3 1/	2	3	4	5	6	7	9	10	11	12	13	14	16	17
			Test no.	B_0	$\overline{A}_0$	S_3	S_2	S_1	S_0	C_n	M	F_0	F_1	F_2	GND	F_3	A=B
9 T_C = 25°C	t_{PHL13}	3003 Fig. 4	289	0.0 V	IN	0.0 V	2.7 V	2.7 V	0.0 V	0.0 V	0.0 V				GND		
			290	"	0.0 V	"	"	"	"	"	"				"		
			291	"	"	"	"	"	"	"	"				"		
			292	"	"	"	"	"	"	"	"				"		
			293	IN	2.7 V	"	"	"	"	"	"				"		
			294	0.0 V	0.0 V	"	"	"	"	"	"				"		
			295	"	"	"	"	"	"	"	"				"		
			296	"	"	"	"	"	"	"	"				"		
	t_{PLH13}		297	"	IN	"	"	"	"	"	"				"		
			298	"	0.0 V	"	"	"	"	"	"				"		
			299	"	"	"	"	"	"	"	"				"		
			300	"	"	"	"	"	"	"	"				"		
			301	IN	2.7 V	"	"	"	"	"	"				"		
			302	0.0 V	0.0 V	"	"	"	"	"	"				"		
			303	"	"	"	"	"	"	"	"				"		
			304	"	"	"	"	"	"	"	"				"		
	t_{PHL14}		305	"	IN	"	"	"	"	"	"				"		OUT
			306	"	2.7 V	"	"	"	"	"	"				"		"
			307	"	"	"	"	"	"	"	"				"		"
			308	"	"	"	"	"	"	"	"				"		"
			309	IN	"	"	"	"	"	"	"				"		"
			310	0.0 V	"	"	"	"	"	"	"				"		"
			311	"	"	"	"	"	"	"	"				"		"
			312	"	"	"	"	"	"	"	"				"		"
	t_{PLH14}		313	"	IN	"	"	"	"	"	"				"		"
			314	"	2.7 V	"	"	"	"	"	"				"		"
			315	"	"	"	"	"	"	"	"				"		"
			316	"	"	"	"	"	"	"	"				"		"
			317	IN	"	"	"	"	"	"	"				"		"
			318	0.0 V	"	"	"	"	"	"	"				"		"
			319	"	"	"	"	"	"	"	"				"		"
			320	"	"	"	"	"	"	"	"				"		"
10	Same tests and terminal conditions as for subgroup 9, except T_C = +125°C and use limits from table I.																
11	Same tests and terminal conditions as for subgroup 10, except T_C = -55°C and use limits from table I.																

See footnotes at end of device type 01.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.4 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases J, K, L	15	16	17	18	19	20	21	22	23	24	Measured terminal	Test limits Min	Test limits Max	Unit
			Case 3 1/	18	19	20	21	23	24	25	26	27	28				
			Test no.	$\overline{P}$	C_{n+4}	G	B_3	A_3	$\overline{B}_2$	$\overline{A}_2$	$\overline{B}_1$	$\overline{A}_1$	V_{CC}				
9 T_A = 25°C	t_{PHL13}	3003 Fig. 4	289	OUT			0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.0 V	$\overline{A}_0$ to $\overline{P}$	2.5	9.5	ns
			290	"			"	"	"	0.0 V	"	IN	"	$\overline{A}_1$ to $\overline{P}$	"	"	"
			291	"			"	"	"	IN	"	0.0 V	"	$\overline{A}_2$ to $\overline{P}$	"	"	"
			292	"			"	IN	"	0.0 V	"	"	"	$\overline{A}_3$ to $\overline{P}$	"	"	"
			293	"			"	0.0 V	"	"	"	"	"	$\overline{B}_0$ to $\overline{P}$	"	"	"
			294	"			"	"	"	"	IN	2.7 V	"	$\overline{B}_1$ to $\overline{P}$	"	"	"
			295	"			"	"	IN	2.7 V	0.0 V	0.0 V	"	$\overline{B}_2$ to $\overline{P}$	"	"	"
			296	"			IN	2.7 V	0.0 V	0.0 V	"	"	"	$\overline{B}_3$ to $\overline{P}$	"	"	"
	t_{PLH13}		297	"			0.0 V	0.0 V	"	"	"	"	"	$\overline{A}_0$ to $\overline{P}$	"	8.0	"
			298	"			"	"	"	"	"	IN	"	$\overline{A}_1$ to $\overline{P}$	"	"	"
			299	"			"	"	"	IN	"	0.0 V	"	$\overline{A}_2$ to $\overline{P}$	"	"	"
			300	"			"	IN	"	0.0 V	"	"	"	$\overline{A}_3$ to $\overline{P}$	"	"	"
			301	"			"	0.0 V	"	"	"	"	"	$\overline{B}_0$ to $\overline{P}$	"	"	"
			302	"			"	"	"	"	IN	2.7 V	"	$\overline{B}_1$ to $\overline{P}$	"	"	"
			303	"			"	"	IN	2.7 V	0.0 V	0.0 V	"	$\overline{B}_2$ to $\overline{P}$	"	"	"
			304	"			IN	2.7 V	0.0 V	0.0 V	0.0 V	"	"	$\overline{B}_3$ to $\overline{P}$	"	"	"
	t_{PHL14}		305				0.0 V	"	"	2.7 V	"	2.7 V	"	$\overline{A}_0$ to A=3	5.5	13.5	"
			306				"	"	"	2.7 V	"	IN	"	$\overline{A}_1$ to A=3	"	"	"
			307				"	"	"	IN	"	2.7 V	"	$\overline{A}_2$ to A=3	"	"	"
			308				"	IN	"	2.7 V	"	"	"	$\overline{A}_3$ to A=3	"	"	"
			309				"	2.7 V	"	"	"	"	"	$\overline{B}_0$ to A=3	"	"	"
			310				"	"	"	"	IN	"	"	$\overline{B}_1$ to A=3	"	"	"
			311				"	"	IN	"	0.0 V	"	"	$\overline{B}_2$ to A=3	"	"	"
			312				IN	"	0.0 V	"	"	"	"	$\overline{B}_3$ to A=3	"	"	"
	t_{PLH14}		313				0.0 V	"	"	"	"	"	"	$\overline{A}_0$ to A=B	11.0	27.0	"
			314				"	"	"	"	"	IN	"	$\overline{A}_1$ to A=B	"	"	"
			315				"	"	"	IN	"	2.7 V	"	$\overline{A}_2$ to A=B	"	"	"
			316				"	IN	"	2.7 V	"	"	"	$\overline{A}_3$ to A=B	"	"	"
			317				"	2.7 V	"	"	"	"	"	$\overline{B}_0$ to A=B	"	"	"
			318				"	"	"	"	IN	"	"	$\overline{B}_1$ to A=B	"	"	"
			319				"	"	IN	"	0.0 V	"	"	$\overline{B}_2$ to A=B	"	"	"
			320				IN	"	0.0 V	"	0.0 V	"	"	$\overline{B}_3$ to A=B	"	"	"
10	Same tests and terminal conditions as for subgroup 9, except T_C = +125°C and use limits from table I.																
11	Same tests and terminal conditions as for subgroup 10, except T_C = -55°C and use limits from table I.																

1/ For case 3 pins not referenced are NC.

2/ I_{IL} limits (mA) min/max values for circuit shown:

Parameter	Test no.	A	B	C
I_{IL1}	59	-.25/-0.6	-0.03/-0.60	-.25/-0.6
I_{IL2}	59-66	-.75/-1.8	-0.09/-1.8	-.75/-1.8
I_{IL3}	67-70	-1.0/-2.4	-0.12/-2.4	-1.0/-2.4
I_{IL4}	71	-1.25/-3.0	-0.15/-3.0	-1.25/-3.0

3/ H ≥ 1.5 V, L ≤ 1.5 V; A = 2.5 V, B = 0.5 V.

4/ Perform functional test at V_{CC} = 4.5 V, then repeat at V_{CC} = 5.5 V.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases E, F Case 2 1/ Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits Min	Limits Max	Unit
				2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20				
				$\overline{G}_1$	$\overline{P}_1$	$\overline{G}_0$	$\overline{P}_0$	$\overline{G}_3$	$\overline{P}_3$	$\overline{P}$	GND	C_{n+z}	$\overline{G}$	C_{n+y}	C_{n+x}	Cn	$\overline{G}_2$	$\overline{P}_2$	V_{CC}				
T_C = 25°C	V_{OH}	3006	1	2.0 V	0.8 V	2.0 V	2.0 V	2.0 V	0.8 V	-1.0 mA	GND	-1.0 mA				2.0 V	2.0 V	0.8 V	4.5 V	$\overline{P}_1$	2.5		V
			2	2.0 V	2.0 V	2.0 V	"	"	2.0 V		"					0.8 V	0.8 V	2.0 V	"	C_{n+z}	"		"
			3	0.8 V	0.8 V	0.8 V	"	"	"		"		-1.0 mA			2.0 V	0.8 V	0.8 V	"	$\overline{G}_3$	"		"
			4	0.8 V	2.0 V	2.0 V	"	"	"		"			-1.0 mA		0.8 V	2.0 V	2.0 V	"	C_{n+y}	"		"
			5	2.0 V	2.0 V	0.8 V	"	"	"		"				-1.0 mA	0.8 V	2.0 V	2.0 V	"	C_{n+x}	"		"
	V_{OL}	3007	6	2.0 V	0.8 V	2.0 V	0.8 V	2.0 V	0.8 V	20 mA	"	20 mA				2.0 V	2.0 V	0.8 V	"	$\overline{P}_1$		0.5	"
			7	0.8 V	0.8 V	0.8 V	2.0 V	2.0 V	2.0 V		"					"	"	2.0 V	"	$\overline{G}_3$		"	"
			8	2.0 V	2.0 V	2.0 V	2.0 V	0.8 V	"		"		20 mA			"	"	"	"	C_{n+y}		"	"
			9	"	"	0.8 V	0.8 V	2.0 V	"		"			20 mA		"	"	"	"	C_{n+x}		"	"
			10	"	"	2.0 V	2.0 V	2.0 V	"		"				20 mA	"	"	"	"			"
	V_{IC}		11	-18 mA							"								"			-1.2	"
			12		-18 mA						"								"	$\overline{G}_1$		"	"
			13			-18 mA					"								"	$\overline{P}_1$		"	"
			14				-18 mA				"								"	C_{n+z}		"	"
			15					-18 mA			"								"	$\overline{G}_0$		"	"
			16						-18 mA		"								"	$\overline{P}_0$		"	"
			17								"					-18 mA			"	$\overline{G}_3$		"	"
			18								"						-18 mA		"	$\overline{P}_3$		"	"
			19								"								"	C_{n+2}		"	"
																				$\overline{G}_2$			
																				$\overline{P}_2$			
	I_{IH1}	3010	20	2.7 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"					5.5 V	0.0 V	0.0 V	5.5 V	$\overline{G}_1$		20	µA
			21	0.0 V	2.7 V	0.0 V	"	"	"		"					0.0 V	"	"	"	$\overline{P}_1$		"	"
			22	0.0 V	0.0 V	2.7 V	"	"	"		"					5.5 V	"	"	"	$\overline{G}_0$		"	"
			23	"	"	0.0 V	2.7 V	"	"		"					0.0 V	"	"	"	$\overline{P}_0$		"	"
			24	"	"	"	0.0 V	2.7 V	"		"					5.5 V	"	"	"	$\overline{G}_3$		"	"
			25	"	"	"	"	0.0 V	2.7 V		"					0.0 V	"	"	"	$\overline{P}_3$		"	"
			26	"	"	"	"	"	0.0 V		"					2.7 V	"	"	"	C_{n+2}		"	"
			27	"	"	"	"	"	"		"					5.5 V	2.7 V	"	"	$\overline{G}_2$		"	"
			28	"	"	"	"	"	"		"					0.0 V	0.0 V	2.7 V	"	$\overline{P}_2$		"	"
	I_{IH2}		29	7.0 V	"	"	"	"	"		"					5.5 V	"	0.0 V	"	$\overline{G}_1$		100	"
			30	0.0 V	7.0 V	"	"	"	"		"					0.0 V	"	"	"	$\overline{P}_1$		"	"
			31	"	0.0 V	7.0 V	"	"	"		"					5.5 V	"	"	"	$\overline{G}_0$		"	"
			32	"	"	0.0 V	7.0 V	"	"		"					0.0 V	"	"	"	$\overline{P}_0$		"	"
			33	"	"	"	0.0 V	7.0 V	"		"					5.5 V	"	"	"	$\overline{G}_3$		"	"
			34	"	"	"	"	0.0 V	7.0 V		"					0.0 V	"	"	"	$\overline{P}_3$		"	"
			35	"	"	"	"	"	0.0 V		"					7.0 V	"	"	"	C_{n+2}		"	"
			36	"	"	"	"	"	"		"					5.5 V	7.0 V	"	"	$\overline{G}_2$		"	"
			37	"	"	"	"	"	"		"					0.0 V	0.0 V	7.0 V	"	$\overline{P}_2$		"	"
	I_{IL1}	3009	38	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V		"					0.5 V	5.5 V	5.5 V	"	Cn	2/	2/	mA
	I_{IL2}		39	"	"	"	"	"	0.5 V		"					5.5 V	"	5.5 V	"	$\overline{P}_3$	"	"	"
	I_{IL3}		40	"	"	"	"	"	5.5 V		"					"	"	0.5 V	"	$\overline{P}_2$	"	"	"
	I_{IL4}	3009	41	"	0.5 V	"	"	"	"		"					"	"	5.5 V	"	$\overline{P}_1$	"	"	"
			42	"	5.5 V	"	0.5 V	"	"		"					"	"	"	"	$\overline{P}_0$	"	"	"
			43	"	"	"	5.5 V	0.5 V	"		"					0.0 V	"	"	"	$\overline{G}_3$	"	"	"
	I_{IL5}		44	"	"	0.5 V	"	5.5 V	"		"					"	"	"	"	$\overline{G}_0$	"	"	"
			45	"	"	5.5 V	"	"	"		"					"	0.5 V	"	"	$\overline{G}_2$	"	"	"
	I_{IL6}		46	0.5 V	"	5.5 V	"	"	"		"					"	0.5 V	"	"	$\overline{G}_1$	"	"	"

See notes at end of device type 02.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE ... Group A inspection ... - Device type 02 - Continued.

Terminal conditions (pins not designated may be ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases E, F Case 1/ 2 Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits Min	Limits Max	Unit
				2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20				
				G_1	$\overline{P}_1$	G_0	$\overline{P}_0$	G_3	$\overline{P}_3$	$\overline{P}$	GND	C_{n+z}	$\overline{G}$	C_{n+y}	C_{r+x}	Cn	$\overline{G}_2$	$\overline{P}_2$	V_{CC}				
1 T_C = 25°C	I_{CS}	3011	47	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	0.0 V	GND	0.0 V				5.5 V	5.5 V	5.5 V	5.5 V	$\overline{P}$	-60	-150	mA
			48	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"					5.5 V	0.0 V	0.0 V	"	C_{n+z}	"	"	"
			49	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V		"		0.0 V			0.0 V	5.5 V	5.5 V	"	$\overline{G}$	"	"	"
			50	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"			0.0 V		5.5 V	"	"	"	C_{n+y}	"	"	"
			51	0.0 V	"	0.0 V	"	0.0 V	"		"				0.0 V	5.5 V	"	"	"	C_{n+x}	"	"	"
	I_{CD}		52	4.5 V	"	4.5 V	"	4.5 V	"	2.5 V	"					4.5 V	4.5 V	0.0 V	4.5 V	$\overline{P}$	60		"
			53	0.0 V	"	0.0 V	"	4.5 V	4.5 V		"	2.5 V				"	"	4.5 V	"	C_{n+z}	"		"
			54	4.5 V	4.5 V	4.5 V	4.5 V	0.0 V	"		"		2.5 V			"	"	"	"	$\overline{G}$	"		"
			55	"	"	0.0 V	0.0 V	4.5 V	"		"			2.5 V		"	"	"	"	C_{n+y}	"		"
			56	"	"	4.5 V	4.5 V	4.5 V	"		"				2.5 V	"	"	"	"	C_{n+x}	"		"
	I_{CCH}	3005	57	0.0 V	0.0 V	0.0 V	0.0 V	5.5 V	5.5 V		"					0.0 V	0.0 V	0.0 V	5.5 V	V_{CC}		28	"
	I_{CCL}	3005	58	5.5 V	0.0 V	5.5 V	0.0 V	0.0 V	0.0 V		"					0.0 V	5.5 V	0.0 V	5.5 V	V_{CC}		36	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = 125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional 3/	3014	59	B	B	B	B	B	B	L	GND	H	L	H	H	B	B	D	4/	All outputs			
			60	"	A	"	B	"	"	H	"	"	"	"	"	"	"	"	"	"				
			61	"	B	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"				
			62	"	"	"	B	"	A	"	"	"	"	"	"	"	"	"	"	"				
			63	"	"	"	"	"	B	"	"	"	"	"	"	"	"	"	A	"				
			64	"	"	"	"	A	A	"	"	"	H	"	"	"	"	"	B	"				
			65	"	"	"	"	"	B	"	"	L	"	"	"	"	A	"	A	"				
			66	A	A	"	"	"	"	"	"	"	"	L	"	"	"	"	B	"				
			67	"	B	A	"	"	"	L	"	"	"	"	L	"	"	"	"	"				
			68	"	B	A	A	B	"	H	"	"	"	L	L	A	"	"	"	"				
			69	B	A	B	A	B	A	"	"	H	L	H	H	B	B	A	"	"			
			70	A	B	A	B	A	A	"	"	"	H	L	A	A	A	B	"	"			
			71	A	B	B	A	"	B	"	"	"	L	"	B	"	"	"	"	"			
			72	B	A	A	"	"	"	"	"	"	"	L	L	"	"	"	"	"			
			73	A	A	A	"	"	"	"	"	"	"	L	L	"	B	A	"	"			
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = 125°C and -55°C.																						
9 T_C = 25°C	t_{PHL1}	3304 Fig. 4	74	2.7 V	0.0 V	2.7 V	0.0 V	0.0 V	0.0 V		GND			OUT	OUT	IN	2.7 V	0.0 V	5.0 V	C_n to C_{n+x}	3.0	9.0	ns
			75	"	"	"	"	"	"		"					"	"	"	"	C_n to C_{n+y}	"	"	"
			76	"	"	"	"	"	"		"	OUT				"	"	"	"	C_n to C_{n+z}	"	"	"
	t_{PLH1}		77	"	"	"	"	"	"		"				OUT	"	"	"	"	C_n to C_{n+x}	"	"	"
			78	"	"	"	"	"	"		"			OUT		"	"	"	"	C_n to C_{n+y}	"	"	"
			79	"	"	"	"	"	"		"	OUT				"	"	"	"	C_n to C_{n+z}	"	"	"
	t_{PHL2}		80	"	"	"	IN	"	"		"				OUT	2.7 V	"	"	"	$\overline{P}_0$ to C_{n+x}	1.0	5.0	"
			81	"	"	"	"	"	"		"			OUT		"	"	"	"	$\overline{P}_0$ to C_{n+y}	"	"	"
			82	"	"	"	"	"	"		"	OUT				"	"	"	"	$\overline{P}_0$ to C_{n+z}	"	"	"
			83	"	IN	"	0.0 V	"	"		"			OUT		"	"	"	"	$\overline{P}_1$ to C_{n+y}	"	"	"
			84	"	IN	"	"	"	"		"	OUT				"	"	"	"	$\overline{P}_1$ to C_{n+z}	"	"	"
			85	"	0.0 V	"	"	"	"		"	OUT				"	"	IN	"	$\overline{P}_2$ to C_{n+z}	"	"	"
	t_{PLH2}		86	"	"	"	IN	"	"		"				OUT	"	"	0.0 V	"	$\overline{P}_0$ to C_{n+x}	2.5	8.5	"
			87	"	"	"	"	"	"		"			OUT		"	"	"	"	$\overline{P}_0$ to C_{n+y}	"	"	"
			88	"	"	"	"	"	"		"	OUT				"	"	"	"	$\overline{P}_0$ to C_{n+z}	"	"	"
			89	"	IN	"	0.0 V	"	"		"			OUT		"	"	"	"	$\overline{P}_1$ to C_{n+y}	"	"	"
			90	"	IN	"	"	"	"		"	OUT				"	"	"	"	$\overline{P}_1$ to C_{n+z}	"	"	"
			91	"	0.0 V	"	"	"	"		"	OUT				"	"	IN	"	$\overline{P}_2$ to C_{n+z}	"	"	"

See footnotes at end of device type 02.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases E, F Case 2 Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits Min	Limits Max	Unit
				2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20				
				$\overline{G}_1$	P_1	$\overline{G}_0$	P_0	$\overline{G}_3$	P_3	$\overline{P}$	GND	C_{n+z}	$\overline{G}$	C_{n+y}	C_{n+x}	Cn	$\overline{G}_2$	P_2	V_{CC}				
9 T_C = 25°C	t_{PLH3}	3004 Fig. 4	92	2.7 V	0.0 V	IN	0.0 V	0.0 V	0.0 V		GND			OUT	OUT	0.0 V	2.7 V	0.0 V	5.0 V	$\overline{G}_0$ to C_{n+x}	1.0	5.2	ns
			93	"	"	"	"	"	"		"			"		"	"	"	"	$\overline{G}_0$ to C_{n+y}	"	"	"
			94	"	"	"	"	"	"		"	OUT			OUT	"	"	"	"	$\overline{G}_0$ to C_{n+z}	"	"	"
			95	"	"	"	2.7 V	"	"		"			OUT		2.7 V	"	"	"	P_0 to C_{n+x}	"	"	"
			96	"	"	"	"	"	"		"	OUT				"	"	"	"	P_0 to C_{n+y}	"	"	"
			97	"	"	"	"	"	"		"			OUT		0.0 V	"	"	"	P_0 to C_{n+z}	"	"	"
			98	IN	"	2.7 V	0.0 V	"	"		"	OUT				2.7 V	"	"	"	$\overline{G}_1$ to C_{n+y}	"	"	"
			99	"	2.7 V	"	"	"	"		"			OUT		"	"	"	"	$\overline{G}_1$ to C_{n+z}	"	"	"
			100	"	"	"	"	"	"		"	OUT				"	"	"	"	P_1 to C_{n+y}	"	"	"
			101	"	"	"	"	"	"		"			OUT		"	"	"	"	P_1 to C_{n+z}	"	"	"
			102	"	0.0 V	"	2.7 V	"	"		"	OUT				0.0 V	IN	"	"	$\overline{G}_2$ to C_{n+y}	"	"	"
			103	"	"	"	2.7 V	"	"		"					2.7 V	"	"	"	$\overline{G}_2$ to C_{n+z}	"	"	"
			104	2.7 V	"	"	0.0 V	"	"		"					"	"	2.7 V	"	P_2 to C_{n+y}	"	"	"
			105	"	"	"	2.7 V	"	"		"					"	"	"	"	P_2 to C_{n+z}	"	"	"
			106	"	2.7 V	"	0.0 V	"	"		"					"	"	"	"	$\overline{G}_3$ to C_{n+y}	"	"	"
			107	"	0.0 V	"	"	"	"		"					"	"	"	"	$\overline{G}_3$ to C_{n+z}	"	"	"
	t_{PHL3}		108	"	"	IN	"	"	"		"			OUT	OUT	0.0 V	2.7 V	0.0 V	"	$\overline{G}_0$ to C_{n+x}	2.5	8.5	"
			109	"	"	"	"	"	"		"			"		"	"	"	"	$\overline{G}_0$ to C_{n+y}	"	"	"
			110	"	"	"	"	"	"		"	OUT			OUT	2.7 V	"	"	"	$\overline{G}_0$ to C_{n+z}	"	"	"
			111	"	"	"	2.7 V	"	"		"			OUT		"	"	"	"	P_0 to C_{n+x}	"	"	"
			112	"	"	"	"	"	"		"	OUT				"	"	"	"	P_0 to C_{n+y}	"	"	"
			113	"	"	"	"	"	"		"			OUT		0.0 V	"	"	"	P_0 to C_{n+z}	"	"	"
			114	IN	"	2.7 V	0.0 V	"	"		"	OUT				2.7 V	"	"	"	$\overline{G}_1$ to C_{n+y}	"	"	"
			115	"	2.7 V	"	"	"	"		"			OUT		"	"	"	"	$\overline{G}_1$ to C_{n+z}	"	"	"
			116	"	"	"	"	"	"		"	OUT				"	"	"	"	P_1 to C_{n+y}	"	"	"
			117	"	"	"	"	"	"		"			OUT		"	"	"	"	P_1 to C_{n+z}	"	"	"
			118	"	0.0 V	"	2.7 V	"	"		"	OUT				0.0 V	IN	"	"	$\overline{G}_2$ to C_{n+y}	"	"	"
			119	"	"	"	2.7 V	"	"		"					2.7 V	"	"	"	$\overline{G}_2$ to C_{n+z}	"	"	"
			120	2.7 V	"	"	0.0 V	"	"		"					"	"	2.7 V	"	P_2 to C_{n+y}	"	"	"
			121	"	"	"	2.7 V	"	"		"					"	"	"	"	P_2 to C_{n+z}	"	"	"
			122	"	2.7 V	"	0.0 V	"	"		"					"	"	"	"	$\overline{G}_3$ to C_{n+y}	"	"	"
			123	"	0.0 V	"	"	"	"		"					"	"	"	"	$\overline{G}_3$ to C_{n+z}	"	"	"
	t_{PHL4}		124	"	IN	0.0 V	"	2.7 V	"		"		OUT			0.0 V	2.7 V	0.0 V	"	P_1 to $\overline{G}_0$	"	8.0	"
			125	"	0.0 V	"	2.7 V	"	"		"		"			"	"	IN	"	P_2 to $\overline{G}_0$	"	"	"
			126	0.0 V	0.0 V	"	0.0 V	"	IN		"		"			"	"	0.0 V	"	P_3 to $\overline{G}_0$	"	"	"
	t_{PLH4}	3004 Fig. 4	127	2.7 V	IN	"	0.0 V	"	0.0 V		"		"			"	"	0.0 V	"	P_1 to $\overline{G}_0$	"	10.0	"
			128	2.7 V	0.0 V	"	2.7 V	"	0.0 V		"		"			"	"	IN	"	P_2 to $\overline{G}_0$	"	"	"
			129	0.0 V	"	"	0.0 V	"	IN		"		"			"	"	0.0 V	"	P_3 to $\overline{G}_0$	"	"	"
	t_{PHL5}	3004 Fig. 4	130	2.7 V	"	IN	"	"	0.0 V		"		"			2.7 V	2.7 V	0.0 V	"	$\overline{G}_0$ to $\overline{G}_3$	"	7.5	"
			131	IN	"	2.7 V	"	"	"		"		"			"	"	"	"	$\overline{G}_1$ to $\overline{G}_3$	"	"	"
			132	IN	2.7 V	0.0 V	"	"	"		"		"			"	IN	"	"	$\overline{G}_2$ to $\overline{G}_3$	"	"	"
			133	2.7 V	0.0 V	2.7 V	"	"	"		"		"			"	"	2.7 V	"	$\overline{G}_3$ to $\overline{G}_3$	"	"	"
			134	"	2.7 V	0.0 V	"	"	"		"		"			"	"	0.0 V	"	P_0 to $\overline{G}_3$	"	"	"
			135	"	0.0 V	0.0 V	"	"	"		"		"			"	2.7 V	0.0 V	"	P_1 to $\overline{G}_3$	"	"	"
			136	"	0.0 V	2.7 V	"	IN	"		"		"			"	"	0.0 V	"	P_2 to $\overline{G}_3$	"	"	"
			137	"	2.7 V	0.0 V	"	"	"		"		"			"	"	2.7 V	"	P_3 to $\overline{G}_3$	"	"	"
			138	"	0.0 V	"	"	"	2.7 V		"		"			"	"	0.0 V	"	$\overline{P}$ to $\overline{G}_3$	"	"	"
			139	"	0.0 V	"	"	"	"		"		"			"	"	"	"	$\overline{G}_2$ to $\overline{G}_3$	"	"	"

See footnotes at end of device type 02

MIL-M-38510/334

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case E, F Case 2 Test no.	1 2 $\overline{G}_1$	2 3 $\overline{P}_1$	3 4 $\overline{G}_0$	4 5 $\overline{P}_0$	5 7 $\overline{G}_3$	6 8 $\overline{P}_3$	7 9 $\overline{P}$	8 10 GND	9 12 C_{n+z}	10 13 $\overline{G}$	11 14 C_{n+y}	12 15 C_{n+x}	13 17 Cn	14 18 $\overline{G}_2$	15 19 $\overline{P}_2$	16 20 V_{CC}	Measured terminal	Limits Min	Limits Max	Unit
9 T_C = 25°C	t_{PLH5}	3004 Fig. 4	140	2.7 V	0.0 V	IN	0.0 V	2.7 V	0.0 V		GND		OUT			2.7 V	2.7 V	0.0 V	5.0 V	$\overline{G}_0$ to $\overline{G}$	3.0	10.5	ns
			141	IN	0.0 V	2.7 V	"	"	"		"		"			"	"	"	"	$\overline{G}_1$ to $\overline{G}$	"	"	"
			142	IN	2.7 V	0.0 V	"	"	"		"		"			"	IN	"	"	$\overline{G}_1$ to $\overline{G}$	"	"	"
			143	2.7 V	0.0 V	2.7 V	"	"	"		"		"			"	"	2.7 V	"	$\overline{G}_2$ to $\overline{G}$	"	"	"
			144	"	2.7 V	0.0 V	"	"	"		"		"			"	"	"	"	$\overline{G}_2$ to $\overline{G}$	"	"	"
			145	"	0.0 V	0.0 V	"	"	"		"		"			"	"	2.7 V	"	$\overline{G}_2$ to $\overline{G}$	"	"	"
			146	"	0.0 V	2.7 V	"	IN	"		"		"			"	2.7 V	0.0 V	"	$\overline{G}_3$ to $\overline{G}$	"	"	"
			147	"	2.7 V	0.0 V	"	"	"		"		"			"	"	0.0 V	"	$\overline{G}_3$ to $\overline{G}$	"	"	"
			148	"	0.0 V	"	"	"	"		"		"			"	"	2.7 V	"	$\overline{G}_3$ to $\overline{G}$	"	"	"
			149	"	"	"	"	"	2.7 V		"		"			"	"	0.0 V	"	$\overline{G}_3$ to $\overline{G}$	"	"	"
	t_{PHL6}		150	0.0 V	"	"	IN	0.0 V	0.0 V	OUT	"					0.0 V	0.0 V	"	"	$\overline{P}_0$ to $\overline{P}$	1.5	5.5	"
			151	"	IN	"	0.0 V	"	"	"	"					"	"	"	"	$\overline{P}_1$ to $\overline{P}$	"	"	"
			152	"	0.0 V	"	"	"	"	"	"					"	"	IN	"	$\overline{P}_2$ to $\overline{P}$	"	"	"
			153	"	"	"	"	"	IN	"	"					"	"	0.0 V	"	$\overline{P}_3$ to $\overline{P}$	"	"	"
	t_{PLH6}		154	"	"	"	IN	"	0.0 V	"	"					"	"	"	"	$\overline{P}_0$ to $\overline{P}$	2.5	7.5	"
			155	"	IN	"	0.0 V	"	"	"	"					"	"	"	"	$\overline{P}_1$ to $\overline{P}$	"	"	"
			156	"	0.0 V	"	"	"	"	"	"					"	"	IN	"	$\overline{P}_2$ to $\overline{P}$	"	"	"
			157	"	0.0 V	"	"	"	IN	"	"					"	"	0.0 V	"	$\overline{P}_3$ to $\overline{P}$	"	"	"
10	Same tests, terminal conditions, and limits as for subgroup 9, except T_C = 125°C and use limits for table I.																						
11	Same tests, terminal conditions, and limits as for subgroup 10, except T_C = -55°C.																						

1/ For case 2, pin not referenced are NC.

2/ I_{IL} limits (mA) min/max values for circuit shown.

Parameter	Test no.	A	B
I_{IL1}	38	-.5/-1.2	-0.5/-1.2
I_{IL2}	39	-1.0/-2.4	-0.10/-2.4
I_{IL3}	40	-1.5/-3.6	-1.5/-3.6
I_{IL4}	41-43	-2.0/-4.8	-1.5/-3.6
I_{IL5}	44-45	-3.5/-8.4	-3.5/-8.4
I_{IL6}	46	-4.0/-9.6	-4.0/-9.6

3/ V_{IH} = 1.5 V, $V_{IL} \leq$ 1.5 V; A = 2.5 V, B = 0.5 V.

4/ Perform functional test at V_{CC} = 4.5 V, then repeat at V_{CC} = 5.5 V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	$\overline{G}$	$\overline{P}$	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
1 T_C = 25°C	V_{OH}	3006	1	0.8 V	0.8 V	0.8 V	0.8 V	2.0 V	0.8 V	0.8 V	-1 mA		GND					0.8 V	0.8 V	0.8 V	0.8 V	0.8 V	4.5 V	F_0	2.5		V
			2	"	"	"	"	"	"	"		-1 mA	"					"	"	"	"	"	"	F_1	"		
			3	"	"	"	"	"	"	"			"	-1 mA				"	"	"	"	"	"	F_2	"		
			4	"	"	"	"	"	"	"			"		-1 mA			"	"	"	"	"	"	F_3	"		
			5	"	"	"	"	"	"	"			"			-1 mA		"	"	"	"	"	"	$\overline{G}$	"		
			6	"	2.0 V	"	2.0 V	0.8 V		2.0 V			"				-1 mA	2.0 V	2.0 V	"	2.0 V	"	"	$\overline{P}$	"		
			7	"	"	"	"	2.0 V	2.0 V	0.8 V	-1 mA		"					0.8 V	"	"	"	"	"	F_0	"		
			8	"	"	"	"	"	"	"		-1 mA	"					"	"	"	"	"	"	F_1	"		
			9	"	"	"	"	"	"	"			"	-1 mA				"	"	"	"	"	"	F_2	"		
			10	"	"	"	"	"	"	"			"		-1 mA			"	"	"	"	"	"	F_3	"		
			11	"	"	"	"	"	"	"			"			-1 mA		"	"	"	"	"	"	$\overline{G}$	"		
			12	"	0.8 V	"	0.8 V	"	"	2.0 V			"				-1 mA	2.0 V	0.8 V	"	0.8 V	"	"	$\overline{P}$	"		
			13	2.0 V	2.0 V	2.0 V	2.0 V	"	0.8 V	"	-1 mA		"					"	2.0 V	2.0 V	2.0 V	2.0 V	"	F_0	"		
			14	"	"	"	"	"	"	"		-1 mA	"					"	"	"	"	"	"	F_1	"		
			15	"	"	"	"	"	"	"			"	-1 mA				"	"	"	"	"	"	F_2	"		
			16	"	"	"	"	"	"	"			"		-1 mA			"	"	"	"	"	"	F_3	"		
			17	"	"	"	"	"	"	"			"			-1 mA		"	"	"	"	"	"	$\overline{G}$	"		
	V_{OL}	3007	18	0.8 V	2.0 V	0.8 V	2.0 V	0.8 V	2.0 V	0.8 V	20 mA		"					0.8 V	2.0 V	0.8 V	2.0 V	0.8 V	"	F_0		0.5	"
			19	"	"	"	"	"	"	"		20 mA	"					"	"	"	"	"	"	F_1		"	
			20	"	"	"	"	"	"	"			"	20 mA				"	"	"	"	"	"	F_2		"	
			21	"	"	"	"	"	"	"			"		20 mA			"	"	"	"	"	"	F_3		"	
			22	2.0 V	0.8 V	2.0 V	0.8 V	"	"	"			"			20 mA		"	0.8 V	2.0 V	0.8 V	2.0 V	"	$\overline{G}$		"	
			23	"	0.8 V	"	0.8 V	"	"	"			"				20 mA	"	0.8 V	"	0.8 V	"	"	$\overline{P}$		"	
			24	"	2.0 V	"	2.0 V	"	0.8 V	2.0 V	20 mA		"					2.0 V	2.0 V	"	2.0 V	"	"	F_0		"	
			25	"	"	"	"	"	"	"		20 mA	"					"	"	"	"	"	"	F_1		"	
			26	"	"	"	"	"	"	"			"	20 mA				"	"	"	"	"	"	F_2		"	
			27	"	"	"	"	"	"	"			"		20 mA			"	"	"	"	"	"	F_3		"	
			28	"	"	"	"	"	"	"			"			20 mA		"	"	"	"	"	"	$\overline{G}$		"	
			29	"	"	"	"	"	"	"			"				20 mA	"	"	"	"	"	"	$\overline{P}$		"	
			30	0.8 V	0.8 V	0.8 V	0.8 V	"	2.0 V	"	20 mA		"					"	0.8 V	0.8 V	0.8 V	0.8 V	"	F_0		"	
			31	"	"	"	"	"	"	"		20 mA	"					"	"	"	"	"	"	F_1		"	
			32	"	"	"	"	"	"	"			"	20 mA				"	"	"	"	"	"	F_2		"	
			33	"	"	"	"	"	"	"			"		20 mA			"	"	"	"	"	"	F_3		"	
			34	"	"	"	"	"	"	"			"			20 mA		"	"	"	"	"	"	$\overline{G}$		"	
			35	"	"	"	"	"	"	"			"				20 mA	"	"	"	"	"	"	$\overline{P}$		"	
	V_{IC}		36	-18 mA									"										"	A_1		-1.2	V
			37		-18 mA								"										"	B_1		"	
			38			-18 mA							"										"	A_0		"	
			39				-18 mA						"										"	B_0		"	
			40					-18 mA					"										"	S_0		"	
			41						-18 mA				"										"	S_1		"	
			42							-18 mA			"										"	S_2		"	
			43										"					-18 mA					"	C_n		"	
			44										"						-18 mA				"	B_3		"	
			45										"							-18 mA			"	A_3		"	
			46										"								-18 mA		"	B_2		"	
			47										"									-18 mA	"	A_2		"	
	$I_{I H}$	3009	48					0.5 V					"										5.5 V	S_0	2/	2/	mA
			49						0.5 V				"										"	S_1	"	"	"
			50							0.5 V			"										"	S_2	"	"	"
	$I_{I L}$		51	0.5 V									"										"	A_1			
			52		0.5 V								"										"	B_1			
			53			0.5 V							"										"	A_0			
			54				0.5 V						"										"	B_0			
			55										"					0.5 V					"	C_n			
			56										"						0.5 V				"	B_3			
			57										"							0.5 V			"	A_3			
			58										"								0.5 V		"	B_2			
			59										"									0.5 V	"	A_2			

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:18Z
Check the source to verify that this is the current version before use.

Subgroup	Symbol	MIL-STD-883 method	Cases R, S, 2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	$\overline{G}$	$\overline{P}$	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
1 T_C = 25°C	I_{IH1}	3010	60	2.7 V	2.7 V	2.7 V	2.7 V	2.7 V	2.7 V	2.7 V			GND					2.7 V	2.7 V	2.7 V	2.7 V	2.7 V	5.5 V	A_1		20	µA
			61										"										"	B_1		"	
			62										"										"	A_0		"	
			63										"										"	B_0		"	
			64										"										"	S_0		"	
			65										"										"	S_1		"	
			66										"										"	S_2		"	
			67										"										"	C_n		"	
			68										"										"	B_3		"	
			69										"										"	A_3		"	
			70										"										"	B_2		"	
			71										"										"	A_2		"	
	I_{IH2}	3010	72	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	7.0 V			"					7.0 V	7.0 V	7.0 V	7.0 V	7.0 V	"	A_1		100	"
			73										"										"	B_1		"	
			74										"										"	A_0		"	
			75										"										"	B_0		"	
			76										"										"	S_0		"	
			77										"										"	S_1		"	
			78										"										"	S_2		"	
			79										"										"	C_n		"	
			80										"										"	B_3		"	
			81										"										"	A_3		"	
			82										"										"	B_2		"	
			83										"										"	A_2		"	
	I_{OS}		84	GND	GND	GND	GND	4.5 V	GND	GND	0.0 V	0.0 V	"					GND	GND	GND	GND	GND	"	F_0	-50	-150	mA
			85	"	"	"	"	"	"	"			"	0.0 V				"	"	"	"	"	"	F_1			
			86	"	"	"	"	"	"	"			"		0.0 V			"	"	"	"	"	"	F_2			
			87	"	"	"	"	"	"	"			"			0.0 V		"	"	"	"	"	"	F_3			
			88	"	"	"	"	"	"	"			"				0.0 V	"	"	"	"	"	"	$\overline{G}$			
			89	"	4.5 V	"	4.5 V	GND	"	4.5 V			"				0.0 V	4.5 V	4.5 V	"	4.5 V	"	"	$\overline{P}$			
	I_{OD}		90	"	GND	"	GND	"	4.5 V	"	2.5 V	2.5 V	"					"	GND	"	GND	"	4.5 V	F_0	-30		"
			91	"	"	"	"	"	"	"			"	2.5 V				"	"	"	"	"	"	F_1			
			92	"	"	"	"	"	"	"			"		2.5 V			"	"	"	"	"	"	F_2			
			93	"	"	"	"	"	"	"			"			2.5 V		"	"	"	"	"	"	F_3			
			94	"	"	"	"	"	"	"			"				2.5 V	"	"	"	"	"	"	$\overline{G}$			
			95	"	"	"	"	"	"	"			"					"	"	"	"	"	"	$\overline{P}$			
	I_{CC}		96	4.5 V	4.5 V	4.5 V	4.5 V	GND	GND	GND			"					"	4.5 V	4.5 V	4.5 V	4.5 V	5.5 V	V_{CC}		89	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = 125°C and V_{IC} tests are omitted.																										
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																										
7 T_C = 25°C	Functional tests 2/	3014	97	B	B	B	B	B	B	B	L	L	GND	L	L	L	L	B	B	B	B	B	4/	All outputs			
			98	"	B	"	B	A	"	"	H	H	"	H	H	L	H	"	B	A	B	A	"				
			99	"	A	"	A	"	"	"	L	H	"	H	H	L	H	"	A	"	A	"	"				
			100	A	B	A	B	"	"	"	L	L	"	L	L	H	"	"	B	A	B	A	"				
			101	A	A	A	A	"	"	"	H	H	"	H	H	"	L	"	B	A	B	A	"				
			102	B	B	B	B	"	"	"	L	L	"	L	L	H	"	A	B	B	B	B	"				
			103	B	A	B	A	"	"	"	H	H	"	H	H	"	L	"	B	B	B	B	"				
			104	A	B	A	B	"	"	"	H	L	"	L	L	H	"	"	B	A	B	A	"				
			105	A	A	A	A	"	"	"	L	L	"	L	L	"	H	"	B	A	B	A	"				
			106	B	B	B	B	B	A	"	H	L	"	H	L	"	L	B	B	A	B	A	"				
			107	B	A	B	A	"	"	"	L	L	"	H	L	"	H	"	B	A	B	A	"				
			108	A	B	A	B	"	"	"	L	H	"	H	H	L	L	"	B	A	B	A	"				
			109	A	A	A	A	"	"	"	H	H	"	H	H	"	H	"	B	A	B	A	"				
			110	B	B	B	B	"	"	"	H	L	"	L	L	H	L	A	B	A	B	A	"				
			111	B	A	B	A	"	"	"	H	L	"	L	L	"	H	"	B	A	B	A	"				
			112	A	B	A	B	"	"	"	H	H	"	H	H	L	L	"	B	A	B	A	"				
			113	A	A	A	A	"	"	"	L	L	"	L	L	H	L	"	B	A	B	A	"				
			114	B	B	B	B	A	"	"	L	L	"	L	L	"	H	B	B	A	B	B	"				
			115	B	A	B	A	"	"	"	L	H	"	H	H	"	L	B	B	B	A	B	"				

See footnotes at end of device type 03.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	G	P	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
7 T_C = 25°C	Functional tests 3/	3014	116	A	B	A	B	A	A	B	H	H	GND	H	H	H	L	B	B	A	B	A	4/	All outputs			
			117	A	A	A	A	"	"	"	L	H	"	H	H	L	L	A	A	A	A	A	"				
			118	B	B	B	B	"	"	"	H	L	"	L	L	H	H	B	B	B	B	B	"				
			119	B	A	B	A	"	"	"	L	"	"	"	"	"	L	"	A	B	A	B	"				
			120	A	B	A	B	"	"	"	L	"	"	"	"	"	L	"	B	A	A	A	"				
			121	A	A	A	A	"	"	"	H	H	"	H	H	L	H	"	B	A	A	A	"				
			122	B	B	B	B	U	B	A	L	L	"	L	L	H	H	"	B	B	B	B	"				
			123	B	A	B	A	"	"	"	H	H	"	H	H	"	H	"	A	B	A	B	"				
			124	B	B	B	B	"	"	"	H	H	"	H	H	"	L	"	B	A	B	A	"				
			125	A	A	A	A	"	"	"	L	L	"	L	L	L	L	"	A	A	A	A	"				
			126	B	B	B	B	A	"	"	L	L	"	L	L	L	H	"	B	B	B	B	"				
			127	A	B	A	B	"	"	"	H	H	"	H	H	"	"	"	A	B	A	B	"				
			128	H	A	B	A	"	"	"	"	"	"	"	"	"	L	"	B	A	B	A	"				
			129	A	A	A	A	"	"	"	"	"	"	"	"	"	L	"	A	A	A	A	"				
			130	B	B	B	B	B	A	"	L	L	"	L	L	L	H	"	B	B	B	B	"				
			131	B	A	B	A	"	"	"	"	"	"	"	"	H	H	"	A	B	A	B	"				
			132	A	B	A	B	"	"	"	"	"	"	"	"	L	L	"	B	A	B	A	"				
			133	A	A	A	A	"	"	"	H	H	"	H	H	H	L	"	A	A	A	A	"				
			134	B	B	B	B	A	"	"	"	"	"	"	"	"	H	"	B	B	B	B	"				
			135	B	A	B	A	"	"	"	"	"	"	"	"	"	"	"	A	B	A	B	"				
			136	A	B	A	B	"	"	"	"	"	"	"	"	"	"	"	B	A	B	A	"				
			137	A	A	A	A	"	"	"	"	"	"	"	"	"	L	"	A	A	A	A	"				
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = 125°C and T_C = -55°C.																										
9 T_C = 25°C	t_{PLH1}	3003 Fig. 4	138	GND	GND	GND	GND	2.7 V	GND	GND	OUT	OUT	GND	OUT	OUT			IN	GND	GND	GND	GND	5.0 V	C_n to F_0	2.5	12	ns
			139	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		C_n to F_1			
			140	"	"	"	"	"	"	"	"	"	"	OUT	"			"	"	"	"	"	"		C_n to F_2			
			141	"	"	"	"	"	"	"	"	"	"	"	OUT			"	"	"	"	"	"		C_n to F_3			
			142	"	"	"	"	GND	2.7 V	"	OUT	"	"	"	"			"	"	"	"	"	"		A_0 to F_0			
			143	"	"	"	"	"	"	"	"	OUT	"	"	"			"	"	"	"	"	"		A_1 to F_1			
			144	"	"	"	"	"	"	"	"	"	"	"	OUT			"	"	"	"	"	"		A_2 to F_2			
			145	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		A_3 to F_3			
			146	"	2.7 V	"	2.7 V	2.7 V	"	"	OUT	"	"	"	"			"	2.7 V	"	2.7 V	"	"		B_0 to F_0			
			147	"	"	"	"	"	"	"	"	OUT	"	"	"			"	"	"	"	"	"		B_1 to F_1			
			148	"	"	"	"	"	"	"	"	"	"	"	OUT			"	"	"	"	"	"		B_2 to F_2			
			149	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		B_3 to F_3			
	t_{PHL1}		150	"	GND	"	GND	"	GND	"	OUT	OUT	"	OUT	OUT			"	GND	"	GND	"	"		C_n to F_0		8	
			151	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		C_n to F_1			
			152	"	"	"	"	"	"	"	"	"	"	OUT	"			"	"	"	"	"	"		C_n to F_2			
			153	"	"	"	"	"	"	"	"	"	"	"	OUT			"	"	"	"	"	"		C_n to F_3			
			154	"	"	"	"	GND	2.7 V	"	OUT	"	"	"	"			"	"	"	"	"	"		A_0 to F_0			
			155	"	"	"	"	"	"	"	"	OUT	"	"	"			"	"	"	"	"	"		A_1 to F_1			
			156	"	"	"	"	"	"	"	"	"	"	"	OUT			"	"	"	"	"	"		A_2 to F_2			
			157	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		A_3 to F_3			
			158	"	2.7 V	"	2.7 V	2.7 V	"	"	OUT	"	"	"	"			"	2.7 V	"	2.7 V	"	"		B_0 to F_0			
			159	"	"	"	"	"	"	"	"	OUT	"	"	"			"	"	"	"	"	"		B_1 to F_1			
			160	"	"	"	"	"	"	"	"	"	"	"	OUT			"	"	"	"	"	"		B_2 to F_2			
			161	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		B_3 to F_3			
	t_{PLH2}		162	"	"	IN	"	"	GND	"	OUT	OUT	"	OUT	OUT			2.7 V	2.7 V	"	"	"	"		A_0 to F_0	3.0	15	ns
			163	IN	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		A_1 to F_1			
			164	"	"	"	"	"	"	"	"	OUT	"	"	OUT			"	"	IN	"	IN	"		A_2 to F_2			
			165	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		A_3 to F_3			
			166	"	"	IN	"	GND	2.7 V	"	OUT	"	"	"	"			GND	"	"	"	"	"		B_0 to F_0			
			167	IN	"	"	"	"	"	"	"	OUT	"	"	OUT			"	"	"	"	"	"		B_1 to F_1			
			168	"	"	"	"	"	"	"	"	"	"	OUT	"			"	"	IN	"	IN	"		B_2 to F_2			
			169	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		B_3 to F_3			
			170	"	"	IN	"	2.7 V	"	"	OUT	"	"	"	"			2.7 V	"	"	"	"	"		A_0 to F_0			
			171	IN	"	"	"	"	"	"	"	OUT	"	"	OUT			"	"	"	"	"	"		A_1 to F_1			
			172	"	"	"	"	"	"	"	"	"	"	OUT	"			"	"	IN	"	IN	"		A_2 to F_2			
			173	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		A_3 to F_3			
			174		GND	IN	GND	GND	GND	2.7 V	OUT	"	"	"	"			GND	GND	"	GND	"	"		B_0 to F_0			
			175	IN	"	"	"	"	"	"	"	OUT	"	"	OUT			"	"	"	"	IN	"		B_1 to F_1			
			176	"	"	"	"	"	"	"	"	"	"	OUT	"			"	"	IN	"	"	"		B_2 to F_2			
			177	"	"	"	"	"	"	"	"	"	"	"	"			"	"	"	"	"	"		B_3 to F_3			

See fo[illegible] at end of device type 03

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,Z 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits Min	Limits Max	Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	G	P	C_n	B_3	A_3	B_2	A_2	V_{CC}				
5 T_L = 25°C	t_{PHL2}		178		2.7 V	IN	2.7 V	2.7 V	GND	GND	OUT	OUT	GND	OUT	OUT			2.7 V	2.7 V		2.7 V		5.0 V	A_0 to F_0	3.0	12.5	ns
			179	IN	"	"	"	"	"	"	"		"					"	"			IN	"	A_1 to F_1	"	"	
			180		"	"	"	"	"	"	"		"					"	"	IN			"	A_2 to F_2	"	"	
			181		"	"	"	"	"	"	"		"					"	"				"	A_3 to F_3	"	"	
			182		"	IN	"	GND	2.7 V	"	"	OUT	"					GND	"				"	A_0 to F_0	"	"	
			183	IN	"	"	"	"	"	"	"		"					"	"			IN	"	A_1 to F_1	"	"	
			184		"	"	"	"	"	"	"		"					"	"	IN			"	A_2 to F_2	"	"	
			185		"	"	"	"	"	"	"		"					"	"				"	A_3 to F_3	"	"	
			186		"	IN	"	2.7 V	"	"	OUT		"					2.7 V	"				"	A_0 to F_0	"	"	
			187	IN	"	"	"	"	"	"	"		"					"	"			IN	"	A_1 to F_1	"	"	
			188		"	"	"	"	"	"	"		"					"	"	IN			"	A_2 to F_2	"	"	
			189		"	"	"	"	"	"	"		"					"	"				"	A_3 to F_3	"	"	
			190		GND	IN	GND	GND	GND	2.7 V	OUT		"					GND	GND				"	A_0 to F_0	"	"	
			191	IN	"	"	"	"	"	"	"		"					"	"			IN	"	A_1 to F_1	"	"	
			192		"	"	"	"	"	"	"		"					"	"	IN			"	A_2 to F_2	"	"	
			193		"	"	"	"	"	"	"		"					"	"				"	A_3 to F_3	"	"	
	t_{PLH3}		194	2.7 V		2.7 V	IN	2.7 V	GND	GND	OUT									2.7 V		2.7 V		B_0 to F_0		15	
			195	"	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			196	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			197	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			198	"		"	IN	GND	2.7 V	"	"							2.7 V				"		B_0 to F_0		"	
			199	"	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			200	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			201	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			202	"		"	IN	2.7 V	"	"	OUT												"		B_0 to F_0		"	
			203	"	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			204	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			205	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			206	"		"	IN	GND	GND	2.7 V	OUT							GND					"		B_0 to F_0		"	
			207	"	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			208	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			209	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			210	GND		GND	IN	2.7 V	"	"	OUT									GND		GND		B_0 to F_0		"	
			211	IN	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			212	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			213	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			214	2.7 V		2.7 V	IN	GND	2.7 V	"	OUT									2.7 V		2.7 V		B_0 to F_0		"	
			215	IN	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			216	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			217	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
	t_{PHL3}		218	"		"	IN	2.7 V	GND	GND	OUT														B_0 to F_0		12.5	
			219	"	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			220	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			221	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			222	"		"	IN	GND	2.7 V	"	"							2.7 V				"		B_0 to F_0		"	
			223	"	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			224	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			225	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			226	"		"	IN	2.7 V	"	"	OUT												"		B_0 to F_0		"	
			227	"	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			228	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			229	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			230	"		"	IN	GND	GND	2.7 V	OUT							GND					"		B_0 to F_0		"	
			231	"	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			232	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			233	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			234	GND		GND	IN	2.7 V	"	"	OUT									GND		GND		B_0 to F_0		"	
			235	IN	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			236	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			237	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
			238	2.7 V		2.7 V	IN	GND	2.7 V	"	OUT									2.7 V		2.7 V		B_0 to F_0		"	
			239	IN	IN	"	"	"	"	"	"										IN		"		B_1 to F_1		"	
			240	"	"	"	"	"	"	"	"												"		B_2 to F_2		"	
			241	"	"	"	"	"	"	"	"								IN				"		B_3 to F_3		"	
	t_{PLH4}		242	GND	GND	GND	GND	IN	"	GND	OUT								GND	GND	GND	GND		S_0 to F_0		20	
			243	"	"	"	"	"	"	"	"								"	"	"	"		S_0 to F_1		"	
			244	"	"	"	"	"	"	"	"								"	"	"	"		S_0 to F_2		"	
			245	"	"	"	"	"	"	"	"								"	"	"	"		S_0 to F_3		"	

See footnotes at end of device type 03.

MIL-M-38510/11B

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	$\overline{G}$	P	C_n	3_3	A_3	B_2	A_2	V_{CC}		Min	Max	
9	tPLH4		246	GND	2.7 V	GND	2.7 V	2.7 V	IN	GND	OUT	OUT	GND					2.7 V	2.7 V	GND	2.7 V	GND	5.0 V	S_1 to F_0	3.0	20.0	ns
			247	"	"	"	"	"	"	"			"	OUT				"	"	"	"	"	"	S_1 to F_1	"	"	
			248	"	"	"	"	"	"	"			"		OUT			"	"	"	"	"	"	S_1 to F_2	"	"	
			249	"	"	"	"	"	"	"			"			OUT		"	"	"	"	"	"	S_1 to F_3	"	"	
			250	"	GND	"	GND	"	GND	IN	OUT	OUT	"					GND	GND	"	GND	"	"	S_2 to F_0	"	"	
			251	"	"	"	"	"	"	"			"	OUT				"	"	"	"	"	"	S_2 to F_1	"	"	
			252	"	"	"	"	"	"	"			"		OUT			"	"	"	"	"	"	S_2 to F_2	"	"	
			253	"	"	"	"	"	"	"			"			OUT		"	"	"	"	"	"	S_2 to F_3	"	"	
	tPHL4		254	"	"	"	"	IN	2.7 V	GND	OUT	OUT	"					"	"	"	"	"	"	S_0 to F_0	"	14.0	"
			255	"	"	"	"	"	"	"			"	OUT				"	"	"	"	"	"	S_0 to F_1	"	"	
			256	"	"	"	"	"	"	"			"		OUT			"	"	"	"	"	"	S_0 to F_2	"	"	
			257	"	"	"	"	"	"	"			"			OUT		"	"	"	"	"	"	S_0 to F_3	"	"	
			258	"	2.7 V	"	2.7 V	2.7 V	IN	"	OUT	OUT	"					2.7 V	2.7 V	"	2.7 V	"	"	S_1 to F_0	"	"	
			259	"	"	"	"	"	"	"			"	OUT				"	"	"	"	"	"	S_1 to F_1	"	"	
			260	"	"	"	"	"	"	"			"		OUT			"	"	"	"	"	"	S_1 to F_2	"	"	
			261	"	"	"	"	"	"	"			"			OUT		"	"	"	"	"	"	S_1 to F_3	"	"	
			262	"	GND	"	GND	"	GND	IN	OUT	OUT	"					GND	GND	"	GND	"	"	S_2 to F_0	"	"	
			263	"	"	"	"	"	"	"			"	OUT				"	"	"	"	"	"	S_2 to F_1	"	"	
			264	"	"	"	"	"	"	"			"		OUT			"	"	"	"	"	"	S_2 to F_2	"	"	
			265	"	"	"	"	"	"	"			"			OUT		"	"	"	"	"	"	S_2 to F_3	"	"	
	tPLH5		266	2.7 V	2.7 V	IN	2.7 V	2.7 V	"	GND			"			OUT		"	2.7 V	2.7 V	2.7 V	2.7 V	"	A_0 to $\overline{G}$	"	11.5	"
			267	IN	"	2.7 V	"	"	"	"			"			"		"	"	"	"	2.7 V	"	A_1 to $\overline{G}$	"	"	
			268	2.7 V	"	"	"	"	"	"			"			"		"	"	IN	"	IN	"	A_2 to $\overline{G}$	"	"	
			269	2.7 V	"	"	"	"	"	"			"			"		"	"	2.7 V	"	2.7 V	"	A_3 to $\overline{G}$	"	"	
			270	GND	GND	IN	GND	GND	2.7 V	"			"			"		"	GND	GND	GND	GND	"	A_0 to $\overline{G}$	"	"	
			271	IN	"	GND	"	"	"	"			"			"		"	"	"	"	GND	"	A_1 to $\overline{G}$	"	"	
			272	GND	"	"	"	"	"	"			"			"		"	"	IN	"	IN	"	A_2 to $\overline{G}$	"	"	
			273	"	"	"	"	"	"	"			"			"		"	"	GND	"	GND	"	A_3 to $\overline{G}$	"	"	
			274	"	2.7 V	IN	2.7 V	2.7 V	"	"			"			"		2.7 V	2.7 V	GND	2.7 V	"	"	A_0 to $\overline{G}$	"	"	
			275	IN	"	GND	"	"	"	"			"			"		"	"	"	"	IN	"	A_1 to $\overline{G}$	"	"	
			276	GND	"	"	"	"	"	"			"			"		"	"	IN	"	GND	"	A_2 to $\overline{G}$	"	"	
			277	GND	"	"	"	"	"	"			"			"		"	"	"	"	"	"	A_3 to $\overline{G}$	"	"	
	tPHL5		278	2.7 V	2.7 V	IN	"	"	GND	"			"			"		GND	"	2.7 V	2.7 V	2.7 V	"	A_0 to $\overline{G}$	"	10.0	"
			279	IN	"	2.7 V	"	"	"	"			"			"		"	"	"	"	2.7 V	"	A_1 to $\overline{G}$	"	"	
			280	2.7 V	"	"	"	"	"	"			"			"		"	"	IN	"	IN	"	A_2 to $\overline{G}$	"	"	
			281	2.7 V	"	"	"	"	"	"			"			"		"	"	2.7 V	"	2.7 V	"	A_3 to $\overline{G}$	"	"	
			282	GND	GND	IN	GND	GND	2.7 V	"			"			"		"	GND	GND	GND	GND	"	A_0 to $\overline{G}$	"	"	
			283	IN	"	GND	"	"	"	"			"			"		"	"	"	"	GND	"	A_1 to $\overline{G}$	"	"	
			284	GND	"	"	"	"	"	"			"			"		"	"	IN	"	IN	"	A_2 to $\overline{G}$	"	"	
			285	"	"	"	"	"	"	"			"			"		"	"	GND	"	GND	"	A_3 to $\overline{G}$	"	"	
			286	"	2.7 V	IN	2.7 V	2.7 V	"	"			"			"		2.7 V	2.7 V	GND	2.7 V	"	"	A_0 to $\overline{G}$	"	"	
			287	IN	"	GND	"	"	"	"			"			"		"	"	"	"	IN	"	A_1 to $\overline{G}$	"	"	
			288	GND	"	"	"	"	"	"			"			"		"	"	IN	"	GND	"	A_2 to $\overline{G}$	"	"	
			289	"	"	"	"	"	"	"			"			"		"	"	"	"	"	"	A_3 to $\overline{G}$	"	"	
	tPLH6		290	"	GND	GND	IN	"	GND	"			"			"		GND	GND	GND	GND	"	"	B_0 to $\overline{G}$	"	11.5	"
			291	"	IN	"	GND	"	"	"			"			"		"	"	"	GND	"	"	B_1 to $\overline{G}$	"	"	
			292	"	GND	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to $\overline{G}$	"	"	
			293	"	GND	"	"	"	"	"			"			"		"	IN	"	GND	"	"	B_3 to $\overline{G}$	"	"	
			294	2.7 V	2.7 V	2.7 V	IN	GND	2.7 V	"			"			"		"	2.7 V	2.7 V	2.7 V	2.7 V	2.7 V	B_0 to $\overline{G}$	"	"	
			295	"	IN	"	2.7 V	"	"	"			"			"		"	"	"	2.7 V	"	"	B_1 to $\overline{G}$	"	"	
			296	"	2.7 V	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to $\overline{G}$	"	"	
			297	"	2.7 V	"	"	"	"	"			"			"		"	IN	"	2.7 V	"	"	B_3 to $\overline{G}$	"	"	
			298	"	GND	"	IN	2.7 V	"	"			"			"		"	GND	"	GND	2.7 V	"	B_0 to $\overline{G}$	"	"	
			299	"	IN	"	GND	"	"	"			"			"		"	"	"	GND	"	"	B_1 to $\overline{G}$	"	"	
			300	"	GND	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to $\overline{G}$	"	"	
			301	"	GND	"	"	"	"	"			"			"		"	IN	"	GND	"	"	B_3 to $\overline{G}$	"	"	

See footnotes at end of device type 03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	$\overline{G}$	$\overline{P}$	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
T_A = 25°C	t_{PHL6}		302	GND	GND	GND	IN	2.7 V	GND	GND			GND			OUT		GND	GND	GND	GND	GND	5.0 V	B_0 to $\overline{G}$	3.0	10.0	ns
			303	"	IN	"	GND	"	"	"			"			"		"	"	"	GND	"	"	B_1 to $\overline{G}$	"	"	"
			304	"	GND	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to $\overline{G}$	"	"	"
			305	"	GND	"	"	"	"	"			"			"		"	IN	"	GND	"	"	B_3 to $\overline{G}$	"	"	"
			306	2.7 V	2.7 V	2.7 V	IN	GND	2.7 V	"			"			"		"	2.7 V	2.7 V	2.7 V	2.7 V	"	B_0 to $\overline{G}$	"	"	"
			307	"	IN	"	2.7 V	"	"	"			"			"		"	"	"	2.7 V	"	"	B_1 to $\overline{G}$	"	"	"
			308	"	2.7 V	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to $\overline{G}$	"	"	"
			309	"	2.7 V	"	"	"	"	"			"			"		"	IN	"	2.7 V	"	"	B_3 to $\overline{G}$	"	"	"
			310	"	GND	"	IN	2.7 V	"	"			"			"		"	GND	"	GND	"	"	B_0 to $\overline{G}$	"	"	"
			311	"	IN	"	GND	"	"	"			"			"		"	"	"	GND	"	"	B_1 to $\overline{G}$	"	"	"
			312	"	GND	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to $\overline{G}$	"	"	"
			313	"	"	"	"	"	"	"			"			"		"	IN	"	GND	"	"	B_3 to $\overline{G}$	"	"	"
	t_{PLH7}		314	GND	"	IN	"	"	GND	"			"				OUT	"	GND	GND	GND	GND	"	A_0 to $\overline{P}$	2.0	11.0	"
			315	IN	"	GND	"	"	"	"			"				"	"	"	"	GND	"	"	A_1 to $\overline{P}$	"	"	"
			316	GND	"	"	"	"	"	"			"				"	"	"	"	IN	"	"	A_2 to $\overline{P}$	"	"	"
			317	"	"	"	"	"	"	"			"				"	"	"	IN	GND	"	"	A_3 to $\overline{P}$	"	"	"
			318	2.7 V	2.7 V	IN	2.7 V	GND	2.7 V	"			"				"	"	2.7 V	2.7 V	2.7 V	2.7 V	"	A_0 to $\overline{P}$	"	"	"
			319	IN	"	2.7 V	"	"	"	"			"				"	"	"	"	"	2.7 V	"	A_1 to $\overline{P}$	"	"	"
			320	2.7 V	"	"	"	"	"	"			"				"	"	"	"	IN	"	"	A_2 to $\overline{P}$	"	"	"
			321	"	"	"	"	"	"	"			"				"	"	"	IN	2.7 V	"	"	A_3 to $\overline{P}$	"	"	"
			322	"	GND	IN	GND	2.7 V	"	"			"				"	"	GND	2.7 V	GND	"	"	A_0 to $\overline{P}$	"	"	"
			323	IN	"	2.7 V	"	"	"	"			"				"	"	"	"	"	"	"	A_1 to $\overline{P}$	"	"	"
			324	2.7 V	"	"	"	"	"	"			"				"	"	"	"	"	IN	"	A_2 to $\overline{P}$	"	"	"
			325	2.7 V	"	"	"	"	"	"			"				"	"	"	"	IN	2.7 V	"	A_3 to $\overline{P}$	"	"	"
	t_{PHL7}		326	GND	"	IN	"	"	GND	"			"				"	"	"	GND	"	"	"	A_0 to $\overline{P}$	3.0	9.5	"
			327	IN	"	GND	"	"	"	"			"				"	"	"	"	"	"	"	A_1 to $\overline{P}$	"	"	"
			328	GND	"	"	"	"	"	"			"				"	"	"	"	"	IN	"	A_2 to $\overline{P}$	"	"	"
			329	"	"	"	"	"	"	"			"				"	"	"	"	IN	GND	"	A_3 to $\overline{P}$	"	"	"
			330	2.7 V	2.7 V	IN	2.7 V	GND	2.7 V	"			"				"	"	2.7 V	2.7 V	2.7 V	2.7 V	"	A_0 to $\overline{P}$	"	"	"
			331	IN	"	2.7 V	"	"	"	"			"				"	"	"	"	"	2.7 V	"	A_1 to $\overline{P}$	"	"	"
			332	2.7 V	"	"	"	"	"	"			"				"	"	"	"	IN	"	"	A_2 to $\overline{P}$	"	"	"
			333	"	"	"	"	"	"	"			"				"	"	"	IN	GND	"	"	A_3 to $\overline{P}$	"	"	"
			334	"	GND	IN	GND	2.7 V	"	"			"				"	"	GND	2.7 V	GND	2.7 V	"	A_0 to $\overline{P}$	"	"	"
			335	IN	"	2.7 V	"	"	"	"			"				"	"	"	"	"	2.7 V	"	A_1 to $\overline{P}$	"	"	"
			336	2.7 V	"	"	"	"	"	"			"				"	"	"	"	"	IN	"	A_2 to $\overline{P}$	"	"	"
			337	"	"	"	"	"	"	"			"				"	"	"	"	IN	2.7 V	"	A_3 to $\overline{P}$	"	"	"
	t_{PLH8}		338	"	2.7 V	"	IN	"	GND	"			"				"	2.7 V	2.7 V	2.7 V	2.7 V	"	"	B_0 to $\overline{P}$	2.0	11.0	"
			339	"	IN	"	2.7 V	"	"	"			"				"	"	"	"	2.7 V	"	"	B_1 to $\overline{P}$	"	"	"
			340	"	2.7 V	"	"	"	"	"			"				"	"	"	"	IN	"	"	B_2 to $\overline{P}$	"	"	"
			341	"	2.7 V	"	"	"	"	"			"				"	"	"	IN	2.7 V	"	"	B_3 to $\overline{P}$	"	"	"
			342	GND	GND	GND	IN	GND	2.7 V	"			"				"	GND	GND	GND	GND	GND	"	B_0 to $\overline{P}$	"	"	"
			343	"	IN	"	GND	"	"	"			"				"	"	"	"	GND	"	"	B_1 to $\overline{P}$	"	"	"
			344	"	GND	"	"	"	"	"			"				"	"	"	"	IN	"	"	B_2 to $\overline{P}$	"	"	"
			345	"	GND	"	"	"	"	"			"				"	"	"	IN	GND	"	"	B_3 to $\overline{P}$	"	"	"
			346	"	2.7 V	"	IN	2.7 V	"	"			"				"	"	"	2.7 V	"	2.7 V	"	B_0 to $\overline{P}$	"	"	"
			347	"	IN	"	2.7 V	"	"	"			"				"	"	"	"	"	2.7 V	"	B_1 to $\overline{P}$	"	"	"
			348	"	2.7 V	"	"	"	"	"			"				"	"	"	"	"	IN	"	B_2 to $\overline{P}$	"	"	"
			349	"	"	"	"	"	"	"			"				"	"	"	IN	"	2.7 V	"	B_3 to $\overline{P}$	"	"	"
	t_{PHL8}		350	2.7 V	"	2.7 V	IN	"	GND	"			"				"	2.7 V	2.7 V	2.7 V	2.7 V	2.7 V	"	B_0 to $\overline{P}$	3.0	9.5	"
			351	"	IN	"	2.7 V	"	"	"			"				"	"	"	"	2.7 V	"	"	B_1 to $\overline{P}$	"	"	"
			352	"	2.7 V	"	"	"	"	"			"				"	"	"	"	IN	"	"	B_2 to $\overline{P}$	"	"	"
			353	"	2.7 V	"	"	"	"	"			"				"	"	"	IN	2.7 V	"	"	B_3 to $\overline{P}$	"	"	"
			354	GND	GND	GND	IN	GND	2.7 V	"			"				"	GND	GND	GND	GND	GND	"	B_0 to $\overline{P}$	"	"	"
			355	"	IN	"	GND	"	"	"			"				"	"	"	"	GND	"	"	B_1 to $\overline{P}$	"	"	"
			356	"	GND	"	"	"	"	"			"				"	"	"	"	IN	"	"	B_2 to $\overline{P}$	"	"	"
			357	"	GND	"	"	"	"	"			"				"	"	"	IN	GND	"	"	B_3 to $\overline{P}$	"	"	"
			358	"	2.7 V	"	IN	2.7 V	"	"			"				"	"	"	2.7 V	"	2.7 V	"	B_0 to $\overline{P}$	"	"	"
			359	"	IN	"	2.7 V	"	"	"			"				"	"	"	"	"	2.7 V	"	B_1 to $\overline{P}$	"	"	"
			360	"	2.7 V	"	"	"	"	"			"				"	"	"	"	"	IN	"	B_2 to $\overline{P}$	"	"	"
			361	"	2.7 V	"	"	"	"	"			"				"	"	"	IN	"	2.7 V	"	B_3 to $\overline{P}$	"	"	"

See footnotes at end of device type 03.

MIL-M-38510/38A

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,Z 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits Min	Limits Max	Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	G	P	C_n	B_3	A_3	B_2	A_2	V_{CC}				
9 T_A = 25°C	tPLH9		362	2.7 V	2.7 V	2.7 V	2.7 V	IN	2.7 V	GND			GND			OUT		GND	2.7 V	2.7 V	2.7 V	2.7 V	5.0 V	S_0 to $\overline{G}$	3.0	15.0	ns
			363	2.7 V	"	"	"	2.7 V	IN	GND			"			"		GND	"	2.7 V	"	GND	"	S_1 to $\overline{G}$	"	"	"
			364	GND	"	GND	"	2.7 V	GND	IN			"			"		2.7 V	"	GND	"	GND	"	S_2 to $\overline{G}$	"	"	"
	tPHL9		365	2.7 V	"	2.7 V	"	IN	2.7 V	GND			"			"		GND	"	2.7 V	"	2.7 V	"	S_0 to $\overline{G}$	"	13.5	"
			366	2.7 V	"	2.7 V	"	2.7 V	IN	GND			"			"		GND	"	2.7 V	"	2.7 V	"	S_1 to $\overline{G}$	"	"	"
			367	GND	"	GND	"	IN	GND	IN			"			"		2.7 V	"	GND	"	GND	"	S_2 to $\overline{G}$	"	"	"
	tPLH10		368	GND	"	GND	"	IN	2.7 V	GND			"				OUT	GND	"	"	GND	"	"	S_0 to P	"	14.0	"
			369	2.7 V	GND	2.7 V	GND	2.7 V	IN	GND			"				"	"	GND	2.7 V	GND	2.7 V	"	S_1 to P	"	"	"
			370	GND	GND	GND	GND	2.7 V	GND	IN			"				"	"	GND	GND	GND	GND	"	S_2 to P	"	"	"
	tPHL10		371	GND	2.7 V	GND	2.7 V	IN	2.7 V	GND			"				"	"	2.7 V	GND	2.7 V	GND	"	S_0 to P	"	13.5	"
			372	2.7 V	GND	2.7 V	GND	2.7 V	IN	GND			"				"	"	GND	2.7 V	GND	2.7 V	"	S_1 to P	"	"	"
			373	GND	GND	GND	GND	2.7 V	GND	IN			"				"	"	GND	GND	GND	GND	"	S_2 to P	"	"	"
10 T_C = 125°C	Same tests as subgroup 9, except use limits from table 1.																										
11 T_C = -55°C	Same tests as subgroup 10, except use limits from table 1.																										

1/ For case 2, pin not referenced are NC.

2/ I_{CC} limits (mA) min/max values for circuit shown:

Parameter	Test numbers	A	B	C
I_{ILL}	48-50		-0.12/-0.6	-0.12/-0.6
I_{ILH}	51-59		-0.12/-2.4	-0.12/-2.4

3/ H ≥ 1.5 V, L ≤ 1.5 V; A = 2.5 V, B = 0.5 V.

4/ Perform functional at V_{CC} = 4.5 V, then repeat with V_{CC} = 5.5 V.

Source: https://assist.dla.mil -- Downloaded: 20261021T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A (tion for device type 04.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V open)

Subgroup	Symbol	MIL-STD-883 method	Cases K,S,2 1/ Test no.	1 A_1	2 B_1	3 A_0	4 B_0	5 S_0	6 S_1	7 S_2	8 F_0	9 F_1	10 GND	11 F_2	12 F_3	13 C	14 F	15 C_n	16 B_3	17 A_3	18 B_2	19 A_2	20 V_{CC}	Measured terminal	Limits Min	Limits Max	Unit
1 T_C = 25°C	V_{OH}	3009	1	0.8 V	0.8 V	0.8 V	0.8 V	2.0 V	0.8 V	0.8 V	-1 mA	-1 mA	GND					0.8 V	0.8 V	0.8 V	0.8 V	0.8 V	4.5 V	F_0	2.5		V
			2	"	"	"	"	"	"	"			"	-1 mA				"	"	"	"	"	"	F_1	"		"
			3	"	"	"	"	"	"	"			"		-1 mA			"	"	"	"	"	"	F_2	"		"
			4	"	"	"	"	"	"	"			"			-1 mA		"	"	"	"	"	"	F_3	"		"
			5	"	"	"	"	0.8 V	0.8 V	"			"					"	"	"	"	"	"	OVR	"		"
			6	"	2.0 V	"	2.0 V	0.8 V	"	"			"				-1 mA	2.0 V	2.0 V	"	2.0 V	"	"	C_{n+4}	"		"
			7	"	"	"	"	2.0 V	2.0 V	"	-1 mA		"					0.8 V	"	"	"	"	"	F_0	"		"
			8	"	"	"	"	"	"	"		-1 mA	"					"	"	"	"	"	"	F_1	"		"
			9	"	"	"	"	"	"	"			"	-1 mA				"	"	"	"	"	"	F_2	"		"
			10	"	"	"	"	"	"	"			"		-1 mA			"	"	"	"	"	"	F_3	"		"
			11	"	"	"	"	0.8 V	0.8 V	"			"			-1 mA		"	"	"	"	"	"	OVR	"		"
			12	"	0.8 V	"	0.8 V	0.8 V	0.8 V	"			"				-1 mA	2.0 V	0.8 V	"	0.8 V	"	"	C_{n+4}	"		"
			13	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	2.0 V	-1 mA		"					"	2.0 V	2.0 V	2.0 V	2.0 V	"	F_0	"		"
			14	"	"	"	"	"	"	"		-1 mA	"					"	"	"	"	"	"	F_1	"		"
			15	"	"	"	"	"	"	"			"	-1 mA				"	"	"	"	"	"	F_2	"		"
			16	"	"	"	"	"	"	"			"		-1 mA			"	"	"	"	"	"	F_3	"		"
			17	"	"	"	"	0.8 V	0.8 V	0.8 V			"			-1 mA		"	"	"	"	"	"	OVR	"		"
	V_{OL}	3007	18	0.8 V	"	0.8 V	"	"	2.0 V	"	20 mA	20 mA	"	-				"	"	0.8 V	"	0.8 V	"	F_0		0.5	"
			19	"	"	"	"	"	"	"			"	20 mA				"	"	"	"	"	"	F_1			"
			20	"	"	"	"	"	"	"			"		20 mA			"	"	"	"	"	"	F_2			"
			21	"	"	"	"	"	"	"			"			20 mA		"	"	"	"	"	"	F_3			"
			22	2.0 V	0.8 V	2.0 V	0.8 V	"	"	"			"				20 mA	"	0.8 V	2.0 V	0.8 V	2.0 V	"	OVR			"
			23	"	0.8 V	"	0.8 V	2.0 V	"	2.0 V			"				20 mA	"	0.8 V	"	0.8 V	"	"	C_{n+4}			"
			24	"	2.0 V	"	2.0 V	0.8 V	0.8 V	2.0 V	20 mA		"					2.0 V	2.0 V	"	2.0 V	"	"	F_0			"
			25	"	"	"	"	"	"	"		20 mA	"					"	"	"	"	"	"	F_1			"
			26	"	"	"	"	"	"	"			"	20 mA				"	"	"	"	"	"	F_2			"
			27	"	"	"	"	"	"	"			"		20 mA			"	"	"	"	"	"	F_3			"
			28	"	"	"	"	2.0 V	2.0 V	"			"			20 mA		0.8 V	"	"	"	"	"	OVR			"
			29	"	"	"	"	2.0 V	"	"			"				20 mA	0.8 V	"	"	"	"	"	C_{n+4}			"
			30	0.8 V	0.8 V	0.8 V	0.8 V	0.8 V	"	"	20 mA		"					2.0 V	0.8 V	0.8 V	0.8 V	0.8 V	"	F_0			"
			31	"	"	"	"	"	"	"		20 mA	"					"	"	"	"	"	"	F_1			"
			32	"	"	"	"	"	"	"			"	20 mA				"	"	"	"	"	"	F_2			"
			33	"	"	"	"	"	"	"			"		20 mA			"	"	"	"	"	"	F_3			"
			34	"	"	"	"	2.0 V	"	"			"			20 mA		"	"	"	"	"	"	OVR			"
			35	"	"	"	"	2.0 V	"	"			"				20 mA	"	"	"	"	"	"	C_{n+4}			"
	V_{IC}		36	-18 mA																			A_1			
			37		-18 mA																			B_1			
			38			-18 mA																		A_0			
			39				-18 mA																	B_0			
			40					-18 mA																S_0			
			41						-18 mA															S_1			
			42							-18 mA														S_2			
			43															-18 mA						C_n			
			44																-18 mA					B_3			
			45																	-18 mA				A_3			
			46																		-18 mA			B_2			
			47																			-18 mA		A_2			
	I_{IL1}	3009	48					0.5 V															4.5 V	S_0	2/	2/	mA
			49						0.5 V														"	S_1	"	"	"
			50							0.5 V													"	S_2	"	"	"
	I_{IL2}		51	0.5 V																				A_1			
			52		0.5 V																			B_1			
			53			0.5 V																		A_0			
			54				0.5 V																	B_0			
			55															0.5 V						C_n			
			56																0.5 V					B_3			
			57																	0.5 V				A_3			
			58																		0.5 V			B_2			
			59																			0.5 V		A_2			

See footnotes at end of device type 04.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.
Test conditions (pins not designated may be HIGH ≥ 2.0 V, low ≤ 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	OVR	C_{n+4}	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
1 T_C = 25°C	I_{IH1}	3010	60	2.7 V	2.7 V								GND										5.5 V	A_1		20	µA
			61			2.7 V							"										"	B_1		"	"
			62				2.7 V						"										"	A_0		"	"
			63					2.7 V					"										"	B_0		"	"
			64						2.7 V				"										"	S_0		"	"
			65							2.7 V			"										"	S_1		"	"
			66										"										"	S_2		"	"
			67										"					2.7 V					"	C_n		"	"
			68										"						2.7 V				"	B_3		"	"
			69										"							2.7 V			"	A_3		"	"
			70										"								2.7 V		"	B_2		"	"
			71										"									2.7 V	"	A_2		"	"
	I_{IH2}	3010	72	7.0 V	7.0 V								"										"	A_1		100	"
			73			7.0 V							"										"	B_1		"	"
			74				7.0 V						"										"	A_0		"	"
			75					7.0 V					"										"	B_0		"	"
			76						7.0 V				"										"	S_0		"	"
			77							7.0 V			"										"	S_1		"	"
			78										"										"	S_2		"	"
			79										"					7.0 V					"	C_n		"	"
			80										"						7.0 V				"	B_3		"	"
			81										"							7.0 V			"	A_3		"	"
			82										"								7.0 V		"	B_2		"	"
			83										"									7.0 V	"	A_2		"	"
	I_{OS}		84	GND	GND	GND	GND	4.5 V	GND	GND	0.0 V	0.0 V	"	0.0 V	0.0 V	0.0 V	0.0 V	GND	GND	GND	GND	GND	"	F_0	-60	-150	mA
			85	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	F_1	"	"	"
			86	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	F_2	"	"	"
			87	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	F_3	"	"	"
			88	"	"	"	"	GND	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	OVR	"	"	"
			89	"	4.5 V	"	4.5 V	"	"	"	"	"	"	"	"	"	"	4.5 V	4.5 V	"	4.5 V	"	"	C_{n+4}	"	"	"
	I_{CO}		90	"	GND	"	GND	"	4.5 V	4.5 V	2.5 V	2.5 V	"	2.5 V	2.5 V	2.5 V	2.5 V	"	GND	"	GND	"	4.5 V	F_0	60		"
			91	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	F_1	"		"
			92	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	F_2	"		"
			93	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	F_3	"		"
			94	"	"	"	"	4.5 V	"	"	"	"	"	"	"	"	2.5 V	"	"	"	"	"	"	OVR	"		"
			95	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.5 V	"	"	"	"	"	"	C_{n+4}	"		"
	I_{CC}		96	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	4.5 V	"	"	"	"	5.5 V	V_{CC}		80	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = 125°C and V_{IC} tests are omitted.																										
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																										
7 T_C = 25°C	Functional tests 3/	3014	97	B	B	B	B	B	B	B	B	L	L	GND	L	L	H	H	B	B	B	B	4/	All outputs			
			98	"	"	"	"	"	"	"	"	L	L	"	L	L	H	K	A	"	"	"	"					
			99	"	"	"	"	A	"	"	"	H	H	"	H	H	L	L	B	"	"	"	"					
			100	"	A	"	A	"	"	"	"	L	H	"	H	H	L	H	"	A	A	A	A					
			101	A	B	A	B	"	"	"	"	L	L	"	L	H	L	H	"	B	A	A	A					
			102	A	A	A	A	"	"	"	"	H	L	"	H	L	H	L	"	A	B	A	A					
			103	B	B	B	B	"	"	"	"	L	H	"	L	H	L	H	"	B	A	B	A					
			104	B	A	B	A	"	"	"	"	H	H	"	H	L	L	L	"	A	B	A	A					
			105	A	B	A	B	"	"	"	"	H	L	"	L	L	H	L	"	B	A	A	A					
			106	A	A	A	A	"	"	"	"	L	H	"	H	L	H	L	"	A	B	A	A					
			107	B	B	B	B	B	A	"	"	H	L	"	L	H	L	H	"	B	A	B	A					
			108	B	A	B	A	"	"	"	"	L	L	"	H	L	H	L	"	A	B	A	A					
			109	A	B	A	B	"	"	"	"	L	H	"	L	H	L	H	"	B	A	B	A					
			110	A	A	A	A	"	"	"	"	H	H	"	H	L	L	L	"	A	B	A	A					
			111	B	B	B	B	"	"	"	"	L	H	"	L	H	L	H	"	B	A	B	A					
			112	B	A	B	A	"	"	"	"	H	L	"	H	L	H	L	"	A	B	A	A					
			113	A	B	A	B	"	"	"	"	H	H	"	L	H	L	H	"	B	A	B	A					
			114	A	A	A	A	"	"	"	"	L	H	"	L	H	L	H	"	B	A	B	A					
			115	B	B	B	B	A	"	"	"	L	L	"	L	H	L	H	"	B	A	B	A					
			116	B	A	B	A	"	"	"	"	H	L	"	H	L	H	L	"	A	B	A	A					
			117	A	B	A	B	"	"	"	"	H	H	"	L	H	L	H	"	B	A	B	A					
			118	A	A	A	A	"	"	"	"	L	H	"	L	H	L	H	"	B	A	B	A					
			119	B	B	B	B	"	"	"	"	L	L	"	L	H	L	H	"	B	A	B	A					
			120	B	A	B	A	"	"	"	"	H	L	"	H	L	H	L	"	A	B	A	A					
			121	A	B	A	B	"	"	"	"	H	H	"	L	H	L	H	"	B	A	B	A					

1/ At end of device type 04.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 34 - (Continued).
Terminal conditions (pins not designated may be high > 2.0 V, low < 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits Min	Limits Max	Unit
			Test no.	A_3	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	OVR	C_{n+1}	C_n	B_3	A_3	B_2	A_2	V_{CC}				
T_C = 25°C	DC logical tests 3/	1014	122	A	A	A	A	A	A	B	H	H	GND	H	H	L	H	A	A	A	A	A	4/	All outputs			
			123	B	B	B	B	B	B	A	L	L	"	L	L	"	L	B	B	B	B	B	"	"			
			124	B	A	B	A	"	"	"	H	H	"	H	H	"	H	"	A	B	A	B	"	"			
			125	A	B	A	B	"	"	"	H	H	"	H	H	"	H	"	B	A	B	A	"	"			
			126	"	A	"	A	"	"	"	L	L	"	L	L	H	H	"	A	"	A	"	"	"			
			127	"	B	"	B	"	"	"	H	H	"	H	H	H	H	A	B	"	B	"	"	"			
			128	B	B	B	B	A	"	"	L	L	"	L	L	L	L	B	B	B	B	B	"	"			
			129	B	A	B	A	"	"	"	H	H	"	H	H	"	"	"	A	B	A	B	"	"			
			130	A	B	A	B	"	"	"	"	"	"	"	"	"	"	"	B	A	B	A	"	"			
			131	"	A	"	A	"	"	"	"	"	"	"	"	"	"	"	A	"	A	"	"	"			
			132	"	A	"	A	"	"	"	"	"	"	"	"	H	H	A	A	"	A	"	"	"			
			133	B	B	B	B	B	A	"	L	L	"	L	L	H	H	B	B	B	B	B	"	"			
			134	B	A	B	A	"	"	"	"	"	"	"	"	L	L	"	A	B	A	B	"	"			
			135	A	B	A	B	"	"	"	"	"	"	"	"	H	H	"	B	A	B	A	"	"			
			136	"	A	"	A	"	"	"	H	H	"	H	H	L	L	"	A	"	A	"	"	"			
			137	"	A	"	A	"	"	"	"	"	"	"	"	H	H	A	A	"	A	"	"	"			
			138	B	B	B	B	A	"	"	"	"	"	"	"	L	L	B	B	B	B	B	"	"			
			139	B	A	B	A	"	"	"	"	"	"	"	"	"	"	"	A	B	A	B	"	"			
			140	A	B	A	B	"	"	"	"	"	"	"	"	"	"	"	B	A	B	A	"	"			
			141	"	A	"	A	"	"	"	"	"	"	"	"	"	"	"	A	"	A	"	"	"			
			142	"	A	"	A	"	"	"	"	"	"	"	"	H	H	A	A	"	A	"	"	"			
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = 125°C and T_C = -55°C.																										
9	Toggle	3003 Fig. 4	143	GND	GND	GND	GND	2.7 V	GND	GND	OUT	OUT	GND					IN	GND	GND	GND	GND	5.0 V	C_n to F_0	3	12	ns
			144	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	"	C_n to F_1			
			145	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	"	C_n to F_2			
			146	"	"	"	"	"	"	"	"		"			OUT		"	"	"	"	"	"	"	C_n to F_3			
			147	"	"	"	"	GND	2.7 V	"	OUT		"					"	"	"	"	"	"	"	C_n to F_0			
			148	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	"	C_n to F_1			
			149	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	"	C_n to F_2			
			150	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	"	C_n to F_3			
			151	"	2.7 V	"	2.7 V	2.7 V	"	"	OUT		"					"	2.7 V	"	2.7 V	"	"	C_n to F_0			
			152	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	"	C_n to F_1			
			153	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	"	C_n to F_2			
			154	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	"	C_n to F_3			
	tPHL1		155	"	GND	"	GND	"	GND	"	OUT	OUT	"					"	GND	"	GND	"	"	C_n to F_0	2.5	8	"
			156	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	C_n to F_1			
			157	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	C_n to F_2			
			158	"	"	"	"	"	"	"	"		"			OUT		"	"	"	"	"	"	C_n to F_3			
			159	"	"	"	"	GND	2.7 V	"	OUT		"					"	"	"	"	"	"	C_n to F_0			
			160	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	C_n to F_1			
			161	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	C_n to F_2			
			162	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	C_n to F_3			
			163	"	2.7 V	"	2.7 V	2.7 V	"	"	OUT		"					"	2.7 V	"	2.7 V	"	"	C_n to F_0			
			164	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	C_n to F_1			
			165	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	C_n to F_2			
			166	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	C_n to F_3			
	Strobe		167	"	"	IN	"	"	GND	"	OUT	OUT	"					2.7 V	"	"	"	"	"	A_0 to F_0	4	15	"
			168	IN	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	A_1 to F_1			
			169	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	IN	"	A_2 to F_2			
			170	"	"	"	"	"	"	"	"		"			OUT		"	"	IN	"	"	"	A_3 to F_3			
			171	"	"	IN	"	GND	2.7 V	"	OUT		"					GND	"	"	"	"	"	A_0 to F_0			
			172	IN	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	A_1 to F_1			
			173	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	IN	"	A_2 to F_2			
			174	"	"	"	"	"	"	"	"		"		OUT			"	"	IN	"	"	"	A_3 to F_3			
			175	"	"	IN	"	2.7 V	"	"	OUT		"					2.7 V	"	"	"	"	"	A_0 to F_0			
			176	IN	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	A_1 to F_1			
			177	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	IN	"	A_2 to F_2			
			178	"	"	"	"	"	"	"	"		"		OUT			"	"	IN	"	"	"	A_3 to F_3			
			179	"	GND	IN	GND	GND	GND	2.7 V	OUT		"					GND	GND	"	GND	"	"	A_0 to F_0			
			180	IN	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	A_1 to F_1			
			181	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	IN	"	A_2 to F_2			
			182	"	"	"	"	"	"	"	"		"		OUT			"	"	IN	"	"	"	A_3 to F_3			

Source: https://assist.dla.mil -- Downloaded: 20260210-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Test conditions (pins not designated to be High ≥ 2.0 V, Low ≤ 0.8 V, or Open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	OVR	C_{n+4}	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
9 T_C = 25°C	t_{PHL2}		183		2.7 V	IN	2.7 V	2.7 V	GND	GND	OUT		GND					2.7 V	2.7 V		2.7 V		5.0 V	A_0 to F_0	3.5	12.5	ns
			184	IN	"	"	"	"	"	"	"	OUT	"	OUT				"	"		"	IN	"	A_1 to F_1	"	"	"
			185		"	"	"	"	"	"	"		"		OUT			"	"	IN	"		"	A_2 to F_2	"	"	"
			186		"	"	"	"	"	"	"		"					GND	"		"		"	A_3 to F_3	"	"	"
			187		"	IN	"	GND	2.7 V	"	OUT		"					"	"		"		"	A_0 to F_0	"	"	"
			188	IN	"	"	"	"	"	"	"	OUT	"	OUT				"	"		"	IN	"	A_1 to F_1	"	"	"
			189		"	"	"	"	"	"	"		"		OUT			"	"	IN	"		"	A_2 to F_2	"	"	"
			190		"	"	"	"	"	"	"		"					"	"		"		"	A_3 to F_3	"	"	"
			191		"	IN	"	2.7 V	"	"	OUT		"					2.7 V	"		"		"	A_0 to F_0	"	"	"
			192	IN	"	"	"	"	"	"	"	OUT	"	OUT				"	"		"	IN	"	A_1 to F_1	"	"	"
			193		"	"	"	"	"	"	"		"		OUT			"	"	IN	"		"	A_2 to F_2	"	"	"
			194		"	"	"	"	"	"	"		"					"	"		"		"	A_3 to F_3	"	"	"
			195		GND	IN	GND	GND	GND	2.7 V	OUT		"					GND	GND		GND		"	A_0 to F_0	"	"	"
			196	IN	"	"	"	"	"	"	"	OUT	"	OUT				"	"		"	IN	"	A_1 to F_1	"	"	"
			197		"	"	"	"	"	"	"		"		OUT			"	"	IN	"		"	A_2 to F_2	"	"	"
			198		"	"	"	"	"	"	"		"					"	"		"		"	A_3 to F_3	"	"	"
	t_{PLH3}		199	2.7 V	IN	2.7 V	IN	2.7 V	"	GND	OUT		"					"		2.7 V		2.7 V	"	B_0 to F_0	4	15	"
			200	"	"	"	"	"	"	"	"	OUT	"	OUT				"		"	IN	"	"	"	B_1 to F_1	"	"	"
			201	"	"	"	"	"	"	"	"		"		OUT			"		"	"	IN	"	B_2 to F_2	"	"	"
			202	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			203	"	"	"	IN	GND	2.7 V	"	OUT		"					2.7 V	"	"	"	"	"	B_0 to F_0	"	"	"
			204	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			205	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			206	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			207	"	"	"	IN	2.7 V	"	"	OUT		"					"	"	"	"	"	"	B_0 to F_0	"	"	"
			208	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			209	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			210	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			211	"	"	"	IN	GND	GND	2.7 V	OUT		"					GND	"	"	"	"	"	B_0 to F_0	"	"	"
			212	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			213	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			214	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			215	GND	"	GND	IN	2.7 V	"	"	OUT		"					"	"	GND	"	GND	"	B_0 to F_0	"	"	"
			216	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			217	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			218	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			219	2.7 V	"	2.7 V	IN	GND	2.7 V	"	OUT		"					"	"	2.7 V	"	2.7 V	"	B_0 to F_0	"	"	"
			220	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			221	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			222	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
	t_{PHL3}		223	"	"	"	IN	2.7 V	GND	GND	OUT		"					"		"		"	"	B_0 to F_0	3.5	12.5	"
			224	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			225	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			226	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			227	"	"	"	IN	GND	2.7 V	"	OUT		"					2.7 V	"	"	"	"	"	B_0 to F_0	"	"	"
			228	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			229	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			230	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			231	"	"	"	IN	2.7 V	"	"	OUT		"					"	"	"	"	"	"	B_0 to F_0	"	"	"
			232	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			233	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			234	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			235	"	"	"	IN	GND	GND	2.7 V	OUT		"					GND	"	"	"	"	"	B_0 to F_0	"	"	"
			236	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			237	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			238	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			239	GND	"	GND	IN	2.7 V	"	"	OUT		"					"	"	GND	"	GND	"	B_0 to F_0	"	"	"
			240	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			241	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			242	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
			243	2.7 V	"	2.7 V	IN	GND	2.7 V	"	OUT		"					"	"	2.7 V	"	2.7 V	"	B_0 to F_0	"	"	"
			244	"	IN	"	"	"	"	"	"	OUT	"	OUT				"	"	"	"	IN	"	B_1 to F_1	"	"	"
			245	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	B_2 to F_2	"	"	"
			246	"	"	"	"	"	"	"	"		"					"	IN	"	"	"	"	B_3 to F_3	"	"	"
	t_{PLH4}		247	GND	GND	GND	GND	IN	"	GND	OUT		"					"	GND	GND	GND	GND	"	S_0 to F_0	4.0	20	"
			248	"	"	"	"	"	"	"		OUT	"	OUT				"	"	"	"	"	"	S_0 to F_1	"	"	"
			249	"	"	"	"	"	"	"			"		OUT			"	"	"	"	"	"	S_0 to F_2	"	"	"
			250	"	"	"	"	"	"	"			"					"	"	"	"	"	"	S_0 to F_3	"	"	"

See footnote at end of device type 04.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	OVR	C_{n+4}	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
9 T_C = 25°C	t_{PLH4}		251	GND	2.7 V	GND	2.7 V	2.7 V	IN	GND	OUT		GND					2.7 V	2.7 V	GND	2.7 V	GND	5.0 V	S_1 to F_0	4.0	20	ns
			252	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	S_1 to F_1	"	"	"
			253	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	S_1 to F_2	"	"	"
			254	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	S_1 to F_3	"	"	"
			255	"	GND	"	GND	"	GND	IN	OUT		"					GND	GND	"	GND	"	"	S_2 to F_0	"	"	"
			256	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	S_2 to F_1	"	"	"
			257	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	S_2 to F_2	"	"	"
			258	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	S_2 to F_3	"	"	"
	t_{PHL4}		259	"	"	"	"	IN	2.7 V	GND	OUT		"					"	"	"	"	"	"	S_0 to F_0	"	14.0	"
			260	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	S_0 to F_1	"	"	"
			261	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	S_0 to F_2	"	"	"
			262	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	S_0 to F_3	"	"	"
			263	"	2.7 V	"	2.7 V	2.7 V	IN	"	OUT		"					2.7 V	2.7 V	"	2.7 V	"	"	S_1 to F_0	"	"	"
			264	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	S_1 to F_1	"	"	"
			265	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	S_1 to F_2	"	"	"
			266	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	S_1 to F_3	"	"	"
			267	"	GND	"	GND	"	GND	IN	OUT		"					GND	GND	"	GND	"	"	S_2 to F_0	"	"	"
			268	"	"	"	"	"	"	"	"	OUT	"					"	"	"	"	"	"	S_2 to F_1	"	"	"
			269	"	"	"	"	"	"	"	"		"	OUT				"	"	"	"	"	"	S_2 to F_2	"	"	"
			270	"	"	"	"	"	"	"	"		"		OUT			"	"	"	"	"	"	S_2 to F_3	"	"	"
	t_{PLH5}		271	2.7 V	"	IN	"	GND	"	2.7 V			"			OUT		2.7 V	"	2.7 V	"	2.7 V	"	A_0 to OVR	6	15.5	"
			272	IN	"	2.7 V	"	"	"	"			"			"		"	"	"	"	2.7 V	"	A_1 to OVR	"	"	"
			273	2.7 V	"	"	"	"	"	"			"			"		"	"	"	"	IN	"	A_2 to OVR	"	"	"
			274	"	"	"	"	"	"	"			"			"		"	"	IN	"	2.7 V	"	A_3 to OVR	"	"	"
			275	"	2.7 V	IN	2.7 V	2.7 V	"	"			"			"		"	2.7 V	2.7 V	2.7 V	"	"	A_0 to OVR	"	"	"
			276	IN	"	2.7 V	"	"	"	"			"			"		"	"	"	"	IN	"	A_1 to OVR	"	"	"
			277	2.7 V	"	"	"	"	"	"			"			"		"	"	IN	"	2.7 V	"	A_2 to OVR	"	"	"
			278	"	"	"	"	"	"	"			"			"		"	"	"	"	"	"	A_3 to OVR	"	"	"
			279	"	"	IN	"	"	2.7 V	"			"			"		"	"	2.7 V	"	"	"	A_0 to OVR	"	"	"
			280	IN	"	2.7 V	"	"	"	"			"			"		"	"	"	"	IN	"	A_1 to OVR	"	"	"
			281	2.7 V	"	"	"	"	"	"			"			"		"	"	"	"	"	"	A_2 to OVR	"	"	"
			282	2.7 V	"	"	"	"	"	"			"			"		"	"	IN	"	2.7 V	"	A_3 to OVR	"	"	"
	t_{PHL5}		283	2.7 V	GND	IN	GND	GND	GND	2.7 V			"			"		"	GND	2.7 V	GND	"	"	A_0 to OVR	5	12.5	"
			284	IN	"	2.7 V	"	"	"	"			"			"		"	"	"	"	IN	"	A_1 to OVR	"	"	"
			285	2.7 V	"	"	"	"	"	"			"			"		"	"	IN	"	2.7 V	"	A_2 to OVR	"	"	"
			286	"	"	"	"	"	"	"			"			"		"	"	"	"	"	"	A_3 to OVR	"	"	"
			287	"	2.7 V	IN	2.7 V	2.7 V	"	"			"			"		"	2.7 V	2.7 V	2.7 V	"	"	A_0 to OVR	"	"	"
			288	IN	"	2.7 V	"	"	"	"			"			"		"	"	"	"	IN	"	A_1 to OVR	"	"	"
			289	2.7 V	"	"	"	"	"	"			"			"		"	"	IN	"	2.7 V	"	A_2 to OVR	"	"	"
			290	"	"	"	"	"	"	"			"			"		"	"	2.7 V	"	"	"	A_3 to OVR	"	"	"
			291	"	"	IN	"	"	2.7 V	"			"			"		"	"	"	"	"	"	A_0 to OVR	"	"	"
			292	IN	"	2.7 V	"	"	"	"			"			"		"	"	"	"	IN	"	A_1 to OVR	"	"	"
			293	2.7 V	"	"	"	"	"	"			"			"		"	"	IN	"	2.7 V	"	A_2 to OVR	"	"	"
			294	"	"	"	"	"	"	"			"			"		"	"	"	"	"	"	A_3 to OVR	"	"	"
	t_{PLH5}		295	"	GND	"	IN	"	"	"			"			"		GND	GND	2.7 V	GND	"	"	B_0 to OVR	6	15.5	"
			296	"	IN	"	GND	"	"	"			"			"		"	"	"	GND	"	"	B_1 to OVR	"	"	"
			297	"	GND	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to OVR	"	"	"
			298	"	GND	"	"	"	"	"			"			"		"	IN	"	GND	"	"	B_3 to OVR	"	"	"
			299	"	2.7 V	"	IN	"	GND	"			"			"		2.7 V	2.7 V	"	2.7 V	"	"	B_0 to OVR	"	"	"
			300	"	IN	"	2.7 V	"	"	"			"			"		"	"	"	2.7 V	"	"	B_1 to OVR	"	"	"
			301	"	2.7 V	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to OVR	"	"	"
			302	"	"	"	"	"	"	"			"			"		"	IN	"	2.7 V	"	"	B_3 to OVR	"	"	"
			303	"	"	"	IN	"	2.7 V	"			"			"		"	2.7 V	"	"	"	"	B_0 to OVR	"	"	"
			304	"	IN	"	2.7 V	"	"	"			"			"		"	"	"	"	"	"	B_1 to OVR	"	"	"
			305	"	2.7 V	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to OVR	"	"	"
			306	"	2.7 V													"	IN	"	2.7 V	"	"	B_3 to OVR	"	"	"

See footnotes at end of device type 04.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases K, L, 2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	OVR	C_{n+4}	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
4 T_A = 25°C	tPHL6		307	2.7 V	GND	2.7 V	IN	GND	GND	2.7 V			GND			OUT		GND	GND	2.7 V	GND	2.7 V	5.0 V	B_0 to OVR	5	12.5	ns
			308	"	IN	"	GND	"	"	"			"			"		"	"	"	GND	"	"	B_1 to OVR	"	"	"
			309	"	GND	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to OVR	"	"	"
			310	"	GND	"	"	"	"	"			"			"		"	IN	"	GND	"	"	B_3 to OVR	"	"	"
			311	"	2.7 V	"	IN	2.7 V	"	"			"			"		2.7 V	2.7 V	"	2.7 V	"	"	B_0 to OVR	"	"	"
			312	"	IN	"	2.7 V	"	"	"			"			"		"	"	"	2.7 V	"	"	B_1 to OVR	"	"	"
			313	"	2.7 V	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to OVR	"	"	"
			314	"	"	"	"	"	"	"			"			"		"	IN	"	2.7 V	"	"	B_3 to OVR	"	"	"
			315	"	"	"	IN	"	2.7 V	"			"			"		"	2.7 V	"	"	"	"	B_0 to OVR	"	"	"
			316	"	IN	"	2.7 V	"	"	"			"			"		"	"	"	"	"	"	B_1 to OVR	"	"	"
			317	"	2.7 V	"	"	"	"	"			"			"		"	"	"	IN	"	"	B_2 to OVR	"	"	"
			318	"	2.7 V	"	"	"	"	"			"			"		"	IN	"	2.7 V	"	"	B_3 to OVP	"	"	"
	tPLH7		319	GND	GND	IN	GND	2.7 V	GND	GND			"				OUT	2.7 V	GND	GND	GND	GND	"	A_0 to C_{n+4}	3.5	9.5	"
			320	IN	"	GND	"	"	"	"			"			"	"	"	"	"	"	GND	"	A_1 to C_{n+4}	"	"	"
			321	GND	"	"	"	"	"	"			"			"	"	"	"	"	"	IN	"	A_2 to C_{n+4}	"	"	"
			322	GND	"	"	"	"	"	"			"			"	"	"	"	IN	"	GND	"	A_3 to C_{n+4}	"	"	"
			323	2.7 V	2.7 V	IN	2.7 V	GND	2.7 V	"			"			"	"	"	2.7 V	2.7 V	2.7 V	2.7 V	"	A_0 to C_{n+4}	"	"	"
			324	IN	"	2.7 V	"	"	"	"			"			"	"	"	"	"	"	2.7 V	"	A_1 to C_{n+4}	"	"	"
			325	2.7 V	"	"	"	"	"	"			"			"	"	"	"	"	"	IN	"	A_2 to C_{n+4}	"	"	"
			326	2.7 V	"	"	"	"	"	"			"			"	"	"	"	IN	"	2.7 V	"	A_3 to C_{n+4}	"	"	"
			327	GND	"	IN	"	2.7 V	"	"			"			"	"	GND	"	GND	"	GND	"	A_0 to C_{n+4}	"	"	"
			328	IN	"	GND	"	"	"	"			"			"	"	"	"	"	"	GND	"	A_1 to C_{n+4}	"	"	"
			329	GND	"	"	"	"	"	"			"			"	"	"	"	"	"	IN	"	A_2 to C_{n+4}	"	"	"
			330	"	"	"	"	"	"	"			"			"	"	"	"	IN	"	GND	"	A_3 to C_{n+4}	"	"	"
	tPHL7		331	"	GND	IN	GND	"	GND	"			"			"	"	2.7 V	GND	GND	GND	"	"	A_0 to C_{n+4}	"	12.0	"
			332	IN	"	GND	"	"	"	"			"			"	"	"	"	"	"	"	"	A_1 to C_{n+4}	"	"	"
			333	GND	"	"	"	"	"	"			"			"	"	"	"	"	"	IN	"	A_2 to C_{n+4}	"	"	"
			334	GND	"	"	"	"	"	"			"			"	"	"	"	IN	"	GND	"	A_3 to C_{n+4}	"	"	"
			335	2.7 V	2.7 V	IN	2.7 V	GND	2.7 V	"			"			"	"	"	2.7 V	2.7 V	2.7 V	2.7 V	"	A_0 to C_{n+4}	"	"	"
			336	IN	"	2.7 V	"	"	"	"			"			"	"	"	"	"	"	2.7 V	"	A_1 to C_{n+4}	"	"	"
			337	2.7 V	"	"	"	"	"	"			"			"	"	"	"	"	"	IN	"	A_2 to C_{n+4}	"	"	"
			338	2.7 V	"	"	"	"	"	"			"			"	"	"	"	IN	"	2.7 V	"	A_3 to C_{n+4}	"	"	"
			339	GND	"	IN	"	2.7 V	"	"			"			"	"	GND	"	GND	"	GND	"	A_0 to C_{n+4}	"	"	"
			340	IN	"	GND	"	"	"	"			"			"	"	"	"	"	"	GND	"	A_1 to C_{n+4}	"	"	"
			341	GND	"	"	"	"	"	"			"			"	"	"	"	"	"	IN	"	A_2 to C_{n+4}	"	"	"
			342	"	"	"	"	"	"	"			"			"	"	"	"	IN	"	GND	"	A_3 to C_{n+4}	"	"	"
	tPHL8		343	"	GND	"	IN	"	GND	"			"			"	"	"	GND	GND	GND	"	"	B_0 to C_{n+4}	"	9.5	"
			344	"	IN	"	GND	"	"	"			"			"	"	"	"	"	GND	"	"	B_1 to C_{n+4}	"	"	"
			345	"	GND	"	"	"	"	"			"			"	"	"	"	"	IN	"	"	B_2 to C_{n+4}	"	"	"
			346	"	GND	"	"	"	"	"			"			"	"	"	IN	"	GND	"	"	B_3 to C_{n+4}	"	"	"
			347	2.7 V	2.7 V	2.7 V	IN	GND	2.7 V	"			"			"	"	"	2.7 V	2.7 V	2.7 V	2.7 V	"	B_0 to C_{n+4}	"	"	"
			348	"	IN	"	2.7 V	"	"	"			"			"	"	"	"	"	2.7 V	"	"	B_1 to C_{n+4}	"	"	"
			349	"	2.7 V	"	"	"	"	"			"			"	"	"	"	"	IN	"	"	B_2 to C_{n+4}	"	"	"
			350	"	2.7 V	"	"	"	"	"			"			"	"	"	IN	"	2.7 V	"	"	B_3 to C_{n+4}	"	"	"
			351	"	GND	"	IN	2.7 V	"	"			"			"	"	"	GND	"	GND	"	"	B_0 to C_{n+4}	"	"	"
			352	"	IN	"	GND	"	"	"			"			"	"	"	"	"	GND	"	"	B_1 to C_{n+4}	"	"	"
			353	"	GND	"	"	"	"	"			"			"	"	"	"	"	IN	"	"	B_2 to C_{n+4}	"	"	"
			354	"	"	"	"	"	"	"			"			"	"	"	IN	"	GND	"	"	B_3 to C_{n+4}	"	"	"
	tPHL8		355	GND	"	GND	IN	"	GND	"			"			"	"	"	GND	GND	"	GND	"	B_0 to C_{n+4}	"	12.0	"
			356	"	IN	"	GND	"	"	"			"			"	"	"	"	"	"	"	"	B_1 to C_{n+4}	"	"	"
			357	"	GND	"	"	"	"	"			"			"	"	"	"	"	IN	"	"	B_2 to C_{n+4}	"	"	"
			358	"	GND	"	"	"	"	"			"			"	"	"	IN	"	GND	"	"	B_3 to C_{n+4}	"	"	"
			359	2.7 V	2.7 V	2.7 V	IN	GND	2.7 V	"			"			"	"	"	2.7 V	2.7 V	2.7 V	2.7 V	"	B_0 to C_{n+4}	"	"	"
			360	"	IN	"	2.7 V	"	"	"			"			"	"	"	"	"	2.7 V	"	"	B_1 to C_{n+4}	"	"	"
			361	"	2.7 V	"	"	"	"	"			"			"	"	"	"	"	IN	"	"	B_2 to C_{n+4}	"	"	"
			362	"	2.7 V	"	"	"	"	"			"			"	"	"	IN	"	2.7 V	"	"	B_3 to C_{n+4}	"	"	"
			363	"	GND	"	IN	2.7 V	"	"			"			"	"	"	GND	"	GND	"	"	B_0 to C_{n+4}	"	"	"
			364	"	IN	"	GND	"	"	"			"			"	"	"	"	"	GND	"	"	B_1 to C_{n+4}	"	"	"
			365	"	GND	"	"	"	"	"			"			"	"	"	"	"	IN	"	"	B_2 to C_{n+4}	"	"	"
			366	"	GND	"	"	"	"	"			"			"	"	"	IN	"	GND	"	"	B_3 to C_{n+4}	"	"	"

See footnot[illegible] end of device type 04.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - continued.

Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open)

Subgroups	Symbol	MIL-STD-883 method	Cases R,S,2 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Measured terminal	Limits		Unit
			Test no.	A_1	B_1	A_0	B_0	S_0	S_1	S_2	F_0	F_1	GND	F_2	F_3	OVR	C_{n+4}	C_n	B_3	A_3	B_2	A_2	V_{CC}		Min	Max	
9 T_A = 25°C	t_{PLH6}		367	2.7 V	2.7 V	2.7 V	2.7 V	IN	GND	2.7 V			GND			OUT		GND	2.7 V	2.7 V	2.7 V	2.7 V	5.0 V	S_0 to OVR	5.0	16.5	ns
			368	GND	"	GND	"	GND	IN	GND			"			"		2.7 V	"	GND	"	GND	"	S_1 to OVR	"	"	"
			369	GND	"	GND	"	GND	GND	IN			"			"		2.7 V	"	GND	"	GND	"	S_2 to OVR	"	"	"
	t_{PHL9}		370	2.7 V	"	2.7 V	"	IN	GND	2.7 V			"			"		GND	"	2.7 V	"	2.7 V	"	S_0 to OVR	"	17.0	"
			371	GND	"	GND	"	GND	IN	GND			"			"		2.7 V	"	GND	"	GND	"	S_1 to OVR	"	"	"
			372	GND	"	GND	"	GND	GND	IN			"			"		2.7 V	"	GND	"	GND	"	S_2 to OVR	"	"	"
	t_{PLH10}		373	2.7 V	"	2.7 V	"	IN	2.7 V	GND			"				OUT	GND	"	2.7 V	"	2.7 V	"	S_0 to C_{n+4}	6.5	16.5	"
			374	GND	"	GND	"	GND	IN	GND			"				"	2.7 V	"	GND	"	GND	"	S_1 to C_{n+4}	"	"	"
			375	2.7 V	GND	2.7 V	GND	GND	GND	IN			"				"	GND	GND	2.7 V	GND	2.7 V	"	S_2 to C_{n+4}	"	"	"
	t_{PHL10}		376	2.7 V	2.7 V	2.7 V	2.7 V	IN	2.7 V	GND			"				"	GND	2.7 V	2.7 V	2.7 V	2.7 V	"	S_0 to C_{n+4}	5.0	16.0	"
			377	GND	2.7 V	GND	2.7 V	GND	IN	GND			"				"	2.7 V	2.7 V	GND	2.7 V	GND	"	S_1 to C_{n+4}	"	"	"
			378	2.7 V	GND	2.7 V	GND	GND	GND	IN			"				"	GND	GND	2.7 V	GND	2.7 V	"	S_2 to C_{n+4}	"	"	"
	t_{PLH11}		379	GND	GND	GND	GND	2.7 V	GND	GND			"				"	IN	"	GND	"	GND	"	C_n to C_{n+4}	2.0	8.0	"
			380	"	GND	"	GND	GND	2.7 V	"			"				"	"	"	"	"	"	"	C_n to C_{n+4}	"	"	"
			381	"	2.7 V	"	2.7 V	2.7 V	2.7 V	"			"				"	"	2.7 V	"	2.7 V	"	"	C_n to C_{n+4}	"	"	"
			382	2.7 V	GND	2.7 V	GND	GND	GND	2.7 V			"				"	"	GND	2.7 V	GND	2.7 V	"	C_n to C_{n+4}	"	"	"
			383	"	2.7 V	"	2.7 V	2.7 V	GND	"			"				"	"	2.7 V	"	2.7 V	"	"	C_n to C_{n+4}	"	"	"
			384	"	"	"	"	GND	2.7 V	"			"				"	"	"	"	"	"	"	C_n to C_{n+4}	"	"	"
			385	"	"	"	"	2.7 V	2.7 V	"			"				"	"	"	"	"	"	"	C_n to C_{n+4}	"	"	"
	t_{PHL11}		386	GND	GND	GND	GND	2.7 V	GND	GND			"				"	"	GND	GND	GND	GND	"	C_n to C_{n+4}	"	9.0	"
			387	"	GND	"	GND	GND	2.7 V	"			"				"	"	GND	"	GND	"	"	C_n to C_{n+4}	"	"	"
			388	"	2.7 V	"	2.7 V	2.7 V	2.7 V	"			"				"	"	2.7 V	"	2.7 V	"	"	C_n to C_{n+4}	"	"	"
			389	2.7 V	GND	2.7 V	GND	GND	GND	2.7 V			"				"	"	GND	2.7 V	GND	2.7 V	"	C_n to C_{n+4}	"	"	"
			390	"	2.7 V	"	2.7 V	2.7 V	GND	"			"				"	"	2.7 V	"	2.7 V	"	"	C_n to C_{n+4}	"	"	"
			391	"	"	"	"	GND	2.7 V	"			"				"	"	"	"	"	"	"	C_n to C_{n+4}	"	"	"
			392	"	"	"	"	2.7 V	2.7 V	"			"				"	"	"	"	"	"	"	C_n to C_{n+4}	"	"	"
	t_{PLH12}		393	"	GND	"	GND	GND	GND	"			"			OUT		"	GND	"	GND	"	"	C_n to OVR	3.0	11.0	"
			394	"	2.7 V	"	2.7 V	2.7 V	GND	"			"			"		"	2.7 V	"	2.7 V	"	"	C_n to OVR	"	"	"
			395	"	"	"	"	GND	2.7 V	"			"			"		"	"	"	"	"	"	C_n to OVR	"	"	"
			396	"	"	"	"	2.7 V	2.7 V	"			"			"		"	"	"	"	"	"	C_n to OVR	"	"	"
	t_{PHL12}		397	"	GND	"	GND	GND	GND	"			"			"		"	GND	"	GND	"	"	C_n to OVR	2.5	10.0	"
			398	"	2.7 V	"	2.7 V	2.7 V	GND	"			"			"		"	2.7 V	"	2.7 V	"	"	C_n to OVR	"	"	"
			399	"	"	"	"	GND	2.7 V	"			"			"		"	"	"	"	"	"	C_n to OVR	"	"	"
			400	"	"	"	"	2.7 V	2.7 V	"			"			"		"	"	"	"	"	"	C_n to OVR	"	"	"
10 T_C = 125°C	Same tests as subgroup 9, except use limits from table I.																										
11 T_C = -55°C	Same tests as subgroup 10, except use limits from table I.																										

1/ For case 2, pin not referenced are NC.

2/ I_{IL} limits (mA) min/max values for circuit shown:

Parameter	Test no.	A	B	C
I_{IL1}	48-50		-0.12/-0.6	
I_{IL2}	51-59		-0.12/-2.4	

3/ H ≥ 1.5 V, L ≤ 1.5 V; A = 2.5 V, B = 0.5 V.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:18Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Electrical test requirements shall be as specified in table II herein.

b. Subgroups 4, 5, and 6 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical test requirements shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table II of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D, E, or F, using the circuit shown on figure 5, or equivalent.

(2) T_A = +125°C minimum.

c. Subgroups 3 and 4 shall be added to group C inspection parameters for class B devices and shall consist of the tests, conditions, and limits specified for subgroups 10 and 11 of group A.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows:

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logisitic support of existing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to the contracting activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action and reporting of results, if applicable.

f. Requirements for product assurance options.

g. Requirements for special lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by or direct shipment to the Government.

h. Requirements for "JAN" marking.

6.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND	Ground zero voltage potential.
I_{IN}	Current flowing into an input terminal.
V_{IN}	Voltage level at an input terminal.

6.4 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.5 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	54F181
02	54F182
03	54F381
04	54F382

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

6.6 Manufacturers' designators. Manufacturers' circuits which form a part of this specification are designated with an "X" as shown in table IV herein.

TABLE IV. Manufacturers' designations.

Device type	Circuit				
	A	B	C	D	E
	Fairchild Semiconductor	Motorola	Signetics		
01	X	X	X		
02	X	X			
03		X	X		
04		X			

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH, TD
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-1205)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-M-38510/338A	22 MAY 1990

3. DOCUMENT TITLE

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED SHOTTKY TTL, ARITHMETIC LOGIC UNITS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)
	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial / (2) AUTOVON
ROME AIR DEVELOPMENT CENTER	315-330-2945 / 587-2945
ADDRESS (Include Zip Code) RADC/RBR GRIFFISS AFB NY 13441-5700	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:18Z
Check the source to verify that this is the current version before use.