MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED SCHOTTKY TTL DATA SELECTORS/MULTIPLEXERS WITH THREE-STATE OUTPUTS, MONOLITHIC SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, advanced Schottky TTL, data selectors and multiplexers (three-state) microcircuits. Two product assurance classes and a choice of case outlines and lead finish are provided and are reflected in the part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510, and as specified herein.

1.2.1 Device types. The device types shall be as follows:

Device type	Circuit
01	8-input, data selector/multiplexer.
02	Dual, 4-input, data selector/multiplexer.
03	Quad, 2-input, data selector/multiplexer.
04	Quad, 2-input, data selector/multiplexer with inverted output.
05	8-input, data selector/multiplexer with 3-state outputs.
06	Quad, 2-input, data selector/multiplexer with 3-state outputs.
07	Quad, 2-input, data selector/multiplexer with 3-state inverted output.
08	Dual, 4-input, data selector/multiplexer with 3-state outputs.
09	Dual, 4-input, data selector/multiplexer with inverted outputs.
10	Dual, 4-input, data selector/multiplexer with 3-state inverted outputs.

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outlines. The case outlines shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
E	D-2 (16-lead, 1/4" x 7/8"), dual-in-line package
F	F-5 (16-lead, 1/4" x 3/8"), flat package
2	C-2 (20-terminal, .350" x .350"), square chip carrier package

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

One kilowatt (1,000) is equal to 1.34 horsepower.

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 to +7.0 V
Input voltage range	-1.2 V at -18 mA to +7.0 V
Storage temperature range	-65°C to +150°C
Maximum power dissipation (P_D) per device 1/	
Device type 01	116 mW
Device type 02	110 mW
Device type 03	127 mW
Device type 04	83 mW
Device type 05	132 mW
Device type 06	127 mW
Device type 07	127 mW
Device type 08	121 mW
Device type 09	110 mW
Device type 10	127 mW
Lead temperature (soldering, 10 seconds)	300°C
Thermal resistance, junction to case (θ_{JC}): 2/	
Cases E, F	(See MIL-M-38510, appendix C)
Case 2	60°C/W
Junction temperature (T_J) 3/	175°C

1.4 Recommended operating conditions.

Supply voltage (V_{CC})	4.5 minimum to 5.5 V dc maximum
Minimum high level input voltage (V_{IH})	2.0 V dc
Maximum low level input voltage (V_{IL})	0.8 V dc
Case operating temperature range (T_C)	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Specification and standard. The following specification and standard, form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARDS

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

1/ Must withstand the added P_D due to short-circuit test (e.g., I_{OS}).
2/ When a thermal resistance value is included in MIL-M-38510, appendix C, it shall supersede the value stated herein.
3/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions per method 5004 of MIL-STD-883.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:19Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Case outlines. The case outlines shall be as specified in 1.2.3.

3.2.2 Terminal connections and pin assignments. The terminal connections and pin assignments shall be as specified on figure 1.

3.2.3 Logic diagrams. The logic diagrams shall be as specified on figure 2.

3.2.4 Truth tables. The truth tables shall be as specified on figure 3.

3.2.5 Schematic circuits. Schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in the specification and shall be submitted to the qualifying activity and agent activity (DESC-ECS) as a prerequisite for qualification. All qualified manufacturers schematics shall be maintained by the agent activity and will be available upon request.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.4).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

TABLE I. Electrical performance characteristics.

Tests	Symbol	Conditions $-55°C \le T_C \le +125°C$		Device type	Limits		Unit
					Min	Max	
High-level output voltage	V_{OH}	V_{CC} = 4.5 V	I_{OH} = -1.0 mA	01,02,03, 04, 09	2.5		V
		V_{IL} = 0.8 V, V_{IH} = 2.0 V	I_{OH} = -3.0 mA	05,06,07, 08, 10	2.4		V
Low-level output voltage	V_{OL}	V_{CC} = 4.5 V, I_{OL} = 20.0 mA, V_{IL} = 0.8 V, V_{IH} = 2.0 V		All		0.5	V
Input clamp voltage	V_{IC}	V_{CC} = 4.5 V, I_{IN} = -18.0 mA, T_C = 25°C		All		-1.2	V
High-level input current	I_{IH1}	V_{CC} = 5.5 V, V_{IH} = 2.7 V		All		20	µA
	I_{IH2}	V_{CC} = 5.5 V, V_{IH} = 7.0 V		All		100	µA
Low-level input current	I_{IL}	V_{CC} = 5.5 V, V_{IL} = 0.5 V		All	-.03	-.60	mA
Short-circuit output current 1/	I_{OS}	V_{CC} = 5.5 V, V_{OS} = 0.0 V		All	-60	-150	mA

1/ Not more than one output should be shorted at a time.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Tests	Symbol	Conditions $-55°C \leq T_C \leq +125°C$	Device type	Limits		Unit
				Min	Max	
Output drive	I_{OD}	V_{CC} = 4.5 V	01,02,03, 04,09	60	---	mA
			05,06,07, 08,10	35	---	mA
Supply current	I_{CC}	V_{CC} = 5.5 V, V_{OS} = 0.0 V	01		21	mA
			02		20	mA
			03		23	mA
			04		15	mA
			05		22	mA
High level supply current	I_{CCH}	V_{CC} = 5.5 V	06		15	mA
			07		9.5	mA
			08		16	mA
			09		14	mA
			10		14	mA
Low level supply current	I_{CCL}	V_{CC} = 5.5 V	06		22	mA
			07		23	mA
			08		23	mA
			09		20	mA
			10		20	mA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Tests	Symbol	Conditions $-55°C \le T_C \le +125°C$	Device type	Limits Min	Limits Max	Unit
Off state supply current	I_{CCZ}	V_{CC} = 5.5 V Outputs disabled	05		124	mA
			06		23	mA
			07		17	mA
			08		23	mA
			10		23	mA
Off state output leakage current	I_{OZH}	V_{CC} = 5.5 V, V_{ZH} = 2.7 V	05,06,07, 08,10		50	µA
	I_{OZL}	V_{CC} = 5.5 V, V_{ZL} = 0.5 V			-50	µA
Propagation delay time, low to high level, data to Z output	t_{PLH1}	V_{CC} = 5.0 V (see figure 5)	01	2.5	8.5	ns
			02	2.0	9.0	ns
			03	2.5	7.5	ns
			05	2.5	9.0	ns
			06	2.0	7.0	ns
			08	3.0	9.0	ns
Propagation delay time, low to high level, data to $\overline{Z}$ output	t_{PLH2}		01	2.5	7.5	ns
			04	2.5	8.5	ns
			05	2.5	8.5	ns
			07	2.0	7.5	ns
			09	2.0	9.0	ns
			10	1.5	9.0	ns
Propagation delay time, low to high level, select to Z output	t_{PLH3}		01	4.5	13.5	ns
			02	4.5	14.0	ns
			03	4.0	12.0	ns
			05	3.5	14.0	ns
			06	3.5	11.5	ns
			08	4.5	15.0	ns
Propagation delay time, low to high level, select to $\overline{Z}$ output	t_{PLH4}		01	3.5	11.5	ns
			04	3.0	10.5	ns
			05	3.5	11.5	ns
			07	3.0	9.5	ns
			09	3.5	14.5	ns
			10	4.0	16.0	ns
Propagation delay time, low to high level, enable to Z output	t_{PLH5}		01	4.0	12.0	ns
			02	4.5	11.5	ns
			03	5.0	13.0	ns
Propagation delay time, low to high level, enable to Z output	t_{PLH6}		01	3.0	7.5	ns
			04	2.5	8.0	ns
			09	3.5	17.0	ns

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Tests	Symbol	Conditions $-55°C \leq T_C \leq +125°C$	Device type	Limits		Unit
				Min	Max	
Propagation delay time, high to low level, data to Z output	t_{PHL1}	V_{CC} = 5.0 V (see figure 5)	01	3.5	9.0	ns
			02	2.5	8.0	ns
			03	1.5	7.5	ns
			05	3.5	9.0	ns
			06	1.5	7.0	ns
			08	2.5	8.0	ns
Propagation delay time, low to high level, data to Z output	t_{PHL2}		01	1.5	6.0	ns
			04	1.5	5.0	ns
			05	1.5	6.0	ns
			07	1.0	6.0	ns
			09	1.5	7.5	ns
			10	1.5	7.5	ns
Propagation delay time, high to low level, select to Z output	t_{PHL3}		01	4.0	9.5	ns
			02	3.5	11.0	ns
			03	3.0	9.0	ns
			05	3.0	10.5	ns
			06	2.5	9.0	ns
			08	2.5	11.0	ns
Propagation delay time, high to low level, select to $\overline{Z}$ output	t_{PHL4}		01	3.0	8.0	ns
			04	2.5	8.0	ns
			05	3.2	8.0	ns
			07	2.5	9.0	ns
			09	3.5	15.0	ns
			10	4.0	14.0	ns
Propagation delay time, high to low level, enable to Z output	t_{PHL5}		01	3.0	8.0	ns
			02	2.5	9.0	ns
			03	2.5	7.5	ns
Propagation delay time, high to low level, enable to $\overline{Z}$ output	t_{PHL6}		01	2.5	6.5	ns
			04	2.0	7.0	ns
			09	3.0	13.0	ns
Propagation delay time, low level to off state, output enable to Z output	t_{PLZ5}		05	1.5	5.5	ns
			06	2.0	8.5	ns
			08	2.0	8.0	ns
Propagation delay time, low level to off state, output enable to $\overline{Z}$ output	t_{PLZ6}		05	1.5	5.0	ns
			07	2.0	8.5	ns
			10	2.0	8.5	ns
Propagation delay time, high level to off state, output enable to Z output	t_{PHZ5}		05	2.0	5.5	ns
			06	2.0	7.0	ns
			08	2.0	6.5	ns
Propagation delay time, high level to off state, output enable to $\overline{Z}$ output	t_{PHZ6}		05	2.5	6.0	ns
			07	1.5	7.0	ns
			10	2.0	6.5	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Tests	Symbol	Conditions $-55°C \le T_C \le +125°C$	Device type	Limits		Unit
				Min	Max	
Propagation delay time, off state to low level output enable to Z output	t_{PZL5}	V_{CC} = 5.0 V (see figure 5)	05	3.5	9.0	ns
			06	2.5	9.0	ns
			08	2.5	10.0	ns
Propagation delay time, off state to low level output enable to Z output	t_{PZL6}		05	2.5	7.5	ns
			07	2.5	9.0	ns
			10	3.0	15.5	ns
Propagation delay time, off state to high level output enable to Z output	t_{PZH5}		05	3.0	8.5	ns
			06	2.0	8.0	ns
			08	3.0	10.0	ns
Propagation delay time, off state to high level output enable to Z output	t_{PZH6}		05	2.0	7.0	ns
			07	2.0	8.0	ns
			10	3.0	11.0	ns

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table III. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 11 (see MIL-M-38510, appendix E).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters (method 5004)	1	1
Final electrical test parameters (method 5004)	1*,2,3,7, 9,10,11	1*,2,3,7,9
Group A test requirements (method 5005)	1,2,3,7,8, 9,10,11	1,2,3,7,8, 9,10,11
Group B test requirements (method 5005) subgroup 5	1,2,3,7,8, 9,10,11	N/A
Group C end-point electrical parameters (method 5005)	N/A	1, 2, 3
Additional electrical subgroups for group C periodic inspections	N/A	N/A
Group D end-point electrical parameters (method 5005)	1, 2, 3	1, 2, 3

*PDA applies to subgroup 1 (see 4.2c.).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510, method 5005 and 5007, as applicable of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in (method 1015 of MIL-STD-883).

(1) Test condition D, E, or F using the circuit shown on figure 4, or equivalent.

(2) T_A = 125°C minimum.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

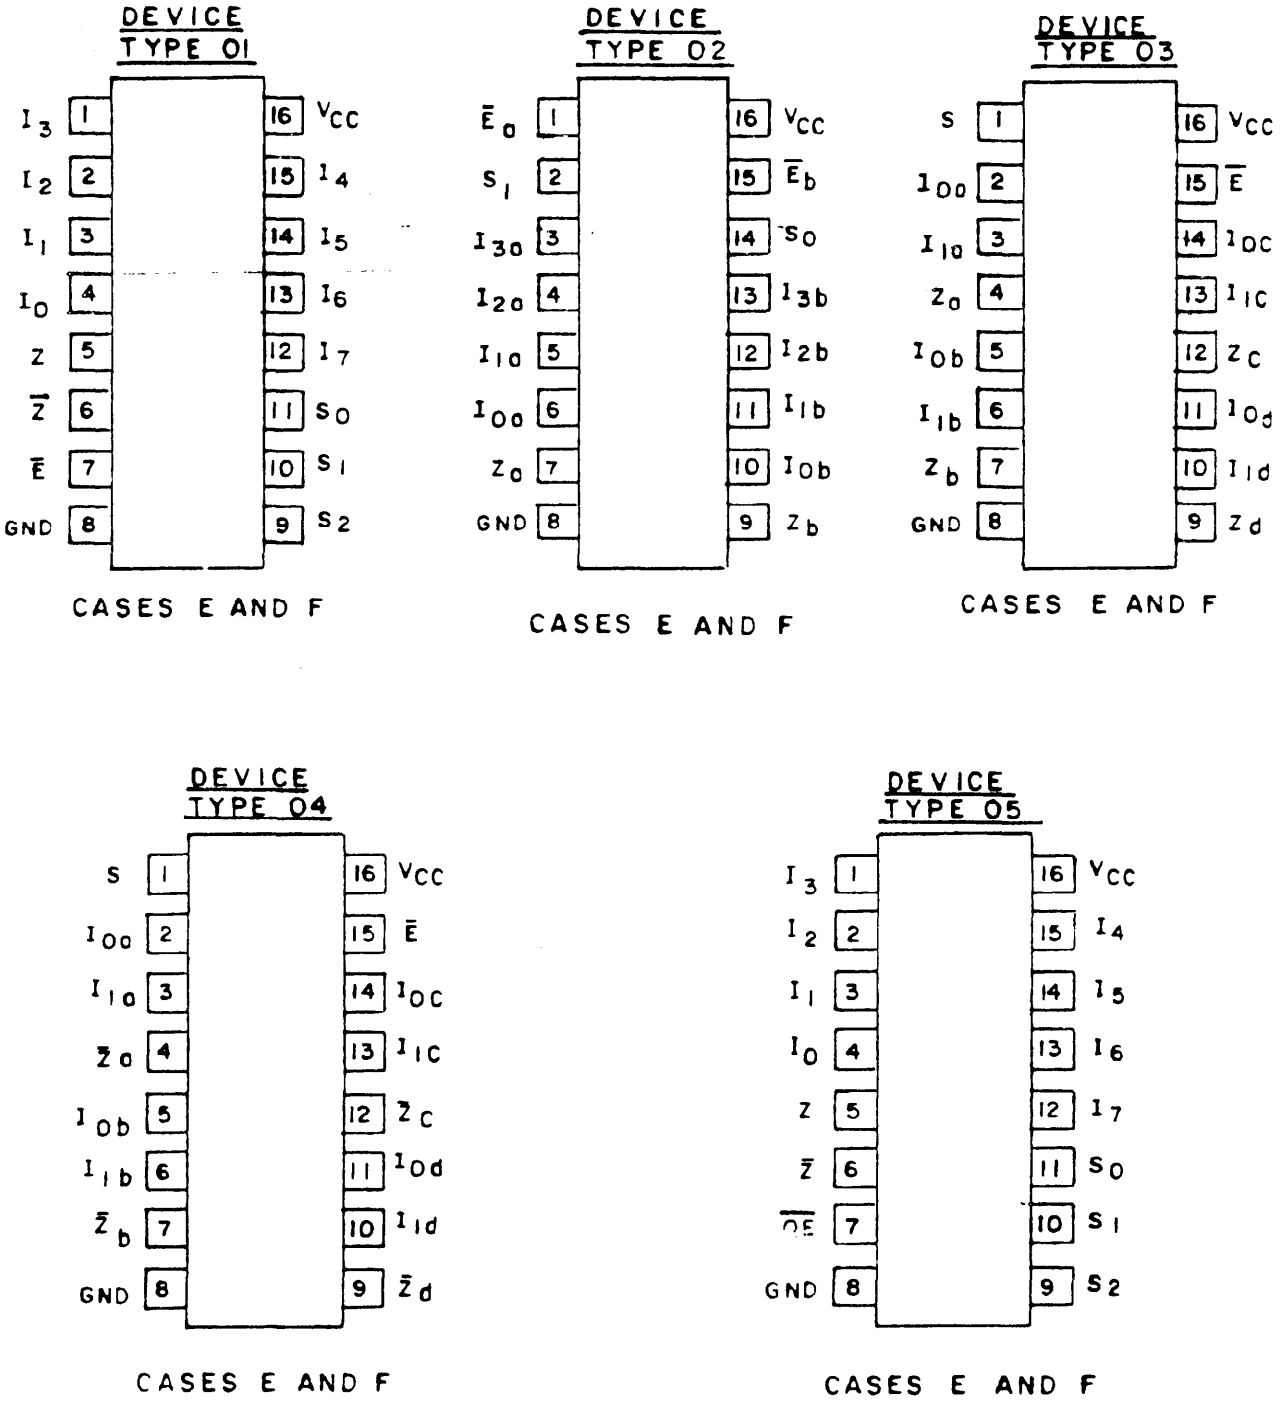


FIGURE 1. Terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

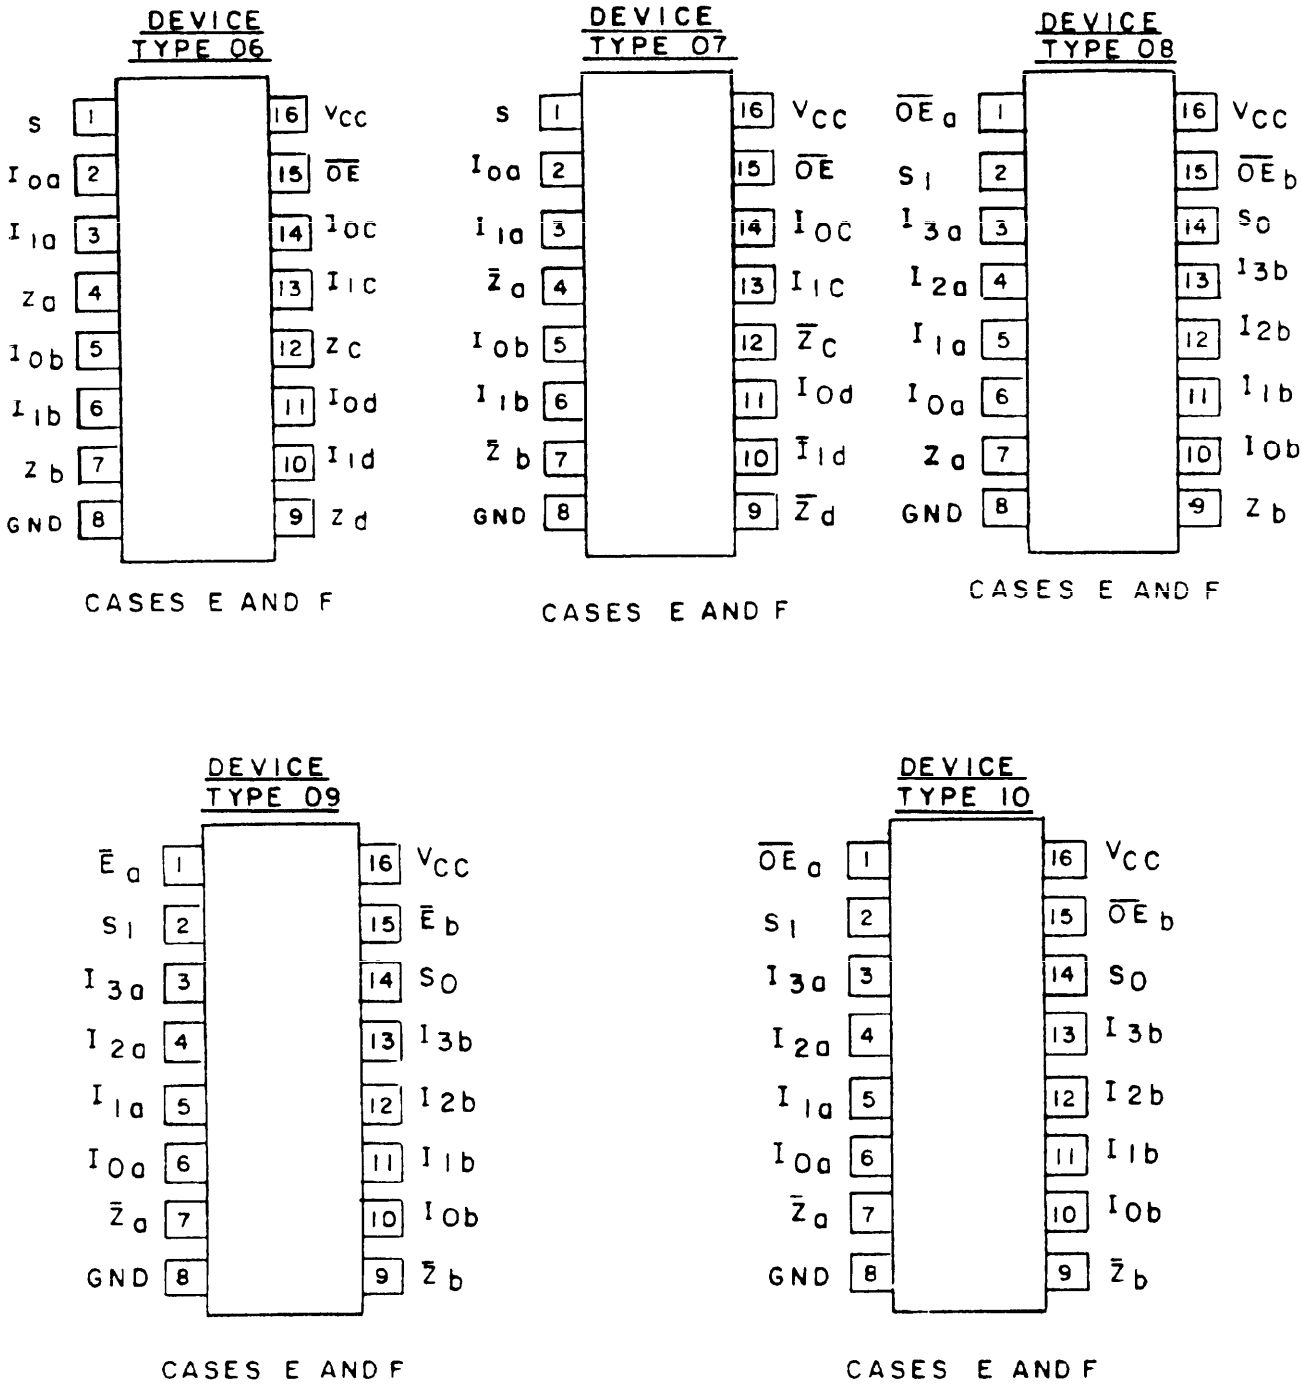


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

for contact with the kelvin or wheatstone bridge leads. The bridge leads shall

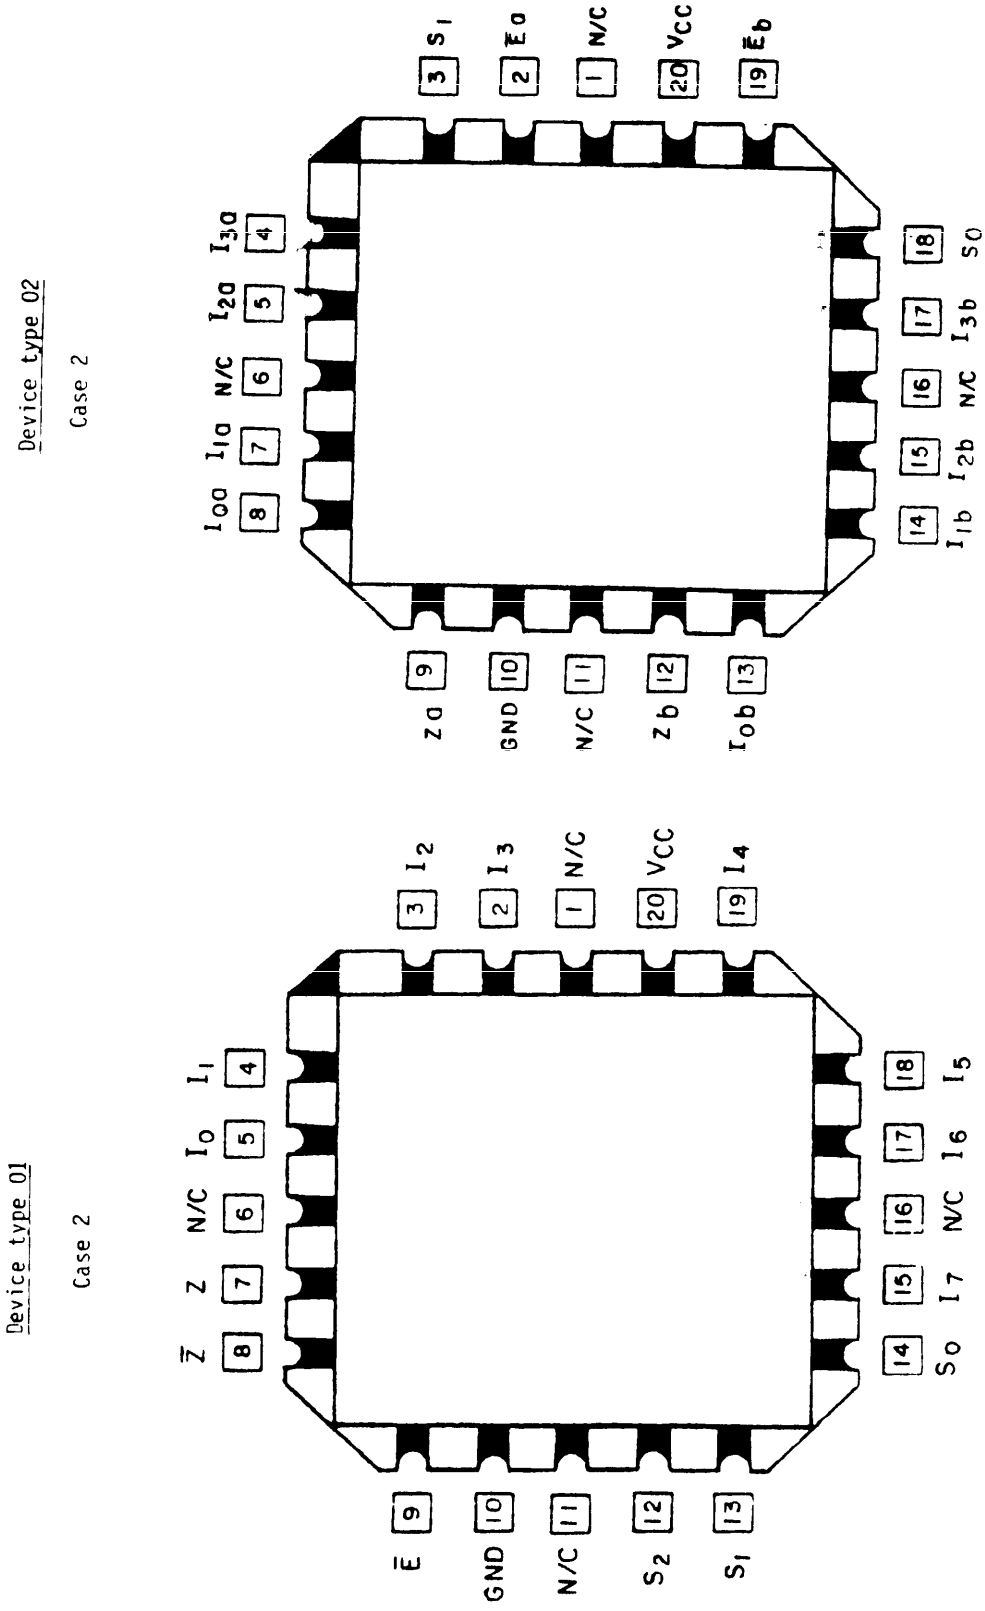


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:19Z
Check the source to verify that this is the current version before use.

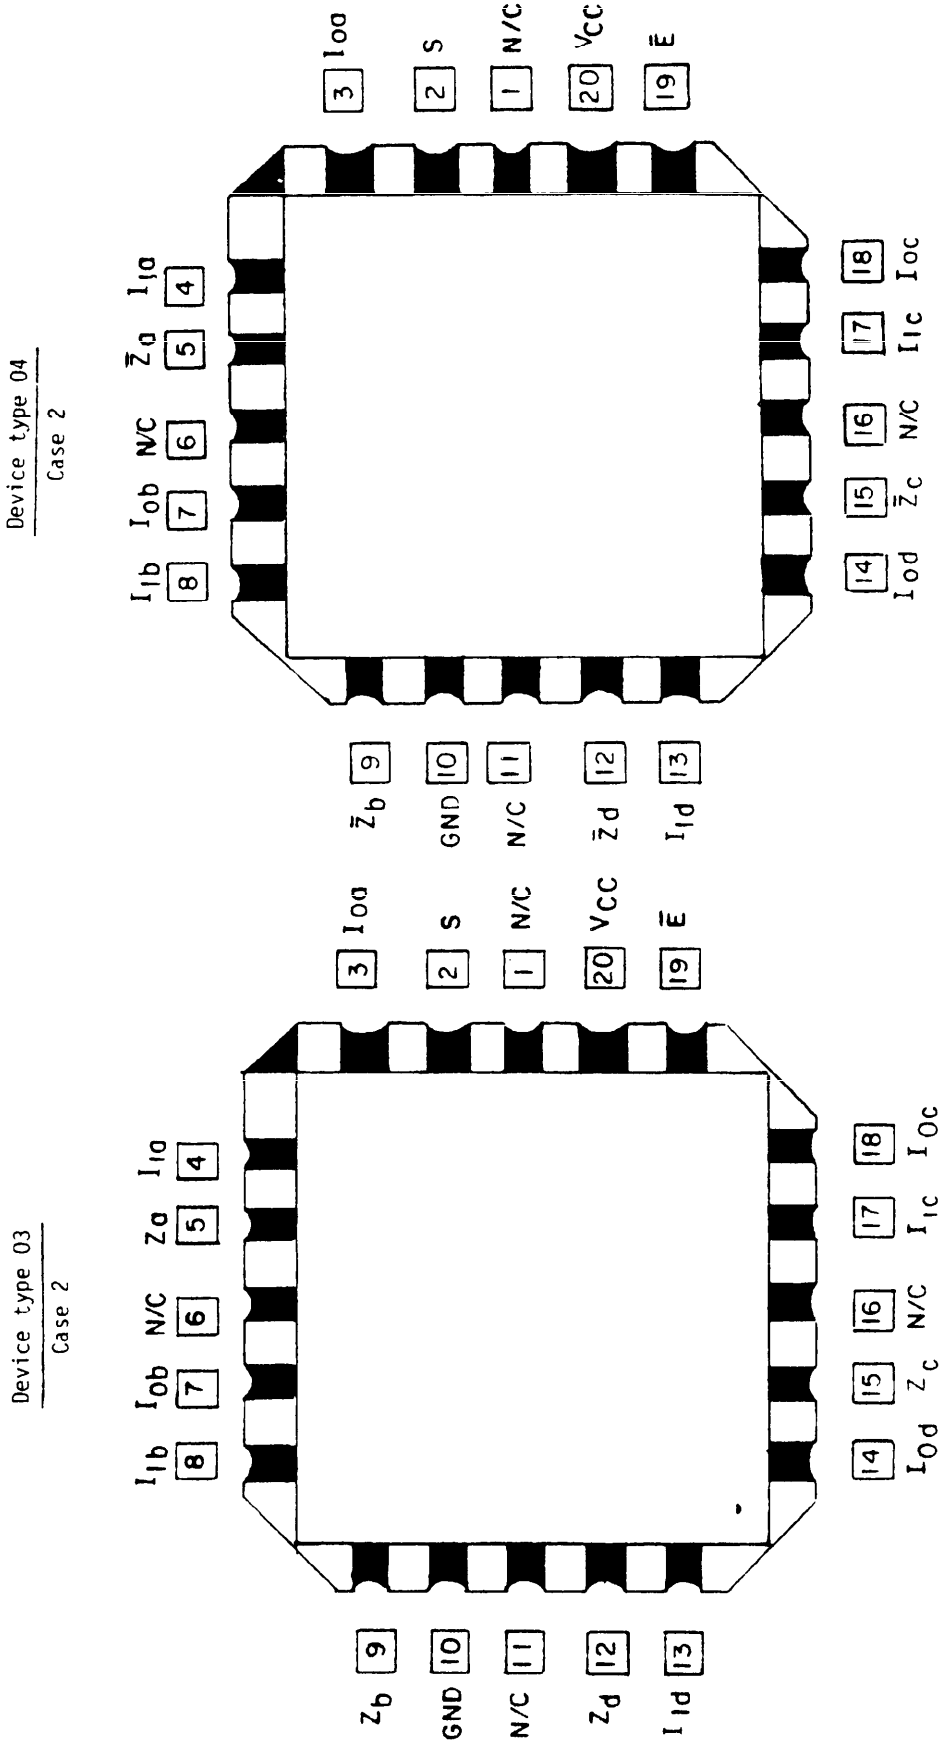


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

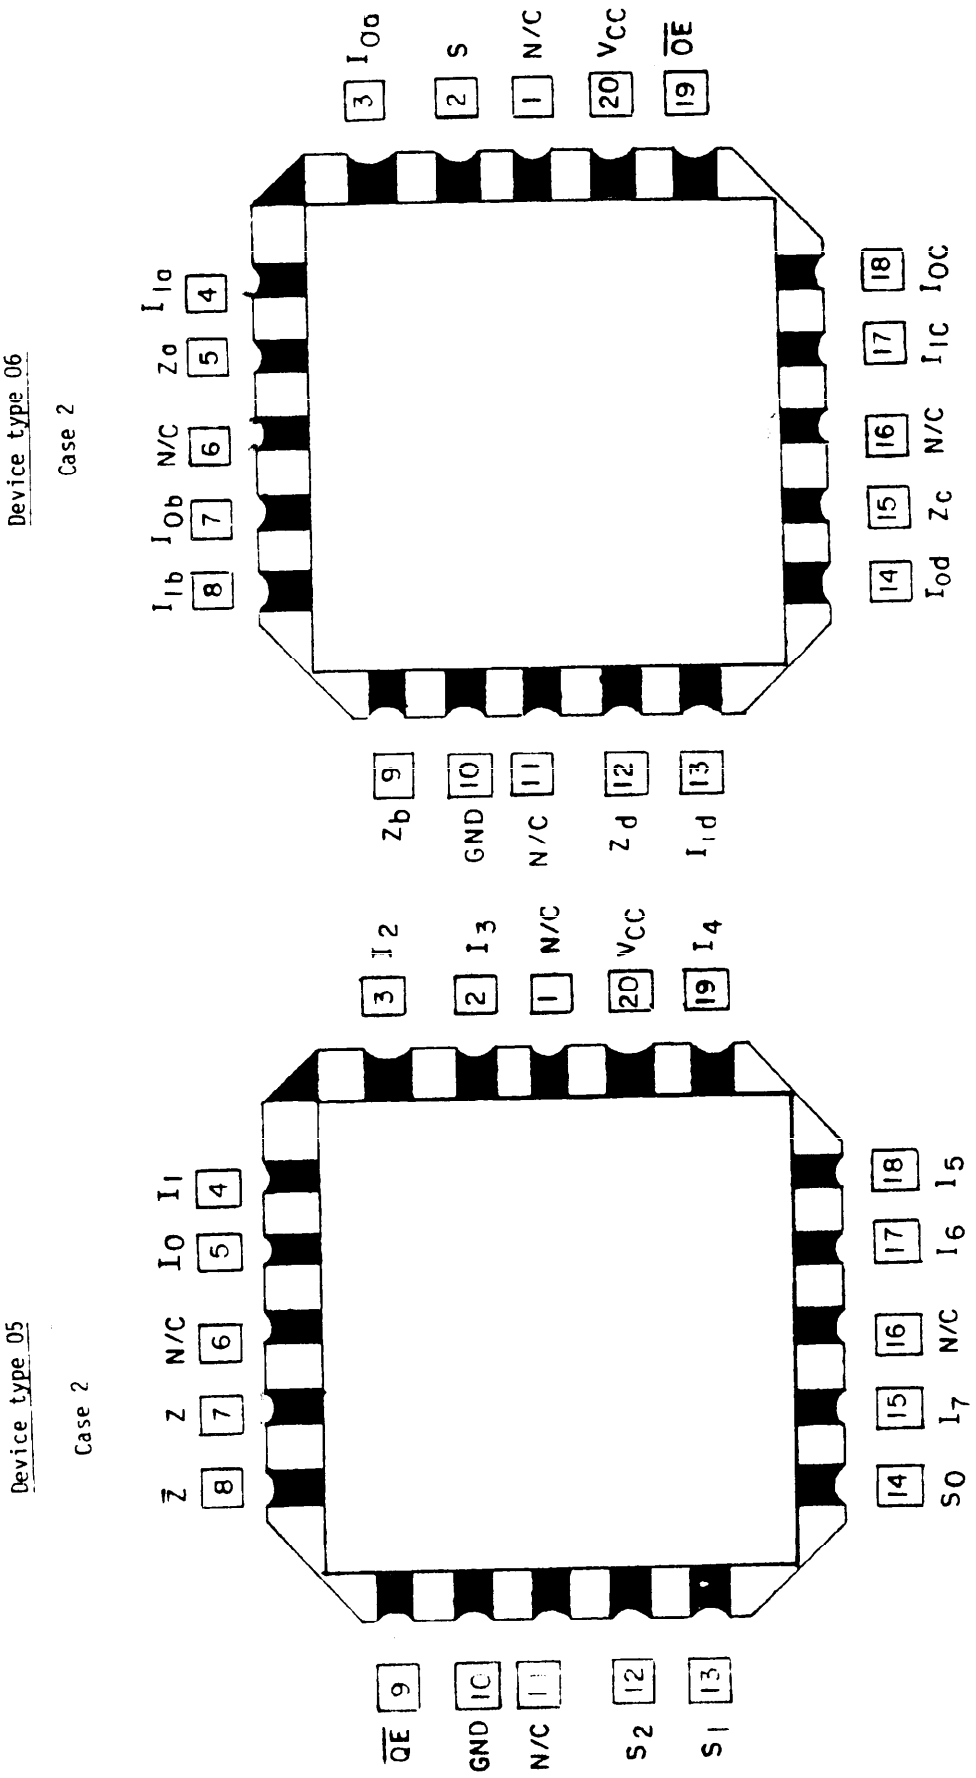


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

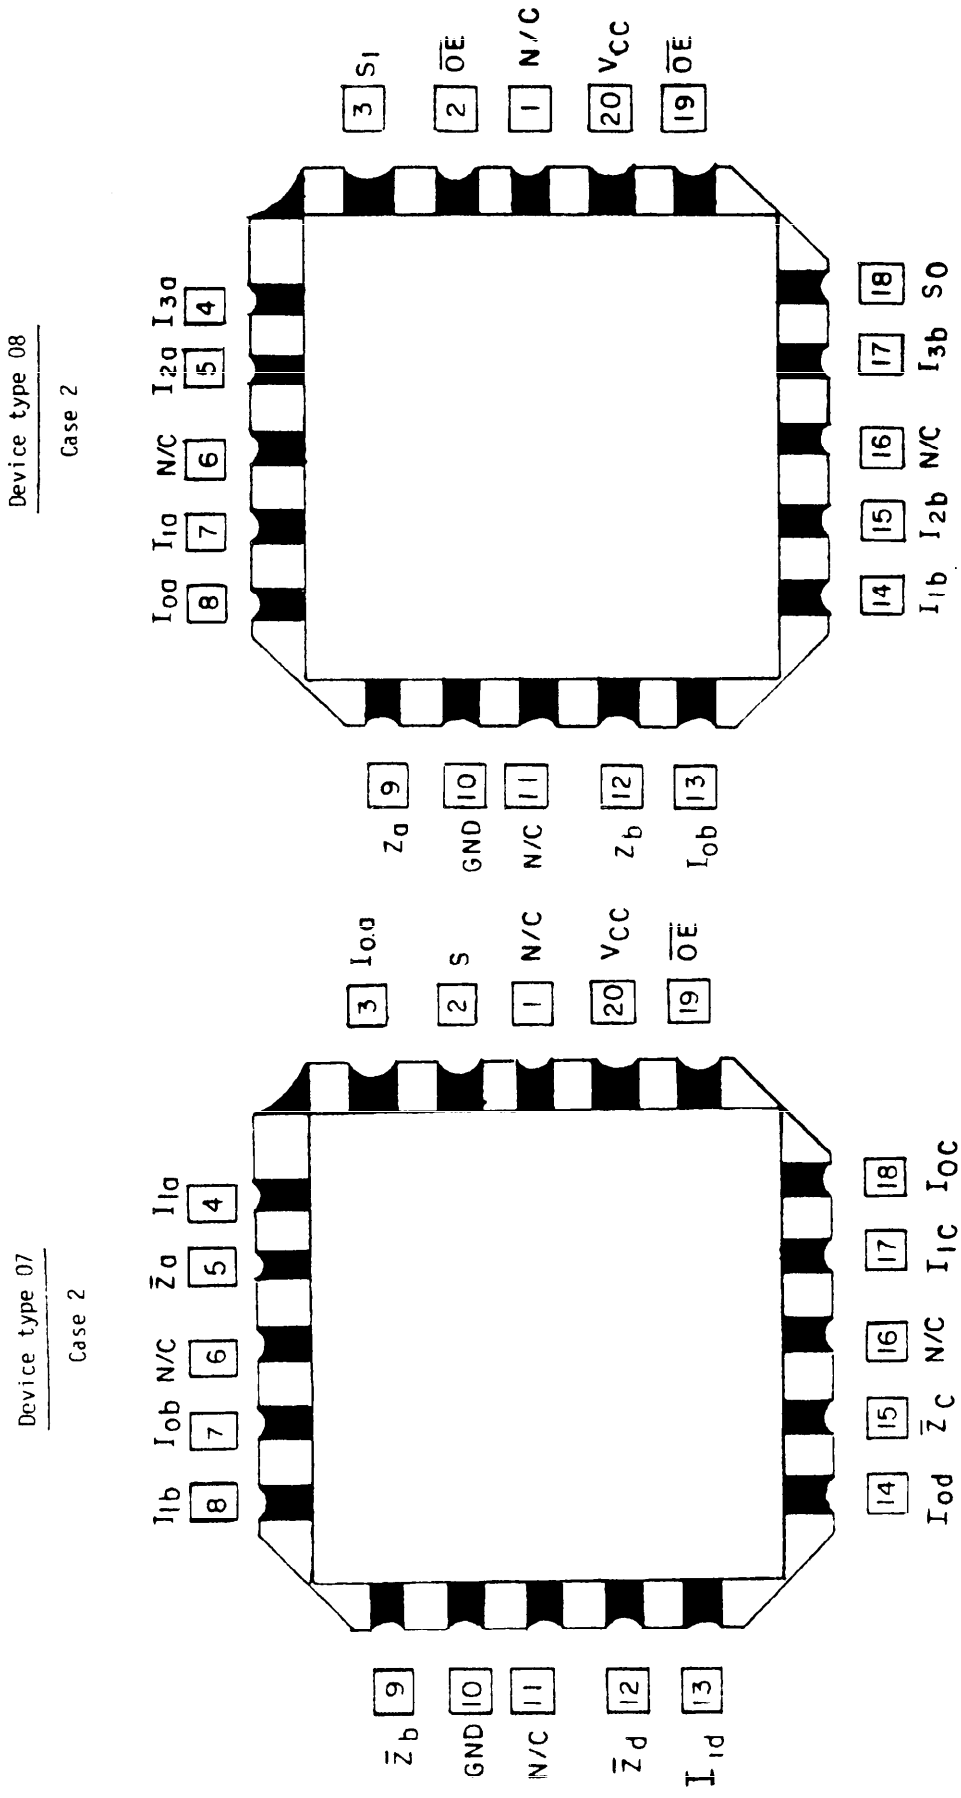


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.


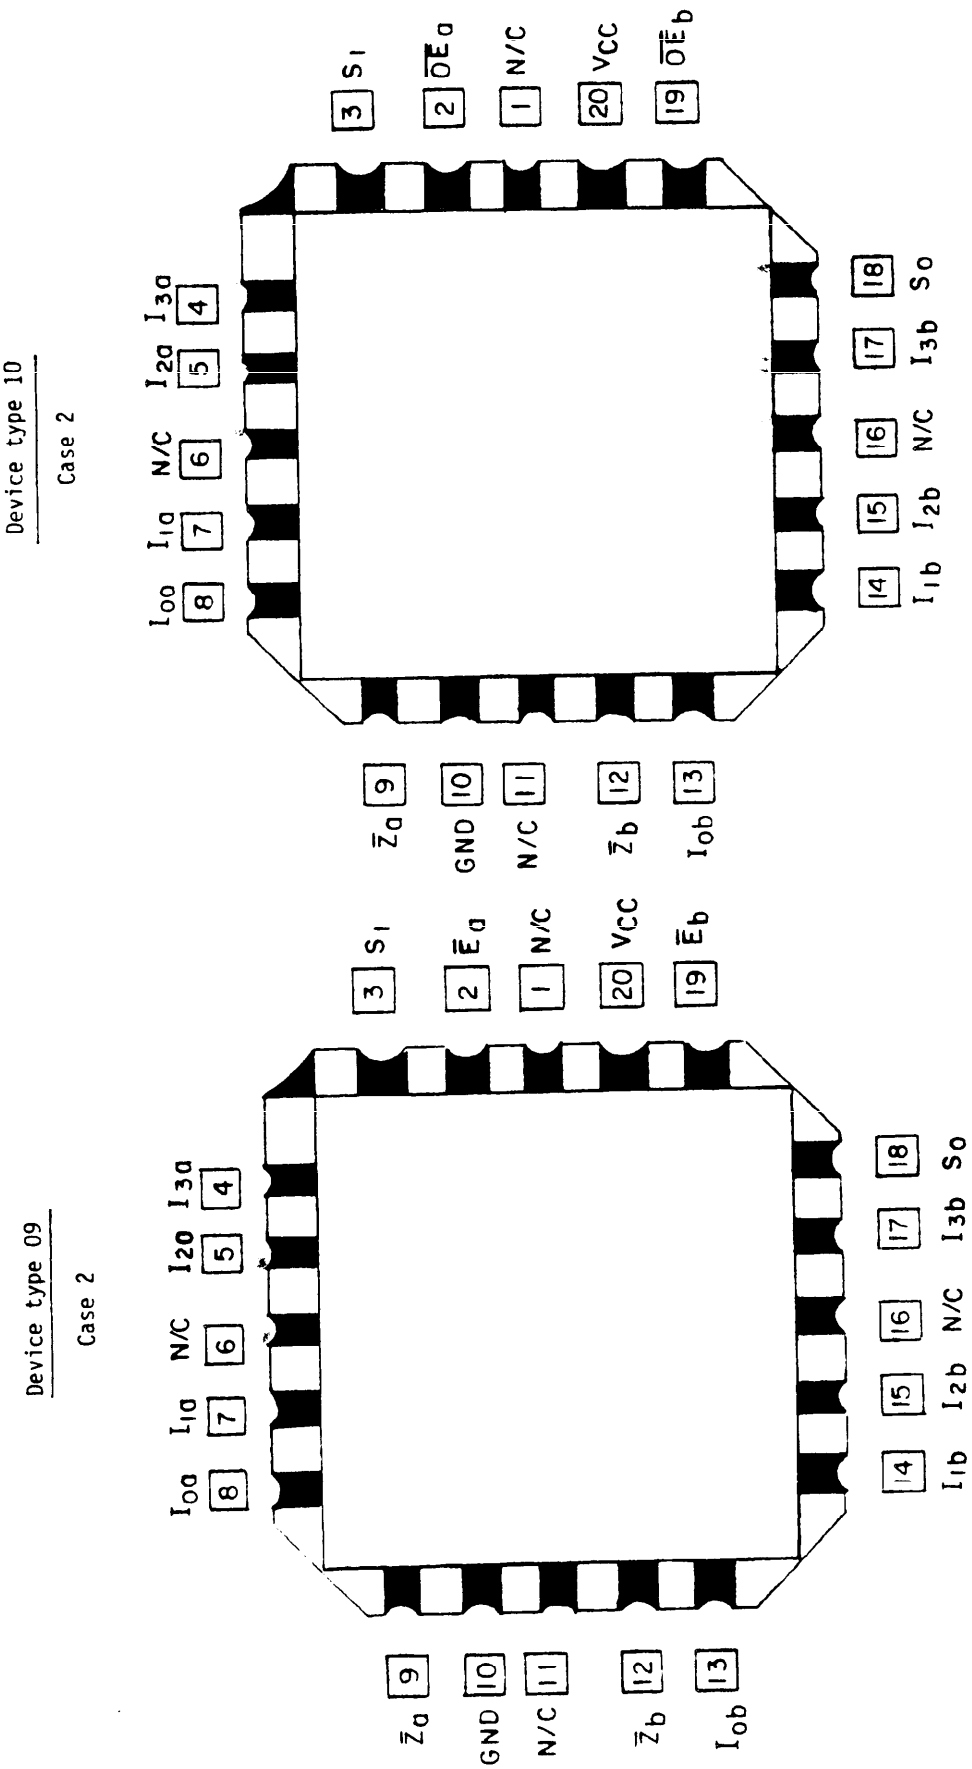


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device type 01

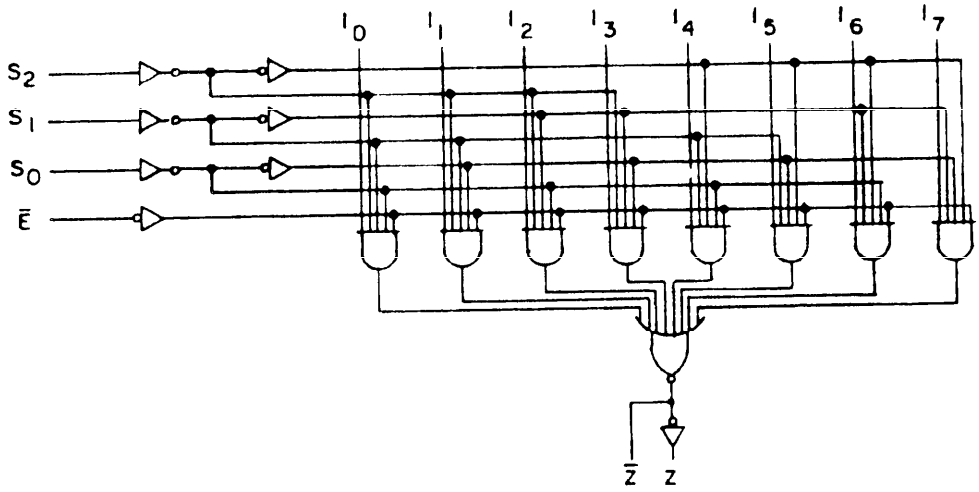

Device type 02


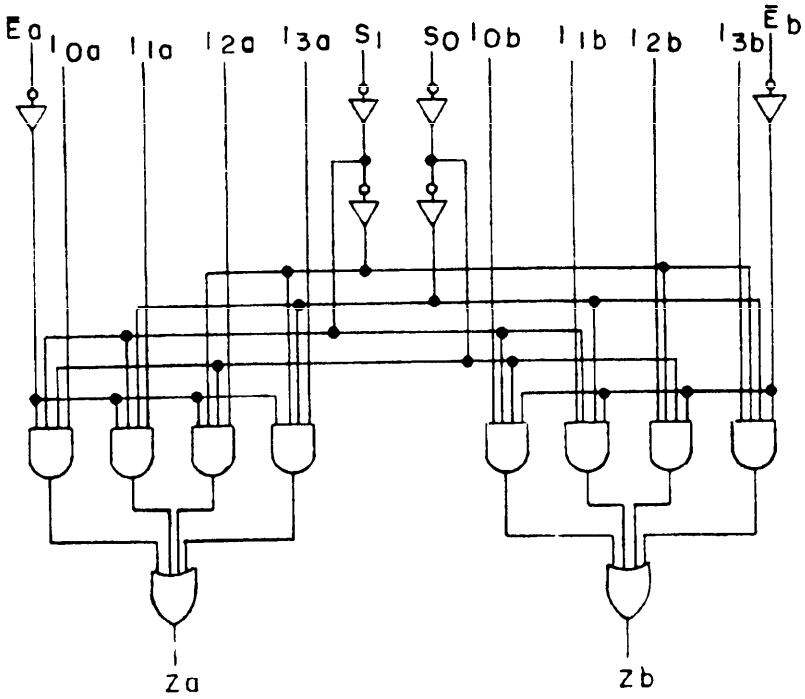


FIGURE 2. Logic diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device type 03

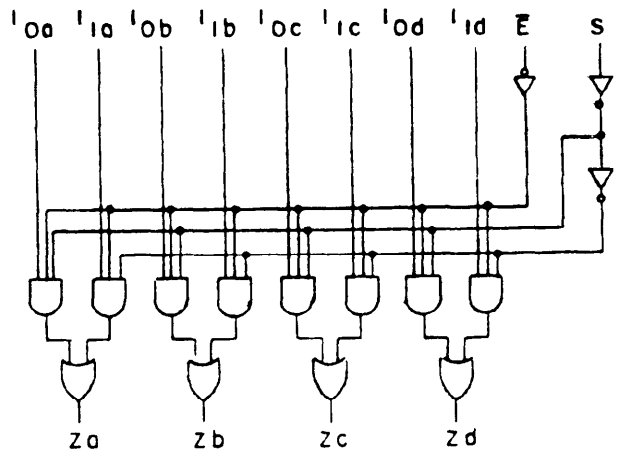

Device type 04


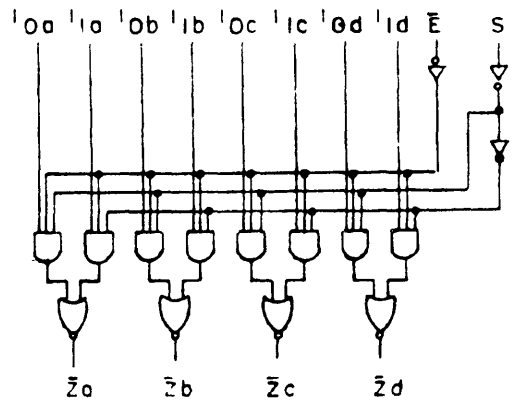


FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device type 05

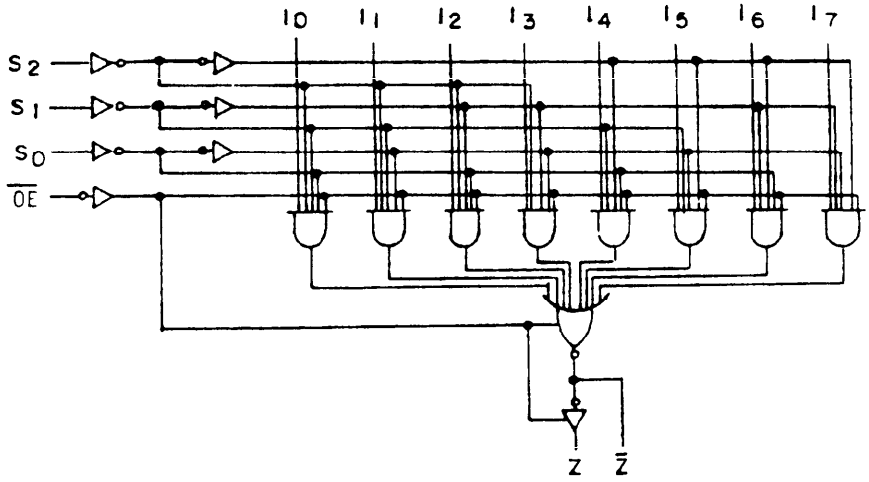

Device type 06


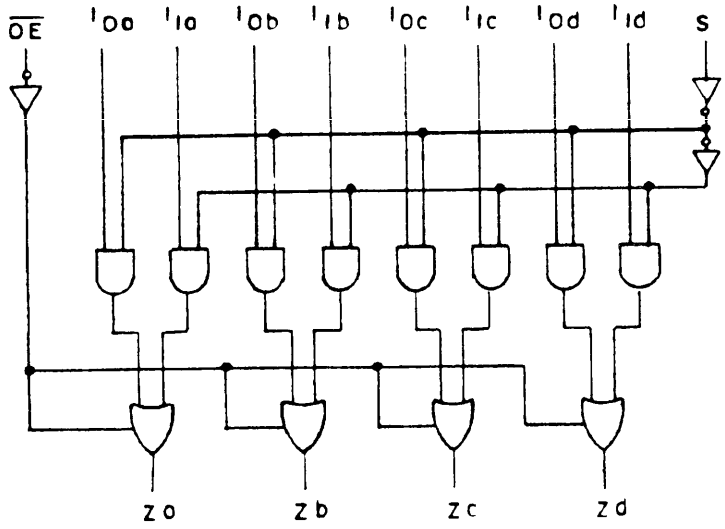


FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device type 07

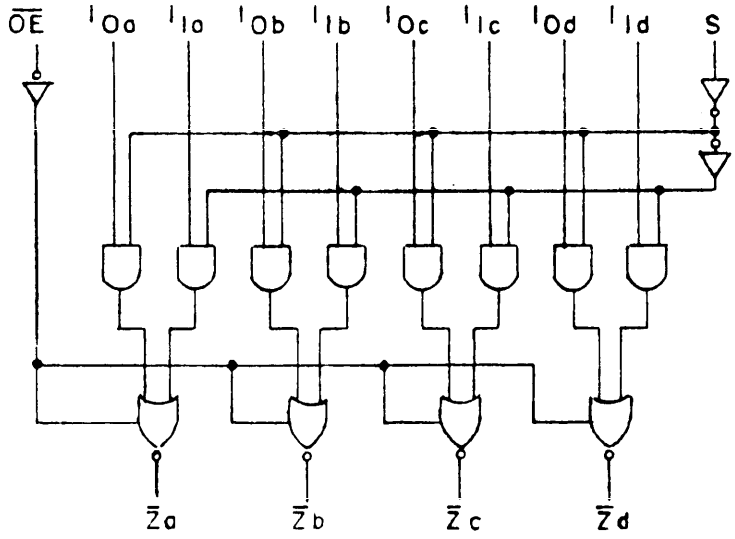

Device type 08


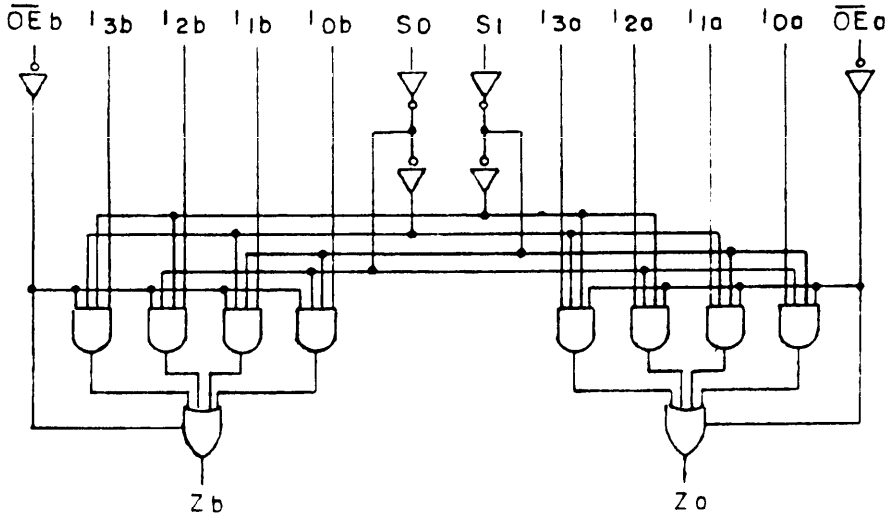


FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device type 09

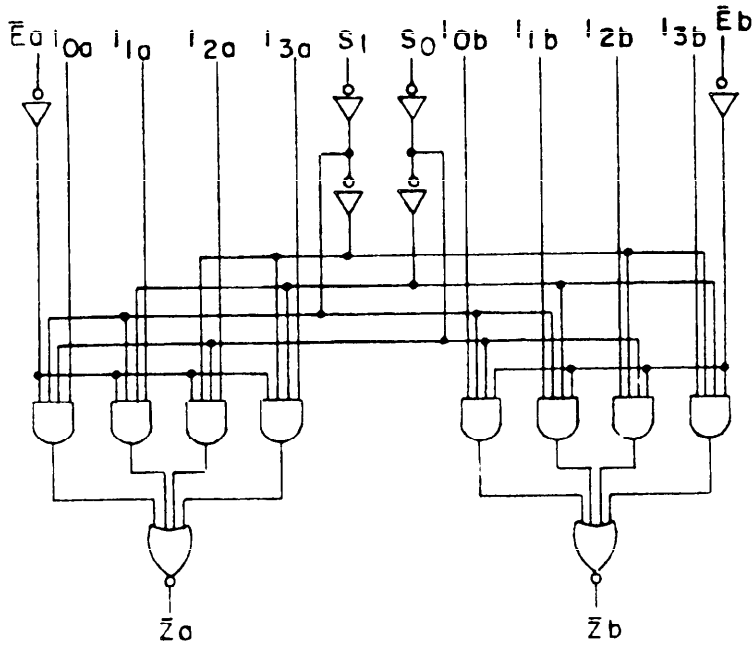

Device type 10

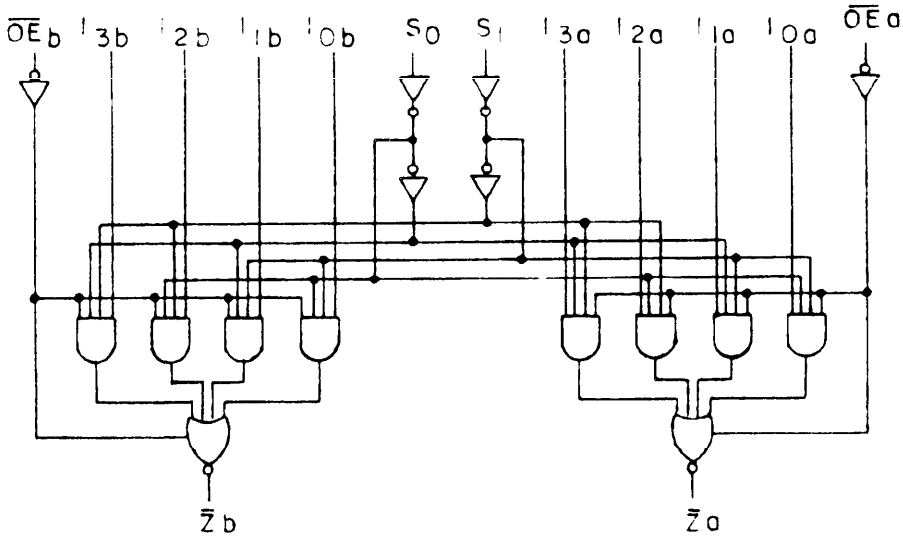


FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device type 01

INPUTS				OUTPUTS	
$\overline{E}$	S_2	S_1	S_0	$\overline{Z}$	Z
H	X	X	X	H	L
L	L	L	L	$\overline{I_0}$	I_0
L	L	L	H	$\overline{I_1}$	I_1
L	L	H	L	$\overline{I_2}$	I_2
L	L	H	H	$\overline{I_3}$	I_3
L	H	L	L	$\overline{I_4}$	I_4
L	H	L	H	$\overline{I_5}$	I_5
L	H	H	L	$\overline{I_6}$	I_6
L	H	H	H	$\overline{I_7}$	I_7

Device Type 02

SELECT INPUTS		INPUTS (a or b)					OUTPUT
S_0	S_1	$\overline{E}$	I_0	I_1	I_2	I_3	Z
X	X	H	X	X	X	X	L
L	L	L	L	X	X	X	L
L	L	L	H	X	X	X	H
H	L	L	X	L	X	X	L
H	L	L	X	H	X	X	H
L	H	L	X	X	L	X	L
L	H	L	X	X	H	X	H
H	H	L	X	X	X	L	L
H	H	L	X	X	X	H	H

H = HIGH voltage level
L = LOW voltage level
X = Immaterial

FIGURE 3. Truth tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device Type 03

INPUTS				OUTPUT
$\overline{E}$	S	1_0	1_1	Z
H	X	X	X	L
L	H	X	L	L
L	H	X	H	H
L	L	L	X	L
L	L	H	X	H

Device Type 04

INPUTS				OUTPUT
$\overline{E}$	S	1_0	1_1	$\overline{Z}$
H	X	X	X	H
L	L	L	X	H
L	L	H	X	L
L	H	X	L	H
L	H	X	H	L

Device type 05

INPUTS				OUTPUTS	
$\overline{OE}$	S_2	S_1	S_0	$\overline{Z}$	Z
H	X	X	X	Z	Z
L	L	L	L	$\overline{I}_0$	1_0
L	L	L	H	$\overline{I}_1$	1_1
L	L	H	L	$\overline{I}_2$	1_2
L	L	H	H	$\overline{I}_3$	1_3
L	H	L	L	$\overline{I}_4$	1_4
L	H	L	H	$\overline{I}_5$	1_5
L	H	H	L	$\overline{I}_6$	1_6
L	H	H	H	$\overline{I}_7$	1_7

Device Type 06

OUTPUT ENABLE	SELECT INPUT	DATA INPUTS		OUTPUTS
$\overline{OE}$	S	1_0	1_1	Z
H	X	X	X	(Z)
L	H	X	L	L
L	H	X	H	H
L	L	L	X	L
L	L	H	X	H

H = HIGH voltage level
L = LOW voltage level
X = Immaterial
(Z) = High impedance

FIGURE 3. Truth tables - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device Type 07

OUTPUT ENABLE	SELECT INPUT	DATA INPUTS		OUTPUTS
$\overline{OE}$	S	1_0	1_1	$\overline{Z}$
H	X	X	X	Z
L	H	X	L	H
L	H	X	H	L
L	L	L	X	H
L	L	H	X	L

Device Type 08

SELECT INPUTS		DATA INPUTS				OUTPUT ENABLE	OUTPUT
S_0	S_1	1_0	1_1	1_2	1_3	$\overline{OE}$	Z
X	X	X	X	X	X	H	(Z)
L	L	L	X	X	X	L	L
L	L	H	X	X	X	L	H
H	L	X	L	X	X	L	L
H	L	X	H	X	X	L	H
L	H	X	X	L	X	L	L
L	H	X	X	H	X	L	H
H	H	X	X	X	L	L	L
H	H	X	X	X	H	L	H

Address inputs S_0 and S_1 are common to both sections.

H = HIGH voltage level
L = LOW voltage level
X = Immaterial
(Z) = High impedance

FIGURE 3. Truth tables - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device Type 09

SELECT INPUTS		INPUTS (a or b)					OUTPUT
S_0	S_1	$\overline{E}$	I_0	I_1	I_2	I_3	$\overline{Z}$
X	X	H	X	X	X	X	H
L	L	L	L	X	X	X	H
L	L	L	H	X	X	X	L
H	L	L	X	L	X	X	H
H	L	L	X	H	X	X	L
L	H	L	X	X	L	X	H
L	H	L	X	X	H	X	L
H	H	L	X	X	X	L	H
H	H	L	X	X	X	H	L

Device Type 10

SELECT INPUTS		DATA INPUTS				OUTPUT ENABLE	OUTPUT
S_0	S_1	I_0	I_1	I_2	I_3	$\overline{OE}$	$\overline{Z}$
X	X	X	X	X	X	H	(Z)
L	L	L	X	X	X	L	H
L	L	H	X	X	X	L	L
H	L	X	L	X	X	L	H
H	L	X	H	X	X	L	L
L	H	X	X	L	X	L	H
L	H	X	X	H	X	L	L
H	H	X	X	X	L	L	H
H	H	X	X	X	H	L	L


Address inputs S_0 and S_1 are common to both sections.

H = HIGH voltage level
L = LOW voltage level
X = Immaterial
(Z) = High impedance

FIGURE 3. Truth tables - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device types 01 and 05

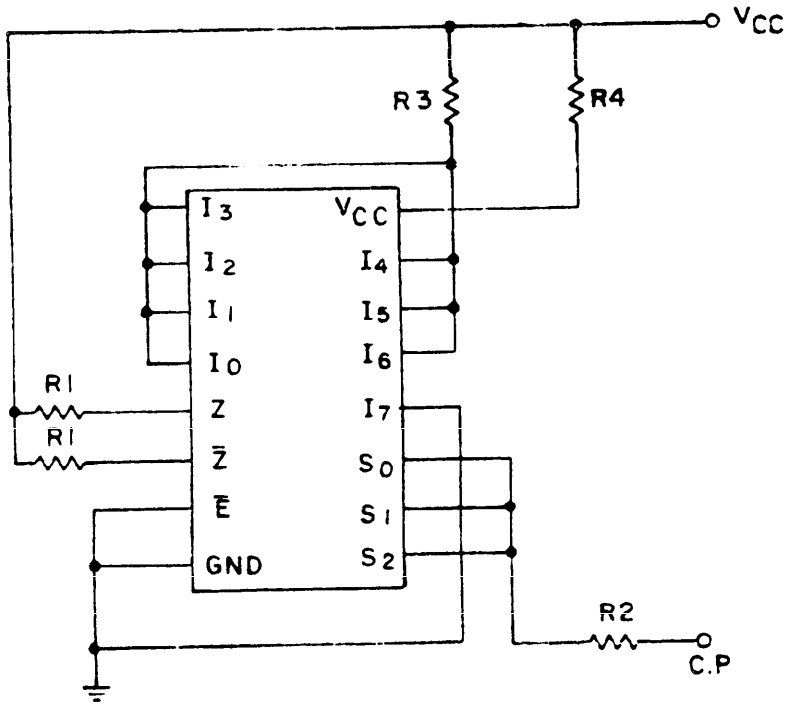


NOTES:
1. CP = 100 kHz ±50% square wave; duty cycle = 50 ±15%; V_{IL} = -0.5 V minimum to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.
2. R1 = 240Ω ±5%; R2 = 50Ω ±5%; R3 = 1 kΩ ±5%.
3. V_{CC} and R4 shall be chosen to insure 5.5 V minimum is present at device V_{CC} terminal.

FIGURE 4. Burn-in and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

Device types 03, 04, 06 and 07

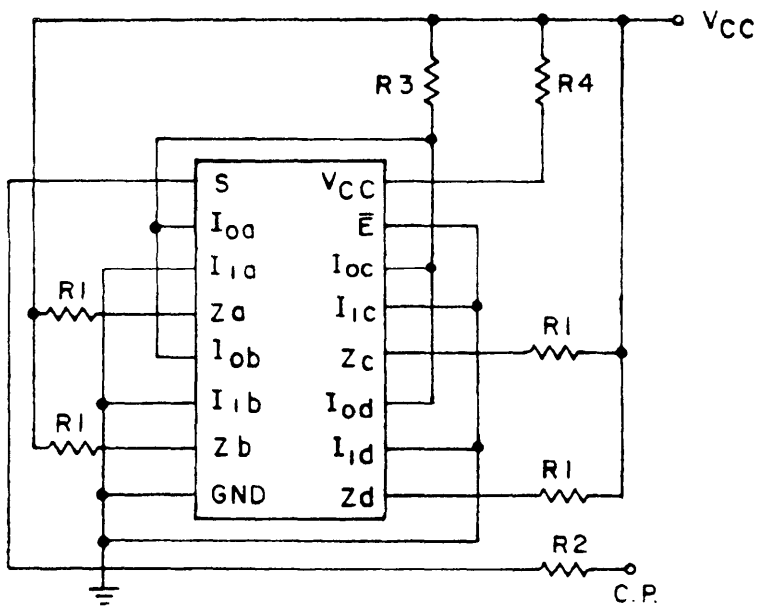


NOTES:
1. CP = 100 kHz ±50% square wave; duty cycle = 50 ±15%;
   V_{IL} = -0.5 V minimum to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.
2. R1 = 240Ω ±5%; R2 = 50Ω ±5%; R3 = 1 kΩ ±5%.
3. V_{CC} and R4 shall be chosen to insure 5.5 V minimum is present at device V_{CC} terminal.

FIGURE 4. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.


Device types 02, 08, 09 and 10

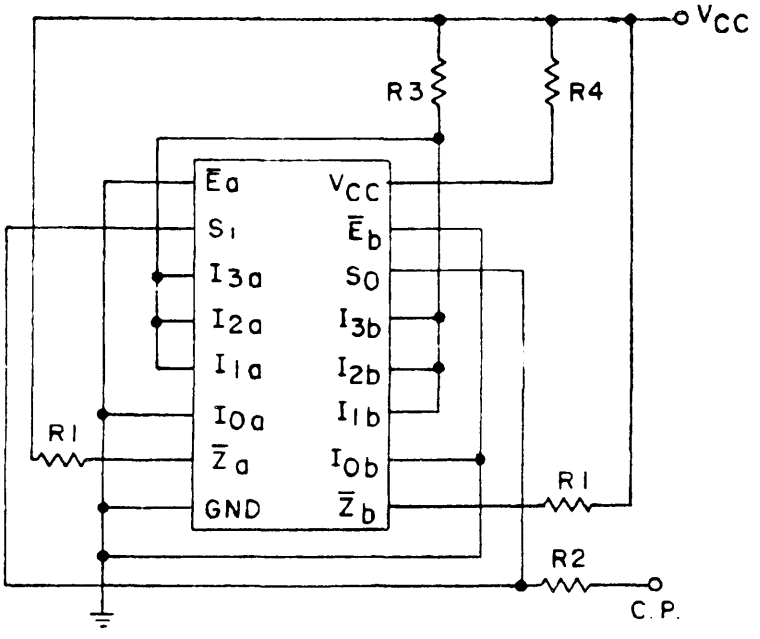

NOTES:
1. CP = 100 kHz ±50% square wave; duty cycle = 50 ±15%; V_{IL} = -0.5 V minimum to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.
2. R1 = 240Ω ±5%; R2 = 50Ω ±5%; R3 = 1 kΩ ±5%.
3. V_{CC} and R4 shall be chosen to insure 5.5 V minimum is present at device V_{CC} terminal.


FIGURE 4. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

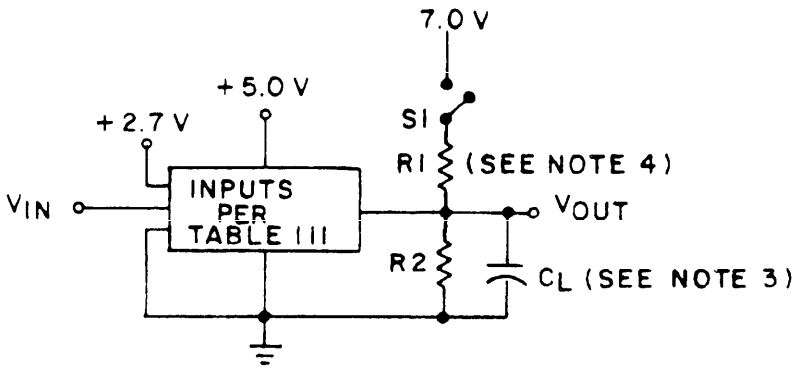

Test Circuit

Test Type	S1
t_{PLH}	Open
t_{PHL}	Open
t_{PHZ}	Open
t_{PZH}	Open
t_{PLZ}	Closed
t_{PZL}	Closed

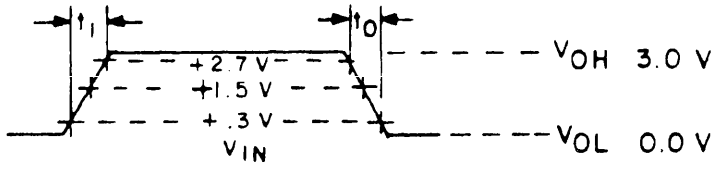


Voltage Waveform


NOTES:
1. V_{IN} input pulse has the following characteristics: $t_1 = t_0 \leq 2.5$ ns; PRR $\leq$ 1 MHz; $Z_{OUT} \approx 50\Omega$.
2. Inputs not under test are at ground.
3. C_L = 50 pF ±10%, including scope probe, wiring and stray capacitance without package in test fixture.
4. $R_1 = R_2$ = 499 ±5%.
5. Voltage measurements are to be made with respect to network ground terminal.

FIGURE 5. Switching time test circuit and waveform for all device types.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

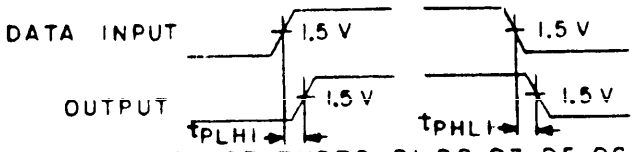


DEVICE TYPES 01, 02, 03, 05, 06, AND 08

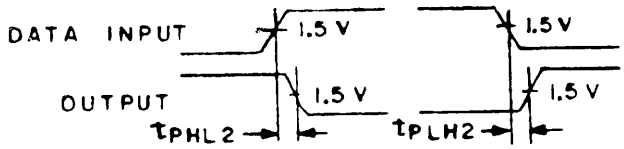

DEVICE TYPES 01, 04, 05, 07, 09, AND 10

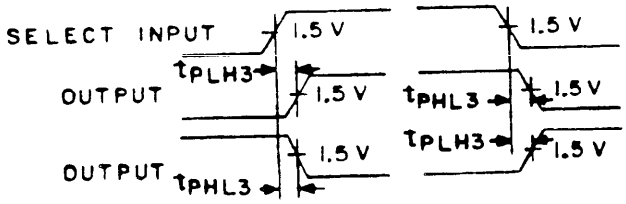


DEVICE TYPES 01, 02, 03, 05, 06, AND 08

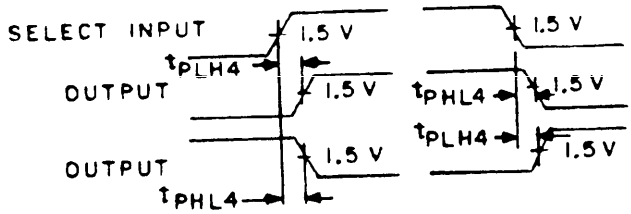


DEVICE TYPES 01, 04, 05, 07, 09, AND 10

FIGURE 5. Switching time waveforms - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.




DEVICE TYPES 01, 04 AND 09



DEVICE TYPES 01, 02 AND 03

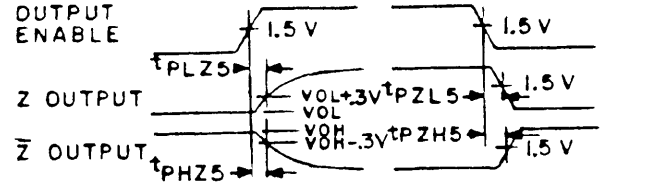

DEVICE TYPES 05, 06 AND 08

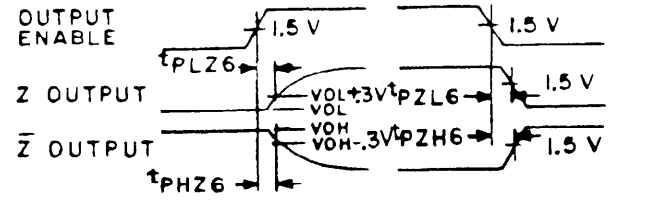

DEVICE TYPES 05, 07 AND 10

FIGURE 5. Switching time waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	I_3	I_2	I_1	I_0	Z	$\overline{Z}$	E	GND	S_2	S_1	S_0	I_7	I_6	I_5	I_4	V_{CC}				
1 T_C = 25°C	V_{OL}	3007	1				2.0 V		20 mA	0.8 V	GND	0.8 V	0.8 V	0.8 V					4.5 V	$\overline{Z}$		0.5	V
			2			2.0 V							0.8 V	2.0 V									
			3		2.0 V								2.0 V	0.8 V									
			4	2.0 V									2.0 V	2.0 V									
			5									2.0 V	0.8 V	0.8 V				2.0 V					
			6										0.8 V	2.0 V			2.0 V						
			7										2.0 V	0.8 V		2.0 V							
			8										2.0 V	2.0 V	2.0 V								
			9				0.8 V	20 mA				0.8 V	0.8 V	0.8 V						$\overline{Z}$			
	V_{OH}	3006	10						-1.0 mA	2.0 V										$\overline{Z}$	2.5		
			11				0.8 V			0.8 V		0.8 V	0.8 V	0.8 V									
			12			0.8 V							0.8 V	2.0 V									
			13		0.8 V								2.0 V	0.8 V									
			14	0.8 V									2.0 V	2.0 V									
			15									2.0 V	0.8 V	0.8 V				0.8 V					
			16										0.8 V	2.0 V			0.8 V						
			17										2.0 V	0.8 V		0.8 V							
			18										2.0 V	2.0 V	0.8 V								
			19				2.0 V	-1.0 mA				0.8 V	0.8 V	0.8 V						$\overline{Z}$			
	V_{IC}		20	-18 mA																			
			21		-18 mA															I_3		-1.2	
			22			-18 mA														I_2			
			23				-18 mA													I_1			
			24							-18 mA										I_0			
			25									-18 mA								E			
			26										-18 mA							S_2			
			27											-18 mA						S_1			
			28												-18 mA					S_0			
			29													-18 mA				I_7			
			30														-18 mA			I_6			
			31															-18 mA		I_5			
																				I_4			
	I_{IH1}	3010	32	2.7 V						4.5 V		4.5 V	0.0 V	0.0 V					5.5 V	I_3		20	µA
			33		2.7 V								0.0 V	4.5 V						I_2			
			34			2.7 V							4.5 V	0.0 V						I_1			
			35				2.7 V						4.5 V	4.5 V						I_0			
			36							2.7 V										E			
			37									2.7 V								S_2			
			38										2.7 V							S_1			
			39											2.7 V						S_0			
			40							4.5 V		0.0 V	0.0 V	0.0 V	2.7 V					I_7			
			41										0.0 V	4.5 V		2.7 V				I_6			
			42										4.5 V	0.0 V			2.7 V			I_5			
			43										4.5 V	4.5 V				2.7 V		I_4			
	I_{IH2}		44	7.0 V								4.5 V	0.0 V	0.0 V									
			45		7.0 V								0.0 V	4.5 V						I_3			
			46			7.0 V							4.5 V	0.0 V						I_2			
			47				7.0 V						4.5 V	4.5 V						I_1			
			48							7.0 V										I_0			
			49									7.0 V								E			
			50										7.0 V							S_2			
			51											7.0 V						S_1			
			52							4.5 V		0.0 V	0.0 V	0.0 V	7.0 V					S_0			
			53										0.0 V	4.5 V		7.0 V				I_7			
			54										4.5 V	0.0 V			7.0 V			I_6			
			55										4.5 V	4.5 V				7.0 V		I_5			
																				I_4			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20261021T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	15				
			Test no.	I_3	I_2	I_1	I_0	Z	$\overline{Z}$	$\overline{E}$	GND	S_2	S_1	S_0	I_7	I_6	I_5	I_4	V_{CC}				
1 T_C = 25°C	I_{IL}	3009	56	0.5 V						0.0 V	GND	0.0 V	4.5 V	4.5 V					5.5 V	I_3	1/	1/	mA
		"	57		0.5 V					"	"	"	4.5 V	0.0 V					"	I_2	"	"	"
		"	58			0.5 V				"	"	"	0.0 V	4.5 V					"	I_1	"	"	"
		"	59				0.5 V			"	"	"	0.0 V	0.0 V					"	I_0	"	"	"
		"	60							0.5 V	"								"	$\overline{E}$	"	"	"
		"	61								"	0.5 V							"	S_2	"	"	"
		"	62								"		0.5 V						"	S_1	"	"	"
		"	63								"			0.5 V					"	S_0	"	"	"
		"	64							0.0 V	"	4.5 V	4.5 V	4.5 V	0.5 V				"	I_7	"	"	"
		"	65							"	"	"	4.5 V	0.0 V		0.5 V			"	I_6	"	"	"
		"	66							"	"	"	0.0 V	4.5 V			0.5 V		"	I_5	"	"	"
		"	67							"	"	"	0.0 V	0.0 V				0.5 V	"	I_4	"	"	"
	I_{OS}	3011	68					4.5 V	0.0 V	0.0 V	"	0.0 V	0.0 V	0.0 V					"	Z	-60	-150	"
	I_{OS}	3011	69						0.0 V	4.5 V	"								"	$\overline{Z}$	-60	-150	"
	I_{OD}		70					2.5 V		5.5 V	"								4.5 V	Z	60		"
	I_{OD}		71				5.5 V		2.5 V	0.0 V	"	0.0 V	0.0 V	0.0 V					4.5 V	$\overline{Z}$	60		"
	I_{CC}	3005	72	4.5 V	4.5 V	4.5 V	4.5 V			4.5 V	"	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	5.5 V	V_{CC}		21	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	73	A	A	A	A	L	H	A	GND	B	B	B	A	A	A	A	5.0 V				
		"	74	"	"	"	"	"	"	"	"	"	B	A	"	"	"	"	"				
		"	75	"	"	"	"	"	"	"	"	"	A	B	"	"	"	"	"				
		"	76	"	"	"	"	"	"	"	"	"	A	A	"	"	"	"	"				
		"	77	"	"	"	"	"	"	"	"	A	B	B	"	"	"	"	"				
		"	78	"	"	"	"	"	"	"	"	"	B	A	"	"	"	"	"				
		"	79	"	"	"	"	"	"	"	"	"	A	B	"	"	"	"	"				
		"	80	"	"	"	"	"	"	"	"	"	A	A	"	"	"	"	"				
		"	81	B	B	B	B	H	L	B	"	B	B	B	B	B	B	B	"				
		"	82	"	B	A	B	"	"	"	"	"	B	A	"	"	"	"	"				
		"	83	"	A	B	"	"	"	"	"	"	A	A	"	"	"	"	"				
		"	84	A	B	"	"	"	"	"	"	"	A	A	"	"	"	"	"				
		"	85	B	"	"	"	"	"	"	"	A	B	B	"	"	"	A	"				
		"	86	"	"	"	"	"	"	"	"	"	B	A	"	"	"	B	"				
		"	87	"	"	"	"	"	"	"	"	"	A	B	"	"	A	B	"				
		"	88	"	"	"	"	"	"	"	"	"	A	A	"	"	B	A	"				
		"	89	A	A	A	A	L	H	"	"	B	B	B	"	"	A	A	"				
		"	90	"	A	B	A	"	"	"	"	"	B	A	"	"	"	"	"				
		"	91	"	B	A	"	"	"	"	"	"	A	B	"	"	"	"	"				
		"	92	B	A	"	"	"	"	"	"	"	A	B	"	"	"	"	"				
		"	93	A	"	"	"	"	"	"	"	A	B	A	"	"	"	B	"				
		"	94	"	"	"	"	"	"	"	"	"	B	B	"	"	"	A	"				
		"	95	"	"	"	"	"	"	"	"	"	A	B	"	"	"	A	"				
		"	96	"	"	"	"	"	"	"	"	"	A	A	B	B	A	A	"				
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	I_3	I_2	I_1	I_0	Z	$\overline{Z}$	$\overline{E}$	GND	S_2	S_1	S_0	I_7	I_6	I_5	I_4	V_{CC}		Min	Max	
9 T_C = 25°C Fig. 5	t_{PLH1}	3003	97				IN	OUT		0.0 V	GND	0.0 V	0.0 V	0.0 V					5.0 V	$I_0 \rightarrow Z$	3.0	6.5	ns
	"	"	98			IN	"	"		"	"	"	0.0 V	2.7 V					"	$I_1 \rightarrow Z$	"	"	"
	"	"	99		IN		"	"		"	"	"	2.7 V	0.0 V					"	$I_2 \rightarrow Z$	"	"	"
	"	"	100	IN			"	"		"	"	"	2.7 V	2.7 V					"	$I_3 \rightarrow Z$	"	"	"
	"	"	101				"	"		"	"	2.7 V	0.0 V	0.0 V				IN	"	$I_4 \rightarrow Z$	"	"	"
	"	"	102				"	"		"	"	"	0.0 V	2.7 V			IN		"	$I_5 \rightarrow Z$	"	"	"
	"	"	103				"	"		"	"	"	2.7 V	0.0 V		IN			"	$I_6 \rightarrow Z$	"	"	"
	"	"	104				"	"		"	"	"	2.7 V	2.7 V	IN				"	$I_7 \rightarrow Z$	"	"	"
	t_{PHL1}	3003 Fig. 4	105				IN	"		"	"	0.0 V	0.0 V	0.0 V					"	$I_0 \rightarrow Z$	3.0	7.0	"
	"	"	106			IN	"	"		"	"	"	0.0 V	2.7 V					"	$I_1 \rightarrow Z$	"	"	"
	"	"	107		IN		"	"		"	"	"	2.7 V	0.0 V					"	$I_2 \rightarrow Z$	"	"	"
	"	"	108	IN			"	"		"	"	"	2.7 V	2.7 V					"	$I_3 \rightarrow Z$	"	"	"
	"	"	109				"	"		"	"	2.7 V	0.0 V	0.0 V				IN	"	$I_4 \rightarrow Z$	"	"	"
	"	"	110				"	"		"	"	"	0.0 V	2.7 V			IN		"	$I_5 \rightarrow Z$	"	"	"
	"	"	111				"	"		"	"	"	2.7 V	0.0 V		IN			"	$I_6 \rightarrow Z$	"	"	"
	"	"	112				"	"		"	"	"	2.7 V	2.7 V	IN				"	$I_7 \rightarrow Z$	"	"	"
	t_{PLH2}	"	113				IN		OUT	"	"	0.0 V	0.0 V	0.0 V					"	$I_0 \rightarrow \overline{Z}$	3.0	6.5	"
	"	"	114			IN	"		"	"	"	"	0.0 V	2.7 V					"	$I_1 \rightarrow \overline{Z}$	"	"	"
	"	"	115		IN		"		"	"	"	"	2.7 V	0.0 V					"	$I_2 \rightarrow \overline{Z}$	"	"	"
	"	"	116	IN			"		"	"	"	"	2.7 V	2.7 V					"	$I_3 \rightarrow \overline{Z}$	"	"	"
	"	"	117				"		"	"	"	2.7 V	0.0 V	0.0 V				IN	"	$I_4 \rightarrow \overline{Z}$	"	"	"
	"	"	118				"		"	"	"	"	0.0 V	2.7 V			IN		"	$I_5 \rightarrow \overline{Z}$	"	"	"
	"	"	119				"		"	"	"	"	2.7 V	0.0 V		IN			"	$I_6 \rightarrow \overline{Z}$	"	"	"
	"	"	120				"		"	"	"	"	2.7 V	2.7 V	IN				"	$I_7 \rightarrow \overline{Z}$	"	"	"
	t_{PHL2}	"	121				IN			"	"	0.0 V	0.0 V	0.0 V					"	$I_0 \rightarrow \overline{Z}$	1.5	4.0	"
	"	"	122			IN	"			"	"	"	0.0 V	2.7 V					"	$I_1 \rightarrow \overline{Z}$	"	"	"
	"	"	123		IN		"			"	"	"	2.7 V	0.0 V					"	$I_2 \rightarrow \overline{Z}$	"	"	"
	"	"	124	IN			"			"	"	"	2.7 V	2.7 V					"	$I_3 \rightarrow \overline{Z}$	"	"	"
	"	"	125				"			"	"	2.7 V	0.0 V	0.0 V				IN	"	$I_4 \rightarrow \overline{Z}$	"	"	"
	"	"	126				"			"	"	"	0.0 V	2.7 V			IN		"	$I_5 \rightarrow \overline{Z}$	"	"	"
	"	"	127				"			"	"	"	2.7 V	0.0 V		IN			"	$I_6 \rightarrow \overline{Z}$	"	"	"
	"	"	128				"			"	"	"	2.7 V	2.7 V	IN				"	$I_7 \rightarrow \overline{Z}$	"	"	"
	t_{PLH5}	"	129	2.7 V	2.7 V	2.7 V	2.7 V	OUT		IN	"	0.0 V	0.0 V	0.0 V	2.7 V	2.7 V	2.7 V	2.7 V	"	$\overline{E} \rightarrow Z$	5.0	9.5	"
	t_{PHL5}	"	130	2.7 V	2.7 V	2.7 V	2.7 V	OUT		IN	"	0.0 V	0.0 V	0.0 V	"	2.7 V	2.7 V	2.7 V	"	$\overline{E} \rightarrow Z$	3.5	7.0	"
	t_{PLH6}	"	131	0.0 V	0.0 V	0.0 V	0.0 V		OUT	"	"	2.7 V	2.7 V	2.7 V	"	0.0 V	0.0 V	0.0 V	"	$\overline{E} \rightarrow \overline{Z}$	3.0	6.1	"
	t_{PHL6}	"	132	0.0 V	0.0 V	0.0 V	0.0 V		OUT	"	"	2.7 V	2.7 V	2.7 V	"	0.0 V	0.0 V	0.0 V	"	$\overline{E} \rightarrow \overline{Z}$	"	6.0	"
	t_{PLH3}	"	133			2.7 V	0.0 V	OUT		0.0 V	"	0.0 V	0.0 V	IN					"	$S_0 \rightarrow Z$	4.5	10.5	"
	"	"	134		2.7 V		"	"		"	"	0.0 V	IN	0.0 V					"	$S_1 \rightarrow Z$	"	"	"
	"	"	135				"	"		"	"	IN	0.0 V	0.0 V				2.7 V	"	$S_2 \rightarrow Z$	"	"	"
	t_{PHL3}	"	136			0.0 V	2.7 V	"		"	"	0.0 V	0.0 V	IN					"	$S_0 \rightarrow Z$	4.0	9.0	"
	"	"	137		0.0 V		"	"		"	"	0.0 V	IN	0.0 V					"	$S_1 \rightarrow Z$	"	"	"
	"	"	138				"	"		"	"	IN	0.0 V	0.0 V				0.0 V	"	$S_2 \rightarrow Z$	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	I_3	I_2	I_1	I_0	Z	$\overline{Z}$	E	GND	S_2	S_1	S_0	I_7	I_6	I_5	I_4	V_{CC}				
9 T_C = 25°C Fig. 5	t_{PLH4}	3003 Fig. 5	139			0.0 V	2.7 V		OUT	0.0 V	GND	0.0 V	0.0 V	IN					5.0 V	$S_0 \rightarrow \overline{Z}$	4.0	9.0	ns
		"	140		0.0 V		"		"	"	"	0.0 V	IN	0.0 V					"	$S_1 \rightarrow \overline{Z}$	"	"	"
		"	141		"		"		"	"	"	IN	0.0 V	0.0 V				0.0 V	"	$S_2 \rightarrow \overline{Z}$	"	"	"
	t_{PHL4}	"	142			2.7 V	0.0 V		"	"	"	0.0 V	0.0 V	IN					"	$S_0 \rightarrow \overline{Z}$	3.2	7.5	"
		"	143		2.7 V		"		"	"	"	0.0 V	IN	0.0 V					"	$S_1 \rightarrow \overline{Z}$	"	"	"
		"	144				"		"	"	"	IN	0.0 V	0.0 V				2.7 V	"	$S_2 \rightarrow \overline{Z}$	"	"	"
10 T_C = +125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and, for the following limits: t_{PLH1} = 2.5 to 8.5 ns; t_{PHL1} = 3.5 to 9.0 ns; t_{PLH2} = 2.5 to 7.5 ns; t_{PHL2} = 1.5 to 6.0 ns; t_{PLH3} = 4.5 to 13.5 ns; t_{PHL3} = 4.0 to 9.5 ns; t_{PLH4} = 3.5 to 11.5 ns; t_{PHL4} = 3.0 to 8.0 ns; t_{PLH5} = 4.0 to 12.0 ns; t_{PHL5} = 3.0 to 8.0 ns; t_{PLH6} = 3.0 to 7.5 ns; t_{PHL6} = 2.5 to 6.5 ns																						
11 T_C = -55°C	Same test, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit		
	A	B	C
I_{IL}	-.25/-.60	-.03/-.60	-.03/-.60

2/ A = 2.5 V, B = 0.5 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	E_a	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{0b}	I_{1b}	I_{2b}	I_{3b}	S_0	E_b	V_{CC}				
1 T_C = 25°C	V_{OH}	3006	1	0.8 V	0.8 V			2.0 V	2.0 V	-1 mA	GND						0.8 V		4.5 V	Z_a	2.5		V
		"	2	"	0.8 V					"	"						2.0 V		"	"	"		
		"	3	"	2.0 V		2.0 V			"	"						0.8 V		"	"	"		
		"	4	"	2.0 V	2.0 V				"	"						2.0 V		"	"	"		
		"	5	"	0.8 V					"	"	-1 mA	2.0 V				0.8 V	0.8 V	"	Z_b	"		
		"	6	"	0.8 V					"	"	"		2.0 V			2.0 V	"	"	"	"		
		"	7	"	2.0 V					"	"	"			2.0 V		0.8 V	"	"	"	"		
		"	8	"	2.0 V					"	"	"				2.0 V	2.0 V	"	"	"	"		
	V_{OL}	3007	9	2.0 V							"								"	Z_a		0.5	"
		"	10	0.8 V	0.8 V			0.8 V	0.8 V	20 mA	"						0.8 V		"	"		"	
		"	11	"	0.8 V					"	"						2.0 V		"	"		"	
		"	12	"	2.0 V		0.8 V			"	"						0.8 V		"	"		"	
		"	13	"	2.0 V	0.8 V				"	"						2.0 V		"	"		"	
		"	14								"	20 mA						2.0 V	"	Z_b		"	
		"	15		0.8 V						"	"	0.8 V				0.8 V	0.8 V	"	"		"	
		"	16		0.8 V						"	"		0.8 V			2.0 V	"	"	"		"	
		"	17		2.0 V						"	"					0.8 V		"	"		"	
		"	18		2.0 V						"	"				0.8 V	2.0 V		"	"		"	
	V_{IC}		19	-18 mA							"								"	E_a		-1.2	"
			20		-18 mA						"								"	S_1		"	"
			21			-18 mA					"								"	I_{3a}		"	"
			22				-18 mA				"								"	I_{2a}		"	"
			23					-18 mA			"								"	I_{1a}		"	"
			24						-18 mA		"								"	I_{0a}		"	"
			25								"		-18 mA						"	I_{0b}		"	"
			26								"			-18 mA					"	I_{1b}		"	"
			27								"				-18 mA				"	I_{2b}		"	"
			28								"					-18 mA			"	I_{3b}		"	"
			29								"						-18 mA		"	S_0		"	"
			30								"							-18 mA	"	E_b		"	"
	I_{IH1}	3010	31	2.7 V							"								5.5 V	E_a		20	µA
		"	32		2.7 V						"								"	S_1		"	"
		"	33	4.5 V	0.0 V						"								"	I_{3a}		"	"
		"	34	"	0.0 V						"								"	I_{2a}		"	"
		"	35	"	4.5 V						"								"	I_{1a}		"	"
		"	36	"	"						"								"	I_{0a}		"	"
		"	37	"	"						"								"	I_{0b}		"	"
		"	38	"	"						"								"	I_{1b}		"	"
		"	39	"	0.0 V						"								"	I_{2b}		"	"
		"	40	"	0.0 V						"								"	I_{3b}		"	"
		"	41								"								"	S_0		"	"
		"	42								"								"	E_b		"	"
	I_{IH2}	"	43	7.0 V							"								"	E_a		100	"
		"	44		7.0 V						"								"	S_1		"	"
		"	45	4.5 V	0.0 V						"								"	I_{3a}		"	"
		"	46	"	0.0 V						"								"	I_{2a}		"	"
		"	47	"	4.5 V						"								"	I_{1a}		"	"
		"	48	"	"						"								"	I_{0a}		"	"
		"	49	"	"						"								"	I_{0b}		"	"
		"	50	"	"						"								"	I_{1b}		"	"
		"	51	"	0.0 V						"								"	I_{2b}		"	"
		"	52	"	0.0 V						"								"	I_{3b}		"	"
		"	53								"								"	S_0		"	"
		"	54								"								"	E_b		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	$\overline{E}_a$	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{0b}	I_{1b}	I_{2b}	I_{3b}	S_0	$\overline{E}_b$	V_{CC}				
1 T_C = 25°C	I_{IL1}	3009	55	0.5 V							GND								5.5 V	$\overline{E}_a$	1/	1/	mA
			56		0.5 V						"								"	S_1	"	"	"
			57	0.0 V	4.5 V	0.5 V					"						4.5 V		"	I_{3a}	"	"	"
			58	"	4.5 V		0.5 V				"						0.0 V		"	I_{2a}	"	"	"
			59	"	0.0 V			0.5 V			"						4.5 V		"	I_{1a}	"	"	"
			60	"	"				0.5 V		"						0.0 V		"	I_{0a}	"	"	"
			61		"						"		0.5 V				0.0 V	0.0 V	"	I_{0b}	"	"	"
			62		"						"			0.5 V			4.5 V	"	"	I_{1b}	"	"	"
			63		4.5 V						"				0.5 V		0.0 V	"	"	I_{2b}	"	"	"
			64		4.5 V						"					0.5 V	4.5 V	"	"	I_{3b}	"	"	"
			65								"						0.5 V		"	S_0	"	"	"
			66								"							0.5 V	"	$\overline{E}_b$	"	"	"
	I_{IH5}	3011	67	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	4.5 V	0.0 V	"						0.0 V		"	Z_a	-60	-150	"
		3011	68		0.0 V						"	0.0 V	4.5 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	"	Z_b	-60	-150	"
	I_{IH3}		69	5.5 V						2.5 V	"								4.5 V	Z_a	60		"
			70	0.0 V							"	2.5 V						5.5 V	4.5 V	Z_b	60		"
	I_{CC}	3005	71	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"		0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.5 V	V_{CC}		20	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	72	A	A	A	A	A	A	L	GND	L	A	A	A	A	A	A	5.0 V	All outputs			
			73	B	B	"	"	"	B	L	"	L	B	"	"	"	B	B	"					
			74	"	"	"	"	"	A	H	"	H	A	"	"	"	B	B	"					
			75	"	"	"	"	B	"	L	"	L	"	B	"	"	A	A	"					
			76	"	"	"	"	A	"	H	"	H	"	A	"	"	A	A	"					
			77	"	A	"	B	"	"	L	"	L	"	"	B	"	B	B	"					
			78	"	"	"	A	"	"	H	"	H	"	"	A	"	B	B	"					
			79	"	"	B	"	"	"	L	"	L	"	"	"	B	A	A	"					
			80	"	"	A	"	"	"	H	"	H	"	"	"	A	A	A	"					
			81	A	B	"	"	"	"	L	"	L	"	"	"	"	B	A	"					
			82	"	B	"	"	"	"	"	"	"	"	"	"	"	A	A	"					
			83	"	A	"	"	"	"	"	"	"	"	"	"	"	B	B	"					
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						
9 T_C = 25°C Fig. 5	t_{PLH1}	3003	84	0.0 V	0.0 V				IN	OUT	GND						0.0 V		5.0 V	I_{0a} → Z_a	3.0	7.0	ns
			85	"	0.0 V			IN		"	"						2.7 V		"	I_{1a} → Z_a	"	"	"
			86	"	2.7 V		IN			"	"						0.0 V		"	I_{2a} → Z_a	"	"	"
			87	"	2.7 V	IN				"	"						2.7 V		"	I_{3a} → Z_a	"	"	"
			88		0.0 V						"	OUT	IN				0.0 V	0.0 V	"	I_{0b} → Z_b	"	"	"
			89		0.0 V						"	"		IN			2.7 V	"	"	I_{1b} → Z_b	"	"	"
			90		2.7 V						"	"			IN		0.0 V	"	"	I_{2b} → Z_b	"	"	"
			91		2.7 V						"	"				IN	2.7 V	"	"	I_{3b} → Z_b	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	E_a	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{0b}	I_{1b}	I_{2b}	I_{3b}	S_0	E_b	V_{CC}				
9 T_C = 25°C Fig. 5	t_{PHL1}	3003	92	0.0 V	0.0 V				IN	OUT	GND						0.0 V		5.0 V	I_{0a} → Z_a	2.5	6.5	ns
		"	93	"	0.0 V			IN		"	"						2.7 V		"	I_{1a} → Z_a	"	"	"
		"	94	"	2.7 V		IN			"	"						0.0 V		"	I_{2a} → Z_a	"	"	"
		"	95	"	2.7 V	IN				"	"						2.7 V		"	I_{3a} → Z_a	"	"	"
		"	96	"	0.0 V					"	"	OUT	IN				0.0 V	0.0 V	"	I_{0b} → Z_b	"	"	"
		"	97	"	0.0 V					"	"	"		IN			2.7 V	"	"	I_{1b} → Z_b	"	"	"
		"	98	"	2.7 V					"	"	"			IN		0.0 V	"	"	I_{2b} → Z_b	"	"	"
		"	99	"	2.7 V					"	"	"				IN	2.7 V	"	"	I_{3b} → Z_b	"	"	"
	t_{PLH5}	"	100	IN	0.0 V				2.7 V	OUT	"						0.0 V		"	E_a → Z_a	4.5	9.0	"
	t_{PLH5}	"	101		"						"	OUT	2.7 V				"	IN	"	E_b → Z_b	4.5	9.0	"
	t_{PHL5}	"	102	IN	"				2.7 V	OUT	"						"		"	E_a → Z_a	3.0	7.0	"
	t_{PHL5}	"	103		"						"	OUT	2.7 V				"	IN	"	E_b → Z_b	3.0	7.0	"
	t_{PLH3}	"	104	0.0 V	2.7 V	0.0 V	2.7 V			OUT	"						IN		"	S_0 → Z_a	4.5	10.5	"
		"	105		2.7 V						"	OUT			2.7 V	0.0 V	IN	0.0 V	"	S_0 → Z_b	"	"	"
		"	106	0.0 V	IN	2.7 V		0.0 V		OUT	"						2.7 V		"	S_1 → Z_a	"	"	"
		"	107		IN						"	OUT		0.0 V		2.7 V	2.7 V	0.0 V	"	S_1 → Z_b	"	"	"
	t_{PHL3}	"	108	0.0 V	0.0 V			0.0 V	2.7 V	OUT	"						IN		"	S_0 → Z_a	3.5	9.0	"
		"	109		0.0 V						"	OUT	2.7 V	0.0 V			IN	0.0 V	"	S_0 → Z_b	"	"	"
		"	110	0.0 V	IN		0.0 V		2.7 V	OUT	"				0.0 V		0.0 V	0.0 V	"	S_1 → Z_a	"	"	"
		"	111		IN						"	OUT	2.7 V				0.0 V	0.0 V	"	S_1 → Z_b	"	"	"
10 T_C = +125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and, for the following limits: t_{PLH1} = 2.5 to 9.0 ns t_{PHL1} = 2.5 to 8.0 ns t_{PLH3} = 4.5 to 14.0 ns t_{PHL3} = 3.5 to 11.0 ns t_{PLH5} = 4.5 to 11.5 ns t_{PHL5} = 2.5 to 9.0 ns																						
11 T_C = -55°C	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit:		
	A	B	C
I_{IL}	-.25/-.60	-.03/-.60	-.03/-.60

2/ A = 2.5 V, B = 0.5 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	16	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	S	I_{0a}	I_{1a}	Z_a	I_{0b}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{0d}	Z_c	I_{1c}	I_{0c}	$\overline{E}$	V_{CC}				
1 T_C = 25°C	V_{OL}	3007	1	0.8 V	0.8 V	2.0 V	20 mA				GND							0.8 V	4.5 V	Z_a		.5	V
			2	2.0 V	2.0 V	0.8 V	20 mA				"							"	"	Z_a		"	
			3	0.8 V				0.8 V	2.0 V	20 mA	"							"	"	Z_b		"	
			4	2.0 V				2.0 V	0.8 V	20 mA	"							"	"	Z_b		"	
			5	0.8 V							"	20 mA	2.0 V	0.8 V				"	"	Z_d		"	
			6	2.0 V							"	20 mA	0.8 V	2.0 V				"	"	Z_d		"	
			7	0.8 V							"				20 mA	2.0 V	0.8 V	"	"	Z_c		"	
			8	2.0 V							"				20 mA	0.8 V	2.0 V	"	"	Z_c		"	
	V_{OH}	3006	9	0.8 V	2.0 V	0.8 V	-1 mA				"							"	"	Z_a	2.5		V
			10	2.0 V	0.8 V	2.0 V	-1 mA				"							"	"	Z_a	"		
			11	0.8 V				2.0 V	0.8 V	-1 mA	"							"	"	Z_b	"		
			12	2.0 V				0.8 V	2.0 V	-1 mA	"							"	"	Z_b	"		
			13	0.8 V							"	-1 mA	0.8 V	2.0 V				"	"	Z_d	"		
			14	2.0 V							"	-1 mA	2.0 V	0.8 V				"	"	Z_d	"		
			15	0.8 V							"				-1 mA	0.8 V	2.0 V	"	"	Z_c	"		
			16	2.0 V							"				-1 mA	2.0 V	0.8 V	"	"	Z_c	"		
	V_{IC}		17	-18 mA							"									S		-1.2	V
			18		-18 mA						"									I_{0a}		"	
			19			-18 mA					"									I_{1a}		"	
			20					-18 mA			"									I_{0b}		"	
			21						-18 mA		"									I_{1b}		"	
			22								"		-18 mA							I_{1d}		"	
			23								"			-18 mA						I_{0d}		"	
			24								"					-18 mA				I_{1c}		"	
			25								"						-18 mA			I_{0c}		"	
			26								"							-18 mA		$\overline{E}$		"	
	I_{IH1}	3010	27	2.7 V							"							4.5 V	5.5 V	S		20	μA
			28	4.5 V	2.7 V						"							"	"	I_{0a}		"	
			29	0.0 V		2.7 V					"							"	"	I_{1a}		"	
			30	4.5 V				2.7 V			"							"	"	I_{0b}		"	
			31	0.0 V					2.7 V		"							"	"	I_{1b}		"	
			32	0.0 V							"		2.7 V					"	"	I_{1d}		"	
			33	4.5 V							"			2.7 V				"	"	I_{0d}		"	
			34	0.0 V							"					2.7 V		"	"	I_{1c}		"	
			35	4.5 V							"						2.7 V	"	"	I_{0c}		"	
			36								"							2.7 V	"	$\overline{E}$		"	
	I_{IH2}	"	37	7.0 V							"							4.5 V	"	S		100	μA
			38	4.5 V	7.0 V						"							"	"	I_{0a}		"	
			39	0.0 V		7.0 V					"							"	"	I_{1a}		"	
			40	4.5 V				7.0 V			"							"	"	I_{0b}		"	
			41	0.0 V					7.0 V		"							"	"	I_{1b}		"	
			42	0.0 V							"		7.0 V					"	"	I_{1d}		"	
			43	4.5 V							"			7.0 V				"	"	I_{0d}		"	
			44	0.0 V							"					7.0 V		"	"	I_{1c}		"	
			45	4.5 V							"						7.0 V	"	"	I_{0c}		"	
			46								"							7.0 V	"	$\overline{E}$		"	
	I_{IL1}	3009	47	0.5 V							"									S	1/	1/	mA
			48	0.0 V	0.5 V						"									I_{0a}	"	"	
			49	4.5 V		0.5 V					"									I_{1a}	"	"	
			50	0.0 V				0.5 V			"									I_{0b}	"	"	
			51	4.5 V					0.5 V		"									I_{1b}	"	"	
			52	4.5 V							"		0.5 V							I_{1d}	"	"	
			53	0.0 V							"			0.5 V						I_{0d}	"	"	
			54	4.5 V							"					0.5 V				I_{1c}	"	"	
			55	0.0 V							"						0.5 V			I_{0c}	"	"	
			56			0.0 V			0.0 V		"		0.0 V			0.0 V		0.5 V		$\overline{E}$	"	"	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	S	I_{0a}	I_{1a}	Z_a	I_{0b}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{0d}	Z_c	I_{1c}	I_{0c}	E	V_{CC}				
1 T_C = 25°C	I_{OS}	3011	57	0.0 V	4.5 V		0.0 V	4.5 V		0.0 V	GND	0.0 V		4.5 V	0.0 V		4.5 V	0.0 V	5.5 V	Z_a	-60	-150	mA
		"	58	"							"							"	"	Z_b	"	"	"
		"	59	"							"							"	"	Z_d	"	"	"
		"	60	"							"							"	"	Z_c	"	"	"
	I_{OD}		61				2.5 V			2.5 V	"							5.5 V	4.5 V	Z_a	60		"
			62								"	2.5 V			2.5 V			"	"	Z_b	"		"
			63								"							"	"	Z_d	"		"
			64								"							"	"	Z_c	"		"
	I_{CC}	3005	65	4.5 V	4.5 V	4.5 V		4.5 V	4.5 V		"		4.5 V	4.5 V		4.5 V	4.5 V	4.5 V	5.5 V	V_{CC}		23	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	66	A	A	A	L	A	A	L	GND	L	A	A	L	A	A	A	5.0 V	All outputs			
		"	67	B	"	A	L	"	A	L	"	L	A	"	L	A	"	A	"				
		"	68	B	"	B	H	"	9	H	"	H	B	"	H	B	"	B	"				
		"	69	A	"	B	L	"	3	L	"	L	3	"	L	8	"	8	"				
		"	70	B	B	A	L	B	A	L	"	L	A	B	L	A	B	A	"				
		"	71	A	B	A	H	B	A	H	"	H	A	B	H	A	B	B	"				
8 T_C = 25°C Fig. 5	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						
	t_{PLH1}	3003	72	0.0 V	IN		IN	OUT			GND							0.0 V	5.0 V	I_{0a} → Z_a	2.5	6.0	ns
		"	73	2.7 V				OUT			"							"	"	I_{1a} → Z_a	"	"	"
		"	74	0.0 V					IN	IN	"	OUT	IN	IN	OUT	IN	IN	"	"	I_{0b} → Z_b	"	"	"
		"	75	2.7 V							"	OUT			OUT			"	"	I_{1b} → Z_b	"	"	"
		"	76	2.7 V							"	OUT			OUT			"	"	I_{1d} → Z_d	"	"	"
		"	77	0.0 V							"	OUT			OUT			"	"	I_{0d} → Z_d	"	"	"
		"	78	2.7 V							"	OUT			OUT			"	"	I_{1c} → Z_c	"	"	"
		"	79	0.0 V							"	OUT			OUT			"	"	I_{0c} → Z_c	"	"	"
	t_{PHL1}	"	80	0.0 V	IN		IN	OUT			"							"	"	I_{0a} → Z_a	"	5.5	"
		"	81	2.7 V				OUT			"							"	"	I_{1a} → Z_a	"	"	"
		"	82	0.0 V					IN	IN	"	OUT	IN	IN	OUT	IN	IN	"	"	I_{0b} → Z_b	"	"	"
		"	83	2.7 V							"	OUT			OUT			"	"	I_{1b} → Z_b	"	"	"
		"	84	2.7 V							"	OUT			OUT			"	"	I_{1d} → Z_d	"	"	"
		"	85	0.0 V							"	OUT			OUT			"	"	I_{0d} → Z_d	"	"	"
		"	86	2.7 V							"	OUT			OUT			"	"	I_{1c} → Z_c	"	"	"
		"	87	0.0 V							"	OUT			OUT			"	"	I_{0c} → Z_c	"	"	"
	t_{PLH5}	"	88	2.7 V		2.7 V	OUT		2.7 V	OUT	"							IN	"	E → Z_a	5.0	9.5	"
		"	89	"							"							"	"	E → Z_b	"	"	"
		"	90	"							"	OUT	2.7 V		OUT	2.7 V		"	"	E → Z_d	"	"	"
		"	91	"							"							"	"	E → Z_c	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	S	I_{Oa}	I_{1a}	Z_a	I_{Ob}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{Od}	Z_c	I_{1c}	I_{Oc}	E	V_{CC}				
9 T_C = 25°C Fig. 5	t_{PHL5}	3003	92	0.0 V	2.7 V		OUT			OUT	GND			2.7 V			2.7 V	IN	5.0 V	E ▸ Z_a	2.5	6.5	V
		"	93	"				2.7 V			"	OUT			OUT			"	"	E ▸ Z_b	"	"	"
		"	94	"							"							"	"	E ▸ Z_d	"	"	"
		"	95	"							"							"	"	E ▸ Z_c	"	"	"
	t_{PLH3}	"	96	IN	2.7 V	0.0 V	OUT			OUT	"			2.7 V			2.7 V	0.0 V	"	S ▸ Z_a	4.0	10.0	"
		"	97	"				2.7 V	0.0 V		"	OUT	0.0 V		OUT	0.0 V		"	"	S ▸ Z_b	"	"	"
		"	98	"							"							"	"	S ▸ Z_d	"	"	"
		"	99	"							"							"	"	S ▸ Z_c	"	"	"
	t_{PHL3}	"	100	"	0.0 V	2.7 V	OUT			OUT	"			0.0 V			0.0 V	"	"	S ▸ Z_a	3.0	7.0	"
		"	101	"				0.0 V	2.7 V		"	OUT	2.7 V		OUT	2.7 V		"	"	S ▸ Z_b	"	"	"
		"	102	"							"							"	"	S ▸ Z_d	"	"	"
		"	103	"							"							"	"	S ▸ Z_c	"	"	"
10 T_C = +125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and use limits from table I.																						
11 T_C = -55°C	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit:		
	A	B	C
I_{IL}	.25/-.60	-.03/-.60	-.03/-.60

2/ A = 2.5 V, B = 0.5 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	S	I_{Oa}	I_{1a}	Z_a	I_{Ob}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{Od}	Z_c	I_{1c}	I_{Oc}	E	V_{CC}				
1 T_C = 25°C	V_{OL}	3007	1	0.8 V	2.0 V	0.8 V	20 mA				GND							0.8 V	4.5 V	Z_a		.5	V
		"	2	2.0 V	0.8 V	2.0 V	20 mA				"							"	"	$\overline{Z_a}$		"	"
		"	3	0.8 V				2.0 V	0.8 V	20 mA	"							"	"	Z_b		"	"
		"	4	2.0 V				0.8 V	2.0 V	20 mA	"							"	"	$\overline{Z_b}$		"	"
		"	5	2.0 V							"	20 mA	2.0 V	0.8 V				"	"	Z_d		"	"
		"	6	0.8 V							"	20 mA	0.8 V	2.0 V				"	"	$\overline{Z_d}$		"	"
		"	7	2.0 V							"				20 mA	2.0 V	0.8 V	"	"	Z_c		"	"
		"	8	0.8 V							"				20 mA	0.8 V	2.0 V	"	"	$\overline{Z_c}$		"	"
	V_{OH}	3006	9	0.8 V	0.8 V	2.0 V	-1 mA				"							"	"	Z_a	2.5		"
		"	10	2.0 V	2.0 V	0.8 V	-1 mA				"							"	"	$\overline{Z_a}$	"		"
		"	11	0.8 V				0.8 V	2.0 V	-1 mA	"							"	"	Z_b	"		"
		"	12	2.0 V				2.0 V	0.8 V	-1 mA	"							"	"	$\overline{Z_b}$	"		"
		"	13	2.0 V							"	-1 mA	0.8 V	2.0 V				"	"	Z_d	"		"
		"	14	0.8 V							"	-1 mA	2.0 V	0.8 V				"	"	$\overline{Z_d}$	"		"
		"	15	2.0 V							"				-1 mA	0.8 V	2.0 V	"	"	Z_c	"		"
		"	16	0.8 V							"				-1 mA	2.0 V	0.8 V	"	"	$\overline{Z_c}$	"		"
	V_{IC}		17	-18 mA							"								"	S		-1.2	"
			18		-18 mA						"								"	I_{Oa}		"	"
			19			-18 mA					"								"	I_{1a}		"	"
			20					-18 mA			"								"	I_{Ob}		"	"
			21						-18 mA		"								"	I_{1b}		"	"
			22								"		-18 mA						"	I_{1d}		"	"
			23								"			-18 mA					"	I_{Od}		"	"
			24								"					-18 mA			"	I_{1c}		"	"
			25								"						-18 mA		"	I_{Oc}		"	"
			26								"							-18 mA	"	E		"	"
	I_{IH1}	3010	27	2.7 V	2.7 V						"							4.5 V	5.5 V	S		20	µA
		"	28	4.5 V		2.7 V					"							"	"	I_{Oa}		"	"
		"	29	0.0 V				2.7 V			"							"	"	I_{1a}		"	"
		"	30	4.5 V					2.7 V		"							"	"	I_{Ob}		"	"
		"	31	0.0 V							"		2.7 V					"	"	I_{1b}		"	"
		"	32	0.0 V							"			2.7 V				"	"	I_{1d}		"	"
		"	33	4.5 V							"					2.7 V		"	"	I_{Od}		"	"
		"	34	0.0 V							"						2.7 V	"	"	I_{1c}		"	"
		"	35	4.5 V							"							2.7 V	"	I_{Oc}		"	"
		"	36								"								"	E		"	"
	I_{IH2}	"	37	7.0 V	7.0 V						"							4.5 V	"	S		100	"
		"	38	4.5 V		7.0 V					"							"	"	I_{Oa}		"	"
		"	39	0.0 V				7.0 V			"							"	"	I_{1a}		"	"
		"	40	4.5 V					7.0 V		"							"	"	I_{Ob}		"	"
		"	41	0.0 V							"		7.0 V					"	"	I_{1b}		"	"
		"	42	0.0 V							"			7.0 V				"	"	I_{1d}		"	"
		"	43	4.5 V							"					7.0 V		"	"	I_{Od}		"	"
		"	44	0.0 V							"						7.0 V	"	"	I_{1c}		"	"
		"	45	4.5 V							"							7.0 V	"	I_{Oc}		"	"
		"	46								"								"	E		"	"
	I_{IL1}	3009	47	0.5 V	0.5 V						"								"	S	1/	1/	mA
		"	48	0.0 V		0.5 V					"								"	I_{Oa}	"	"	"
		"	49	4.5 V				0.5 V			"								"	I_{1a}	"	"	"
		"	50	0.0 V					0.5 V		"								"	I_{Ob}	"	"	"
		"	51	4.5 V							"		0.5 V						"	I_{1b}	"	"	"
		"	52	4.5 V							"			0.5 V					"	I_{1d}	"	"	"
		"	53	0.0 V							"					0.5 V			"	I_{Od}	"	"	"
		"	54	4.5 V							"						0.5 V		"	I_{1c}	"	"	"
		"	55	0.0 V							"								"	I_{Oc}	"	"	"
		"	56								"		0.0 V			0.0 V		0.5 V	"	E	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	S	I_{0a}	I_{1a}	Z_a	I_{0b}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{0d}	Z_c	I_{1c}	I_{0c}	E	V_{CC}				
1 T_C = 25°C	I_{OS}	3011	57	0.0 V	0.0 V	4.5 V	0.0 V	0.0 V	4.5 V	0.0 V	GND	0.0 V	4.5 V	0.0 V	0.0 V	4.5 V	0.0 V	0.0 V	5.5 V	Z_a, Z_b, Z_d, Z_c	-60	-150	mA
		"	58	"							"							"	"		"	"	"
		"	59	"							"							"	"		"	"	"
		"	60	"							"							"	"		"	"	"
	I_{OD}		61	"	5.5 V		2.5 V	5.5 V		2.5 V	"	2.5 V		5.5 V	2.5 V		5.5 V	"	4.5 V	Z_a, Z_b, Z_d, Z_c	60		"
			62	"							"							"	"		"		"
			63	"							"							"	"		"		"
			64	"							"							"	"		"		"
	I_{CC}	3005	65	4.5 V	4.5 V	4.5 V		4.5 V	4.5 V		"		4.5 V	4.5 V		4.5 V	4.5 V	4.5 V	5.5 V	V_{CC}		15	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	66	A	A	A	H	A	A	H	GND	H	A	A	H	A	A	A	5.0 V	All outputs			
		"	67	B	"	A	H	"	A	H	"	H	A	"	H	A	A	A	"				
		"	68	A	"	B	L	"	B	L	"	L	B	"	L	B	B	B	"				
		"	69	B	"	B	H	"	B	H	"	H	B	"	H	B	A	"	"				
		"	70	A	B	A	H	B	A	H	"	H	A	B	H	A	A	B	"				
		"	71	B	B	A	L	B	A	L	"	L	A	B	L	A	A	B	"				
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						
9 T_C = 25°C Fig. 5	t_{PLH2}	3003	72	0.0 V	IN	IN	OUT	IN	IN	OUT	GND	OUT	IN	IN	OUT	IN	IN	0.0 V	5.0 V	I_{0a} ▸ Z_a, I_{1a} ▸ Z_a, I_{0b} ▸ Z_b, I_{1b} ▸ Z_b, I_{1d} ▸ Z_d, I_{0d} ▸ Z_d, I_{1c} ▸ Z_c, I_{0c} ▸ Z_c	2.5	5.9	ns
		"	73	2.7 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	74	0.0 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	75	2.7 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	76	2.7 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	77	0.0 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	78	2.7 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	79	0.0 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
	t_{PHL2}	"	80	0.0 V	IN	IN	OUT	IN	IN	OUT	"	OUT	IN	IN	OUT	IN	IN	"	"	I_{0a} ▸ Z_a, I_{1a} ▸ Z_a, I_{0b} ▸ Z_b, I_{1b} ▸ Z_b, I_{1d} ▸ Z_d, I_{0d} ▸ Z_d, I_{1c} ▸ Z_c, I_{0c} ▸ Z_c	1.5	4.0	"
		"	81	2.7 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	82	0.0 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	83	2.7 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	84	2.7 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	85	0.0 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	86	2.7 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
		"	87	0.0 V			OUT			OUT	"	OUT			OUT			"	"		"	"	"
	t_{PLH6}	"	88	2.7 V		2.7 V	OUT		2.7 V	OUT	"	OUT	2.7 V		OUT	2.7 V		IN	"	E ▸ Z_a, E ▸ Z_b, E ▸ Z_d, E ▸ Z_c	2.5	6.0	"
		"	89	"							"							"	"		"	"	"
		"	90	"							"							"	"		"	"	"
		"	91	"							"							"	"		"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	S	I_{0a}	I_{1a}	Z_a	I_{0b}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{0d}	Z_c	I_{1c}	I_{0c}	E	V_{CC}				
9 T_C = 25°C Fig. 5	t_{PHL6}	3303	92	0.0 V	2.7 V		OUT	2.7 V		OUT	GND	OUT		2.7 V	OUT		2.7 V	IN	5.0 V	E ↓ Z_a	2.0	6.0	V
		"	93	"							"							"	"	E ↓ Z_b	"	"	"
		"	94	"							"							"	"	E ↓ Z_d	"	"	"
		"	95	"							"							"	"	E ↓ Z_c	"	"	"
	t_{PLH4}	"	96	IN	0.0 V	2.7 V	OUT	0.0 V	2.7 V	OUT	"	OUT	2.7 V	0.0 V	OUT	2.7 V	0.0 V	0.0 V	"	S ↑ Z_a	3.0	9.5	"
		"	97	"							"							"	"	S ↑ Z_b	"	"	"
		"	98	"							"							"	"	S ↑ Z_d	"	"	"
		"	99	"							"							"	"	S ↑ Z_c	"	"	"
	t_{PHL4}	"	100	"	2.7 V	0.0 V	OUT	2.7 V	0.0 V	OUT	"	OUT	0.0 V	2.7 V	OUT	0.0 V	2.7 V	"	"	S ↓ Z_a	2.5	5.5	"
		"	101	"							"							"	"	S ↓ Z_b	"	"	"
		"	102	"							"							"	"	S ↓ Z_d	"	"	"
		"	103	"							"							"	"	S ↓ Z_c	"	"	"
10 T_C = +125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and use limits from table I.																						
11 T_C = -55°C	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit:		
	A	B	C
I_{IL}	-.25/-.50	-.03/-.60	-.03/-.60

2/ A = 2.5 V, B = 0.5 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	9	9	10	12	13	14	15	17	19	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	I_3	I_2	I_1	I_0	Z	$\overline{Z}$	$\overline{OE}$	GND	S_2	S_1	S_0	I_7	I_6	I_5	I_4	V_{CC}				
T_C = 25°C	V_{OL}	3007	1				2.0 V			0.8 V	GND	0.8 V	0.8 V	0.8 V					4.5 V	Z		0.5	V
			2										0.8 V	2.0 V									
			3	2.0 V	2.0 V								2.0 V	0.8 V									
			4			2.0 V			20 mA				2.0 V	2.0 V									
			5									2.0 V	0.8 V	0.8 V									
			6										0.8 V	2.0 V									
			7				0.8 V	20 mA					2.0 V	0.8 V									
			8									0.8 V	2.0 V	0.8 V									
			9										0.8 V	0.8 V									
	V_{OH}	3006	10				2.0 V	-3.0 mA		0.8 V		0.3 V	0.8 V	0.8 V						Z	2.4		
			11				0.8 V		-3.0 mA					2.0 V						$\overline{Z}$			
			12		0.8 V								2.0 V	0.8 V									
			13			0.8 V							2.0 V	2.0 V									
			14	0.8 V								2.0 V	0.8 V	0.8 V									
			15										0.8 V	2.0 V									
			16										2.0 V	0.8 V									
			17										2.0 V	2.0 V	0.8 V								
			18													0.8 V							
			19														0.8 V						
	V_{IC}		19	-18 mA																I_3		-1.2	V
			20		-18 mA															I_2			
			21			-18 mA														I_1			
			22				-18 mA													I_0			
			23																	$\overline{OE}$			
			24							-18 mA										S_2			
			25									-18 mA								S_1			
			26										-18 mA							S_0			
			27											-18 mA	-18 mA					I_7			
			28													-18 mA				I_6			
			29														-18 mA			I_5			
			30															-18 mA		I_4			
	I_{IH1}	3010	31	2.7 V						4.5 V		4.5 V	0.0 V	0.0 V					5.5 V	I_3		20	μA
			32		2.7 V								0.0 V	4.5 V						I_2			
			33			2.7 V							4.5 V	0.0 V						I_1			
			34				2.7 V						4.5 V	4.5 V						I_0			
			35									2.7 V								$\overline{OE}$			
			36										2.7 V							S_2			
			37											2.7 V						S_1			
			38																	S_0			
			39										0.0 V	0.0 V	2.7 V					I_7			
			40										0.0 V	4.5 V		2.7 V				I_6			
			41										4.5 V	0.0 V			2.7 V			I_5			
			42										4.5 V	4.5 V				2.7 V		I_4			
	I_{IH2}	"	43	7.0 V						7.0 V		4.5 V	0.0 V	0.0 V						I_3		100	"
			44		7.0 V								0.0 V	4.5 V						I_2			
			45			7.0 V							4.5 V	0.0 V						I_1			
			46				7.0 V						4.5 V	4.5 V						I_0			
			47									7.0 V								$\overline{OE}$			
			48										7.0 V							S_2			
			49											7.0 V						S_1			
			50																	S_0			
			51										0.0 V	0.0 V	7.0 V					I_7			
			52										0.0 V	4.5 V		7.0 V				I_6			
			53										4.5 V	0.0 V			7.0 V			I_5			
			54										4.5 V	4.5 V				7.0 V		I_4			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	I_3	I_2	I_1	I_0	$\overline{Z}$	$\overline{Y}$	$\overline{OE}$	GND	S_2	S_1	S_0	I_7	I_6	I_5	I_4	V_{CC}				
1 T_C = 25°C	I_{IL}	3009	55	0.5 V						0.0 V	GND	0.0 V	4.5 V	4.5 V					5.5 V	I_3	1/	1/	mA
		"	56		0.5 V					"	"	"	4.5 V	0.0 V					"	I_2	"	"	"
		"	57			0.5 V				"	"	"	0.0 V	4.5 V					"	I_1	"	"	"
		"	58				0.5 V			"	"	"	0.0 V	0.0 V					"	I_0	"	"	"
		"	59							0.5 V	"								"	$\overline{OE}$	"	"	"
		"	60							0.0 V	"	0.5 V							"	S_2	"	"	"
		"	61								"		0.5 V						"	S_1	"	"	"
		"	62								"			0.5 V					"	S_0	"	"	"
		"	63							0.0 V	"	4.5 V	4.5 V	4.5 V	0.5 V				"	I_7	"	"	"
		"	64							"	"	"	4.5 V	0.0 V		0.5 V			"	I_6	"	"	"
		"	65							"	"	"	0.0 V	4.5 V			0.5 V		"	I_5	"	"	"
		"	66							"	"	"	0.0 V	0.0 V				0.5 V	"	I_4	"	"	"
	I_{OZH}		67				0.0 V	2.4 V		4.5 V	"	0.0 V	0.0 V	0.0 V					"	Z		50	uA
	I_{OZH}		68				4.5 V		2.4 V	"	"	"	"	"					"	Y		50	"
	I_{OZL}		69				4.5 V	0.5 V		"	"	"	"	"					"	Z		-50	"
	I_{OZL}		70				0.0 V		0.5 V	"	"	"	"	"					"	Y		-50	"
	I_{OS}	3011	71				4.5 V	0.0 V		0.0 V	"	"	"	"					"	Z	-60	-150	mA
	I_{OS}	3011	72				0.0 V		0.0 V	"	"	"	"	"					"	Y	-60	-150	"
	I_{OD}		73				0.0 V	2.5 V		"	"	"	"	"					4.5 V	Z	35		"
	I_{OD}		74				5.5 V		2.5 V	"	"	"	"	"					"	Y	35		"
	I_{CC}	3005	75	4.5 V	4.5 V	4.5 V	4.5 V			"	"	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	5.5 V	V_{CC}		22	"
		3005	76	4.5 V	4.5 V	4.5 V	4.5 V			4.5 V	"	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	4.5 V	5.5 V	V_{CC}		24	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	77	B	B	B	A	H	L	B	GND	3	B	B	B	B	3	B	5.0 V	All outputs			
	"	"	78	"	B	A	B	"	"	"	"	"	B	A	"	"	"	"	"	"			
	"	"	79	"	A	B	"	"	"	"	"	"	A	B	"	"	"	"	"	"			
	"	"	80	A	B	"	"	"	"	"	"	"	A	A	"	"	"	"	"	"			
	"	"	81	B	"	"	"	"	"	"	"	A	B	B	"	"	"	A	"	"			
	"	"	82	"	"	"	"	"	"	"	"	"	B	A	"	"	A	3	"	"			
	"	"	83	"	"	"	"	"	"	"	"	"	A	B	"	A	3	"	"	"			
	"	"	84	"	"	"	"	"	"	"	"	"	A	A	A	B	B	"	"	"			
	"	"	85	A	A	A	"	L	H	"	"	B	B	B	"	A	A	A	"	"			
	"	"	86	"	A	B	"	"	"	"	"	"	B	A	"	"	"	"	"	"			
	"	"	87	"	B	A	"	"	"	"	"	"	A	B	"	"	"	"	"	"			
	"	"	88	B	A	"	"	"	"	"	"	"	A	A	"	"	"	"	"	"			
	"	"	89	A	"	"	"	"	"	"	"	A	B	B	"	"	"	B	"	"			
	"	"	90	"	"	"	"	"	"	"	"	"	A	B	"	B	"	"	"	"			
	"	"	91	"	"	"	"	"	"	"	"	"	A	A	B	"	"	"	"	"			
	"	"	92	"	"	"	"	"	"	"	"	"	B	A	B	"	B	"	"	"			
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	I_3	I_2	I_1	I_0	Z	$\overline{Z}$	$\overline{OE}$	GND	S_2	S_1	S_0	I_7	I_6	I_5	I_4	V_{CC}				
9 T_C = 25°C	t_{PLH1}	3003	93				IN	OUT		0.0 V	GND	0.0 V	0.0 V	0.0 V					5.0 V	$I_0 \rightarrow Z$	3.5	7.0	ns
		"	94			IN		"		"	"	"	0.0 V	2.7 V					"	$I_1 \rightarrow Z$	"	"	
		"	95		IN			"		"	"	"	2.7 V	0.0 V					"	$I_2 \rightarrow Z$	"	"	
		"	96	IN				"		"	"	"	2.7 V	2.7 V					"	$I_3 \rightarrow Z$	"	"	
		"	97					"		"	"	2.7 V	0.0 V	0.0 V				IN	"	$I_4 \rightarrow Z$	"	"	
		"	98					"		"	"	"	0.0 V	2.7 V			IN		"	$I_5 \rightarrow Z$	"	"	
		"	99					"		"	"	"	2.7 V	0.0 V		IN			"	$I_6 \rightarrow Z$	"	"	
		"	100					"		"	"	"	2.7 V	2.7 V	IN				"	$I_7 \rightarrow Z$	"	"	
	t_{PHL1}	3003 Fig. 4	101				IN	"		"	"	0.0 V	0.0 V	0.0 V					"	$I_0 \rightarrow Z$	"	7.0	"
		"	102			IN		"		"	"	"	0.0 V	2.7 V					"	$I_1 \rightarrow Z$	"	"	
		"	103		IN			"		"	"	"	2.7 V	0.0 V					"	$I_2 \rightarrow Z$	"	"	
		"	104	IN				"		"	"	"	2.7 V	2.7 V					"	$I_3 \rightarrow Z$	"	"	
		"	105					"		"	"	2.7 V	0.0 V	0.0 V				IN	"	$I_4 \rightarrow Z$	"	"	
		"	106					"		"	"	"	0.0 V	2.7 V			IN		"	$I_5 \rightarrow Z$	"	"	
		"	107					"		"	"	"	2.7 V	0.0 V		IN			"	$I_6 \rightarrow Z$	"	"	
		"	108					"		"	"	"	2.7 V	2.7 V	IN				"	$I_7 \rightarrow Z$	"	"	
	t_{PLH2}	"	109				IN		OUT	"	"	0.0 V	0.0 V	0.0 V					"	$I_0 \rightarrow \overline{Z}$	3.0	6.5	"
		"	110			IN			"	"	"	"	0.0 V	2.7 V					"	$I_1 \rightarrow \overline{Z}$	"	"	
		"	111		IN				"	"	"	"	2.7 V	0.0 V					"	$I_2 \rightarrow \overline{Z}$	"	"	
		"	112	IN					"	"	"	"	2.7 V	2.7 V					"	$I_3 \rightarrow \overline{Z}$	"	"	
		"	113						"	"	"	2.7 V	0.0 V	0.0 V				IN	"	$I_4 \rightarrow \overline{Z}$	"	"	
		"	114						"	"	"	"	0.0 V	2.7 V			IN		"	$I_5 \rightarrow \overline{Z}$	"	"	
		"	115						"	"	"	"	2.7 V	0.0 V		IN			"	$I_6 \rightarrow \overline{Z}$	"	"	
		"	116						"	"	"	"	2.7 V	2.7 V	IN				"	$I_7 \rightarrow \overline{Z}$	"	"	
	t_{PHL2}	"	117				IN		"	"	"	0.0 V	0.0 V	0.0 V					"	$I_0 \rightarrow \overline{Z}$	1.5	4.0	"
		"	118			IN			"	"	"	"	0.0 V	2.7 V					"	$I_1 \rightarrow \overline{Z}$	"	"	
		"	119		IN				"	"	"	"	2.7 V	0.0 V					"	$I_2 \rightarrow \overline{Z}$	"	"	
		"	120	IN					"	"	"	"	2.7 V	2.7 V					"	$I_3 \rightarrow \overline{Z}$	"	"	
		"	121						"	"	"	2.7 V	0.0 V	0.0 V				IN	"	$I_4 \rightarrow \overline{Z}$	"	"	
		"	122						"	"	"	"	0.0 V	2.7 V			IN		"	$I_5 \rightarrow \overline{Z}$	"	"	
		"	123						"	"	"	"	2.7 V	0.0 V		IN			"	$I_6 \rightarrow \overline{Z}$	"	"	
		"	124						"	"	"	"	2.7 V	2.7 V	IN				"	$I_7 \rightarrow \overline{Z}$	"	"	
	t_{PLH3}	"	125			2.7 V	0.0 V	OUT		"	"	0.0 V	0.0 V	IN					"	$S_0 \rightarrow Z$	4.5	10.5	"
		"	126		2.7 V		"	"		"	"	0.0 V	IN	0.0 V					"	$S_1 \rightarrow Z$	"	"	
		"	127				"	"		"	"	IN	0.0 V	0.0 V				2.7 V	"	$S_2 \rightarrow Z$	"	"	
	t_{PHL3}	"	128			0.0 V	2.7 V	"		"	"	0.0 V	0.0 V	IN					"	$S_0 \rightarrow Z$	4.0	8.5	"
		"	129		0.0 V		"	"		"	"	0.0 V	IN	0.0 V					"	$S_1 \rightarrow Z$	"	"	
		"	130				"	"		"	"	IN	0.0 V	0.0 V				0.0 V	"	$S_2 \rightarrow Z$	"	"	
	t_{PLH4}	"	131			0.0 V	0.0 V	"	OUT	"	"	0.0 V	0.0 V	IN					"	$S_0 \rightarrow \overline{Z}$	3.5	9.0	"
		"	132		0.0 V		"	"	"	"	"	0.0 V	IN	0.0 V					"	$S_1 \rightarrow \overline{Z}$	"	"	
		"	133				"	"	"	"	"	IN	0.0 V	0.0 V				0.0 V	"	$S_2 \rightarrow \overline{Z}$	"	"	
	t_{PHL4}	"	134			2.7 V	0.0 V		"	"	"	0.0 V	0.0 V	IN					"	$S_0 \rightarrow \overline{Z}$	3.2	7.5	"
		"	135		2.7 V		"		"	"	"	0.0 V	IN	0.0 V					"	$S_1 \rightarrow \overline{Z}$	"	"	
		"	136				"		"	"	"	IN	0.0 V	0.0 V				2.7 V	"	$S_2 \rightarrow \overline{Z}$	"	"	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	I_3	I_2	I_1	I_0	Z	Z	$\overline{OE}$	GND	S_2	S_1	S_0	I_7	I_6	I_5	I_4	V_{CC}				
9 T_C = 25°C	t_{PZH5}	3003 Fig. 4	137				2.7 V	OUT		IN	GND	0.0 V	0.0 V	0.0 V					5.0 V	$\overline{OE}$ to Z	3.5	7.0	ns
	t_{PZH6}	"	138				0.0 V		OUT	"	"	"	"	"					"	$\overline{OE}$ to $\overline{Z}$	2.5	6.0	"
	t_{PZL5}	"	139				0.0 V	OUT		"	"	"	"	"					"	$\overline{OE}$ to Z	3.5	7.5	"
	t_{PZL6}	"	140				2.7 V		OUT	"	"	"	"	"					"	$\overline{OE}$ to $\overline{Z}$	2.5	6.0	"
	t_{PHZ5}	"	141				2.7 V	OUT		"	"	"	"	"					"	$\overline{OE}$ to Z	2.0	5.5	"
	t_{PHZ6}	"	142				0.0 V		OUT	"	"	"	"	"					"	$\overline{OE}$ to $\overline{Z}$	2.5	5.5	"
	t_{PLZ5}	"	143				0.0 V	OUT		"	"	"	"	"					"	$\overline{OE}$ to Z	1.5	4.5	"
	t_{PLZ6}	"	144				2.7 V		OUT	"	"	"	"	"					"	$\overline{OE}$ to $\overline{Z}$	"	4.5	"
10 T_C = +125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and, for the following limits: t_{PLH1} = 2.5 to 9.0 ns; t_{PLH3} = 3.5 to 14.0 ns; t_{PZH5} = 3.0 to 8.5 ns; t_{PHZ5} = 2.0 to 5.5 ns t_{PLH2} = 2.5 to 8.5 ns; t_{PLH4} = 3.5 to 11.5 ns; t_{PZH6} = 2.0 to 7.0 ns; t_{PHZ6} = 2.5 to 6.0 ns t_{PHL1} = 3.5 to 9.0 ns; t_{PHL3} = 3.0 to 10.5 ns; t_{PZL5} = 3.5 to 9.0 ns; t_{PLZ5} = 1.5 to 5.5 ns t_{PHL2} = 1.5 to 6.0 ns; t_{PHL4} = 3.2 to 8.0 ns; t_{PZL6} = 2.5 to 7.5 ns; t_{PLZ6} = 1.5 to 5.0 ns																						
11 T_C = -55°C	Same test, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit		
	A	B	C
I_{IL}	-.25/-.60	-.03/-.60	-.03/-.60

2/ A = 2.4 V, B = 0.5 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	S	I_{0a}	I_{1a}	Z_a	I_{0b}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{0d}	Z_c	I_{1c}	I_{0c}	$\overline{OE}$	V_{CC}		Min	Max	
1 T_C = 25°C	V_{OL}	3007	1	0.8 V	0.8 V	2.0 V	20 mA				GND							0.8 V	4.5 V	Z_a		.5	V
		"	2	2.0 V	2.0 V	0.8 V	20 mA				"							"	"	Z_a		"	"
		"	3	0.8 V				0.8 V	2.0 V	20 mA	"							"	"	Z_b		"	"
		"	4	2.0 V				2.0 V	0.8 V	20 mA	"							"	"	Z_b		"	"
		"	5	0.8 V							"	20 mA	2.0 V	0.8 V				"	"	Z_d		"	"
		"	6	2.0 V							"	20 mA	0.8 V	2.0 V				"	"	Z_d		"	"
		"	7	0.8 V							"				20 mA	2.0 V	0.8 V	"	"	Z_c		"	"
		"	8	2.0 V							"				20 mA	0.8 V	2.0 V	"	"	Z_c		"	"
	V_{OH}	3006	9	0.8 V	2.0 V	0.8 V	-3.0 mA				"							"	"	Z_a	2.4		"
		"	10	2.0 V	0.8 V	2.0 V	-3.0 mA				"							"	"	Z_a	"		"
		"	11	0.8 V				2.0 V	0.8 V	-3.0 mA	"							"	"	Z_b	"		"
		"	12	2.0 V				0.8 V	2.0 V	-3.0 mA	"							"	"	Z_b	"		"
		"	13	0.8 V							"	-3.0 mA	0.8 V	2.0 V				"	"	Z_d	"		"
		"	14	2.0 V							"	-3.0 mA	2.0 V	0.8 V				"	"	Z_d	"		"
		"	15	0.8 V							"				-3.0 mA	0.8 V	2.0 V	"	"	Z_c	"		"
		"	16	2.0 V							"				-3.0 mA	2.0 V	0.8 V	"	"	Z_c	"		"
	V_{IC}		17	-18 mA							"								"	S		-1.2	"
			18		-18 mA						"								"	I_{0a}		"	"
			19			-18 mA					"								"	I_{1a}		"	"
			20					-18 mA			"								"	I_{0b}		"	"
			21						-18 mA		"								"	I_{1b}		"	"
			22								"		-18 mA						"	I_{1d}		"	"
			23								"			-18 mA					"	I_{0d}		"	"
			24								"					-18 mA			"	I_{1c}		"	"
			25								"						-18 mA		"	I_{0c}		"	"
			26								"							-18 mA	"	$\overline{OE}$		"	"
	I_{IH1}	3010	27	2.7 V							"							4.5 V	5.5 V	S		20	µA
		"	28	4.5 V	2.7 V						"							"	"	I_{0a}		"	"
		"	29	0.0 V		2.7 V					"							"	"	I_{1a}		"	"
		"	30	4.5 V				2.7 V			"							"	"	I_{0b}		"	"
		"	31	0.0 V					2.7 V		"							"	"	I_{1b}		"	"
		"	32	0.0 V							"		2.7 V					"	"	I_{1d}		"	"
		"	33	4.5 V							"			2.7 V				"	"	I_{0d}		"	"
		"	34	0.0 V							"					2.7 V		"	"	I_{1c}		"	"
		"	35	4.5 V							"						2.7 V	"	"	I_{0c}		"	"
			36								"							2.7 V	"	$\overline{OE}$		"	"
	I_{IH2}	"	37	7.0 V							"							4.5 V	"	S		100	"
		"	38	4.5 V	7.0 V						"							"	"	I_{0a}		"	"
		"	39	0.0 V		7.0 V					"							"	"	I_{1a}		"	"
		"	40	4.5 V				7.0 V			"							"	"	I_{0b}		"	"
		"	41	0.0 V					7.0 V		"							"	"	I_{1b}		"	"
		"	42	0.0 V							"		7.0 V					"	"	I_{1d}		"	"
		"	43	4.5 V							"			7.0 V				"	"	I_{0d}		"	"
		"	44	0.0 V							"					7.0 V		"	"	I_{1c}		"	"
		"	45	4.5 V							"						7.0 V	"	"	I_{0c}		"	"
			46								"							7.0 V	"	$\overline{OE}$		"	"
	I_{IL1}	3009	47	0.5 V							"								"	S	1/	1/	mA
		"	48	0.0 V	0.5 V						"								"	I_{0a}	"	"	"
		"	49	4.5 V		0.5 V					"								"	I_{1a}	"	"	"
		"	50	0.0 V				0.5 V			"								"	I_{0b}	"	"	"
		"	51	4.5 V					0.5 V		"								"	I_{1b}	"	"	"
		"	52	4.5 V							"		0.5 V						"	I_{1d}	"	"	"
		"	53	0.0 V							"			0.5 V					"	I_{0d}	"	"	"
		"	54	4.5 V							"					0.5 V			"	I_{1c}	"	"	"
		"	55	0.0 V							"						0.5 V		"	I_{0c}	"	"	"
			56								"							0.5 V	"	$\overline{OE}$	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.

Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	S	I_{Oa}	I_{Ia}	Z_a	I_{Ob}	I_{Ib}	Z_b	GND	Z_d	I_{Id}	I_{Od}	Z_c	I_{Ic}	I_{Oc}	$\overline{OE}$	V_{CC}				
1 T_C = 25°C	I_{OS}	3011	57	0.0 V	4.5 V		0.0 V	4.5 V		0.0 V	GND	0.0 V		4.5 V	0.0 V		4.5 V	0.0 V	5.5 V	Z_a Z_c Z_d Z_c	-60	-150	mA
			58	"							"							"	"		"	"	
			59	"							"							"	"		"	"	
			60	"							"							"	"		"	"	
	I_{OD}		61	0.0 V	0.0 V		2.5 V	0.0 V		2.5 V	"	2.5 V		0.0 V	2.5 V		0.0 V	"	4.5 V	Z_a Z_b Z_d Z_c	35		"
			62								"							"	"		"		
			63								"							"	"		"		
			64								"							"	"		"		
	I_{OZH}		65	4.5 V	4.5 V	4.5 V	2.7 V	4.5 V	4.5 V	2.7 V	"	2.7 V	4.5 V	4.5 V	2.7 V	4.5 V	4.5 V	2.0 V	5.5 V	Z_a Z_b Z_d Z_c		50	µA
			66	"							"							"	"		"	"	
			67	"							"							"	"		"	"	
			68	"							"							"	"		"	"	
	I_{OZL}		69	0.0 V	0.0 V	4.5 V	0.5 V	0.0 V	4.5 V	0.5 V	"	0.5 V	4.5 V	0.0 V	0.5 V	4.5 V	0.0 V	"	"	Z_a Z_b Z_d Z_c		-50	"
			70	"							"							"	"		"	"	
			71	"							"							"	"		"	"	
			72	"							"							"	"		"	"	
	I_{CCH}	3005	73	4.5 V	0.0 V	4.5 V		0.0 V	4.5 V		"		4.5 V	0.0 V		4.5 V	0.0 V	0.0 V	"	V_{CC}		15	mA
	I_{CCL}	3005	74	0.0 V	0.0 V	0.0 V		0.0 V	0.0 V		"		0.0 V	0.0 V		0.0 V	0.0 V	0.0 V	"	V_{CC}		22	mA
	I_{CCZ}	3005	75	0.0 V	0.0 V	0.0 V		0.0 V	0.0 V		"		0.0 V	0.0 V		0.0 V	0.0 V	4.5 V	"	V_{CC}		23	mA
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 4/	3014	76	A	A	B	L	A	B	L	GND	L	B	A	L	B	A	B	5.0 V	All outputs			
			77	"	B	A	L	B	A	H	"	L	B	B	H	A	B	"	"				
			78	"	A	B	H	A	B	L	"	H	A	A	L	B	A	"	"				
			79	"	B	A	H	B	A	H	"	H	A	B	H	A	B	"	"				
			80	"	A	A	L	A	A	L	"	L	B	A	L	A	A	"	"				
			81	"	B	B	L	B	B	H	"	H	B	A	H	A	A	"	"				
			82	"	A	B	H	A	B	L	"	L	A	B	H	B	A	"	"				
			83	"	B	B	H	B	B	H	"	H	A	B	L	B	A	"	"				
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						
9 T_C = 25°C Fig. 5	t_{PLH1}	3003 Fig. 5	84	0.0 V	IN	IN	OUT	IN	IN	OUT	GND	OUT	IN	IN	OUT	IN	IN	0.0 V	5.0 V	I_{Oa} > Z_a I_{Ia} > Z_a I_{Ob} > Z_b I_{Ib} > Z_b I_{Id} > Z_d I_{Id} > Z_c I_{Oc} > Z_c	2.5	5.5	ns
			85	2.7 V			OUT			OUT	"							"	"		"	"	
			86	0.0 V							"							"	"		"	"	
			87	2.7 V							"							"	"		"	"	
			88	2.7 V							"							"	"		"	"	
			89	0.0 V							"							"	"		"	"	
			90	2.7 V							"							"	"		"	"	
			91	0.0 V							"							"	"		"	"	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	9	9	10	12	13	14	15	17	19	19	20	Measured terminal	Test limits		Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	S	I_{0a}	I_{1a}	Z_a	I_{0b}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{0d}	Z_c	I_{1c}	I_{0c}	$\overline{OE}$	V_{CC}		Min	Max	
9 T_C = 25°C Fig 5.	t_{PHL1}	3003 Fig. 5	92	0.0 V	IN		OUT				GND							0.0 V	5.5 V	$I_{0a} \rightarrow Z_a$	2.0	5.5	
			93	2.7 V		IN	OUT	IN		OUT	"							"	"	$I_{1a} \rightarrow Z_a$	"	"	"
			94	0.0 V					IN	OUT	"							"	"	$I_{0b} \rightarrow Z_b$	"	"	"
			95	2.7 V				IN		OUT	"	OUT	IN					"	"	$I_{1b} \rightarrow Z_b$	"	"	"
			96	2.7 V							"	OUT		IN				"	"	$I_{1d} \rightarrow Z_d$	"	"	"
			97	0.0 V							"				OUT	IN		"	"	$I_{0d} \rightarrow Z_d$	"	"	"
			98	2.7 V							"				OUT		IN	"	"	$I_{1c} \rightarrow Z_c$	"	"	"
			99	0.0 V							"				OUT		IN	"	"	$I_{0c} \rightarrow Z_c$	"	"	"
	t_{PLH3}	"	100	IN	0.0 V	2.7 V	OUT				"							"	"	$\overline{S} \rightarrow Z_a$	4.0	9.5	"
		"	101	"				0.0 V	2.7 V	OUT	"	OUT	2.7 V	0.0 V				"	"	$\overline{S} \rightarrow Z_b$	"	"	"
		"	102	"							"				OUT	2.7 V	0.0 V	"	"	$\overline{S} \rightarrow Z_d$	"	"	"
		"	103	"							"							"	"	$\overline{S} \rightarrow Z_c$	"	"	"
	t_{PHL3}	"	104	IN	2.7 V	0.0 V	OUT				"							0.0 V	5.0 V	$\overline{S} \rightarrow Z_a$	2.5	7.0	ns
		"	105					2.7 V	0.0 V	OUT	"	OUT	0.0 V	2.7 V				"	"	$\overline{S} \rightarrow Z_b$	"	"	"
		"	106								"				OUT	2.7 V	0.0 V	"	"	$\overline{S} \rightarrow Z_d$	"	"	"
		"	107								"							"	"	$\overline{S} \rightarrow Z_c$	"	"	"
	t_{PZH5}	"	109	0.0 V	2.7 V		OUT				"							IN	"	$\overline{OE} \rightarrow Z_a$	2.0	6.0	"
		"	109	"				2.7 V		OUT	"	OUT		2.7 V				"	"	$\overline{OE} \rightarrow Z_b$	"	"	"
		"	110	"							"				OUT		2.7 V	"	"	$\overline{OE} \rightarrow Z_d$	"	"	"
		"	111	"							"							"	"	$\overline{OE} \rightarrow Z_c$	"	"	"
	t_{PZL5}	"	112	2.7 V		0.0 V	OUT				"							"	"	$\overline{OE} \rightarrow Z_a$	2.5	7.0	"
		"	113	"					0.0 V	OUT	"	OUT	0.0 V					"	"	$\overline{OE} \rightarrow Z_b$	"	"	"
		"	114	"							"				OUT	0.0 V		"	"	$\overline{OE} \rightarrow Z_d$	"	"	"
		"	115	"							"							"	"	$\overline{OE} \rightarrow Z_c$	"	"	"
	t_{PHZ5}	"	116	"		2.7 V	OUT				"							"	"	$\overline{OE} \rightarrow Z_a$	2.0	6.0	"
		"	117	"					2.7 V	OUT	"	OUT	2.7 V					"	"	$\overline{OE} \rightarrow Z_b$	"	"	"
		"	118	"							"				OUT	2.7 V		"	"	$\overline{OE} \rightarrow Z_d$	"	"	"
		"	119	"							"							"	"	$\overline{OE} \rightarrow Z_c$	"	"	"
	t_{PLZ5}	"	120	0.0 V	0.0 V		OUT				"							"	"	$\overline{OE} \rightarrow Z_a$	"	"	"
		"	121	"				0.0 V		OUT	"	OUT		0.0 V				"	"	$\overline{OE} \rightarrow Z_b$	"	"	"
		"	122	"							"				OUT		0.0 V	"	"	$\overline{OE} \rightarrow Z_d$	"	"	"
		"	123	"							"							"	"	$\overline{OE} \rightarrow Z_c$	"	"	"
10 T_C = 125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and use limits from table I.																						
11 T_C = -55°C	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit:		
	A	B	C
I_{IL}	-.25/-.60	-.03/-.60	-.03/-.60

2/ A = 2.4 V, B = 0 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	S	I_{0a}	I_{1a}	Z_a	I_{0b}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{0d}	Z_c	I_{1c}	I_{0c}	$\overline{OE}$	V_{CC}				
1 T_C = 25°C	I_{OS}	3011	57	0.0 V	4.5 V		0.0 V			0.0 V	GND			4.5 V				0.0 V	5.5 V	Z_a	-60	-150	mA
		"	58	"				4.5 V			"	0.0 V			0.0 V		4.5 V	"	"	Z_b	"	"	"
		"	59	"							"							"	"	Z_d	"	"	"
		"	60	"							"							"	"	Z_c	"	"	"
	I_{OD}		61	0.0 V	0.0 V		2.5 V			2.5 V	"			0.0 V				"	4.5 V	Z_a	35		"
			62					0.0 V			"	2.5 V			2.5 V			"	"	Z_b	"		"
			63								"							"	"	Z_d	"		"
			64								"							"	"	Z_c	"		"
	I_{OZH}		65	4.5 V	4.5 V	4.5 V	2.7 V				"							2.0 V	5.5 V	Z_a		50	µA
			66	"				4.5 V	4.5 V	2.7 V	"							"	"	Z_b		"	"
			67	"							"							"	"	Z_d		"	"
			68	"							"	2.7 V	4.5 V	4.5 V	2.7 V	4.5 V	4.5 V	"	"	Z_c		"	"
	I_{OZL}		69	0.0 V	0.0 V	4.5 V	0.5 V				"							"	"	Z_a		-50	"
			70	"				0.0 V	4.5 V	0.5 V	"							"	"	Z_b		"	"
			71	"							"	0.5 V	4.5 V	0.0 V				"	"	Z_d		"	"
			72	"							"				0.5 V	4.5 V	0.0 V	"	"	Z_c		"	"
	I_{CCH}	3005	73	4.5 V	0.0 V	4.5 V		0.0 V	4.5 V		"		4.5 V	0.0 V		4.5 V	0.0 V	0.0 V	"	V_{CC}		15	mA
	I_{CCL}	3005	74	0.0 V	0.0 V	0.0 V		0.0 V	0.0 V		"		0.0 V	0.0 V		0.0 V	0.0 V	0.0 V	"	V_{CC}		22	mA
	I_{CC2}	3005	75	0.0 V	0.0 V	0.0 V		0.0 V	0.0 V		"		0.0 V	0.0 V		0.0 V	0.0 V	4.5 V	"	V_{CC}		23	mA
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	76	A	A	B	L	A	B	L	GND	L	B	A	L	B	A	B	5.0 V	All outputs			
		"	77	"	B	B	L	B	B	L	"	L	B	B	L	B	B	"	"				
		"	78	"	B	A	H	B	A	H	"	H	A	B	H	A	B	"	"				
		"	79	"	A	A	H	A	A	H	"	H	A	A	H	A	A	"	"				
		"	80	B	B	A	L	B	A	L	"	L	A	B	L	A	B	"	"				
		"	81	"	B	B	L	B	B	L	"	L	B	B	L	B	B	"	"				
		"	82	"	A	B	H	A	B	H	"	H	B	A	H	B	A	"	"				
		"	83	"	A	A	H	A	A	H	"	H	A	A	H	A	A	"	"				
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						
9 T_C = 25°C Fig. 5	t_{PLH1}	3003 Fig. 5	84	0.0 V	IN		OUT				GND							0.0 V	5.0 V	I_{0a} ▸ Z_a	2.5	5.5	ns
		"	85	2.7 V		IN	OUT				"							"	"	I_{1a} ▸ Z_a	"	"	"
		"	86	0.0 V				IN			"							"	"	I_{0b} ▸ Z_b	"	"	"
		"	87	2.7 V					IN	OUT	"							"	"	I_{1b} ▸ Z_b	"	"	"
		"	88	2.7 V						OUT	"	OUT	IN					"	"	I_{0d} ▸ Z_d	"	"	"
		"	89	0.0 V							"			IN				"	"	I_{1c} ▸ Z_c	"	"	"
		"	90	2.7 V							"				OUT	IN		"	"	I_{0c} ▸ Z_c	"	"	"
		"	91	0.0 V							"				OUT		IN	"	"				

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device t
5 - Continued.
Terminal conditions (pins not designated may be high
V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	14	15	17	19	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E,F	1	2	3	4	5	5	7	9	9	11	12	13	14	15	16				
			Test no.	S	I_{0a}	I_{1a}	Z_a	I_{0b}	I_{1b}	Z_b	GND	Z_d	I_{0d}	Z_c	I_{1c}	I_{0c}	$\overline{OE}$	V_{CC}				
9 T_C = 25°C Fig 5.	t_{PHL1}	3003 Fig. 5	92	0.0 V	IN		OUT				GND		IN				0.0 V	5.5 V	$I_{0a} \rightarrow Z_a$	2.0	5.5	ns
		"	93	2.7 V		IN	OUT				"		"				"	"	$I_{1a} \rightarrow Z_a$	"	"	"
		"	94	0.0 V				IN		OUT	"								$I_{0b} \rightarrow Z_b$			
		"	95	2.7 V					IN	OUT	"								$I_{1b} \rightarrow Z_b$			
		"	96	2.7 V							"	OUT							$I_{1d} \rightarrow Z_d$			
		"	97	0.0 V							"	OUT							$I_{0d} \rightarrow Z_d$			
		"	98	2.7 V							"			OUT	IN				$I_{1c} \rightarrow Z_c$			
		"	99	0.0 V							"			OUT		IN			$I_{0c} \rightarrow Z_c$			
	t_{PLH3}	"	100	IN	0.0 V	2.7 V	OUT				"		V	0.0 V					$S \rightarrow Z_a$	4.0	9.5	"
		"	101	"				0.0 V	2.7 V	OUT	"								$S \rightarrow Z_b$	"	"	"
		"	102	"							"	OUT		OUT	2.7 V	0.0 V			$S \rightarrow Z_d$	"	"	"
		"	103	"							"								$S \rightarrow Z_c$	"	"	"
	t_{PHL3}	"	104	IN	2.7 V	0.0 V	OUT				"		V	2.7 V			0.0 V	5.0 V	$S \rightarrow Z_a$	2.5	7.0	ns
		"	105	"				2.7 V	0.0 V	OUT	"						"	"	$S \rightarrow Z_b$	"	"	"
		"	106	"							"	OUT		OUT	2.7 V	0.0 V			$S \rightarrow Z_d$	"	"	"
		"	107	"							"								$S \rightarrow Z_c$	"	"	"
	t_{PZH5}	"	108	0.0 V	2.7 V		OUT				"		2.7 V				IN	"	$\overline{OE} \rightarrow Z_a$	2.0	6.0	"
		"	109	"				2.7 V		OUT	"						"	"	$\overline{OE} \rightarrow Z_b$	"	"	"
		"	110	"							"	OUT		OUT		2.7 V	"		$\overline{OE} \rightarrow Z_d$	"	"	"
		"	111	"							"						"		$\overline{OE} \rightarrow Z_c$	"	"	"
	t_{PZL5}	"	112	2.7 V		0.0 V	OUT				"		V				"	"	$\overline{OE} \rightarrow Z_a$	2.5	7.0	"
		"	113	"					0.0 V	OUT	"						"	"	$\overline{OE} \rightarrow Z_b$	"	"	"
		"	114	"							"	OUT		OUT	0.0 V		"		$\overline{OE} \rightarrow Z_d$	"	"	"
		"	115	"							"						"		$\overline{OE} \rightarrow Z_c$	"	"	"
	t_{PHZ5}	"	116	"		2.7 V	OUT				"		V				"	"	$\overline{OE} \rightarrow Z_a$	2.0	6.0	"
		"	117	"					2.7 V	OUT	"						"	"	$\overline{OE} \rightarrow Z_b$	"	"	"
		"	118	"							"	OUT		OUT	2.7 V		"		$\overline{OE} \rightarrow Z_d$	"	"	"
		"	119	"							"						"		$\overline{OE} \rightarrow Z_c$	"	"	"
	t_{PLZ5}	"	120	0.0 V	0.0 V		OUT				"		0.0 V				"	"	$\overline{OE} \rightarrow Z_a$	"	"	"
		"	121	"				0.0 V		OUT	"						"	"	$\overline{OE} \rightarrow Z_b$	"	"	"
		"	122	"							"	OUT		OUT		0.0 V	"		$\overline{OE} \rightarrow Z_d$	"	"	"
		"	123	"							"						"		$\overline{OE} \rightarrow Z_c$	"	"	"
10 T_C = 125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and use limits from table I.																					
11 T_C = -55°C	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																					

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit: A	B	C
I_{IL}	-.25/-.60	-.03/-.60	-.03/-.60

2/ A = 2.4 V, B = 0 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	S	I_{Oa}	I_{1a}	Z_a	I_{Ob}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{Od}	Z_c	I_{1c}	I_{Oc}	$\overline{OE}$	V_{CC}		Min	Max	
1 T_C = 25°C	V_{OL}	3007	1	0.8 V	2.0 V	0.8 V	20 mA				GND							0.8 V	4.5 V	Z_a		.5	V
		"	2	2.0 V	0.8 V	2.0 V	20 mA				"							"	"	Z_a		"	
		"	3	0.8 V				2.0 V	0.8 V	20 mA	"							"	"	Z_b		"	
		"	4	2.0 V				0.8 V	2.0 V	20 mA	"							"	"	Z_b		"	
		"	5	0.8 V							"	20 mA	0.8 V	2.0 V				"	"	Z_d		"	
		"	6	2.0 V							"	20 mA	2.0 V	0.8 V				"	"	Z_d		"	
		"	7	0.8 V							"				20 mA	0.8 V	2.0 V	"	"	Z_c		"	
		"	8	2.0 V							"				20 mA	2.0 V	0.8 V	"	"	Z_c		"	
	V_{OH}	3006	9	0.8 V	0.8 V	2.0 V	-3.0 mA				"							"	"	Z_a	2.4		"
		"	10	2.0 V	2.0 V	0.8 V	-3.0 mA				"							"	"	Z_a	"		"
		"	11	0.8 V				0.8 V	2.0 V	-3.0 mA	"							"	"	Z_b	"		"
		"	12	2.0 V				2.0 V	0.8 V	-3.0 mA	"							"	"	Z_b	"		"
		"	13	0.8 V							"	-3.0 mA	2.0 V	0.8 V				"	"	Z_d	"		"
		"	14	2.0 V							"	-3.0 mA	0.8 V	2.0 V				"	"	Z_d	"		"
		"	15	0.8 V							"				-3.0 mA	2.0 V	0.8 V	"	"	Z_c	"		"
		"	16	2.0 V							"				-3.0 mA	0.8 V	2.0 V	"	"	Z_c	"		"
	V_{IC}		17	-18 mA							"							"	"	S		-1.2	"
			18		-18 mA						"							"	"	I_{Oa}		"	"
			19			-18 mA					"							"	"	I_{1a}		"	"
			20					-18 mA			"							"	"	I_{Ob}		"	"
			21						-18 mA		"							"	"	I_{1b}		"	"
			22								"		-18 mA					"	"	I_{1d}		"	"
			23								"			-18 mA				"	"	I_{Od}		"	"
			24								"					-18 mA		"	"	I_{1c}		"	"
			25								"						-18 mA	"	"	I_{Oc}		"	"
			26								"							-18 mA	"	$\overline{OE}$		"	"
	I_{IH1}	3010	27	2.7 V	2.7 V						"							4.5 V	5.5 V	S		20	μA
		"	28	4.5 V		2.7 V					"							"	"	I_{Oa}		"	"
		"	29	0.0 V				2.7 V			"							"	"	I_{1a}		"	"
		"	30	4.5 V					2.7 V		"							"	"	I_{Ob}		"	"
		"	31	0.0 V							"		2.7 V					"	"	I_{1b}		"	"
		"	32	0.0 V							"			2.7 V				"	"	I_{1d}		"	"
		"	33	4.5 V							"					2.7 V		"	"	I_{Od}		"	"
		"	34	0.0 V							"						2.7 V	"	"	I_{1c}		"	"
		"	35	4.5 V							"							2.7 V	"	I_{Oc}		"	"
		"	36								"									$\overline{OE}$		"	"
	I_{IH2}	"	37	7.0 V	7.0 V						"							4.5 V	"	S		100	"
		"	38	4.5 V		7.0 V					"							"	"	I_{Oa}		"	"
		"	39	0.0 V				7.0 V			"							"	"	I_{1a}		"	"
		"	40	4.5 V					7.0 V		"							"	"	I_{Ob}		"	"
		"	41	0.0 V							"		7.0 V					"	"	I_{1b}		"	"
		"	42	0.0 V							"			7.0 V				"	"	I_{1d}		"	"
		"	43	4.5 V							"					7.0 V		"	"	I_{Od}		"	"
		"	44	0.0 V							"						7.0 V	"	"	I_{1c}		"	"
		"	45	4.5 V							"							7.0 V	"	I_{Oc}		"	"
		"	46								"									$\overline{OE}$		"	"
	I_{IL1}	3009	47	0.5 V	0.5 V						"								"	S	1/	1/	mA
		"	48	0.0 V		0.5 V					"								"	I_{Oa}	"	"	"
		"	49	4.5 V				0.5 V			"								"	I_{1a}	"	"	"
		"	50	0.0 V					0.5 V		"								"	I_{Ob}	"	"	"
		"	51	4.5 V							"		0.5 V						"	I_{1b}	"	"	"
		"	52	4.5 V							"			0.5 V					"	I_{1d}	"	"	"
		"	53	0.0 V							"					0.5 V			"	I_{Od}	"	"	"
		"	54	4.5 V							"						0.5 V		"	I_{1c}	"	"	"
		"	55	0.0 V							"							0.5 V	5.5 V	I_{Oc}	"	"	"
		"	56								"									$\overline{OE}$	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.
Terminal conditions (pins not designated may be high ≥2.7 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/ Cases E, F	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	$\overline{S}$	I_{Oa}	I_{1a}	Z_a	I_{Ob}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{Od}	Z_c	I_{1c}	I_{Oc}	$\overline{CE}$	V_{CC}				
1 T_C = 25°C	I_{OS}	3011	57	0.0 V	0.0 V	4.5 V	0.0 V	0.0 V	4.5 V	0.0 V	GND	0.0 V	4.5 V	0.0 V	0.0 V	4.5 V	0.0 V	0.0 V	5.5 V	Z_a	-60	-150	mA
		"	58	"							"							"	"	I_{1a}	"	"	"
		"	59	"							"							"	"	Z_b	"	"	"
		"	60	"							"							"	"	I_{1b}	"	"	"
	I_{CD}		61	"	5.5 V		2.5 V				"									Z_a	35		"
			62	"				5.5 V		2.5 V	"	2.5 V							4.5 V	I_{1a}	"		"
			63	"							"			5.5 V	2.5 V		5.5 V	"	"	Z_b	"		"
			64	"							"							"	"	I_{1b}	"		"
	I_{OZH}		65	"	4.5 V	4.5 V	2.7 V				"							2.0 V	5.5 V	Z_a		50	µA
			66	"				4.5 V	4.5 V	2.7 V	"	2.7 V	4.5 V	4.5 V				"	"	I_{1a}		"	"
			67	"							"				2.7 V	4.5 V	4.5 V	"	"	Z_b		"	"
			68	"							"							"	"	I_{1b}		"	"
	I_{OZL}		69	4.5 V	4.5 V	0.0 V	0.5 V				"							"	"	Z_a		-50	"
			70	"				4.5 V	0.0 V	0.5 V	"	0.5 V	0.0 V	4.5 V				"	"	I_{1a}			"
			71	"							"				0.5 V	0.0 V	4.5 V	"	"	Z_b			"
			72	"							"							"	"	I_{1b}			"
	I_{CCH}	3005	73	0.0 V	0.0 V	0.0 V		0.0 V	0.0 V		"		0.0 V	0.0 V		0.0 V	0.0 V	0.0 V	"	V_{CC}		9.5	mA
	I_{CCL}	3005	74	4.5 V	0.0 V	4.5 V		0.0 V	4.5 V		"		4.5 V	0.0 V		4.5 V	0.0 V	0.0 V	"	V_{CC}		25	mA
	I_{CCZ}	3005	75	0.0 V	0.0 V	0.0 V		0.0 V	0.0 V		"		0.0 V	0.0 V		0.0 V	0.0 V	4.5 V	"	V_{CC}		17	mA
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	76	B	A	3	L	A	B	L	GND	L	3	A	L	B	A	B	5.0 V	All outputs			
		"	77	"	A	A	L	A	A	L	"	L	A	A	L	A	A	"	"				
		"	78	"	B	A	H	B	A	H	"	H	A	B	H	A	B	"	"				
		"	79	"	B	B	"	B	B	"	"	"	B	B	"	B	B	"	"				
		"	80	A	A	B	"	A	B	"	"	"	B	A	"	B	B	"	"				
		"	81	"	B	B	"	B	B	"	"	"	B	B	"	B	A	"	"				
		"	82	"	B	A	L	B	A	L	"	L	A	B	L	A	B	"	"				
		"	83	"	A	A	L	A	A	L	"	L	A	A	L	A	A	"	"				
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						
9 T_C = 25°C Fig. 5	t_{PLH2}	3003 Fig. 5	84	0.0 V	IN		OUT				GND							0.0 V	5.0 V	I_{Oa} - Z_a	2.5	5.3	ns
		"	85	2.7 V		IN	OUT				"							"	"	I_{1a} - Z_a	"	"	"
		"	86	0.0 V				IN			"							"	"	I_{Ob} - Z_b	"	"	"
		"	87	2.7 V					IN	OUT	"							"	"	I_{1b} - Z_b	"	"	"
		"	88	2.7 V						OUT	"	OUT	IN					"	"	I_{1d} - Z_d	"	"	"
		"	89	0.0 V							"	OUT		IN				"	"	I_{Od} - Z_d	"	"	"
		"	90	2.7 V							"				OUT	IN		"	"	I_{1c} - Z_c	"	"	"
		"	91	0.0 V							"				OUT		IN	"	"	I_{Oc} - Z_c	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-01-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	S	I_{Oa}	I_{1a}	Z_a	I_{Ob}	I_{1b}	Z_b	GND	Z_d	I_{1d}	I_{Od}	Z_c	I_{1c}	I_{Oc}	$\overline{OE}$	V_{CC}		Min	Max	
9 T_C = 25°C Fig 5.	t_{PHL2}	3003 Fig. 5	92	0.0 V	IN	IN	OUT	IN	IN	OUT	GND	OUT	IN	IN	OUT	IN	IN	0.0 V	5.5 V	$I_{Oa} \rightarrow Z_a$ $I_{1a} \rightarrow Z_a$ $I_{Ob} \rightarrow Z_b$ $I_{1b} \rightarrow Z_b$ $I_{1d} \rightarrow Z_d$ $I_{Od} \rightarrow Z_d$ $I_{1c} \rightarrow Z_c$ $I_{Oc} \rightarrow Z_c$	1.0	4.0	
		"	93	2.7 V			OUT			OUT	"	OUT		IN	OUT			"	"				
		"	94	0.0 V			OUT	IN		OUT	"	OUT		IN	OUT			"	"				
		"	95	2.7 V			OUT		IN	OUT	"	OUT		IN	OUT			"	"				
		"	96	2.7 V			OUT			OUT	"	OUT	IN	IN	OUT			"	"				
		"	97	0.0 V			OUT			OUT	"	OUT	IN	IN	OUT			"	"				
		"	98	2.7 V			OUT			OUT	"	OUT	IN	IN	OUT			"	"				
		"	99	0.0 V			OUT			OUT	"	OUT	IN	IN	OUT			"	"				
	t_{PLH4}	"	100	IN	2.7 V	0.0 V	OUT				"							"	"	$S \rightarrow Z_a$ $S \rightarrow Z_b$ $S \rightarrow Z_d$ $S \rightarrow Z_c$	3.0	7.5	
		"	101	"				2.7 V	0.0 V	OUT	"	OUT	0.0 V	2.7 V	OUT	0.0 V	2.7 V	"	"				
		"	102	"							"							"	"				
		"	103	"							"							"	"				
	t_{PHL4}	"	104	IN	0.0 V	2.7 V	OUT				GND							"	"	$S \rightarrow Z_a$ $S \rightarrow Z_b$ $S \rightarrow Z_d$ $S \rightarrow Z_c$	2.5	7.0	ns
		"	105	"				0.0 V	2.7 V	OUT	"	OUT	2.7 V	0.0 V	OUT	2.7 V	0.0 V	"	"				
		"	106	"							"							"	"				
		"	107	"							"							"	"				
	t_{PZH6}	"	108	0.0 V	0.0 V		OUT				"							IN	"	$\overline{OE} \rightarrow Z_a$ $\overline{OE} \rightarrow Z_b$ $\overline{OE} \rightarrow Z_d$ $\overline{OE} \rightarrow Z_c$	2.0	6.0	
		"	109	"				0.0 V		OUT	"	OUT	0.0 V		OUT		0.0 V	"	"				
		"	110	"							"							"	"				
		"	111	"							"							"	"				
	t_{PZL6}	"	112	2.7 V		2.7 V	OUT				"							"	"	$\overline{OE} \rightarrow Z_a$ $\overline{OE} \rightarrow Z_b$ $\overline{OE} \rightarrow Z_d$ $\overline{OE} \rightarrow Z_c$	2.5	7.0	
		"	113	"					2.7 V	OUT	"	OUT	2.7 V		OUT	2.7 V		"	"				
		"	114	"							"							"	"				
		"	115	"							"							"	"				
	t_{PHZ6}	"	116	0.0 V	0.0 V		OUT				"							"	"	$\overline{OE} \rightarrow Z_a$ $\overline{OE} \rightarrow Z_b$ $\overline{OE} \rightarrow Z_d$ $\overline{OE} \rightarrow Z_c$	2.0	6.0	
		"	117	"				0.0 V		OUT	"	OUT	0.0 V		OUT		0.0 V	"	"				
		"	118	"							"							"	"				
		"	119	"							"							"	"				
	t_{PLZ6}	"	120	2.7 V		2.7 V	OUT				"							"	"	$\overline{OE} \rightarrow Z_a$ $\overline{OE} \rightarrow Z_b$ $\overline{OE} \rightarrow Z_d$ $\overline{OE} \rightarrow Z_c$			
		"	121	"					2.7 V	OUT	"	OUT	2.7 V		OUT	2.7 V		"	"				
		"	122	"							"							"	"				
		"	123	"							"							"	"				
10 T_C = 125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and use limits from Table I.																						
11 T_C = -55°C	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit:		
	A	B	C
I_{IL}	-.25/-.60	-.03/-.60	-.03/-.60

2/ A = 2.4 V, B = 0.5 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/ Cases E,F Test no.	2 1 $\overline{OE}_a$	3 2 S_1	4 3 I_{3a}	5 4 I_{2a}	7 5 I_{1a}	8 6 I_{0a}	9 7 Z_a	10 9 GND	12 9 Z_b	13 10 I_{0b}	14 11 I_{1b}	15 12 I_{2b}	17 13 I_{3b}	18 14 S_0	19 15 $\overline{OE}_b$	20 16 V_{CC}	Measured terminal	Test limits Min	Test limits Max	Unit
1 T_C = 25°C	V_{OH}	3006	1	0.8 V	0.8 V				2.0 V	-3 mA	GND						0.8 V		4.5 V	Z_a	2.4		V
			2	"	0.8 V												2.0 V						
			3	"	2.0 V		2.0 V	2.0 V									0.8 V						
			4	"	2.0 V	2.0 V											2.0 V						
			5		0.8 V							-3 mA	2.0 V				0.8 V	0.8 V		Z_b			
			6		0.8 V									2.0 V			2.0 V						
			7		2.0 V										2.0 V		0.8 V						
			8		2.0 V											2.0 V	2.0 V						
	V_{OL}	3007	9	0.8 V	0.8 V				0.8 V	20 mA							0.8 V			Z_a		0.5	
			10	"	0.8 V			0.8 V									2.0 V						
			11	"	2.0 V		0.8 V										0.8 V						
			12	"	2.0 V	0.8 V											2.0 V						
			13		0.8 V							20 mA	0.8 V				0.8 V	0.8 V		Z_b			
			14		0.8 V									0.8 V			2.0 V						
			15		2.0 V										0.8 V		0.8 V						
			16		2.0 V											0.8 V	2.0 V						
	V_{IC}		17	-18 mA																$\overline{OE}_a$		-1.2	
			18		-18 mA															S_1			
			19			-18 mA														I_{3a}			
			20				-18 mA													I_{2a}			
			21					-18 mA												I_{1a}			
			22						-18 mA											I_{0a}			
			23										-18 mA							I_{0b}			
			24											-18 mA						I_{1b}			
			25												-18 mA					I_{2b}			
			26													-18 mA				I_{3b}			
			27														-18 mA			S_0			
			28															-18 mA		$\overline{OE}_b$			
	I_{IH1}	3010	29	2.7 V															5.5 V	$\overline{OE}_a$		20	µA
			30		2.7 V															S_1			
			31		0.0 V	2.7 V											0.0 V			I_{3a}			
			32		0.0 V		2.7 V										4.5 V			I_{2a}			
			33		4.5 V			2.7 V									0.0 V			I_{1a}			
			34		"				2.7 V								4.5 V			I_{0a}			
			35		"								2.7 V				4.5 V			I_{0b}			
			36		"									2.7 V			0.0 V			I_{1b}			
			37		0.0 V										2.7 V		4.5 V			I_{2b}			
			38		0.0 V											2.7 V	0.0 V			I_{3b}			
			39														2.7 V			S_0			
			40															2.7 V		$\overline{OE}_b$			
	I_{IH2}	"	41	7.0 V																$\overline{OE}_a$		100	
			42		7.0 V															S_1			
			43		0.0 V	7.0 V											0.0 V			I_{3a}			
			44		0.0 V		7.0 V										4.5 V			I_{2a}			
			45		4.5 V			7.0 V									0.0 V			I_{1a}			
			46		"				7.0 V								4.5 V			I_{0a}			
			47		"								7.0 V				4.5 V			I_{0b}			
			48		"									7.0 V			0.0 V			I_{1b}			
			49		0.0 V										7.0 V		4.5 V			I_{2b}			
			50		0.0 V											7.0 V	0.0 V			I_{3b}			
			51														7.0 V			S_0			
			52															7.0 V		$\overline{OE}_b$			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	$\overline{OE}_a$	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{0b}	I_{1b}	I_{2b}	I_{3b}	S_0	$\overline{OE}_b$	V_{CC}				
1 T_C = 25°C	I_{IL}	3009	53	0.5 V							GND						4.5 V		5.5 V	$\overline{OE}_a$	1/	1/	mA
		"	54		0.5 V						"						0.0 V		"	S_1	"	"	"
		"	55		4.5 V	0.5 V					"						4.5 V		"	I_{3a}	"	"	"
		"	56		4.5 V		0.5 V				"						0.0 V		"	I_{2a}	"	"	"
		"	57		0.0 V			0.5 V			"						4.5 V		"	I_{1a}	"	"	"
		"	58		"				0.5 V		"		0.5 V				0.0 V		"	I_{0a}	"	"	"
		"	59		"						"		0.5 V				0.0 V		"	I_{0b}	"	"	"
		"	60		"						"						4.5 V		"	I_{1b}	"	"	"
		"	61		4.5 V						"						0.0 V		"	I_{2b}	"	"	"
		"	62		4.5 V						"						4.5 V		"	I_{3b}	"	"	"
		"	63								"						0.5 V		"	S_0	"	"	"
		"	64								"							0.5 V	"	$\overline{OE}_b$	"	"	"
	I_{OS}	3011	65	0.0 V	0.0 V				4.5 V	0.0 V	"						0.0 V		"	Z_a	-60	-150	"
	I_{OS}	3011	66		0.0 V						"	0.0 V	4.5 V				0.0 V	0.0 V	"	Z_b	-60	-150	"
	I_{OS}		67	0.0 V	0.0 V				0.0 V	2.5 V	"						0.0 V	0.0 V	4.5 V	Z_a	35		"
	I_{OS}		68	0.0 V	0.0 V						"	2.5 V	0.0 V				0.0 V	0.0 V	4.5 V	Z_b	35		"
	I_{OZH}		69	2.0 V	0.0 V				0.0 V	2.7 V	"						0.0 V		5.5 V	Z_a		50	uA
	I_{OZH}		70		0.0 V						"	2.7 V	0.0 V				0.0 V	2.0 V	"	Z_b		50	"
	I_{OZL}		71	2.0 V	4.5 V	4.5 V				0.5 V	"						4.5 V		"	Z_a		-50	"
	I_{OZL}		72		4.5 V						"	0.5 V				4.5 V	4.5 V	2.0 V	"	Z_b		-50	"
	I_{CC}	3005	73	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"		0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	"	V_{CC}		23	mA
	I_{CC}	3005	74	0.0 V	0.0 V	4.5 V	0.0 V	0.0 V	4.5 V		"		4.5 V	0.0 V	0.0 V	4.5 V	0.0 V	0.0 V	"	V_{CC}		16	mA
	I_{CC}	3005	75	4.5 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"		0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	4.5 V	"	V_{CC}		23	mA
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	76	3	B	B	B	B	B	L	GND	L	B	B	B	B	B	B	5.0 V	All outputs			
		"	77	"	"	"	"	B	A	H	"	H	A	B	"	"	B	"	"				
		"	78	"	"	"	"	B	B	L	"	L	B	B	"	"	A	"	"				
		"	79	"	"	"	"	A	A	H	"	H	A	A	"	"	A	"	"				
		"	80	"	A	"	"	B	B	L	"	L	B	B	"	"	B	"	"				
		"	81	"	"	"	A	"	"	H	"	H	"	"	A	"	B	"	"				
		"	82	"	"	"	B	"	"	L	"	L	"	"	B	"	A	"	"				
		"	83	"	"	"	B	"	"	H	"	H	"	"	B	"	A	"	"				
8	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and T_C = -55°C.																						
9 T_C = 25°C Fig. 5	t_{PLH1}	3003	84	0.0 V	0.0 V				IN	OUT	GND						0.0 V		5.0 V	I_{0a} → Z_a	3.0	7.0	ns
		"	85	"	0.0 V			IN		"	"						2.7 V		"	I_{1a} → Z_a	"	"	"
		"	86	"	2.7 V		IN			"	"						0.0 V		"	I_{2a} → Z_a	"	"	"
		"	87		2.7 V	IN					"						2.7 V		"	I_{3a} → Z_a	"	"	"
		"	88		0.0 V						"	OUT	IN				0.0 V	0.0 V	"	I_{0b} → Z_b	"	"	"
		"	89		0.0 V						"	"		IN			2.7 V	"	"	I_{1b} → Z_b	"	"	"
		"	90		2.7 V						"	"			IN		0.0 V	"	"	I_{2b} → Z_b	"	"	"
		"	91		2.7 V						"	"				IN	2.7 V	"	"	I_{3b} → Z_b	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-01-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 7 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E,F	1	7	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	$\overline{OE}_a$	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{0b}	I_{1b}	I_{2b}	I_{3b}	S_0	$\overline{OE}_b$	V_{CC}				
9 T_C = 25°C Fig. 5	t_{PHL1}	3003	92	0.0 V	0.0 V				IN	OUT	"						0.0 V		5.0 V	I_{0a} → Z_a	2.5	7.0	ns
		"	93	"	0.0 V			IN		"	"						2.7 V		"	I_{1a} → Z_a	"	"	"
		"	94	"	2.7 V		IN			"	"						0.0 V		"	I_{2a} → Z_a	"	"	"
		"	95	"	2.7 V	IN				"	"						2.7 V		"	I_{3a} → Z_a	"	"	"
		"	96		0.0 V					"	"	OUT	IN				0.0 V	0.0 V	"	I_{0b} → Z_b	"	"	"
		"	97		0.0 V					"	"	"		IN			2.7 V	"	"	I_{1b} → Z_b	"	"	"
		"	98		2.7 V					"	"	"			IN		0.0 V	"	"	I_{2b} → Z_b	"	"	"
		"	99		2.7 V					"	"	"				IN	2.7 V	"	"	I_{3b} → Z_b	"	"	"
	t_{PLH3}	"	100	0.0 V	0.0 V			2.7 V	0.0 V	OUT	"						IN		"	S_0 → Z_a	4.5	11.5	ns
		"	101		0.0 V					"	"	OUT	0.0 V	2.7 V			IN	0.0 V	"	S_0 → Z_b	"	"	"
		"	102	0.0 V	IN		2.7 V		0.0 V	OUT	"						0.0 V		"	S_1 → Z_a	"	"	"
		"	103		IN						"	OUT	0.0 V		2.7 V		0.0 V	0.0 V	"	S_1 → Z_b	"	"	"
	t_{PHL3}	"	104	0.0 V	0.0 V			0.0 V	2.7 V	OUT	"						IN		"	S_0 → Z_a	3.0	9.0	"
		"	105		0.0 V					"	"	OUT	2.7 V	0.0 V			IN	0.0 V	"	S_0 → Z_b	"	"	"
		"	106	0.0 V	IN		0.0 V		2.7 V	OUT	"						0.0 V		"	S_1 → Z_a	"	"	"
		"	107		IN						"	OUT	2.7 V		0.0 V		0.0 V	0.0 V	"	S_1 → Z_b	"	"	"
	t_{PZH5}	"	108	IN	2.7 V	2.7 V				OUT	"						2.7 V		"	$\overline{OE}_a$ → Z_a	3.0	8.0	"
	t_{PZH5}	"	109		2.7 V						"	OUT				2.7 V	2.7 V	IN	"	$\overline{OE}_b$ → Z_b	3.0	8.0	"
	t_{PZL5}	"	110	IN	0.0 V				0.0 V	OUT	"						0.0 V		"	$\overline{OE}_a$ → Z_a	3.0	8.0	"
	t_{PZL5}	"	111		0.0 V						"	OUT	0.0 V				0.0 V	IN	"	$\overline{OE}_b$ → Z_b	3.0	8.0	"
	t_{PHZ5}	"	112	IN	2.7 V	2.7 V				OUT	"						2.7 V		"	$\overline{OE}_a$ → Z_a	2.0	5.0	"
	t_{PHZ5}	"	113		2.7 V						"	OUT				2.7 V	2.7 V	IN	"	$\overline{OE}_b$ → Z_b	2.0	5.0	"
	t_{PLZ5}	"	114	IN	0.0 V				0.0 V	OUT	"						0.0 V		"	$\overline{OE}_a$ → Z_a	2.0	6.0	"
	t_{PLZ5}	"	115		0.0 V						"	OUT	0.0 V				0.0 V	IN	"	$\overline{OE}_b$ → Z_b	2.0	6.0	"
10 T_C = 125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and, for the following limits: t_{PLH1} = 2.5 to 9.0 ns; t_{PHL1} = 2.5 to 8.0 ns; t_{PZH5} = 2.5 to 10.0 ns; t_{PHZ5} = 2.5 to 6.5 ns; t_{PLH3} = 3.5 to 15.0 ns; t_{PHL3} = 2.5 to 11.0 ns; t_{PZL5} = 2.5 to 10.0 ns; t_{PLZ5} = 2.5 to 8.0 ns																						
11 T_C = -55°C	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit: A	B	C
I_{IL}	-.257-.60	-.037-.60	-.037-.60

2/ A = 2.4 V, B = 0.4 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits		Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Min	Max	
			Test no.	$\overline{E}_a$	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{0b}	I_{1b}	I_{2b}	I_{3b}	S_0	$\overline{OE}_b$	V_{CC}				
1 T_C = 25°C	V_{OH}	3006	1	2.0 V	0.8 V					-1 mA	GND								4.5 V	Z_a	2.5		V
		"	2	0.8 V	0.8 V					"	"								"	"			
		"	3		2.0 V					"	"								"	"			
		"	4		2.0 V					"	"								"	"			
		"	5			0.8 V					"								"	Z_b			
		"	6				0.8 V				"								"	"			
		"	7		0.8 V			0.8 V			"	-1 mA							"	"			
		"	8		0.8 V				0.8 V		"	"	0.8 V						"	"			
		"	9		2.0 V						"			0.8 V					"	"			
		"	10		2.0 V						"				0.8 V				"	"			
																	0.8 V	2.0 V					
																	2.0 V	0.8 V					
																	0.8 V	"					
																	2.0 V	"					
	V_{OL}	3007	11	0.8 V	0.8 V					20 mA	"									Z_a		0.5	"
		"	12	"	0.8 V					"	"									"			
		"	13	"	2.0 V					"	"									"			
		"	14		2.0 V	2.0 V					"									"			
		"	15		0.8 V		2.0 V				"									Z_b			
		"	16		0.8 V			2.0 V			"	20 mA								"			
		"	17		2.0 V				2.0 V		"	"	2.0 V							"			
		"	18		2.0 V						"			2.0 V						"			
															2.0 V								
																2.0 V							
																	2.0 V						
																	2.0 V	0.8 V					
																	2.0 V	"					
	V_{IC}		19	-18 mA	-18 mA															$\overline{E}_a$		-1.2	"
			20			-18 mA														S_1			
			21				-18 mA													$I3_a$			
			22					-18 mA												$I2_a$			
			23						-18 mA											$I1_a$			
			24										-18 mA							$I0_a$			
			25											-18 mA						$I0_b$			
			26												-18 mA					$I1_b$			
			27													-18 mA				$I2_b$			
			28														-18 mA			$I3_b$			
			29															-18 mA		S_0			
			30																	$\overline{E}_b$			
	I_{IH1}	3010	31	2.7 V	2.7 V														5.5 V	$\overline{E}_a$		20	uA
		"	32	4.5 V	0.0 V														"	S_1			
		"	33	"	0.0 V														"	$I3_a$			
		"	34	"	4.5 V														"	$I2_a$			
		"	35		"	2.7 V													"	$I1_a$			
		"	36		"		2.7 V												"	$I0_a$			
		"	37		"			2.7 V											"	$I0_b$			
		"	38		"				2.7 V				2.7 V						"	$I1_b$			
		"	39		0.0 V									2.7 V					"	$I2_b$			
		"	40		0.0 V										2.7 V				"	$I3_b$			
		"	41													2.7 V			"	S_0			
		"	42																"	$\overline{E}_b$			
	I_{IH2}	"	43	7.0 V	7.0 V														5.5 V	$\overline{E}_a$		100	"
		"	44	4.5 V	0.0 V														"	S_1			
		"	45	"	0.0 V														"	$I3_a$			
		"	46	"	4.5 V														"	$I2_a$			
		"	47		"	7.0 V													"	$I1_a$			
		"	48		"		7.0 V												"	$I0_a$			
		"	49		"			7.0 V											"	$I0_b$			
		"	50		"				7.0 V				7.0 V						"	$I1_b$			
		"	51		0.0 V									7.0 V					"	$I2_b$			
		"	52		0.0 V										7.0 V				"	$I3_b$			
			53													7.0 V				S_0			
			54																	$\overline{E}_b$			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for d for device type 09 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 1/ / Cases E, F Test no.	2 / 1	3 / 2	4 / 3	5 / 4	7 / 5	8 / 6	9 / 7	10 / 8	12 / 9	13 / 10	14 / 11	15 / 12	17 / 13	18 / 14	19 / 15	20 / 16	Measured terminal	Test limits Min	Test limits Max	Unit
1 T_C = 25°C	I_{IL}	3009	55	0.5 V							GND							5.5 V	$\overline{E}_a$	1/	1/	mA
		"	56		0.5 V						"							"	S_1	"	"	"
		"	57	0.0 V	4.5 V	0.5 V					"							"	$I3_a$	"	"	"
		"	58	"	4.5 V		0.5 V				"							"	$I2_a$	"	"	"
		"	59	"	0.0 V			0.5 V			"							"	$I1_a$	"	"	"
		"	60	"	"				0.5 V		"							"	$I0_a$	"	"	"
		"	61		"						"		0.5 V					"	$I0_b$	"	"	"
		"	62		"						"							"	$I1_b$	"	"	"
		"	63		4.5 V						"							"	$I2_b$	"	"	"
		"	64		4.5 V						"							"	$I3_b$	"	"	"
		"	65								"							"	S_0	"	"	"
		"	66								"							"	$\overline{E}_b$	"	"	"
	I_{IH1}	3011	67	0.0 V	0.0 V				0.0 V	0.0 V	"							"	I_a	-60	-150	"
	I_{IH2}	"	68		0.0 V						"							"	I_b	-60	-150	"
	I_{OH}		69	0.0 V	0.0 V				5.5 V	2.5 V	"							4.5 V	Z_a	60		"
	I_{OH}		70		0.0 V						"	2.5 V	5.5 V					4.5 V	Z_b	60		"
	I_{CCH}	3005	71	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"		0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.5 V	V_{CC}		14	"
	I_{CCL}	3005	72	0.0 V	0.0 V	4.5 V	4.5 V	4.5 V	4.5 V		"		4.5 V	4.5 V	4.5 V	4.5 V	0.0 V	0.0 V	5.5 V	V_{CC}		20	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																					
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																					
7 T_C = 25°C	Functional tests 2/	3014	73	A	A	A	A	A	A	H	GND	H	A	A	A	A	A	A	5.0 V	All outputs		
		"	74	B	B	"	"	A	B	H	"	H	B	A	"	"	B	B	"			
		"	75	"	"	"	"	A	A	L	"	L	A	A	"	"	B	"	"			
		"	76	"	"	"	"	B	"	H	"	H	"	B	"	"	A	"	"			
		"	77	"	"	"	"	A	"	L	"	L	"	A	"	"	A	"	"			
		"	78	"	A	"	B	"	"	H	"	H	"	"	B	"	B	"	"			
		"	79	"	"	"	A	"	"	L	"	L	"	"	A	"	B	"	"			
		"	80	"	"	B	A	"	"	H	"	H	"	"	A	B	A	"	"			
		"	91	"	"	A	A	"	"	L	"	L	"	"	A	A	A	"	"			
		"	82	A	B	B	B	B	B	H	"	H	B	B	B	B	B	A	"			
		"	83	B	"	"	"	B	B	H	"	H	B	"	"	"	B	B	"			
		"	84	"	"	"	"	A	A	L	"	L	A	"	"	"	B	"	"			
		"	85	"	"	"	"	"	B	H	"	H	B	"	"	"	A	"	"			
		"	86	"	"	"	"	A	"	L	"	L	B	A	"	"	A	"	"			
		"	87	"	A	"	"	B	"	H	"	H	"	B	"	"	B	"	"			
		"	88	"	"	"	A	"	"	L	"	L	"	"	A	"	B	"	"			
		"	89	"	"	"	B	"	"	H	"	H	"	"	B	"	A	"	"			
		"	90	"	"	A	B	"	"	L	"	L	"	"	B	A	A	"	"			
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = 125°C and T_C = -55°C.																					
9 T_C = 25°C Fig. 6	t_{PLH2}	3003 Fig. 5	91	0.0 V	2.7 V	IN				OUT	GND						2.7 V		5.0 V	3_a - Z_a	2.0	7.0	ns
		"	92	"	2.7 V		IN			OUT	GND						0.0 V		5.0 V	2_a - Z_a	"	"	"
		"	93	"	0.0 V			IN		OUT	GND						2.7 V		5.0 V	1_a - Z_a	"	"	"
		"	94	"	"				IN	OUT	GND						0.0 V		5.0 V	0_a - Z_a	"	"	"
		"	95		"							OUT	IN				0.0 V	0.0 V	5.0 V	0_b - Z_b	"	"	"
		"	96		"							OUT		IN			2.7 V	0.0 V	5.0 V	1_b - Z_b	"	"	"
		"	97		2.7 V							OUT			IN		0.0 V	0.0 V	5.0 V	2_b - Z_b	"	"	"
		"	98		2.7 V							OUT				IN	2.7 V	0.0 V	5.0 V	3_b - Z_b	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/ Cases E,F Test no.	2 1 $\overline{E}_a$	3 2 S_1	4 3 I_{3a}	5 4 I_{2a}	7 5 I_{1a}	8 6 I_{0a}	9 7 Z_a	10 8 GND	12 9 Z_b	13 10 I_{0b}	14 11 I_{1b}	15 12 I_{2b}	17 13 I_{3b}	18 14 S_0	19 15 $\overline{E}_b$	20 16 V_{CC}	Measured terminal	Test limits Min	Test limits Max	Unit
9 T_C = 25°C	t_{PHL2}	3003 Fig. 5	99	0.0 V	2.7 V	IN				OUT	GND						2.7 V		5.0 V	$I13_a \rightarrow Z_a$	1.7	6.0	ns
		"	100	"	2.7 V		IN			"	"						0.0 V		"	$I12_a \rightarrow Z_a$	"	"	"
		"	101	"	0.0 V			IN		"	"						2.7 V		"	$I11_a \rightarrow Z_a$	"	"	"
		"	102	"	"					"	"						0.0 V		"	$I10_a \rightarrow Z_a$	"	"	"
		"	103	"	"					"	"	OUT	IN				0.0 V	0.0 V	"	$I9_b \rightarrow Z_b$	"	"	"
		"	104	"	"					"	"	OUT		IN			2.7 V	"	"	$I11_b \rightarrow Z_b$	"	"	"
		"	105	"	2.7 V					"	"	OUT			IN		0.0 V	"	"	$I12_b \rightarrow Z_b$	"	"	"
		"	106	"	2.7 V					"	"	OUT				IN	2.7 V	"	"	$I13_b \rightarrow Z_b$	"	"	"
	t_{PLH4}	"	107	0.0 V	2.7 V	2.7 V	0.0 V			OUT	"						IN	0.0 V	"	$S_0 \rightarrow Z_a$	3.5	13.0	"
		"	108		2.7 V					"	"	OUT			0.0 V	2.7 V	IN	"	"	$S_0 \rightarrow Z_b$	"	"	"
		"	109	0.0 V	IN	0.0 V		2.7 V		OUT	"						2.7 V		"	$S_1 \rightarrow Z_a$	"	"	"
		"	110		IN					"	"	OUT		2.7 V		0.0 V	2.7 V	0.0 V	"	$S_1 \rightarrow Z_b$	"	"	"
	t_{PHL4}	"	111	0.0 V	0.0 V			2.7 V	0.0 V	OUT	"						IN	0.0 V	"	$S_0 \rightarrow Z_a$	3.5	"	"
		"	112		0.0 V				0.0 V	"	"	OUT	0.0 V	2.7 V			IN	"	"	$S_0 \rightarrow Z_b$	"	"	"
		"	113	0.0 V	IN		2.7 V		0.0 V	OUT	"				2.7 V		0.0 V	0.0 V	"	$S_1 \rightarrow Z_a$	"	"	"
		"	114		IN					"	"	OUT	0.0 V				0.0 V	0.0 V	"	$S_1 \rightarrow Z_b$	"	"	"
	t_{PLH6}	"	115	IN	0.0 V				2.7 V	OUT	"						0.0 V		"	$\overline{E}_a \rightarrow Z_a$	3.5	14.0	"
	t_{PLH6}	"	116		"						"	OUT	2.7 V				"	IN	"	$\overline{E}_b \rightarrow Z_b$	"	14.0	"
	t_{PHL6}	"	117	IN	"				2.7 V	OUT	"						"		"	$\overline{E}_a \rightarrow Z_a$	3.0	11.0	"
	t_{PHL6}	"	118		"						"	OUT	2.7 V				"	IN	"	$\overline{E}_b \rightarrow Z_b$	3.0	11.0	"
10 T_C = 125°C	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and, for the following limits: t_{PHL2} = 2.0 to 9.0 ns; t_{PHL2} = 1.5 to 7.5 ns; t_{PLH4} = 3.5 to 14.5 ns; t_{PHL4} = 3.5 to 15.0 ns; t_{PLH6} = 3.5 to 17.0 ns; t_{PHL6} = 3.5 to 13.0 ns																						
11 T_C = -55°C	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits are as follows:

Test	Min/Max limits [mA] for circuit: A	B	C
I_{IL}	-.257/-.60	-.03/-.60	-.03/-.60

2/ A = 7.5 V, B = 0.5 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	8	9	10	12	13	14	15	17	19	19	20	Measured terminal	Test limits		Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	15				
			Test no.	$\overline{OE}_a$	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{3b}	I_{1b}	I_{2b}	I_{3b}	S_0	$\overline{OE}_b$	V_{CC}		Min	Max	
1 T_C = 25°C	V_{OH}	3006	1	0.8 V	0.8 V			0.8 V	0.8 V	-3 mA	GND						0.3 V		4.5 V	Z_a	2.4		V
		"	2	"	0.8 V					"	"						2.0 V		"	"	"		"
		"	3	"	2.0 V		0.9 V			"	"						0.9 V		"	"	"		"
		"	4	"	2.0 V	0.8 V				"	"						2.0 V		"	"	"		"
		"	5	"	0.8 V					"	"	-3 mA	0.9 V				0.8 V	0.8 V	"	$\overline{Z}_b$	"		"
		"	6	"	0.8 V					"	"	"		0.8 V			2.0 V	"	"	"	"		"
		"	7	"	2.0 V					"	"	"			0.8 V		0.9 V	"	"	"	"		"
		"	8	"	2.0 V					"	"	"				0.8 V	2.0 V	"	"	"	"		"
	V_{OL}	3007	9	0.8 V	0.8 V			2.0V	2.0 V	20 mA	"						0.8 V		"	Z_a		0.5	"
		"	10	"	0.8 V					"	"						2.0 V		"	"		"	"
		"	11	"	2.0 V		2.0 V			"	"						0.8 V		"	"		"	"
		"	12	"	2.0 V	2.0 V				"	"						2.0 V		"	"		"	"
		"	13	"	0.8 V					"	"	20 mA	2.0 V				0.8 V	0.8 V	"	Z_b		"	"
		"	14	"	0.8 V					"	"	20 mA		2.0 V			2.0 V	"	"	"		"	"
		"	15	"	2.0 V					"	"	20 mA			2.0 V		0.8 V	"	"	"		"	"
		"	16	"	2.0 V					"	"	20 mA				2.0 V	2.0 V	"	"	"		"	"
	V_{IC}		17	-18 mA							"								"	$\overline{OE}_a$		-1.2	"
			18		-18 mA						"								"	S_1		"	"
			19			-18 mA					"								"	$I3_a$		"	"
			20				-18 mA				"								"	$I2_a$		"	"
			21					-18 mA			"								"	$I1_a$		"	"
			22						-18 mA		"								"	$I0_a$		"	"
			23								"		-18 mA						"	$I0_b$		"	"
			24								"			-18 mA					"	$I1_b$		"	"
			25								"				-18 mA				"	$I2_b$		"	"
			26								"					-18 mA			"	$I3_b$		"	"
			27								"						-18 mA		"	S_0		"	"
			28								"							-18 mA	"	$\overline{OE}_b$		"	"
	I_{IH1}	3010	29	2.7 V							"								5.5 V	$\overline{OE}_a$		20	µA
		"	30		2.7 V						"								"	S_1		"	"
		"	31	4.5 V	0.0 V	2.7 V					"						0.0 V		"	$I3_a$		"	"
		"	32	"	0.0 V		2.7 V				"						4.5 V		"	$I2_a$		"	"
		"	33	"	4.5 V			2.7 V			"						0.0 V		"	$I1_a$		"	"
		"	34	"	"				2.7 V		"						4.5 V		"	$I0_a$		"	"
		"	35	"	"						"		2.7 V				4.5 V	4.5 V	"	$I0_b$		"	"
		"	36	"	"						"			2.7 V			0.0 V	"	"	$I1_b$		"	"
		"	37	"	0.0 V						"				2.7 V		4.5 V	"	"	$I2_b$		"	"
		"	38	"	0.0 V						"					2.7 V	0.0 V	"	"	$I3_b$		"	"
		"	39								"						2.7 V		"	S_0		"	"
		"	40								"							2.7 V	"	$\overline{OE}_b$		"	"
	I_{IH2}	"	41	7.0 V							"								"	$\overline{OE}_a$		100	"
		"	42		7.0 V						"								"	S_1		"	"
		"	43	4.5 V	0.0 V	7.0 V					"						0.0 V		"	$I3_a$		"	"
		"	44	"	0.0 V		7.0 V				"						4.5 V		"	$I2_a$		"	"
		"	45	"	4.5 V			7.0 V			"						0.0 V		"	$I1_a$		"	"
		"	46	"	"				7.0 V		"						4.5 V		"	$I0_a$		"	"
		"	47	"	"						"		7.0 V				4.5 V	4.5 V	"	$I0_b$		"	"
		"	48	"	"						"			7.0 V			0.0 V	"	"	$I1_b$		"	"
		"	49	"	0.0 V						"				7.0 V		4.5 V	"	"	$I2_b$		"	"
		"	50	"	0.0 V						"					7.0 V	0.0 V	"	"	$I3_b$		"	"
		"	51								"						7.0 V		"	S_0		"	"
		"	52								"							7.0 V	"	$\overline{OE}_b$		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open)

Subgroup	Symbol	MIL-STD-883 method	Case 2 1/	2	3	4	5	7	9	9	10	12	13	14	15	17	19	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	$\overline{OE}_a$	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{0b}	I_{1b}	I_{2b}	I_{3b}	S_0	$\overline{OE}_b$	V_{CC}				
1 T_C = 25°C	I_{IL}	3009	53	0.5 V							GND								5.5 V	$\overline{OE}_a$	1/	1/	mA
		"	54		0.5 V						"								"	S_1	"	"	"
		"	55	0.0 V	4.5 V	0.5 V					"						4.5 V		"	3_a	"	"	"
		"	56	"	4.5 V		0.5 V				"						0.0 V		"	2_a	"	"	"
		"	57	"	0.0 V			0.5 V			"						4.5 V		"	1_a	"	"	"
		"	59	"	"				0.5 V		"						0.0 V		"	0_a	"	"	"
		"	59		"						"		0.5 V				0.0 V	0.0 V	"	0_b	"	"	"
		"	60		"						"			0.5 V			4.5 V		"	1_b	"	"	"
		"	61		4.5 V						"				0.5 V		0.0 V		"	2_b	"	"	"
		"	62								"					0.5 V	4.5 V		"	3_b	"	"	"
		"	63								"						0.5 V		"	S_0	"	"	"
		"	64								"							0.5 V	"	$\overline{OE}_b$	"	"	"
	I_{OZH}		65	2.0 V	0.0 V				2.0 V	2.7 V	"						0.0 V		"	Z_a		50	µA
	I_{OZH}		66		"						"	2.7 V	2.0 V				"	2.0 V	"	Z_b		50	"
	I_{OZL}		67	2.0 V	"				0.8 V	0.5 V	"						"		"	Z_a		-50	"
	I_{OZL}		68		"						"	0.5 V	0.8 V				"	2.0 V	"	Z_b		-50	"
	I_{OS}		69	0.0 V	0.0 V				0.0 V	0.0 V	"						"		"	Z_a	-60	-150	mA
	I_{OS}		70		0.0 V						"	0.0 V	0.0 V				"	0.0 V	"	Z_b	-60	-150	"
	I_{OD}		71	0.0 V	0.0 V				5.5 V	2.5 V	"						0.0 V		4.5 V	Z_a	35		"
	I_{OD}		72		0.0 V						"	2.5 V	5.5 V				0.0 V	0.0 V	4.5 V	Z_b	35		"
	I_{CCH}		73	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"		0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	5.5 V	V_{CC}		14	"
	I_{CCL}		74	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	4.5 V		"		4.5 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	"	V_{CC}		20	"
	I_{CCZ}		75	4.5 V	0.0 V	0.0 V	0.0 V	0.0 V	0.0 V		"		0.0 V	0.0 V	0.0 V	0.0 V	0.0 V	4.5 V	"	V_{CC}		23	"
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = 25°C	Functional tests 2/	3014	76	B	B	B	B	B	B	B	H	GND	H	B	B	B	B	B	B	5.0 V	All outputs		
		"	77	"	"	"	"	"	B	A	L	"	L	A	B	"	"	B	"	"			
		"	78	"	"	"	"	"	B	B	H	"	H	B	B	"	"	A	"	"			
		"	79	"	"	"	"	"	A	"	L	"	L	"	A	"	"	A	"	"			
		"	80	"	A	"	"	"	B	"	H	"	H	"	B	"	"	B	"	"			
		"	81	"	"	"	A	"	"	"	L	"	L	"	"	"	A	B	"	"			
		"	82	"	"	"	B	"	"	"	H	"	H	"	"	"	B	A	"	"			
		"	83	"	"	A	B	"	"	"	L	"	L	"	B	A	"	A	"	"			
		"	84	"	B	"	A	A	"	"	H	"	H	A	A	"	B	B	"	"			
		"	85	"	"	"	"	A	A	"	L	"	L	A	A	"	"	B	"	"			
		"	86	"	"	"	"	B	"	"	H	"	H	"	B	"	"	A	"	"			
		"	87	"	"	"	"	A	"	"	L	"	L	"	A	"	"	A	"	"			
		"	88	"	A	"	B	"	"	"	H	"	H	"	"	B	"	B	"	"			
		"	89	"	"	"	A	"	"	"	L	"	L	"	"	A	"	B	"	"			
		"	90	"	"	B	A	"	"	"	H	"	H	"	"	A	B	A	"	"			
		"	91	"	"	A	A	"	"	"	L	"	L	"	"	A	A	A	"	"			
8	Same tests, terminal conditions, and limits as for subgroup 7, except T_C = +125°C and T_C = -55°C.																						

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 10 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V, low ≤0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Case 2 3/	2	3	4	5	7	9	6	10	12	13	14	15	17	18	19	20	Measured terminal	Test limits Min	Test limits Max	Unit
			Cases E,F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
			Test no.	$\overline{OE}_a$	S_1	I_{3a}	I_{2a}	I_{1a}	I_{0a}	Z_a	GND	Z_b	I_{0b}	I_{1b}	I_{2b}	I_{3b}	S_0	$\overline{OE}_b$	V_{CC}				
9	t_{PLH2}	3303	92	0.0 V	2.7 V	IN				OUT	GND						2.7 V		5.0 V	$I3_a \rightarrow Z_a$	1.5	7.0	ns
T_C = 25°C		Fig. 5	93	"	2.7 V		IN			"	"						0.0 V		"	$I2_a \rightarrow Z_a$	"	"	"
			94	"	0.0 V			IN		"	"						2.7 V		"	$I1_a \rightarrow Z_a$	"	"	"
			95	"	"				IN	"	"						0.0 V		"	$I0_a \rightarrow Z_a$	"	"	"
			96		"					"	"	OUT	IN				0.0 V	0.0 V	"	$I0_b \rightarrow Z_b$	"	"	"
			97		"					"	"	"		IN			2.7 V	"	"	$I1_b \rightarrow Z_b$	"	"	"
			98		2.7 V					"	"	"			IN		0.0 V	"	"	$I2_b \rightarrow Z_b$	"	"	"
			99		2.7 V					"	"	"				IN	2.7 V	"	"	$I3_b \rightarrow Z_b$	"	"	"
	t_{PHL2}	"	100	0.0 V	2.7 V	IN				OUT	"						2.7 V		"	$I3_a \rightarrow Z_a$	"	6.0	"
		"	101	"	2.7 V		IN			"	"						0.0 V		"	$I2_a \rightarrow Z_a$	"	"	"
		"	102	"	0.0 V			IN		"	"						2.7 V		"	$I1_a \rightarrow Z_a$	"	"	"
		"	103	"	"				IN	"	"						0.0 V		"	$I0_a \rightarrow Z_a$	"	"	"
		"	104		"					"	"	OUT	IN				0.0 V	0.0 V	"	$I0_b \rightarrow Z_b$	"	"	"
		"	105		"					"	"	"		IN			2.7 V	"	"	$I1_b \rightarrow Z_b$	"	"	"
		"	106		2.7 V					"	"	"			IN		0.0 V	"	"	$I2_b \rightarrow Z_b$	"	"	"
		"	107		2.7 V					"	"	"				IN	2.7 V	"	"	$I3_b \rightarrow Z_b$	"	"	"
	t_{PLH1}	"	108	0.0 V	2.7 V	2.7 V	0.0 V			OUT	"						IN		"	$S_0 \rightarrow Z_a$	4.0	14.0	
		"	109		2.7 V					"	"	OUT			0.0 V	2.7 V	IN	0.0 V	"	$S_0 \rightarrow Z_b$	"	"	"
		"	110	0.0 V	IN	0.0 V		2.7 V		OUT	"						2.7 V		"	$S_1 \rightarrow Z_a$	"	"	"
		"	111		IN					"	"	OUT		2.7 V		0.0 V	2.7 V	0.0 V	"	$S_1 \rightarrow Z_b$	"	"	"
	t_{PHL1}	"	112	0.0 V	0.0 V			2.7 V	0.0 V	OUT	"						IN		"	$S_0 \rightarrow Z_a$	"	11.0	"
		"	113		0.0 V					"	"	OUT	0.0 V	2.7 V			IN	0.0 V	"	$S_0 \rightarrow Z_b$	"	"	"
		"	114	0.0 V	IN		2.7 V		0.0 V	OUT	"						0.0 V		"	$S_1 \rightarrow Z_a$	"	"	"
		"	115		IN					"	"	OUT	0.0 V		2.7 V		0.0 V	0.0 V	"	$S_1 \rightarrow Z_b$	"	"	"
	t_{PLZ6}	"	116	IN	0.0 V				2.7 V	OUT	"						0.0 V		"	$\overline{OE}_a \rightarrow Z_a$	2.0	6.0	"
	t_{PLZ6}	"	117		"						"	OUT	2.7 V				0.0 V	IN	"	$\overline{OE}_b \rightarrow Z_b$	2.0	"	"
	t_{PHZ6}	"	118	IN	"				0.0 V	OUT	"						0.0 V		"	$\overline{OE}_a \rightarrow Z_a$	2.0	"	"
	t_{PHZ6}	"	119		"						"	OUT	0.0 V				0.0 V	IN	"	$\overline{OE}_b \rightarrow Z_b$	2.0	"	"
	t_{PZL6}	"	120	IN	"				2.7 V	OUT	"						0.0 V		"	$\overline{OE}_a \rightarrow Z_a$	3.0	111.0	"
	t_{PZL6}	"	121		"						"	OUT	2.7 V				0.0 V	IN	"	$\overline{OE}_b \rightarrow Z_b$	3.0	111.0	"
	t_{PZH6}	"	122	IN	"				0.0 V	OUT	"						0.0 V		"	$\overline{OE}_a \rightarrow Z_a$	3.0	8.0	"
	t_{PZH6}	"	123		"						"	OUT	0.0 V				0.0 V	IN	"	$\overline{OE}_b \rightarrow Z_b$	3.0	8.0	"
10	Same tests and terminal conditions as subgroup 9, except T_C = +125°C and, for the following limits:																						
T_C = 125°C	t_{PLH2} = 1.5 to 9.0 ns			t_{PLH1} = 4.0 to 16.0 ns				t_{PLZ6} = 2.0 to 8.5 ns			t_{PZL6} = 3.5 to 15.5 ns												
	t_{PHL2} = 1.5 to 7.5 ns			t_{PHL1} = 4.0 to 14.0 ns				t_{PHZ6} = 2.0 to 6.5 ns			t_{PZH6} = 3.0 to 11.0 ns												
11	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																						
T_C = -55°C																							

1/ I_{IL} limits are as follows:

Test	Min/Max limits (mA) for circuit: A	B	C
I_{IL}	-.25/-.60	-.03/-.60	-.03/-.60

2/ A = 2.4 V, B = 0.5 V.

3/ Case 2 pins not referenced are N/C.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:19Z
Check the source to verify that this is the current version before use.

4.3 Qualification inspection.. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, and 6 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical parameters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D, E, or F using the circuit shown on figure 4, or equivalent.

(2) T_A = +125°C minimum.

(3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows:

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for use for Government microcircuit applications (original equipment) and logistic purposes.

6.2 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

d. Requirements for notification of change of product or process to the contracting activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.

f. Requirements for product assurance options.

g Requirements for special carriers, lead lengths, or lead forming, if applicable, these requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by or direct shipment to the Government.

h. Requirements for "JAN" marking.

6.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND - - - - - - - - - - - - - Ground zero voltage potential.
V_{IN} - - - - - - - - - - - - Voltage level at an input terminal.
I_{IN} - - - - - - - - - - - - Current flowing into an input terminal.

6.4 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2) lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.5 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	54F151A
02	54F153
03	54F157A
04	54F158A
05	54F251A
06	54F257A
07	54F258A
08	54F253
09	54F352
10	54F353

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.

6.6 Manufacturers' designations. Manufacturers' circuit which form a part of this specification are designated with an "X" as shown in table IV herein.

TABLE IV. Manufacturers' designation.

Device type	Circuits		
	A	B	C
	Fairchild Semiconductor	Motorola	Signetics
01	X	X	
02	X	X	
03	X		
04	X		
05	X	X	
06	X		
07	X		
08	X	X	
09		X	
10		X	

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Air Force - 11, 19, 85, 99
Navy - OS, SH, TD
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-0923)

U.S. GOVERNMENT PRINTING OFFICE: 1984 - 704-036/45731

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:19Z
Check the source to verify that this is the current version before use.