MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED SCHOTTKY TTL, TRANSPARENT AND OCTAL D TYPE LATCHES, CASCADABLE, MONOLITHIC SILICON

This amendment forms a part of MIL-M-38510/346B, dated 12 February 1987, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2.3, add the following new case outline: "X C-2A (20 terminal, .350" x .350"), square chip carrier package".

1.3, Thermal resistance: Delete "Case 2" and substitute "Cases 2 and X."

PAGE 3

TABLE I, Low-level input current, Min limits column: Delete "-0.03" and substitute "0".

PAGE 4

TABLE I, LE to Q, t_{PLH2}, Device type 01, Max limits column: Delete "15.5" and substitute "15.0".

PAGE 9

FIGURE 1: Delete "Case 2" and substitute "Cases 2 and X" (two places).

PAGE 10

FIGURE 1: Delete "Case 2" and substitute "Cases 2 and X".

PAGE 11

FIGURE 1: Delete "Case 2" and substitute "Cases 2 and X".

PAGE 12

FIGURE 2, Device types 01 and 02: Delete "OE" and substitute "$\overline{OE}$" (two places).

PAGE 15

FIGURE 3, Device types 01 and 04: Delete "OE" and substitute "$\overline{OE}$". Device type 02: Delete "OE and substitute "$\overline{OE}$". Device type 02: Delete "Q_n" and substitute "$\overline{Q_n}$".

PAGES 17 THROUGH 20

FIGURE 4: Delete "OE" and substitute "$\overline{OE}$".


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:24Z
Check the source to verify that this is the current version before use.

PAGE 20

FIGURE 4, add new circuit and notes as follows:

"

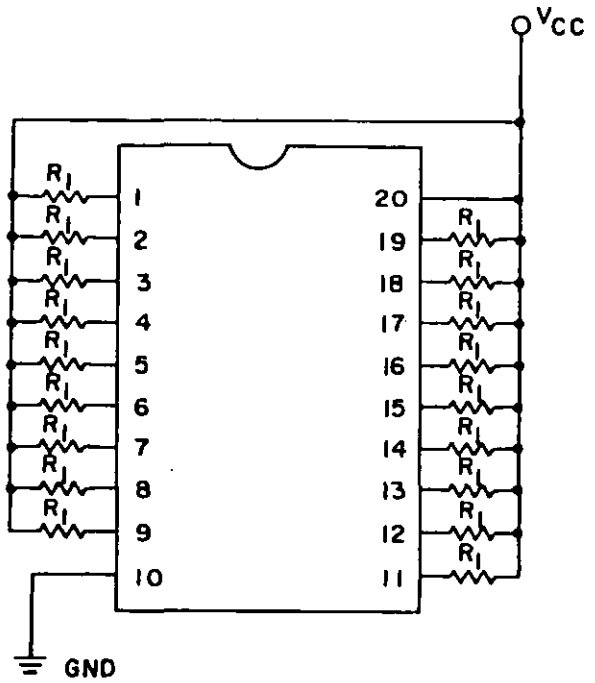

NOTES:
1. High temperature condition F (+175°C) burn-in circuit only.
2. R1 = 2 kΩ
3. V_{CC} shall be chosen such that 5.0 V minimum is present at device terminal."

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:24Z
Check the source to verify that this is the current version before use.

PAGES 23 THROUGH 39

TABLE III, column heading: Delete "Cases R, S, 2" and substitute "Cases R, S, 2, X".

PAGE 24

TABLE III, $\overline{OE}$ pin, test numbers 82-88: Add "0.0 V" (seven places).

PAGE 26

TABLE III, footnote 4, delete and substitute:
"4/ I_{IL} limits (mA) min/max values for circuit shown.

Parameter	Circuits			
	A	B	C	D
I_{IL}	-.25/-.60	-.03/-.60	-.03/-.60	0/-0.3

"

PAGE 28

TABLE III, $\overline{OE}$ pin, test numbers 82-88: Add "0.0 V" (seven places).

PAGE 30

TABLE III, Measured terminal column, test numbers 133-164: Delete "$Q_0...Q_7$" and substitute "$\overline{Q_0}...\overline{Q_7}$" as appropriate (32 places).

PAGE 31

TABLE III, LE pin, test numbers 9-16: Delete "1.1 V" and substitute "2.0 V" (eight places).

PAGE 32

TABLE III, GND pin, test number 82: Add "GND".

PAGE 34

TABLE III, Measured terminal column, test numbers 140-155: Delete "$Q_0...Q_7$" and substitute "$\overline{Q_0}...\overline{Q_7}$" as appropriate (16 places).

PAGE 35

TABLE III, LE pin, test numbers 9-16: Delete "1.1 V" and substitute "2.0 V" (eight places).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:24Z
Check the source to verify that this is the current version before use.

PAGE 36

TABLE III, GND pin, test number 82: Add "GND".

PAGE 40

TABLE IV, delete and substitute:

"TABLE IV. Manufacturers' designations.

Device Type	Circuits A Fairchild Semiconductor	B Motorola	C Signetics	D Texas Instruments
01	X	X	X	X
02	X	X		
03	X			
04	X			

"

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH, TD
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-1065)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:24Z
Check the source to verify that this is the current version before use.