MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED SCHOTTKY TTL, 8-BIT IDENTITY COMPARATOR, MONOLITHIC SILICON

This amendment forms a part of MIL-M-38510/347, dated 1 May 1985, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Title: Delete and substitute new title as printed above.

* 1.2.3, add "X C-2A (20-terminal, .350" x .350"), square chip carrier".

* 1.3, thermal resistance: Delete "Case 2" and substitute "Cases X and 2".

PAGE 3

* Table I, I_{IL}, min limits: Delete "-.03" and substitute "0".

PAGE 4

* 4.2.a.(1): Delete "D or E" and substitute "D, E, or F".

PAGE 5

* 4.4.3.c.(1): Delete "D or E" and substitute "D, E, or F".

* Table II, interim electrical parameters: Delete "(pre burn-in)".

PAGE 6

* Figure 1, delete "Case 2" and substitute "Cases X and 2".

PAGE 11

* Table III, delete "Cases R, S, 2" and substitute "Cases R, S, X, and 2". Make this same change to pages 12, 13, and 14.

PAGE 12

Table III, subgroup 7, symbol column, truth table test: Add "2/ 3/". Also, V_{CC} column: Add "4/".

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
10a	New page

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:24Z
Check the source to verify that this is the current version before use.

PAGE 13

Table III, subgroup 7, symbol column, truth table test: Add "2/ 3/". Also, V_{CC} column: Add "4/".

PAGE 14

Table III, add the following new footnotes:

"2/ A = 2.5 V, B = 0.5 V.

"3/ H $\geq$ 1.5 V, L $\leq$ 1.5 V.

"4/ Subgroup 7, test V_{CC} 4.5 V then repeat at 5.5 V."

* Table III, footnote 1/: Add circuit D with min/max limits 0/-0.3 mA.

PAGE 16

* Table IV, add "circuit D, Texas Instruments".

The margins of this amendment are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH, TD
Air Force - 11, 19, 85, 99


User activities:
Army - SM
Navy - AS, CG, MC

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-1066)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:24Z
Check the source to verify that this is the current version before use.

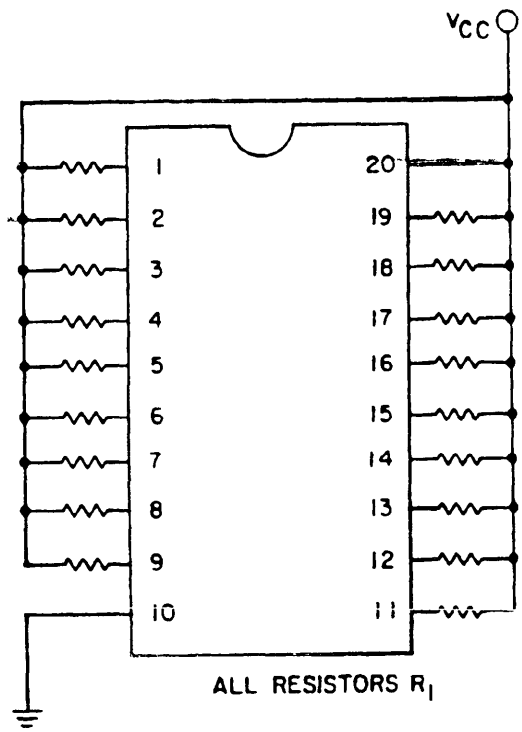

NOTES:
1. High temperature (175°C) condition F burn-in circuit only.
2. R_1 = 2 kΩ.
3. V_{CC} shall be chosen such that 5.0 V minimum is present at device terminal.

FIGURE 4 Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:24Z
Check the source to verify that this is the current version before use.