MILITARY SPECIFICATION SHEET

METERS, TIME TOTALIZING, NON-HERMETICALLY SEALED, ELECTRICAL; TYPE I, 4-40 V OR 40-130V; GRADES A AND B, 2½ INCH AND 3½ INCH, 3 HOLE FLANGE

The complete requirements for procuring meters described herein shall consist of this document and the issue in effect of MIL-M-3971.

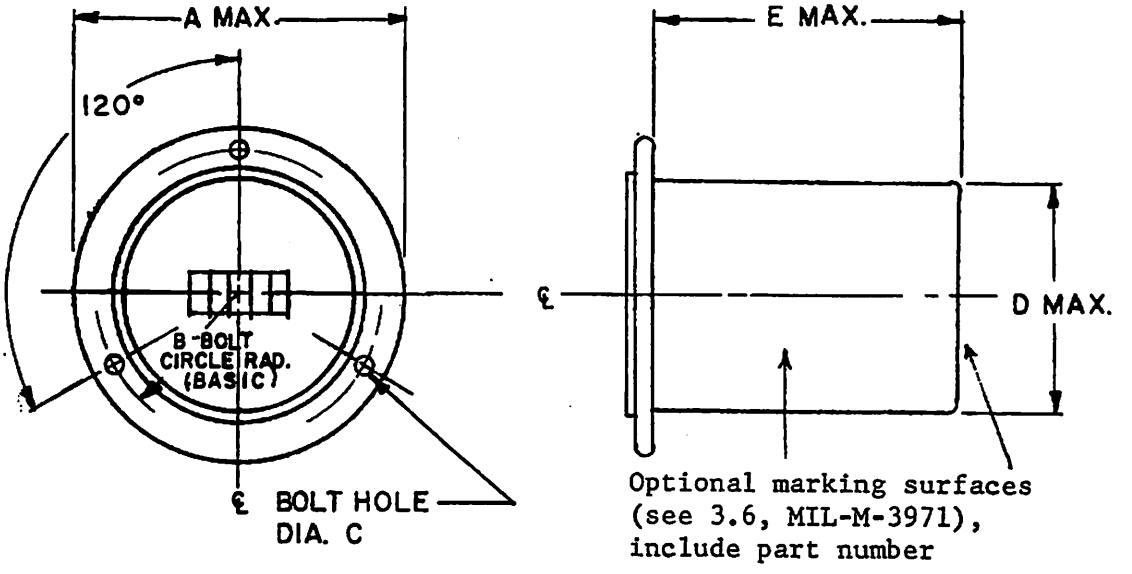


TABLE I

Dash No.	A	B	C	D	E	Grade	Voltage	Range	Readout
1	2.875	1.265	.150	2.210	3.00	A	4-40	10,000	9999.9
2	2.875	1.265	.150	2.210	3.00	A	40-130	10,000	9999.9
3	3.500	1.580	.150	2.625	3.00	A	4-40	10,000	9999.9
4	3.500	1.580	.150	2.625	3.00	A	40-130	10,000	9999.9
5	2.875	1.265	.150	2.210	3.00	B	4-40	10,000	9999.9
6	2.875	1.265	.150	2.210	3.00	B	40-130	10,000	9999.9
7	3.500	1.580	.150	2.625	3.00	B	4-40	10,000	9999.9
8	3.500	1.580	.150	2.625	3.00	B	40-130	10,000	9999.9

FSC 6645

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches
2. Tolerances: Dimensional ± 0.015 inches, unless otherwise indicated
   Angular ± 0.5°
3. Range and readout are in hours

REQUIREMENTS

Dimensions of case: See Figure and Table I.

Colors, elapsed time indicator:

Hours: White on black background
Tenths: Black on white background

Power consumption: Not applicable.

Dielectric strength:		
Voltage	-	200 volts rms
Frequency	-	60 cps
Potential	-	ac
Points of application	-	Terminals and case

Weight: 0.60 lbs. maximum

Starting: 4-40V:
1. Energize with 28V for 60 seconds at +22°C (±2°C), de-energize for 180 seconds, repeat 3 times. Meter to start within 10 seconds.
2. As above at 12V, repeat 2 times.

40-130V:
1. As above at 120V, repeat 3 times.
2. As above at 85V, repeat 2 times.

Stopping: Within 120 seconds after being de-energized.

Power supply tolerance:		
4-40 voltmeters	-	1/2 hour at 4 volts 1/2 hour at 40 volts
40-130 voltmeters	-	1/2 hour at 40 volts 1/2 hour at 130 volts

Part number: Consists of the basic number of this specification sheet and a dash number taken from Table I.

Example: M3971/1-1

Basic number
Specification sheet number
Dash number from Table I

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:11Z
Check the source to verify that this is the current version before use.

Supersession data:

MS 16970-1 replaced by M3971/1-(5 or 6)
MS 16970-2 replaced by M3971/1-(7 or 8)

Custodians:
Army - MU
Navy - SA
Air Force - 82

Review activities:
Army - ME, MI, GL
Navy - YD, SH
Air Force - 11

User activities:
Army - EL
Navy - MC, AS

Preparing activity:
Army - MU

Project No. 6645-0198

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:11Z
Check the source to verify that this is the current version before use.