INCH-POUND

MIL-M-003971/1C(AR)
22 January 1992
USED IN LIEU OF
MIL-M-3971/1B
31 January 1985

MILITARY SPECIFICATION SHEET

METERS, TIME TOTALIZING, NON-HERMETICALLY SEALED, ELECTRICAL: TYPE I, 10-40V or 40-130V or 10-130V; GRADES A AND B, 2 HOLE AND 3 HOLE FLANGE

This specification is approved for use by the U.S. Army Armament Research, Development and Engineering Center based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-M-3971. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in acquisition.

The complete requirement for procuring meters described herein shall consist of this document and the issue in effect of MIL-M-3971.

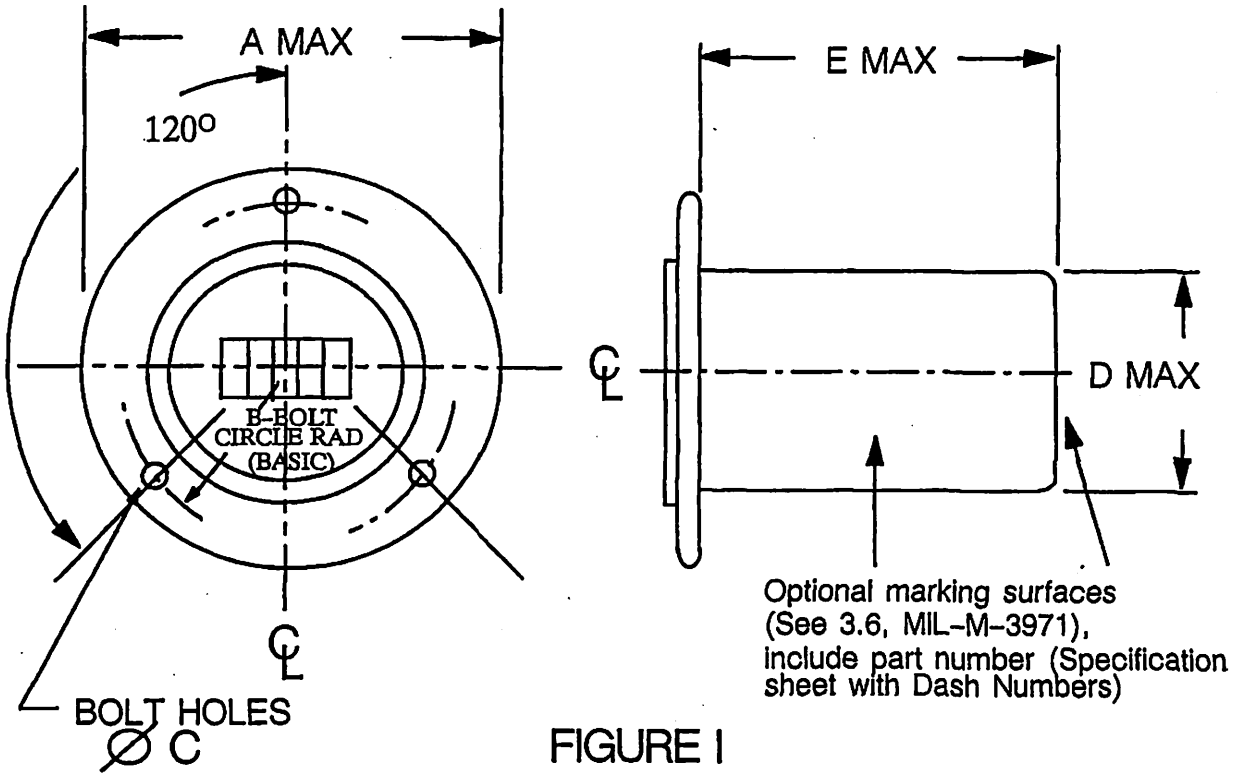


FIGURE I

AMSC N/A FSC 6645

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:11Z
Check the source to verify that this is the current version before use.

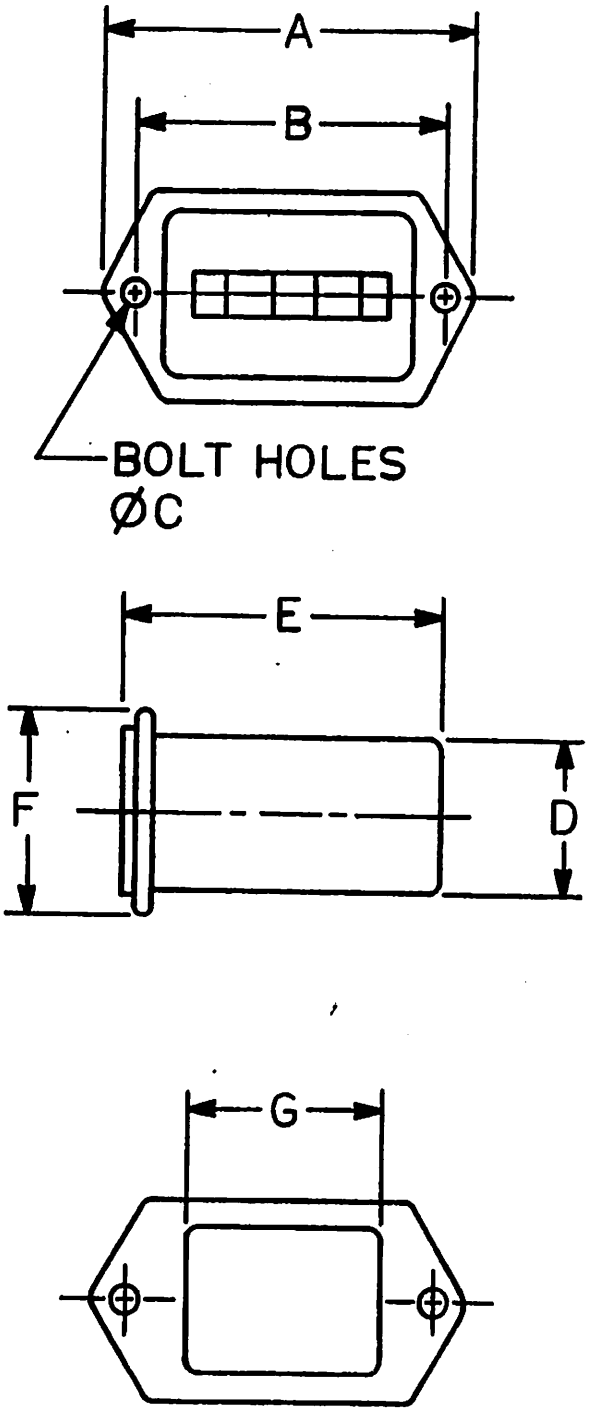


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:11Z
Check the source to verify that this is the current version before use.

TABLE I

Dash No.	Fig	A	B	C	D	E	F	G	Grade	Voltage	Range	Readout
1	1	2.875	1.265	.150	2.210	3.00	–	–	A	10–40	10,000	9999.9
2	1	2.875	1.265	.150	2.210	3.00	–	–	A	40–130	10,000	9999.9
3	1	3.500	1.580	.150	2.625	3.00	–	–	A	10–40	10,000	9999.9
4	1	3.500	1.580	.150	2.625	3.00	–	–	A	40–130	10,000	9999.9
5	1	2.875	1.265	.150	2.210	3.00	–	–	B	10–40	10,000	9999.9
6	1	2.875	1.265	.150	2.210	3.00	–	–	B	40–130	10,000	9999.9
7	1	3.500	1.580	.150	2.625	3.00	–	–	B	10–40	10,000	9999.9
8	1	3.500	1.580	.150	2.625	3.00	–	–	B	40–130	10,000	9999.9
9	1	2.810	1.580	.150	2.135	1.75	–	–	B	10–130	10,000	9999.9
10	1	3.500	1.580	.150	2.135	1.75	–	–	B	10–130	10,000	9999.9
11	2	2.12	1.75	.150	.900	1.950	1.25	1.414	A	10–40	10,000	9999.9
12	2	2.12	1.75	.150	.900	1.950	1.25	1.414	B	10–40	10,000	9999.9

NOTES:

1. Dimensions are in inches
2. Tolerances: Dimensional ± 0.015 inches, Bolt Holes ± .005, unless otherwise indicated. Angular ± 0.5°.
3. Range and readout are in hours and tenth of hours.

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:11Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS

Dimensions of case: See Figure 1 and 2 and Table I as applicable

Colors, elapsed time indicator:

Hours: White on black background

Tenths: Black on white background

Power consumption: Not applicable

Dielectric strength: Voltage – 200 volts rms

Frequency – 60 Hz

Potential – ac

Points of application – Terminals and case

Weight: 0.60 lbs maximum

Starting: 10-40V:
1. Energize with 28V for 60 seconds at +22° (±2°C), de-energize for 180 seconds, repeat 3 times.
2. As above at 12V, repeat 2 times.

40-130V:
1. As above at 120V, repeat 3 times.
2. As above at 85V, repeat 2 times.

10-130V:
1. As above at 120V, repeat 3 times.
2. As above at 85V, repeat 2 times.
3. As above at 28V, repeat 3 times.
4. As above at 12V, repeat 2 times.

Stopping: Within 120 seconds after being de-energized.

Power supply tolerance: 10-40 voltmeters – 1/2 hour at 4 volts
– 1/2 hour at 40 volts


40-130 voltmeters – 1/2 hour at 40 volts
– 1/2 hour at 130 volts

10-130 voltmeters – 1/2 hour at 10 volts
– 1/2 hour at 130 volts

Part number: Consists of the basic number of this specification sheet and a dash number taken from Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:11Z
Check the source to verify that this is the current version before use.

Example:

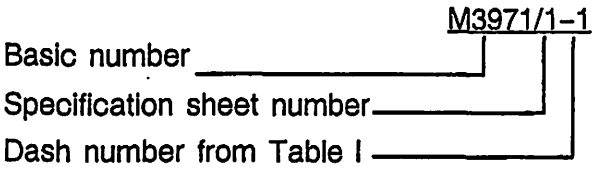

Supersession data:

MS 16970-1 replaced by M3971/1-(5 or 6)

MS 16970-2 replaced by M3971/1-(7 or 8)

Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - AR

Preparing activity:

Army - AR

Project No. 6645-A420

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:11Z
Check the source to verify that this is the current version before use.