INCH-POUND

MIL-DTL-3976E
5 October 2007
SUPERSEDING
MIL-L-3976D
29 December 1989

DETAIL SPECIFICATION

LIGHTS, MARKER, CLEARANCE (SERVICE AND BLACKOUT) GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. Scope

1.1 Scope. This specification covers amber (yellow) or red clearance marker lights for service and blackout use in military vehicles. The clearance marker light assembly will be referred to as "light assembly" herein (see 6.1).

1.2 Classification. Lights should be of the following classes and colors (see 6.2).

Class 1	Service lights enable safe operations of military vehicles under normal conditions of visibility.
Class 2	Blackout lights are designed to maintain vehicle blackout security during blackout conditions by limiting horizontal and vertical illumination as well as providing ample light for safe vehicle operation.

1.2.2 Colors. The color of filters should be designated as follows:

A - Amber (Yellow).
B - Red.

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Philadelphia, ATTN: DSCP-NASA, 700 Robbins Avenue, Philadelphia, PA 19111-5096 or email to dscpg&inspecomments@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil/

AMSC N/A FSC 6220

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in section 3 or 4 of this standard. This section does not include documents cited in other sections of this standard or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in section 3 or 4 of this standard, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL STANDARDS

FED-STD-H28	Screw-Thread Standards for Federal Services
FED-STD-595/33446	Yellow, Flat or Lusterless
FED-STD-595/34083	Green, Flat or Lusterless

COMMERCIAL ITEM DESCRIPTIONS

A-A-55820	Orthophosphoric (Phosphoric) Acid, Technical

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-L-3976/1	Light Emitting Diode (LED), Marker, Clearance Blackout, 14 and 28 Volt
MIL-L-3976/2	Light, Marker, Clearance Blackout, 24 Volt
MIL-DTL-5541	Chemical Conversion Coatings on Aluminum and Aluminum Alloys
MIL-DTL-13486	Cable, Special Purpose, Electrical: Low Tension, Heavy Duty, Single-Conductor and Multiconductor, Shielded and Unshielded, General Specification For
MIL-DTL-53039	Coating, Aliphatic Polyurethane, Chemical Agent Resistant
MIL-DTL-53072	Chemical Agent Resistant Coating (CARC) System Application Procedures and Quality Control Inspection
MIL-DTL-64159	Coating, Water Dispersible Aliphatic Polyurethane Chemical Agent Resistant

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-130	Identification Marking of US Military Property
MIL-STD-202	Test Method Standard Electronic and Electrical Component Parts
MIL-STD-889	Dissimilar Metals
MS35420	Lens, Clearance Marker Light, Blackout
MS35421	Lens, Clearance Marker Light, Service
MS35422	Lampholder, Light, Marker, Clearance
MS35423	Light, Marker, Clearance-Service

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-454	General Guidelines for Electronic Equipment

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

U.S.Army Tank-Automotive Command

12480561	Waterproofness Requirements for Automotive Electrical Components

(Copies of this documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.3 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A167	Standard Specification for Stainless and Heat- Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM A176	Standard Specification for Stainless and Heat-Resisting Chromium Steel Plate, Sheet, and Strip
ASTM B85	Standard Specification for Aluminum-Alloy Die Castings
ASTM B633	Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel
ASTM D395	Standard Test Methods for Rubber Property Compression- Set

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

ASTM D471	Standard Test Method for Rubber Property-Effect of Liquids
ASTM D573	Standard Test Method for Rubber-Deterioration in an air oven
ASTM D707	Standard Specification for Cellulose Acetate Butyrate Molding and Extrusion Compounds
ASTM D1149	Standard Test Method for Rubber Deterioration – Surface Ozone Cracking in a Chamber
ASTM D2137	Standard Test Methods for Rubber Property – Brittleness Point of Flexible Polymers and Coated Fabrics
ASTM D3935	Standard Specification for Polycarbonate (PC) Unfilled and Reinforced Material
ASTM D3951	Standard Practice for Commercial Packaging
ASTM F104	Standard Classification System for Nonmetallic Gasket Materials

(Copies of these documents are available from www.astm.org or the American Society for Testing and Materials, 100 Barr Harbor Drive, W. Conshohocken, PA 19428-2959.)

IPC – ASSOCIATION CONNECTING ELECTRONICS INDUSTRIES

J-STD-006	Requirements for Electronic Grade Solder Alloys and Fluxed and Non-Fluxed Solid Solders for Electronic Soldering Applications

(Copies of these documents are available from the IPC – Association Connecting Electronics Industries, 3000 Lakeside Drive, Suite 309S, Bannockburn, IL 60015.)

MASTER PAINTERS INSTITUTE (MPI)

MPI # 49	Alkyd, Interior, Flat (MPI Gloss Level 1)

(Copies of these documents are available from www.mpi.net.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE-AMS-C-81562	Coatings, Cadmium, Tin-Cadmium and Zinc (Mechanically Deposited)
SAE J561	Electrical Terminals – Eyelet and Spade Type
SAE J575	Test Methods and Equipment for Lighting Devices and Components for Use on Vehicles Less Than 2032 mm in Overall Width
SAE J578	Color Specification
SAE J592	Sidemarker Lamps for Use on Road Vehicles Less Than 2032 mm in Overall Width

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

(Copies of these documents are available from www.sae.org or the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

THE SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC-Paint 25 Zinc Oxide, Alkyd, Linseed Oil Primer for Use Over Hand Cleaned Steel Type I and Type II

(Copies of these documents are available from www.sspc.org or the Society for Protective Coatings, 40 24th Street, 6th Floor, Pittsburgh, PA 15222-4656.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the reference cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a first article sample shall be subjected to first article inspection in accordance with 4.3.

3.2 Materials. Materials shall be as specified herein and in referenced specifications, standards, and drawings (see 4.6.1).

3.2.1 Solder. Unless otherwise specified (see 6.2), solder shall be of a composition conforming to Sn 50 or Sn 60 of J-STD-006 (see 4.6.1).

3.2.2 Lampholder boot rubber. Physical properties of the rubber used in the lampholder boot shall be as specified below and in table I (see 4.6.1):

a. Shore A durometer hardness: 50 ± 5
b. Minimum tensile strength: 1500 pounds per square inch (psi)
c. Minimum ultimate elongation: 3.5 percent (%)
d. Resistance to oil aging: 0 – 120% volume change

TABLE I. Material property values.

Physical property	Test
Resistance to heat aging: 70 hours, 158º F *	ASTM D573
Compression set: 50%, after 22 hours at 158º F	ASTM D395, method B
Resistance to ozone at 50 parts per hundred million (pphm) at 100º F for 7 days	ASTM D1149
Low temperature brittleness at -67º F	ASTM D2137, method A
Resistance to water	ASTM D471

* Degrees Fahrenheit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

3.2.2.1 Lampholder door. Lampholder door shall be die cast aluminum as specified in 3.2.3 (see 4.6.1).

3.2.2.2 Lampholder plate. Lampholder plate shall be die cast aluminum as specified in 3.2.3 (see 4.6.1).

3.2.3 Aluminum. Die cast parts shall be of an aluminum alloy conforming to UNS A03600, A03800, A13800, or A14130 per ASTM B85.

3.2.4 Lens assemblies.

3.2.4.1 Blackout lens assembly.

3.2.4.1.1 Uncolored lens. Uncolored lens shall be clear and shall be of molded polycarbonate plastic conforming to ASTM D3935 designation PC0110B30740EB140ED030EE150EG010FL012. Lens shall be painted black as specified in MS35420 (see 4.6.1).

3.2.4.1.2 Shield. Shield shall be made of 0.020 cold-rolled steel conforming to ASTM A167 or ASTM A176. Shield shall be primed with primer conforming to SSPC-Paint 25 and finished with a black lusterless enamel conforming to MPI # 49 (see 4.6.1).

3.2.4.1.3 Filter. Filter shall be of molded cellulose acetate butyrate conforming to ASTM D707. Color of filter shall be in accordance with Tennessee – Eastman Co. number 18029 (red) or 14686 (amber), formula 205A (see 4.6.1).

3.2.4.2 Service lens. Service lens shall be of molded polycarbonate plastic conforming to ASTM D3935 designation PC0110B30740EB140ED030EE150EG010FL012 for general purpose use or PC0130B30740EB140ED030EE150EG010FL012 for ultra violet stabilized. Lens shall be as specified in MS35421 (see 4.6.1).

3.2.5 Lampholder socket. Socket shall be made of 0.020 thick, cold-rolled sheet steel conforming to ASTM A167 or ASTM A176 (see 4.6.1).

3.2.6 Mounting pad. Mounting pad (gasket) shall be made of rubber-impregnated fiber, 0.062 inch thick, conforming to the identification number F337576M6 of ASTM F104 (see 4.6.1).

3.2.7 Recycled, virgin and reclaimed materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 4.6.1 and 6.4).

3.3 Design and construction. All parts shall be new and conform to the form and dimensions specified in MIL-DTL-3976/1 and MIL-DTL-3976/2 and in MS35420, MS35421, MS35422, and MS35423, as applicable (see 4.6.1 and 4.6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

3.3.1 Threaded parts. All screw threads shall conform to FED-STD-H28. The form, number per inch, and class of threads shall be as specified in applicable standards or drawings. All threads, except electrical conducting parts and self-locking nuts, shall be coated with commercial quality grade antiseize compound (see 4.6.2).

3.3.2 Standard parts. Military standard parts shall be used wherever applicable. Commercial standard parts may be used, provided they are interchangeable with military standard parts without modification (see 4.6.1 and 4.6.2).

3.3.3 Soldering. Soldering shall conform to the guideline 5 of MIL-HDBK-454 (see 4.6.1 and 4.6.2).

3.3.4 Terminals. Terminals shall be soldered in accordance with the guideline 5 of MIL-HDBK-454 or crimped in accordance with SAE J561.

3.3.5 Cable. Cable shall be no. 14 American Wire Gage (AWG) single conductor size conforming to type I, class A of MIL-DTL-13488 (see 4.6.1 and 4.6.2).

3.3.6 Dissimilar metals. Dissimilar metals shall be protected from galvanic corrosion in accordance with MIL-STD-889 (see 4.6.1 and 4.6.2).

3.3.7 Protective finishes, plating and sealing.

3.3.7.1 Lampholder socket. Socket shall be zinc plated to conform to type II, suffix Fe/Zn 25 of ASTM B633 or type II class 4 of SAE-AMS-C-81562 and then cleaned and the metal prepared with phosphoric acid conforming to A-A-55820 prior to priming in accordance with SSPC-Paint 25 (see 4.6.2).

3.3.7.2 Aluminum parts. Aluminum parts shall be sealed before painting in accordance with MIL-DTL-5541 (see 4.6.2).

3.3.8 MS sheets. The individual requirements shall be as specified herein and in accordance with the applicable MS sheet. In the event of any conflict between the requirements of this specification and the MS sheet, the latter shall govern (see 4.6.1).

3.4 Performance.

3.4.1 Operation. The light shall operate without dimming or flickering when connected to a power source in accordance with the applicable drawing or MS (see 4.6.3.1).

3.4.2 Color. Color of light emitted shall be within the chromaticity coordinates of SAE J578 (see 4.6.3.2).

3.4.3 Service light. With a 3-cp lamp installed, the light shall meet the minimum photometric requirements specified in SAE J592 (see 4.6.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

3.4.4 Environmental. At the conclusion of each environmental category, the light assembly shall operate in accordance with the requirements of 3.4.1.

3.4.4.1 Temperature cycling. The light assembly shall show no evidence of cracking, deformation, opening of seals, or visual damage after exposure to extremes of high and low temperatures, and shall be resistant to the shock of alternate exposure to these extremes (see 4.6.4.1).

3.4.4.2 Vibration resistance. The light assembly shall show no evidence of hours in disintegration after exposure to vibration testing under power for not less than 2 each of 3 perpendicular axes for a total of 6 hours (see 4.6.4.2).

3.4.4.3 Shock resistance. The light assembly shall show no evidence of disintegration after induced shocks of sawtooth waveform of 6 minutes duration and a peak value of 75 gravity units (g) (see 4.6.4.3).

3.4.4.4 Waterproofness. The light assembly performance shall not be affected nor shall the light assembly show signs of leakage during and after submersion while under power (see 4.6.4.4).

3.5 Painting. Unless otherwise specified (see 6.2), the external surface of the light assembly shall be cleaned, primed, and finished in accordance with MIL-DTL-53072. The paint topcoat shall conform to MIL-DTL-53039 or MIL-DTL-64159. Unless otherwise specified, the color shall be lusterless camouflage forest green conforming to chip number 34083 of FED-STD-595. When a lusterless desert tan color light assembly is specified in the contract or order, the chip number shall be 33446 of FED-STD-595 (see 4.6.2).

3.6 Marking. Marking shall be in accordance with MIL-STD-130 and shall consist of the MS part number and manufacturers identification (see 4.6.2).

3.7 Workmanship. Workmanship shall be such as to assure the product will meet the guideline 9 of MIL-HDBK-454 (see 4.6.2).

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follow:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).
c. Control tests (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

4.2 Inspection conditions. The inspection requirements specified herein are classified as follows:

a. Air temperature: 77 ± 18° F.
b. Relative humidity: Uncontrolled room ambient.
c. Atmospheric pressure: Site pressure.

4.3 First article inspection. When first article is required (see 3.1), first article inspection shall be performed on four first article samples (see 6.2). Unless otherwise specified (see 6.2), first article inspection shall include the inspections specified in table II (see 6.3.1 for first article inspection of spare parts).

Table II. Classification of inspections.

Title	Requirement	Inspection	First article	Conformance Exam	Conformance Tests	Control tests
Group A:						
Materials and construction	3.2 thru 3.2.7, 3.3.2 And 3.3.8	4.6.1	X			
Examination	3.3 thru 3.3.7 and 3.5 thru 3.7	4.6.2	X	X		
Group B: (Performance):						
Operation	3.4.1	4.6.3.1	X	X	X	
Color	3.4.2	4.6.3.2	X			X
Service light	3.4.3	4.6.3.3	X			X
Group C (Environment):						
Temperature cycling	3.4.4.1	4.6.4.1	X			X
Vibration	3.4.4.2	4.6.4.2	X			
Shock resistance	3.4.4.3	4.6.4.3	X			
Waterproofness	3.4.4.4	4.6.4.4	X			X

4.4 Conformance inspection. Conformance inspection shall include the examination of 4.4.1 and the tests of 4.4.2 (see 6.2). Noncompliance with any of the specified requirements in section 3 shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

4.4.1 Examination. Light assemblies shall be examined for the defects specified in table III.

4.4.2 Conformance tests. Light assemblies shall be subjected to the conformance inspection tests specified in table II.

4.5 Control tests. Light assemblies selected for control tests shall be new and subjected to the control tests specified in table II (see 6.2).

Table III. Classification of defects.

Category	Defects	Method of examination
Critical	Faulty grounded power lead affecting performance (see 3.3).	SIE *
Major		
101	Incorrect dimensions affecting interchangeability not within tolerance (see 3.3, 3.3.1, 3.3.2).	SIE
102	Operating inability (3.4.1).	Visual
103	Incorrect soldering (see 3.3.3 and 3.3.4).	Visual
104	Incorrect crimping of terminal (see 3.3.4)	Visual
105	Incorrect cable (see 3.3.5)	Visual
106	Incorrect dissimilar metals (see 3.3.6)	Visual
107	Faulty workmanship affecting performance (see 3.7)	Visual
Minor		
201	Incorrect dimensions not within tolerance but not affecting interchangeability (see 3.3)	SIE
202	Incorrect finish (see 3.5 and 3.3.7).	Visual
203	Incorrect marking (see 3.6)	Visual
204	Faulty workmanship not affecting performance (see 3.7)	Visual

* SIE = Standard Inspection Equipment

4.6 Methods of inspection.

4.6.1 Materials and construction. Conformance to 3.2 through 3.2.7, 3.3.2 and 3.3.8 shall be determined by inspection of contractor records providing proof or certification that design, construction, processing, and materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, tests reports, and rating data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

4.6.2 Examination. Conformance to 3.3 through 3.3.7 and 3.5 thru 3.7 shall be determined by examination for the defects listed in table III.

4.6.3 Performance.

4.6.3.1 Operation. To determine conformance to 3.4.1, the assembled light shall have a 3-cp incandescent lamp installed in lampholder. The light shall be connected to the applicable power source (12 or 24 V dc) and observed.

4.6.3.2 Color. To determine conformance to 3.4.2, the transmitting media shall be tested in accordance with tristimulus test method specified in SAE J578 to determine conformance of red and amber (yellow) transmitting media.

4.6.3.3 Service light. To determine conformance to 3.4.3, the light shall be tested in accordance with the photometry test as specified in SAE J575.

4.6.4 Environment. At the conclusion of each environmental category, the light assembly shall be tested as specified in 4.6.3.1.

4.6.4.1 Temperature cycling. To determine conformance to 3.4.4.1, the light shall be tested as specified in method 107, test condition A of MIL-STD-202.

4.6.4.2 Vibration. To determine conformance to 3.4.4.2, after mounting to simulate actual mounting in use, and while operating, the light shall be subjected to the vibration resistance test specified in method 201of MIL-STD-202 for one hour in each direction of the three major axes of the light. Filament breakage in lamp shall not constitute failure. During and after the test, the light shall operate as specified in 4.6.3.1.

4.6.4.3 Shock resistance. To determine conformance to 3.4.4.3, light, with the lamp installed, shall be mounted to simulate actual mounting in use and while operating. The light shall be subjected to the shock resistance test specified in method 213, test condition H (using the sawtooth waveform and 75 g peak value) of MIL-STD-202. Shocks shall be applied twice in each direction of the three major axes. Filament breakage in lamp shall not constitute failure. The light shall be observed and examined during and after the test.

4.6.4.4 Waterproofness. To determine conformance to 3.4.4.4, the light shall be tested in accordance with Army drawing 12480561, Test Type I.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of material is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Services or Defense Agency, or within the military service's system commands. Packaging

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Lights covered by this specification are primarily intended for mounting on military vehicles for use as combination clearance and sidemarker lights. Lights are either service or blackout class (see 1.2). Front and near front mounted lights must emit amber light. Rear and near rear mounted lights must emit red light.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Class, color, and light to be furnished (see 1.2).
c. If first article is required (see 3.1).
d. If soldering should be other than as specified (see 3.2.1).
e. If finish of exterior should be other than as specified (see 3.5).
f. Type of first article sample, and the number of samples to be inspected (see 4.3 and 6.3).
g. Conformance inspection acceptance criteria (see 4.4 and 6.7.1).
h. Control test sample size, frequency of tests, and disposition of lots covered by the sample size and of defective items (see 4.5 and 6.7.2).
i. Packaging requirements (see 5.1).

6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory (see 3.1), and the number of items to be tested as specified in 4.4. The contracting officer should also include specific instructions in acquisitions documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.3.1 First article inspection of spare parts. Spare parts, such as lenses (MS35420 and

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

MS35421) and the lampholder (MS35422) should be considered as having met first article requirements, providing they have been installed in an applicable light assembly that has passed first article testing as specified in 4.3.

6.4 Definitions.

6.4.1 Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste (see 6.4.2).

6.4.2 Solid waste. "Solid waste" means (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Clean Water Act, (33 U.S.C.1342 et seq.), or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.5 Subject term (key word) listing.

Blackout lights; for security
Horizontal and vertical illumination
Lights, clearance
Service lights; safe operations of Military Vehicles
Visibility

6.6 Inspection. The following information is presented for guidance in specifying sampling and acceptance procedures for conformance inspection, control testing in the acquisition document.

6.6.1 Conformance inspection.

6.6.1.1 Sampling.

6.6.1.1.1 Lot formation. An inspection lot should consist of all the lights of one type and part number, from an identifiable production period, from one manufacturer, submitted at one time for acceptance.

6.6.1.1.2 Sampling for examination. Samples for conformance examination should be selected in accordance with general inspection level II of ASQ Z1.4.

6.6.1.1.3 Sampling for test. Samples for tests should be selected in accordance with level S-3 of ASQ Z1.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

6.6.1.2 Examination.

6.6.1.2.1 Acceptable quality level. Each sample selected in accordance with 6.6.1.1.2 should be examined to determine conformance to the following acceptable quality level (AQL).


Classification	AQL
Major	1.0
Minor	2.5

6.6.1.3 Test. Samples selected in accordance with 6.6.1.1.3 should be subjected to the quality conformance tests specified in table II, and should conform to an AQL of 6.5.

6.6.2 Control test. Control test should be conducted on samples selected at a rate of two (2) lights per month or two of each 500 lights produced, whichever occurs first, except that not more than four lights should be selected in any single month. The first sample should be taken at or near the start of production. Samples should be subjected to the applicable tests specified in table II.

6.6.2.1 Failure. Failure of a control test sample to pass any of the specified examination or test may be cause for the Government to refuse to accept subsequent lots until it has been proved to the satisfaction of the Government that the faults revealed by the tests have been corrected.

6.7 Part or Identifying Number (PIN). The PINs to be used to identify service and blackout lights acquired to this specification are created as follows:

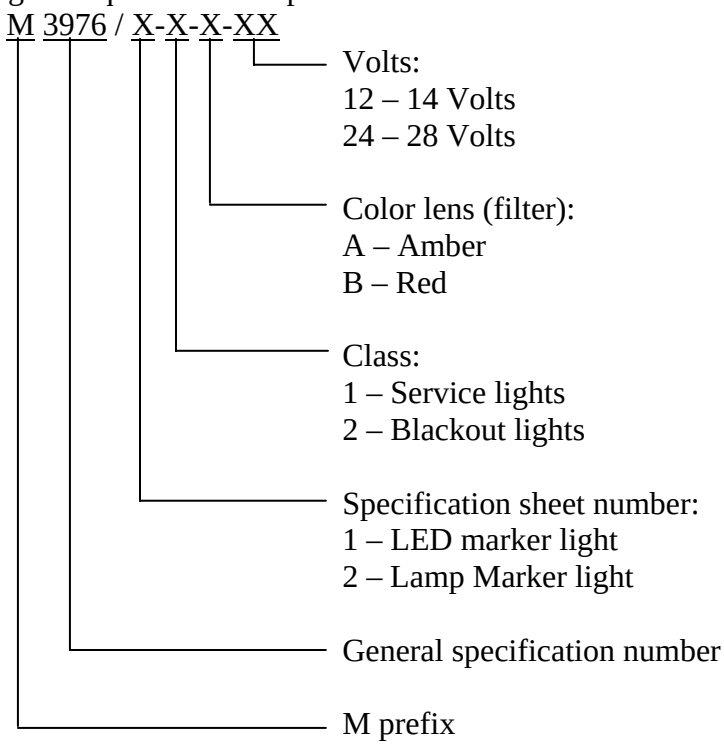

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army – AT
Navy - AS
Air Force - 99

Preparing activity:
DLA – IS

(Project 6220-2007-001)

Review activities:
Army - MI
Navy - MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.