INCH-POUND

MIL-DTL-3976G
22 October 2018
SUPERSEDING
MIL-DTL-3976F
30 October 2013

DETAIL SPECIFICATION

LIGHTS, MARKER, CLEARANCE (SERVICE AND BLACKOUT) GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers amber (yellow) or red clearance marker lights for service and blackout use in military vehicles. The clearance marker light assembly will be referred to as "light assembly" herein (see 6.1).

1.2 Classification. Lights should be of the following classes, colors and voltages.

1.2.1 Classes. The class should be designated as follows:

1. - class 1 Service lights, enable safe operation of military vehicles under normal conditions of visibility.
2. - class 2 Blackout lights, are designed to maintain vehicle blackout security during blackout conditions by limiting horizontal and vertical illumination as well as providing ample light for safe vehicle operation.

1.2.2 Colors. The color of filters should be designated as follows:

A. - Amber (Yellow).
R. - Red.


1.2.3 Voltages. The Volts of lights should be designated as follows:

14. - 14 Volts
24. - 24 Volts
28. - 28 Volts

Comments, suggestions, or questions on this document shall be addressed to Defense Logistics Agency - Aviation, ATTN: DLA-Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or e-mailed to stdznmgt@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

1.3 Part or Identifying Number (PIN). The PINs to be used to identify service and blackout lights acquired to this specification are created as follows:

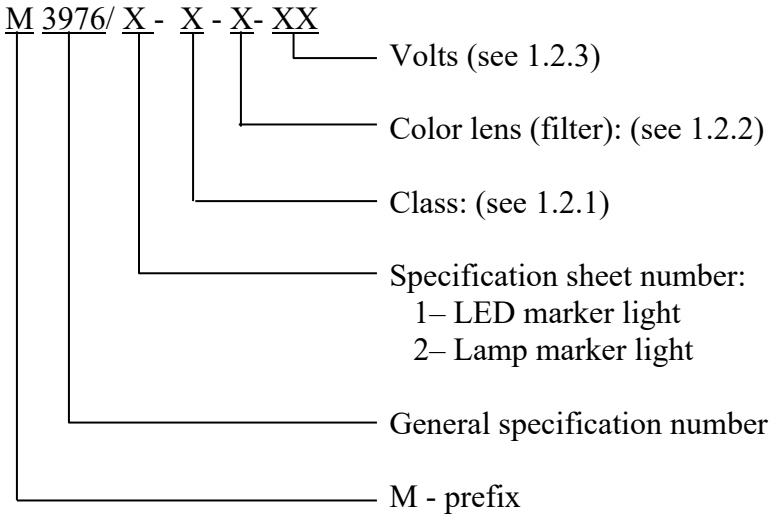

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in section 3 or 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in section 3 or 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL STANDARDS

FED-STD-H28 - Screw-Thread Standards for Federal Services

COMMERCIAL ITEM DESCRIPTIONS

A-A-55820 - Orthophosphoric (Phosphoric) Acid, Technical

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-3976/1	- Light Emitting Diode (LED), Marker, Clearance Blackout, 14 and 28 Volt
MIL-DTL-3976/2	- Light, Marker, Clearance Blackout, 24 Volt
MIL-DTL-5541	- Chemical Conversion Coatings on Aluminum and Aluminum Alloys
MIL-DTL-13486	- Cable, Special Purpose, Electrical: Low Tension, Heavy Duty, - Single-Conductor and Multi conductor, Shielded and Unshielded, General Specification For
MIL-PRF-32550	- Metal-Rich Primer
MIL-DTL-53039	- Coating, Aliphatic Polyurethane, Single Component, Chemical Agent Resistant
MIL-DTL-53072	- Chemical Agent Resistant Coating (CARC) System Application Procedures and Quality Control Inspection
MIL-DTL-64159	- Camouflage Coating, Water Dispersible Aliphatic Polyurethane Chemical Agent Resistant
MS35420	- Lens, Clearance Marker Light, Blackout
MS35421	- Lens, Clearance Marker Light, Service
MS35422	- Lamp holder, Light, Marker, Clearance
MS35423	- Light, Marker, Clearance-Service

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-130	- Identification Marking of US Military Property
MIL-STD-202-107	- Method 107, Thermal Shock
MIL-STD-202-201	- Method 201, Vibration
MIL-STD-202-213	- Method 213, Shock (Specified Pulse)
MIL-STD-889	- Dissimilar Metals
MIL-STD-1916	- DOD Preferred Methods for Acceptance of Product

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-454	- General Guidelines for Electronic Equipment

(Copies of these documents are available online at http://quicksearch.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

U.S. Army Tank - Automotive Command,

- Army Drawing-12480561 Waterproofness Requirements for Automotive Electrical Components

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the U.S. Army Tank-automotive and Armaments Command, ATTN: AMSRD-TAR-E/CM/DM/STND, Warren, MI 48397-5000, or at dami_standardization@conus.army.mil)

2.3 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A240/A240M	- Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
ASTM-B85/B85M	- Standard Specification for Aluminum-Alloy Die Castings
ASTM-B633	- Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel
ASTM-D395	- Standard Test Methods for Rubber Property - Compression Set
ASTM D412	- Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers-Tension
ASTM-D471	- Standard Test Method for Rubber Property-Effect of Liquids
ASTM-D573	- Standard Test Method for Rubber-Deterioration in an air oven
ASTM-D707	- Standard Classification System and Basis for Specification for Cellulose Acetate Butyrate Molding and Extrusion Compounds
ASTM-D1149	- Standard Test Methods for Rubber Deterioration—Cracking in an Ozone Controlled Environment
ASTM-D2137	- Standard Test Methods for Rubber Property – Brittleness Point of Flexible Polymers and Coated Fabrics
ASTM D2240	- Standard Test Method for Rubber Property-Durometer Hardness
ASTM-D3935	- Standard Specification for Polycarbonate (PC) Unfilled and Reinforced Material
ASTM-D3951	- Standard Practice for Commercial Packaging
ASTM-F104	- Standard Classification System for Nonmetallic Gasket Materials

(Copies of these documents are available from www.astm.org or the American Society for Testing and Materials, 100 Barr Harbor Drive, W. Conshohocken, PA 19428-2959.)

IPC – ASSOCIATION CONNECTING ELECTRONICS INDUSTRIES

J-STD-006	- Requirements for Electronic Grade Solder Alloys and Fluxed and Non-Fluxed Solid Solders for Electronic Soldering Applications

(Copies of these documents are available from www.IPC.org or the IPC - Association Connecting Electronics Industries, 3000 Lakeside Drive, Suite 309S, Bannockburn, IL 60015.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

SAE INTERNATIONAL

SAE AMS-STD-595	- Colors Used in Government Procurement
SAE J561	- Electrical Terminals – Eyelet and Spade Type
SAE J575	- Test Methods and Equipment for Lighting Devices for Use on Vehicles Less than 2032 mm in Overall Width
SAE J578	- Color Specification
SAE J592	- Sidemarker Lamps for Use on Road Vehicles Less Than 2032 mm in Overall Width

(Copies of these documents are available from www.sae.org or the SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern.

3.2 Materials. Materials shall be as specified herein and in referenced specifications, standards, and drawings (see 4.6.1).

3.2.1 Solder. Unless otherwise specified, solder shall be of a composition conforming to Sn 50 or Sn 60 of J-STD-006 (see 4.6.1).

3.2.2 Lampholder boot rubber. Physical properties of the rubber used in the lampholder boot shall be as specified below in table I (see 4.6.1):

TABLE I. Material property values.

Physical property	Test
Resistance to heat aging: 70 hours, 158º F*	ASTM D573
Compression set: 50%, after 22 hours at 158º F*	ASTM D395, method B
Resistance to ozone at 50 parts per hundred million (pphm) at 100º F* for 7 days	ASTM D1149
Low temperature brittleness at -67º F*	ASTM D2137, method A
Resistance to water	ASTM D471
Shore A durometer hardness: 50 ± 5	ASTM D2240
Minimum tensile strength: 1500 pounds per square inch (psi)	ASTM D412
Minimum ultimate elongation: 3.5 percent (%)	ASTM D412
Resistance to oil aging: 0 – 120% volume change	ASTM D471, 70 hours

NOTES: F*- Degrees Fahrenheit. If not specified temperature will be according to 4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

3.2.2.1 Lampholder door. Lampholder door shall be die cast aluminum as specified in 3.2.3 (see 4.6.1).

3.2.2.2 Lampholder plate. Lampholder plate shall be die cast aluminum as specified in 3.2.3 (see 4.6.1).

3.2.3 Aluminum. Die cast parts shall be of an aluminum alloy conforming to UNS A03600, A03800, A13800, or A14130 per ASTM-B85/B85M.

3.2.4 Lens assemblies.

3.2.4.1 Blackout lens assembly.

3.2.4.1.1 Uncolored lens. Uncolored lens shall be clear and shall be of molded polycarbonate plastic conforming to ASTM D3935 designation PC0110B30740EB140ED030EE150EG010FL012. Lens shall be painted black as specified in MS35420 (see 4.6.1).

3.2.4.1.2 Shield. Shield shall be made of 0.020 inches cold-rolled steel conforming to ASTM A240/A240M. Shield shall be primed with primer conforming to MIL-PRF-32550 Form A and finished with MIL-DTL-53039 or MIL-DTL-64159, black 37030 per SAE AMS-STD-595 (see 4.6.1).

3.2.4.1.3 Filter. Filter shall be of molded cellulose acetate butyrate conforming to ASTM D707. Color of filter shall be in accordance with 4.6.3.2 (see 4.6.1).

3.2.4.2 Service lens. Service lens shall be of molded polycarbonate plastic conforming to ASTM D3935 designation PC0110B30740EB140ED030EE150EG010FL012 for general purpose use or PC0130B30740EB140ED030EE150EG010FL012 for ultra violet stabilized. Lens shall be as specified in MS35421 (see 4.6.1).

3.2.5 Lampholder socket. Socket shall be made of 0.020 inches thick, cold-rolled sheet steel conforming to ASTM A240/A240M (see 4.6.1).

3.2.6 Mounting pad. Mounting pad (gasket) shall be made of rubber-impregnated fiber, 0.062 inch thick, conforming to the identification number P3353B of ASTM F104 (see 4.6.1).

3.2.7 Recycled, virgin and reclaimed materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 4.6.1 and 6.4).

3.3 Design and construction. All parts shall be new and conform to the form and dimensions specified in MIL-DTL-3976/1 and MIL-DTL-3976/2 and in MS35420, MS35421, MS35422, and MS35423, as applicable (see 4.6.1 and 4.6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

3.3.1 Threaded parts. All screw threads shall conform to FED-STD-H28. The form, number per inch, and class of threads shall be as specified in applicable standards or drawings. All threads, except electrical conducting parts and self-locking nuts, shall be coated with commercial quality grade antiseize compound (see 4.6.2).

3.3.2 Standard parts. Military standard parts shall be used wherever applicable. Commercial standard parts may be used, provided they are interchangeable with military standard parts without modification (see 4.6.1 and 4.6.2).

3.3.3 Soldering. For soldering guidance see guideline 5 of MIL-HDBK-454 (see 4.6.1 and 4.6.2).

3.3.4 Terminals. For guidance on terminals soldering see guideline 5 of MIL-HDBK-454 or crimped in accordance with SAE J561.

3.3.5 Cable. Cable shall be M13486/1-5 (14 AWG, type I, class A) in accordance with MIL-DTL-13486 (see 4.6.1 and 4.6.2).

3.3.6 Dissimilar metals. Dissimilar metals shall be protected from galvanic corrosion in accordance with MIL-STD-889 (see 4.6.1 and 4.6.2).

3.3.7 Protective finishes, plating and sealing.

3.3.7.1 Lampholder socket. Socket shall be zinc plated to conform to type IV, suffix Fe/Zn 25 of ASTM B633 and then cleaned and the metal prepared with phosphoric acid conforming to A-A-55820 prior to priming in accordance with MIL-PRF-32550 Form A 4(see 4.6.2).

3.3.7.2 Aluminum parts. Aluminum parts shall be sealed before painting in accordance with MIL-DTL-5541Type II Class 1A (see 4.6.2).

3.4 Performance.

3.4.1 Operation. The light shall operate without dimming or flickering when connected to a power source in accordance with the applicable drawing or MS (see 4.6.3.1).

3.4.2 Color. Color of light emitted shall be within the chromaticity coordinates of SAE J578 (see 4.6.3.2).

3.4.3 Service light. With a 3-cp lamp installed, the light shall meet the minimum photometric requirements specified in SAE J592 (see 4.6.3.3).

3.4.4 Environmental. At the conclusion of each environmental category, the light assembly shall operate in accordance with the requirements of 3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

3.4.4.1 Temperature cycling. The light assembly shall show no evidence of cracking, deformation, opening of seals, or visual damage after exposure to extremes of high and low temperatures, and shall be resistant to the shock of alternate exposure to these extremes (see 4.6.4.1).

3.4.4.2 Vibration resistance. The light assembly shall show no evidence of disintegration after exposure to vibration testing under power for not less than 2 each of 3 perpendicular axes for a total of 6 hours (see 4.6.4.2).

3.4.4.3 Shock resistance. The light assembly shall show no evidence of disintegration after induced shocks of sawtooth waveform of 6 minutes duration and a peak value of 75 gravity units (g) (see 4.6.4.3).

3.4.4.4 Waterproofness. The light assembly performance shall not be affected nor shall the light assembly show signs of leakage during and after submersion while under power (see 4.6.4.4).

3.5 Painting. Unless otherwise specified (see 6.2), the external surface of the light assembly shall be cleaned, primed, and finished in accordance with MIL-DTL-53072. The paint topcoat shall conform to MIL-DTL-53039 or MIL-DTL-64159. Unless otherwise specified, the color shall be lusterless camouflage forest green conforming to color number 34083 of SAE AMS-STD-595. When a lusterless desert tan color light assembly is specified in the contract or order, the color number shall be 33446 of SAE AMS-STD-595 (see 4.6.2).

3.6 Marking. Marking shall be in accordance with MIL-STD-130 and shall consist of the MS part number and manufacturers identification (see 4.6.2).

3.7 Workmanship. For guidance on workmanship see guideline 9 of MIL-HDBK-454 (see 4.6.2).

3.8 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follow:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).
c. Control tests (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

4.2 Inspection conditions. The inspection requirements specified herein are classified as follows:

a. Air temperature: 77 ± 18º F.
b. Relative humidity: Uncontrolled room ambient.
c. Atmospheric pressure: Site pressure.

4.3 First article inspection. When first article is required (see 3.1), first article inspection shall be performed on four first article samples. Unless otherwise specified, first article inspection shall include all the inspections specified in table II (see 6.3.1 for first article inspection of spare parts).

Table II. Classification of inspections.

Title	Requirement	Inspection	First article	Conformance Exam	Conformance Tests	Control tests
Group A:						
Materials and construction	3.2 thru 3.2.7, 3.3.2 And 3.3.8	4.6.1	X			
Examination	3.3 thru 3.3.7 and 3.5 thru 3.7	4.6.2	X	X		
Group B: (Performance):						
Operation	3.4.1	4.6.3.1	X	X	X	
Color	3.4.2	4.6.3.2	X			X
Service light	3.4.3	4.6.3.3	X			X
Group C (Environment):						
Temperature cycling	3.4.4.1	4.6.4.1	X			X
Vibration	3.4.4.2	4.6.4.2	X			
Shock resistance	3.4.4.3	4.6.4.3	X			
Waterproofness	3.4.4.4	4.6.4.4	X			X

4.4 Conformance inspection. Conformance inspection shall include the examination of 4.4.1 and the tests of 4.4.2. Noncompliance with any of the specified requirements in section 3 shall be cause for rejection. Samples for conformance inspection shall be to an “accept at zero” (c=0) sampling plan in accordance with MIL-STD-1916 at verification level (VL) of VII for critical

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

defects, IV for major defects, and II for minor defects, unless otherwise specified in the contract. If no defect categorization is provided use MIL-STD-1916 VL II.

4.4.1 Examination. Light assemblies shall be examined for the defects specified in table III.

4.4.2 Conformance tests. Light assemblies shall be subjected to the conformance inspection tests specified in table II.

4.5 Control tests. Light assemblies selected for control tests shall be new and subjected to the control tests specified in table II.

4.5.1 Control test sampling. Samples for control tests should be selected at a rate of two (2) lights per month or two of each 500 lights produced, whichever occurs first, except that not more than four lights should be selected in any single month, unless otherwise specified in the contract. The first sample should be taken at or near the start of production. Test failures shall be treated the same as stated in MIL-STD-1916.

Table III. Classification of defects.

Category	Defects	Method of examination
Critical	Faulty grounded power lead affecting performance (see 3.3).	SIE*
Major		
101	Incorrect dimensions affecting interchangeability not within tolerance (see 3.3, 3.3.1, 3.3.2).	SIE*
102	Operating inability (3.4.1).	Visual
103	Incorrect soldering (see 3.3.3 and 3.3.4).	Visual
104	Incorrect crimping of terminal (see 3.3.4)	Visual
105	Incorrect cable (see 3.3.5)	Visual
106	Incorrect dissimilar metals (see 3.3.6)	Visual
107	Faulty workmanship affecting performance (see 3.7)	Visual
Minor		
201	Incorrect dimensions not within tolerance but not affecting interchangeability (see 3.3)	SIE*
202	Incorrect finish (see 3.5 and 3.3.7).	Visual
203	Incorrect marking (see 3.6)	Visual
204	Faulty workmanship not affecting performance (see 3.7)	Visual

NOTES: SIE* = Standard Inspection Equipment

4.6 Methods of inspection.

4.6.1 Materials and construction. Conformance to 3.2 through 3.2.7, 3.3.2 and 3.3.8 shall be determined by inspection of contractor records providing proof or certification that design,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

construction, processing, and materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, tests reports, and rating data.

4.6.2 Examination. Conformance to 3.3 through 3.3.7 and 3.5 thru 3.7 shall be determined by examination for the defects listed in table III.

4.6.3 Performance.

4.6.3.1 Operation. To determine conformance to 3.4.1, the assembled light shall have a 3-cp incandescent lamp installed in lampholder. The light shall be connected to the applicable power source (12 or 24 V dc) and observed.

4.6.3.2 Color. To determine conformance to 3.4.2, the transmitting media shall be tested in accordance with tristimulus test method specified in SAE J578 to determine conformance of red and amber (yellow) transmitting media.

4.6.3.3 Service light. To determine conformance to 3.4.3, the light shall be tested in accordance with the photometry test as specified in SAE J575.

4.6.4 Environment. At the conclusion of each environmental category, the light assembly shall be tested as specified in 4.6.3.1.

4.6.4.1 Temperature cycling. To determine conformance to 3.4.4.1, the light shall be tested as specified in test condition A of MIL-STD-202-107.

4.6.4.2 Vibration. To determine conformance to 3.4.4.2, after mounting to simulate actual mounting in use, and while operating, the light shall be subjected to the vibration resistance test specified in MIL-STD-202-201 for one hour in each direction of the three major axes of the light. Filament breakage in lamp shall not constitute failure for PIN M3976/2-X-X-XX type incandesce lamp. During and after the test, the light shall operate as specified in 4.6.3.1.

4.6.4.3 Shock resistance. To determine conformance to 3.4.4.3, light, with the lamp installed, shall be mounted to simulate actual mounting in use and while operating. The light shall be subjected to the shock resistance test specified in test condition H (using the sawtooth waveform and 75g peak value) of MIL-STD-202-213. Shocks shall be applied twice in each direction of the three major axes. Filament breakage in lamp shall not constitute failure for PIN M3976/2-X-X-XX type incandesce lamp. The light shall be observed and examined during and after the test.

4.6.4.4 Waterproofness. To determine conformance to 3.4.4.4, the light shall be tested in accordance with Army drawing 12480561, Test Type I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Services or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Lights covered by this specification are primarily intended for mounting on military vehicles for use as combination clearance and sidemarker lights. Lights are either service or blackout class (see 1.2). Front and near front mounted lights must emit amber light. Rear and near rear mounted lights must emit red light.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. If first article is required (see 3.1).
c. If soldering should be other than as specified (see 3.2.1).
d. If finish of exterior should be other than as specified (see 3.5).
e. Type of first article sample and the number of samples to be inspected (see 4.3 and 6.3).
f. Conformance inspection acceptance criteria (see 4.4 and 6.7.1).
g. Control test sample size, frequency of tests, and disposition of lots covered by the sample size and of defective items (see 4.5 and 6.6).
h. Safety Data Sheet (SDS), when required (see 6.7).
i. Packaging requirements (see 5.1).

6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory (see 3.1), and the number of items to be tested as specified in paragraph 4.4. The contracting officer should also include specific instructions in acquisitions documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.3.1 First article inspection of spare parts. Spare parts, such as lenses (MS35420 and MS35421) and the lamp holder (MS35422) should be considered as having met first article requirements, providing they have been installed in an applicable light assembly that has passed first article testing as specified in 4.3.

6.4 Definitions.

a. Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste.

b. Solid waste. "Solid waste" means (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Clean Water Act, (33 U.S.C.1342 et seq.), or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.5 Subject term (key word) listing.

Blackout lights; for security
Horizontal and vertical illumination
Lights, clearance
Service lights; safe operations of Military Vehicles
Visibility

6.6 Inspection. The following information is presented for guidance in specifying sampling and acceptance procedures for conformance inspection, control testing in the acquisition document.

6.6.1 Failure. Failure of a control test sample to pass any of the specified examination or test may be cause for the Government to refuse to accept subsequent lots until it has been proved to the satisfaction of the Government that the faults revealed by the tests have been corrected.

6.7 Safety data sheets (SDS). When required (see 6.2), contracting officers will identify those activities requiring copies of completed SDSs prepared in accordance with FED-STD-313. In order to obtain the SDS, FAR clause 52.223-3 must be in the contract.

6.8 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.

Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army – AT
Navy – AS
Air Force – 99

Preparing activity:
DLA – GS2

(Project 6220-2018-001)

Review activities:
Army – MI
Navy – MC
DLA – IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:12Z
Check the source to verify that this is the current version before use.