INCH-POUND

MIL-W-3970/23B
w/AMENDMENT 1
25 April 2024
SUPERSEDING
MIL-W-3970/23B
20 August 2014


DETAIL SPECIFICATION SHEET

WAVEGUIDE ASSEMBLIES, RIGID, CAST, 90-DEGREE E-PLANE BEND, MITER AND RADIUS-BACK MITER, FULL CORRAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design
after 18 September 1998.

The requirements for acquiring the waveguide assemblies described herein shall consist of this document and MIL-DTL-3970.

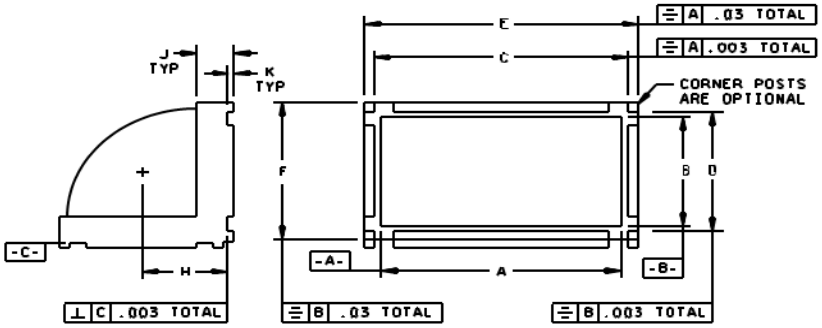

inches	mm	Letter	Dimension are in inches for Figure 1
.003	.08	A	1.872 ± .005
.005	.13	B	.872 ± .005
.010	.25	C	2.004 +.005 -.000
.02	.5	D	1.004 +.005 -.000
.03	.8	E	2.18 ± .03
.08	2.0	F	1.18 ± .03
.30	7.6	H	.593 ± .010
.593	15.06	J	.30 ± .02
.872	22.15	K	.08 ± .02
1.004	25.50		
1.18	30.0		
1.872	47.55		
2.004	50.90		
2.18	55.4		


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are determined from 1.00 inch = 25.4 mm.
3. Dimensions are in accordance with ASME Y14.5.

FIGURE 1. Dimensions for radius-back miter configuration, for dash numbers 001 and 002.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:09Z
Check the source to verify that this is the current version before use.

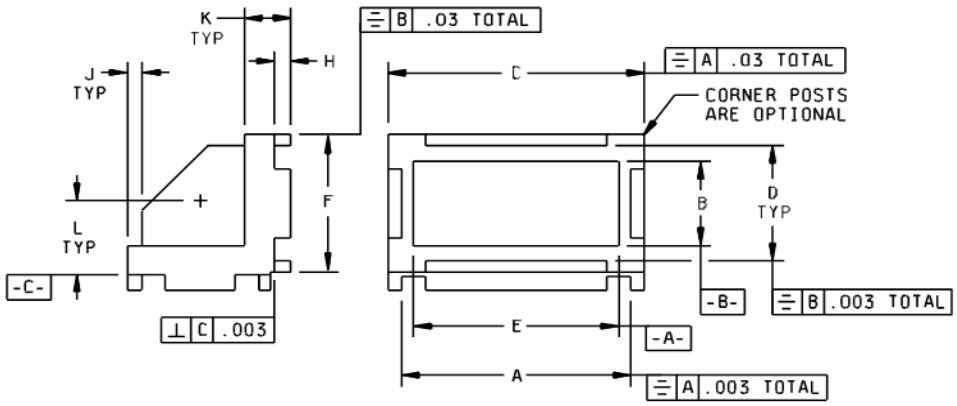

Letter	Dimensions are in inches figure 2
A	1.002 + .005 - .000
B	.400 ± .003
C	1.13 ± .03
D	.502 +.003 - .000
E	.900 ± .003
F	.63 ± .03
H	.10 ± .06
J	.05 -.03 +.00
K	.20 ± .03
L	.325 ±.003

Inches	mm	Inches	mm	Inches	mm
.003	.08	.06	1.5	.502	12.75
.005	.13	.10	2.5	.63	16.0
.030	.76	.20	5.1	.900	22.9
.03	.8	.325	8.26	1.002	25.45
.05	1.3	.400	10.16	1.13	28.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based on 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions for miter configuration, for dash number 003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:09Z
Check the source to verify that this is the current version before use.

TABLE 1. Dash numbers and electrical and physical characteristics.

Dash no.	Frequency range TE_{10} mode GHz	VSWR max	Peak power kW max	Average power kW max	Operating temperature range	Pressurization lbf/in^2 gage	Figure	Material	Mating waveguide M85/
001	4.0 - 5.9	1.05	1/	1/	0° to +60°C	20	1	Aluminum alloy, D712.0, temper F, in accordance with ASTM-B26/B26M or C712.1 in accordance with ASTM-B179	1-053 1-054 1-174
002	4.0 - 5.9	1.05	1/	1/	0° to +60°C	20	1	Beryllium copper, alloy	1-051 1-055
003	8.2 - 12.4	1.05	250	10	-55° to +200°C	45	2	Aluminum alloy, D712.0, temper F, in accordance with ASTM-B26/B26M or C712.1 in accordance with ASTM-B179	1-077 1-078 1-178

1/ Assemblies shall have the same power handling capabilities as their mating waveguides.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Physical characteristics.

Dimensions and configuration: See figures 1 and 2.

Operating temperature range: See table I.

Material: See table I.

Surfaces (sandblasting after machining permissible):

Internal: $63\sqrt{}$ microinches in accordance with ASME - B46.1.

External: $125\sqrt{}$ microinches in accordance with ASME - B46.1.

Fungus resistance: Materials nutrient to fungus shall not be used.

Pressurization: See table I.

Penetrant inspection. No indication of any cracks at any location when tested in accordance with ASTM-E1417/E1417M, type I, method B.

Electrical characteristics:
Frequency range: See table I.
VSWR: See table I.
Power
Peak - See table I.
Average - See table I.

Part number: M3970/23- (dash number from table I).

Referenced documents. In addition to MIL-DTL-3970, this specification sheet references ASTM-B26/B26M, ASTM-B179, ASME-B46.1, ASME Y14.5, and ASTM-E1417/E1417M.

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2024-004)

Review activities:
Army - MI
Navy - AS, CG, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:09Z
Check the source to verify that this is the current version before use.