AN100039

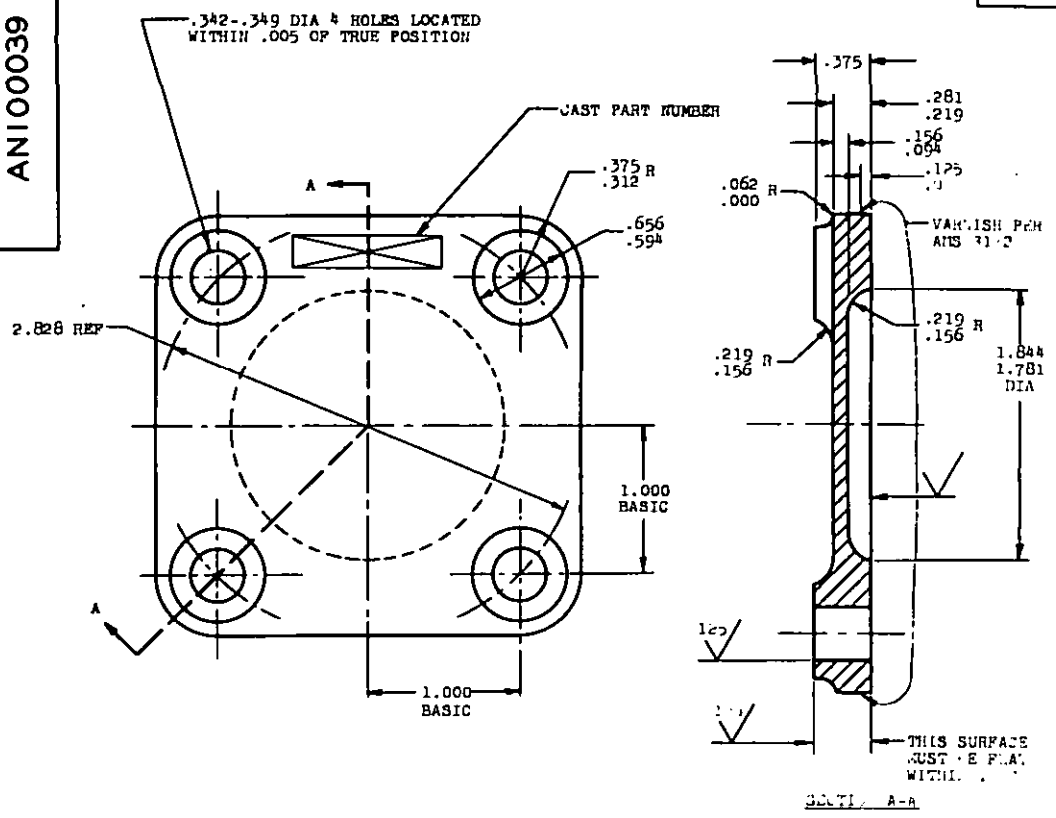

PART NO.	FIIN	APPROX WEIGHT EA
AN100039		.200

② INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972.
NO SUPERSEDING STANDARD.

MATERIAL: MAGNESIUM AMS 4424 OR AMS 4484

PARTING LINES OF CASTINGS ARE TO BE COMMERCIALLY CLEAN.

SURFACE ROUGHNESS: AS 291 UNSPECIFIED SURFACES AS CAST.

MACHINED PARTS SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.

FINISH: AMS 2510 UNLESS OTHERWISE SPECIFIED.

CASTING IDENTIFICATION: AMS 2804

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

COVERS SUITABLE FOR FLIGHT, SHIPMENT, AND STORAGE.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 9 Feb 50 REVISED ① 6 Jan 58 ② 26 Oct 72

PROCUREMENT SPECIFICATION

AIR FORCE-NAVY AERONAUTICAL STANDARD

AN100039

COVER-TYPE XIII ENGINE ACCESSORY DRIVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:24Z
Check the source to verify that this is the current version before use.