MIL-C-52286/23A(ME)
2 August 1973
SUPERSEDING
MIL-C-52286/23(ME)
4 May 1970

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, POWER ELECTRICAL, ADAPTER

The complete requirements for procuring the cable assembly described herein shall consist of this document and the issue in effect of MIL-C-52286(ME)

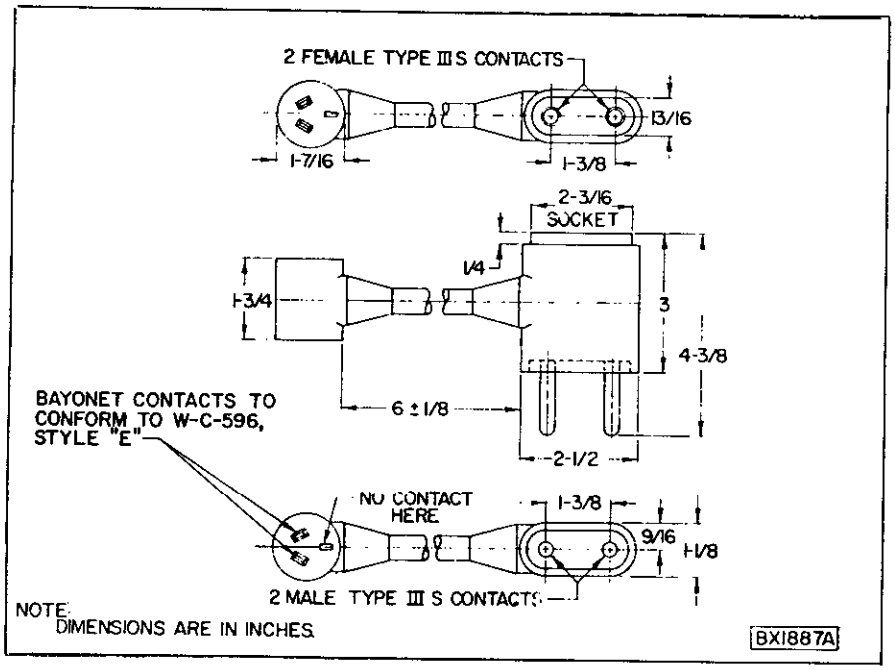

FSC 6150
Page 1 of
2 pages

Source: https://assist.dla.mil -- Downloaded: 20261O-22T21:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See above figure.
Electrical rating: 600 volt, 25 amperes.
Voltage drop: 20 Millivolt at 25 amperes, Maximum.
Connecting and disconnecting force: 15 - 35 pounds.
Minimum bond between cable and connectors: 120 pounds.
Cable: CO-02 HLF (2/14) 0550.

Custodian:

Army - ME

User interest:

Army - AT

Preparing activity:

Army - ME

Project No. 6150-A147

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:13Z
Check the source to verify that this is the current version before use.