MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

METERS

TO ALL HOLDERS OF DOD-STD-35-12A(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-12A(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
Cover	26 February 1979	(Reprinted without change)	26 February 1979
ii	29 January 1980	ii	26 February 1979
1	26 February 1979	(Reprinted without change)	26 February 1979
2	29 January 1980	2	26 February 1979
3	29 January 1980	3	26 February 1979
4	29 January 1980	4	26 February 1979
11	29 January 1980	11	26 February 1979
12	29 January 1980	12	26 February 1979
31	26 February 1979	(Reprinted without change)	26 February 1979
32	29 January 1980	32	26 February 1979
33	29 January 1980	33	26 February 1979
34	29 January 1980	34	26 February 1979
49	29 January 1980	49	26 February 1979
50	26 February 1979	(Reprinted without change)	26 February 1979
61	29 January 1980	61	26 February 1979
62	26 February 1979	(Reprinted without change)	26 February 1979
101	26 February 1979	(Reprinted without change)	26 February 1979
102	29 January 1980	102	26 February 1979
135	29 January 1980	135	26 February 1979
136	26 February 1979	(Reprinted without change)	26 February 1979
151	29 January 1980	151	26 February 1979
152	26 February 1979	(Reprinted without change)	26 February 1979
163	29 January 1980	163	26 February 1979
164	26 February 1979	(Reprinted without change)	26 February 1979
171	29 January 1980	171	26 February 1979
172	26 February 1979	(Reprinted without change)	26 February 1979
209	29 January 1980	209	26 February 1979
210	26 February 1979	(Reprinted without change)	26 February 1979
215	29 January 1980	215	26 February 1979
216	26 February 1979	(Reprinted without change)	26 February 1979

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

METERS

TO ALL HOLDERS OF DOD-STD-35-12A(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-12A(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
Cover	26 February 1979	(Reprinted without change)	26 February 1979
ii	29 January 1980	ii	26 February 1979
1	26 February 1979	(Reprinted without change)	26 February 1979
2	29 January 1980	2	26 February 1979
3	29 January 1980	3	26 February 1979
4	29 January 1980	4	26 February 1979
11	29 January 1980	11	26 February 1979
12	29 January 1980	12	26 February 1979
31	26 February 1979	(Reprinted without change)	26 February 1979
32	29 January 1980	32	26 February 1979
33	29 January 1980	33	26 February 1979
34	29 January 1980	34	26 February 1979
49	29 January 1980	49	26 February 1979
50	26 February 1979	(Reprinted without change)	26 February 1979
61	29 January 1980	61	26 February 1979
62	26 February 1979	(Reprinted without change)	26 February 1979
101	26 February 1979	(Reprinted without change)	26 February 1979
102	29 January 1980	102	26 February 1979
135	29 January 1980	135	26 February 1979
136	26 February 1979	(Reprinted without change)	26 February 1979
151	29 January 1980	151	26 February 1979
152	26 February 1979	(Reprinted without change)	26 February 1979
163	29 January 1980	163	26 February 1979
164	26 February 1979	(Reprinted without change)	26 February 1979
171	29 January 1980	171	26 February 1979
172	26 February 1979	(Reprinted without change)	26 February 1979
209	29 January 1980	209	26 February 1979
210	26 February 1979	(Reprinted without change)	26 February 1979
215	29 January 1980	215	26 February 1979
216	26 February 1979	(Reprinted without change)	26 February 1979

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

DOD-STD-35-12A(MI)
26 February 1979
SUPERSEDING
MIL-STD-35-12(MI)
19 SEPTEMBER 1973

MILITARY STANDARD

METERS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM



FSC EDS

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Meters
Automated Engineering
Document Preparation System

DOD-STD-35-12A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Meters.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1279, Selection and Use of Meters, Electrical Indicating be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check to verify that this is the current version before use.
Reprinted without change

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
METER, ELECTRICAL	031012	MIL-M-3971	TIME TOTALIZING CAP 10000 HOURS AC OR DC
		MIL-V-6753	VOLTMETERS, AC, 0-150 VOLT, 330 TO 1200 CYCLE
		MS24332	0-150 VOLT AC 330 TO 1200 CY
		MIL-M-7793	TIME TOTALIZING
		MS17321	MINIATURE, 28 VOLT DC
		MS17322	MINIATURE, 115 VOLT, 400 CYCLE
		MS17324	115 V, 60 CYCLE
		MS17325	115 VOLT, 60 OR 400 HERTZ
		MS21341	HERMETICALLY SEALED 28 V DC
		MS27650	HERMETICALLY SEALED 26 V 400 HERTZ
		MS27651	HERMETICALLY SEALED 115 V 400 HERTZ AC
		MS28053	115 VOLT 400 CYCLE
		MS90445	115 VOLT, 60 HZ
		MIL-I-8374	AIRCRAFT 400 CYCLE AC
		MIL-M-10304	WATERTIGHT
		MIL-M-16034	SWITCHBOARD AND PORTABLE
		MIL-M-16125	SWITCHBOARD AND PORTABLE
		MIL-M-19261	SWITCHBOARD
		MIL-M-23167	SWITCHBOARD

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
METER, ELECTRICAL	031012 (CONT)	MIL-M-24359	ANMETER DC MA HORIZONTAL AND VERTICAL
		MIL-I-26525	BATTERY GENTR INDICATOR
		MS24532	VOLTMETER GEN 28 VOLT DC
		AN3201	ANMETER, DC
		AN3203	VOLTMETER DC
		MS25025	LOADMETER, DC AIRCRAFT
METER, ELECTRICAL, DIGITAL INDICATING, PANEL TYPE, SQUARE FLANGE	031008	MIL-M-7793	TIME TOTALIZING 60 AND 400 CPS AC AND 28 V DC
		MS28053	115 VOLT 400 CYCLE
		MS90445	115 VOLT, 60 HZ
METER, ELECTRICAL, DIGITAL INDICATING, PANEL TYPE, ROUND FLANGE	031009	MIL-M-3971	TIME TOTALIZING CAP 10000 HOURS AC OR DC
		MIL-M-7793	TIME TOTALIZING
		MS17324	115 V, 60 CYCLE
		MS28053	115 V, 400 CYCLE
METER, ELECTRICAL, DIGITAL INDICATING, PANEL TYPE, SPECIAL FLANGE	031010	MIL-M-7793	TIME TOTALIZING
		MS17321	MINIATURE, 28 VOLT DC
		MS17322	MINIATURE, 115 VOLT, 400 CYCLE
		MS17325	115 VOLT, 60 OR 400 HERTZ
		MS21341	HERMETICALLY SEALED 28 V DC
		MS27650	HERMETICALLY SEALED 26 V 400 HERTZ

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
METER, ELECTRICAL, DIGITAL INDICATING, PANEL TYPE, SPECIAL FLANGE	031010 (CONT)	MS27651	HERMETICALLY SEALED 115 V 400 HERTZ
METER, ELECTRICAL, POINTER INDICATING, EDGEWISE PANEL TYPE, HORIZONTAL	031005	MIL-M-24359	AMMETER DC MA HORIZONTAL
METER, ELECTRICAL, POINTER INDICATING, EDGEWISE PANEL TYPE, VERTICAL	031004	MIL-M-24359	AMMETER DC MA VERTICAL
METER, ELECTRICAL, POINTER INDICATING, PANEL TYPE, RECTANGULAR FLANGE	031001	AN3201	AMMETER, DC
		AN3203	VOLTMETER DC
		MIL-M-10304	WATERTIGHT
		MIL-M-16034	SWITCHBOARD AND PORTABLE
		MIL-M-16125	SWITCHBOARD AND PORTABLE
		MIL-M-19261	SWITCHBOARD
		MIL-M-23167	SWITCHBOARD
		MS25025	LOADMETER, DC, AIRCRAFT
METER, ELECTRICAL, POINTER INDICATING, PANEL TYPE, ROUND FLANGE	031002	MIL-V-6753	VOLTMETERS, AC, 0-150 VOLT, 330 TO 1200 CYCLE
		MS24332	0-150 VOLT AC 330 TO 1200 CY
		MIL-M-10304	FLUSH MOUNT, RUGGEDIZED AC AND DC
		MIL-M-23167	FREQUENCY EXPANDED SCALE

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
METER, ELECTRICAL, POINTER INDICATING, PANEL TYPE, SPECIAL FLANGE	Ø31ØØ3	MIL-I-26525 MS24532	BATTERY GENTR INDICATOR VOLTMETER GEN 28 VOLT DC
METER, ELECTRICAL, VIBRATING REED INDICATING, PANEL TYPE, ROUND FLANGE	Ø31Ø11	MIL-I-8374	AIRCRAFT 400 CYCLE AC

New page

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1600	TYPE DES	1602	GRADE DES	1604	CLASS DES
1606	STYLE DES	1608	CMPNT DES	1610	ACCURACY FULL SCALE PERCENT
1612	ACCURACY FREQ SPAN PERCENT	1647	END-SCALE (DES)	5069	MAX OPER TEMP RTG (DEG C)
5068	MIN OPER TEMP RTG (DEG C)	7591	MIN CUR RTG AMPERES	7592	MIN CUR RTG MA
7594	MAX CUR RTG AMPERES	7595	MAX CUR RTG MA	7597	NOM CUR RTG AMPERES
7598	NOM CUR RTG MA	7631	MIN PWR RTG W	7632	MIN PWR RTG KW
7633	MIN PWR RTG MW	7645	MIN PWR RTG VA	7634	MAX PWR RTG WATTS
7635	MAX PWR RTG KW	7636	MAX PWR RTG MW	7646	MAX PWR RTG VA
7637	NOM PWR RTG WATTS	7638	NOM PWR RTG KW	7639	NOM PWR RTG MW
7647	NOM PWR RTG VA	7600	MIN V RTG VOLTS AC	7601	MIN V RTG VOLTS DC
7602	MIN V RTG VOLTS RMS	7603	MIN V RTG MILLIVOLTS AC	7604	MIN V RTG MILLIVOLTS DC
7605	MIN V RTG MILLIVOLTS RMS	7609	MAX V RTG VOLTS AC	7610	MAX V RTG VOLTS DC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7611	MAX V RTG VOLTS RMS	7612	MAX V RTG MILLIVOLTS AC	7613	MAX V RTG MILLIVOLTS DC
7614	MAX V RTG MILLIVOLTS RMS	7618	NOM V RTG VOLTS AC	7619	NOM V RTG VOLTS DC
7620	NOM V RTG VOLTS RMS	7621	NOM V RTG MILLIVOLTS AC	7622	NOM V RTG MILLIVOLTS DC
7623	NOM V RTG MILLIVOLTS RMS	7627	FREQ RTG HERTZ	7628	FREQ RTG MEGAHERTZ
7641	FREQ RTG KILOHERTZ	7022	MAX WT PER UNIT OZ	7023	MAX WT PER UNIT POUND
7021	MAX WT PER UNIT GRAMS	7024	MAX WT PER UNIT KG	6996	NOM WT PER UNIT OZ
6997	NOM WT PER UNIT POUND	6998	NOM WT PER UNIT GRAMS	6999	NOM WT PER UNIT KG
1642	MVT SENS OHMS NOM	1643	MVT SENS OHMS PER VOLT MIN	1644	MVT SENS OHMS PER VOLT MAX
1645	MVT SENS OHMS	1646	MVT SENS TOL OHMS		

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTUNUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

CURRENT TYPE.

1574 THE METER SHALL BE THE AC TYPE.

1575 THE METER SHALL BE THE DC TYPE.

1576 THE METER SHALL BE THE AC/DC TYPE.

Reprinted without change
Source: http://assist.dla.mil -- Downloaded: 202640-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SCALE (SELECT ONE)	
INDICATOR, DIGITAL, TYPE PER ILLUSTRATION 031-01-4 (LETTER)	1562
NUMBER OF COLUMNS LEFT OF DECIMAL (QUANTITY)	1563
COLOR OF DIGITS (NAME)	1564
COLOR PER FED-STD-595 (NUMBER)	1577
BACKGROUND COLOR (NAME)	1565
COLOR PER FED-STD-595 (NUMBER)	1578
NUMBER OF COLUMNS RIGHT OF DECIMAL (QUANTITY)	1566
COLOR OF DIGITS (NAME)	1567
COLOR PER FED-STD-595 (NUMBER)	1568
BACKGROUND COLOR (NAME)	1597
COLOR PER FED-STD-595 (NUMBER)	1580
NUMBER OF COLUMNS, IF NO DECIMAL (QUANTITY)	1569
COLOR OF DIGITS (NAME)	1570
COLOR PER FED-STD-595 (NUMBER)	1581
BACKGROUND COLOR (NAME)	1571
COLOR PER FED-STD-595 (NUMBER)	1582

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1562	DIGITAL INDICATOR SCALE TYPE. THE DIGITAL INDICATOR SCALE SHALL BE TYPE 1562 OF ILLUSTRATION 031-01-4.
1563	THE NUMBER OF COLUMNS LEFT OF THE DECIMAL POINT SHALL BE 1563.
1564	THE DIGIT(S) COLOR SHALL BE 1564.
1577	THE DIGIT(S) COLOR NUMBER 1577 OF FED-STD-595 SHALL APPLY.
1565	THE BACKGROUND COLOR SHALL BE 1565.
1578	THE BACKGROUND COLOR NUMBER 1578 OF FED-STD-595 SHALL APPLY.
1566	THE NUMBER OF COLUMNS RIGHT OF THE DECIMAL POINT SHALL BE 1566.
1567	THE DIGIT(S) COLOR SHALL BE 1567.
1568	THE DIGIT(S) COLOR NUMBER 1568 OF FED-STD-595 SHALL APPLY.
1597	THE BACKGROUND COLOR SHALL BE 1597.
1580	THE BACKGROUND COLOR NUMBER 1580 OF FED-STD-595 SHALL APPLY.
1569	THE NUMBER OF COLUMNS, IF THERE IS NO DECIMAL POINT SHALL BE 1569.
1570	THE DIGIT(S) COLOR SHALL BE 1570.
1581	THE DIGIT(S) COLOR NUMBER 1581 OF FED-STD-595 SHALL APPLY.
1571	THE BACKGROUND COLOR SHALL BE 1571.
1582	THE BACKGROUND COLOR NUMBER 1582 OF FED-STD-595 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SCALE (CONT)	
DIGIT HEIGHT (SELECT ONE)	
(INCHES)	1572
TOLERANCE (INCH)	1573
(MILLIMETERS)	1589
TOLERANCE (MILLIMETERS)	1590
CURVED SCALE TYPE	
PER ILLUSTRATION 031-01-6 (LETTER)	1583
PER CURVED SCALE TABLE.	
NOTE: USE ILLUSTRATION 031-01-3 FOR DEFINITIONS.	

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1691 EXTERNAL RESISTORS SHALL BE IN ACCORDANCE WITH 1691.

SHUNTS, EXTERNAL.

1692 EXTERNAL SHUNTS SHALL BE PROVIDED WITH THE METER(S).

1693 EXTERNAL SHUNTS SHALL BE IN ACCORDANCE WITH 1693.

DIAL.

1700 THE DIAL SHAPE SHALL BE IN ACCORDANCE WITH TYPE 1700 OF ILLUSTRATION 031-01-2.

1701 THE DIAL BACKGROUND COLOR SHALL BE 1701.

1702 THE DIAL BACKGROUND COLOR SHALL BE 1702 IN ACCORDANCE WITH FED-STD-595.

1703 THE DIAL BACKGROUND COLOR SHALL BE IN ACCORDANCE WITH 1703.

1704 MIRRORED STRIP. THE DIAL SHALL BE PROVIDED WITH MIRRORED STRIP(S) TO REDUCE VIEWING PARALLAX. FOR PURPOSE OF LOCATION, SCALE(S) 1704 OF ILLUSTRATION 031-01-6 SHALL APPLY.

1705 THE MIRRORED STRIP SHALL EXTEND NOT LESS THAN 1705 INCH(S) BEYOND THE FULL SWING OF THE POINTER.

1724 THE MIRRORED STRIP SHALL EXTEND NOT LESS THAN 1724 MILLIMETERS BEYOND THE FULL SWING OF THE POINTER.

1706 THE MIRRORED STRIP SHALL EXTEND NOT LESS THAN 1706 DEGREES BEYOND THE FULL SWING OF THE POINTER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DIAL (CONT)	
ILLUMINATION (SELECT ONE)	
REFLECTIVE COATING.	1707
PHOSPHORESCENT COATING.	1708
INTERNAL (SELECT ONE)	
INCANDESCENT.	1710
FLUORESCENT.	1711
NEON.	1712
EXTERNAL (SELECT ONE)	
INCANDESCENT.	1713
FLUORESCENT.	1714
NEON.	1715
MARKING CHARACTERS (SELECT ONE)	
BOLD GOTHIC.	1716
PER MS33558.	1717
OTHER ____	1718

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	WIRE LEAD TYPE.
1825	WIRE LEAD TERMINAL SHALL ACCOMMODATE A WIRE SIZE OF 1825 AWG.
1826	WIRE LEAD TERMINAL SHALL ACCOMMODATE A WIRE DIAMETER OF 1826 INCH.
1827	WIRE LEAD TERMINAL SHALL ACCOMMODATE A WIRE DIAMETER OF 1827 MILLIMETERS.
1828	WIRE LEAD INSULATION SHALL BE 1828.
1850	WIRE LEAD INSULATION SHALL BE IN ACCORDANCE WITH 1850.
1852	WIRE LEAD LENGTH SHALL BE 1852 INCHES.
1854	WIRE LEAD LENGTH SHALL BE 1854 MILLIMETERS.
1832	THE POSITIVE WIRE LEAD COLOR SHALL BE 1832.
1834	THE POSITIVE WIRE LEAD COLOR SHALL BE 1834 IN ACCORDANCE WITH MIL-STD-104.
1836	THE NEGATIVE WIRE LEAD COLOR SHALL BE 1836.
1838	THE NEGATIVE WIRE LEAD COLOR SHALL BE 1838 IN ACCORDANCE WITH MIL-STD-104.

Source: https://assist.dla.mil - Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINATION (CONT)	
HARDWARE	
PER TERMINAL HARDWARE TABLE.	1819
BEZEL	
COLOR (NAME)	1840
PER FED-STD-595 (NUMBER)	1842
COVER	
PER ILLUSTRATION 031-01-7 (LETTER)	1844
COLOR (NAME)	1846
PER FED-STD-595 (NUMBER)	1848

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2470	MOMENTARY OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2470.
2472	MOMENTARY OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2474	THERE SHALL BE NO MECHANICAL OR THERMAL DAMAGE.
2476	THE PERMANENT CHANGE SHALL BE NOT GREATER THAN 2476 PERCENT.
2478	THE DEVIATION FROM RATED ACCURACY SHALL BE NOT GREATER THAN 2478 PERCENT.
2480	MOMENTARY OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2480.

Reprinted without change.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOMENTARY OVERLOAD (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2482
NUMBER OF CURRENT APPLICATIONS (QUANTITY)	2484
TEST CURRENT EQUAL TO NUMBER OF TIMES OF END SCALE VALUE (QUANTITY)	2486
NUMBER OF TEST CURRENT APPLICATIONS FOR EACH 0.5 SECOND (QUANTITY)	2488
INTERVALS BETWEEN EACH SUCCESSIVE TEST CURRENT APPLICATION (MINUTES)	2490
FINAL CURRENT APPLICATION (SECONDS)	2492
FINAL PERIOD AFTER CURRENT APPLICATION (HOURS)	2494
TEMPERATURE (DEGREES CELSIUS)	2496
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2498
POSITION INFLUENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
MAXIMUM DEVIATION FROM ZERO MARK, PERCENT OF THE FULL SCALE LENGTH (PERCENT)	2504

Source: https://dasiac.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2644 THE TEMPORARY ZERO SHIFT SHALL BE NOT GREATER THAN 2644 PERCENT.

2646 THE PERMANENT ZERO SHIFT SHALL BE NOT GREATER THAN 2646 PERCENT.

2648 THE PERMANENT INDICATION CHANGE SHALL BE NOT GREATER THAN 2648 PERCENT.

2650 SUSTAINED OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2650.

2652 SUSTAINED OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2652.

2654 THE APPLICATION OF ENERGY SHALL BE APPLIED WITH AN OVERLOAD PERIOD OF 2654 HOURS.

2656 THE APPLICATION OF ENERGY SHALL BE GREATER THAN 2656 PERCENT OF THE END-SCALE VALUE.

2658 THE TEST TEMPERATURE SHALL BE 2658 DEGREES CELSIUS.

2660 THE TEST TEMPERATURE TOLERANCE SHALL BE 2660 DEGREES CELSIUS.

2662 DETERMINE TEMPORARY AND PERMANENT SHIFT AFTER OVERLOAD.

2664 DETERMINE PERMANENT INDICATION CHANGE AFTER OVERLOAD.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE INFLUENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2670
AS FOLLOWS:	2672
MAXIMUM	
INDICATION CHANGE (PERCENT)	2674
FREQUENCY SPAN (PERCENT)	2676
REFERENCE TEMPERATURE (DEGREES CELSIUS)	2678
MINIMUM SCALE POINTS READ (QUANTITY)	2680
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2690
PER DOCUMENT (DOC DES)	2692
TEST TEMPERATURE	
BELOW REFERENCE (DEGREES CELSIUS)	2694
ABOVE REFERENCE (DEGREES CELSIUS)	2696
COMPUTE THE TEMPERATURE INFLUENCE.	2698

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-ER
Army-ME
Army-MR
Army-SG
Army-CR

User activity:
Army-AR

Preparing activity:
Army-MI


(Project EDS-A306)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 202640-23T20:54Z
Check the source to verify that this is the current version before use.

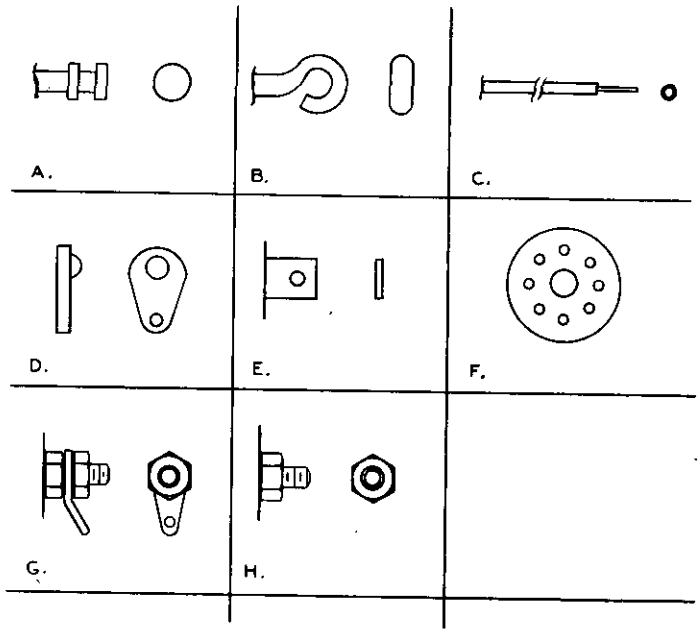


031-01-9

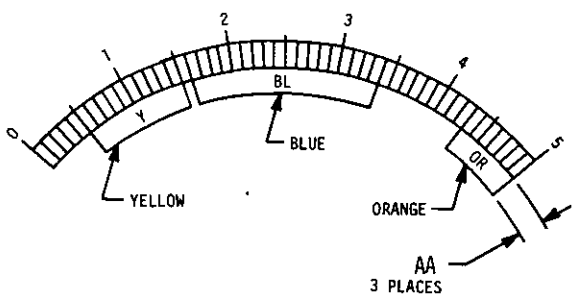


031-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

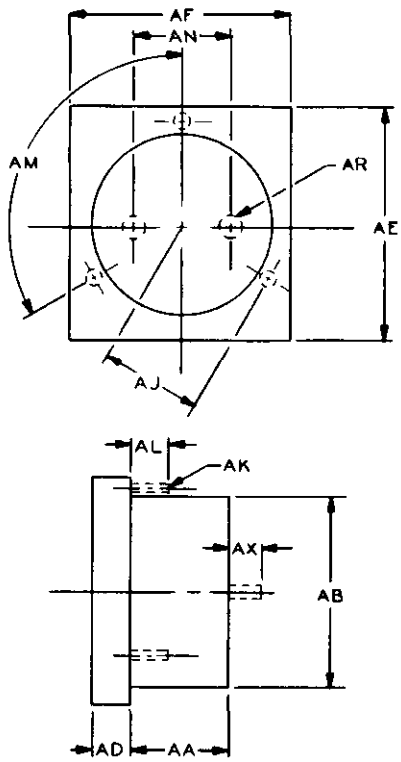


031-02-1

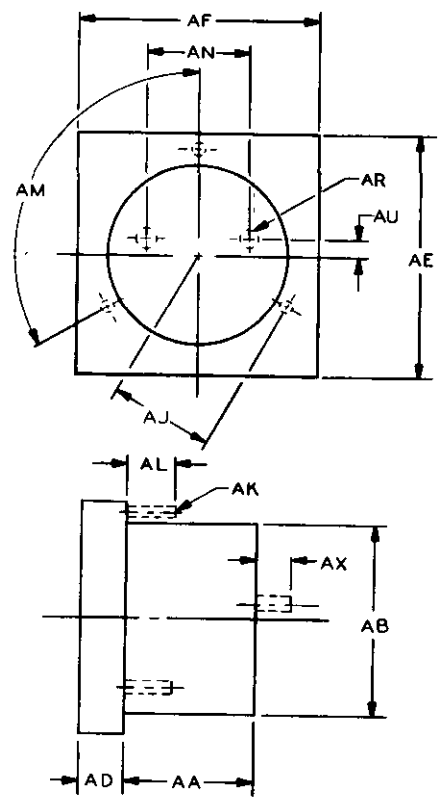


031-02-2

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

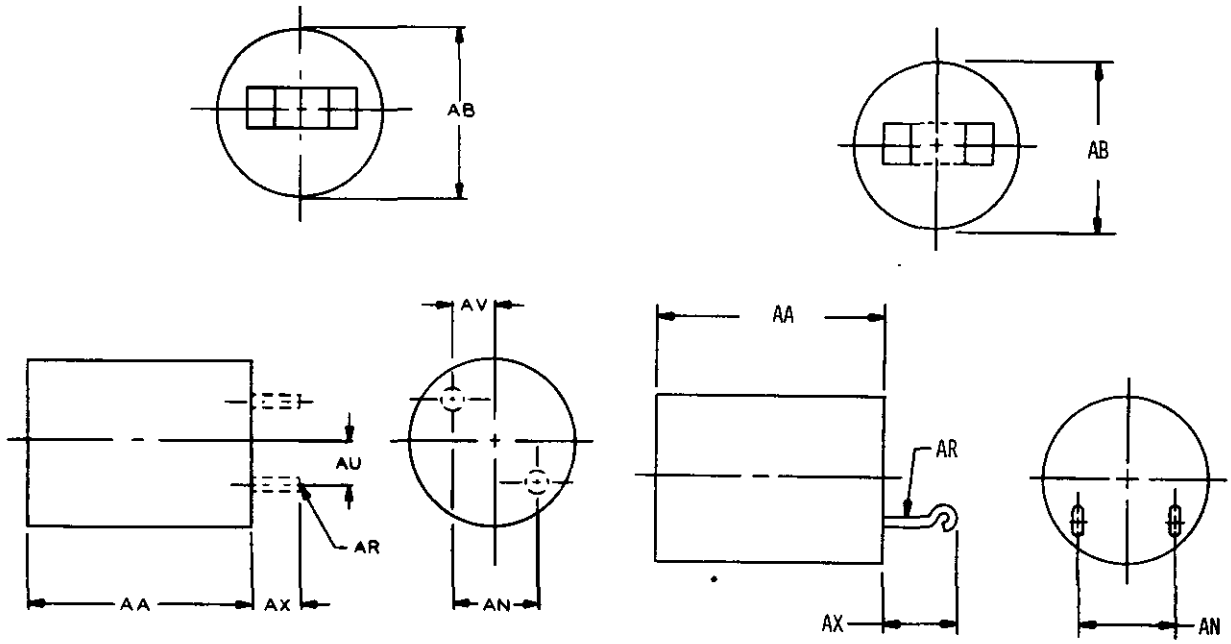


031-24-3

031-24-4

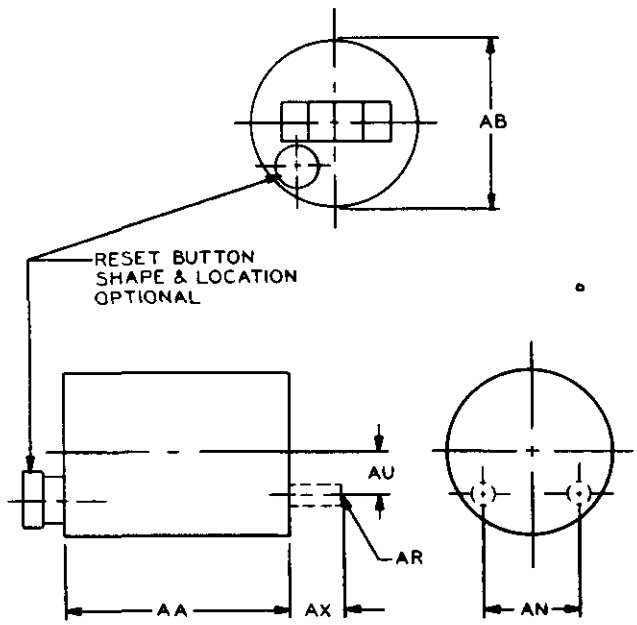


031-25-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

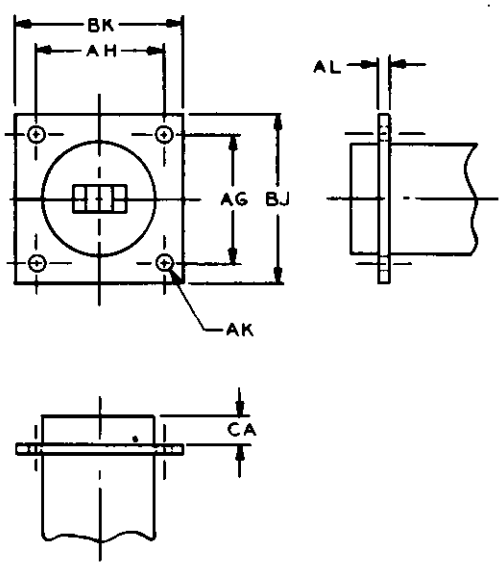


031-26-1

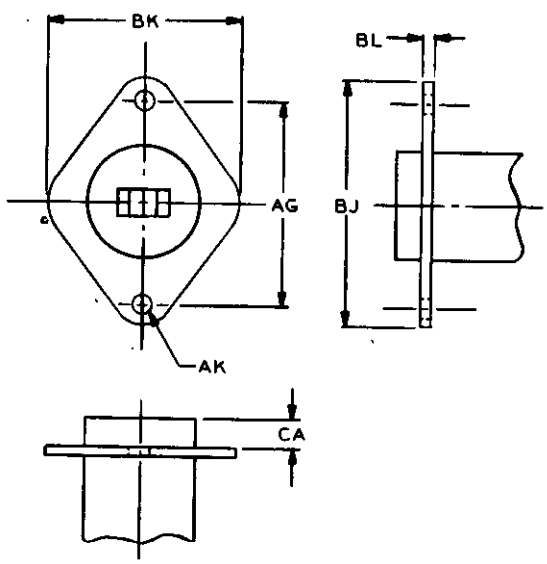


031-26-2

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

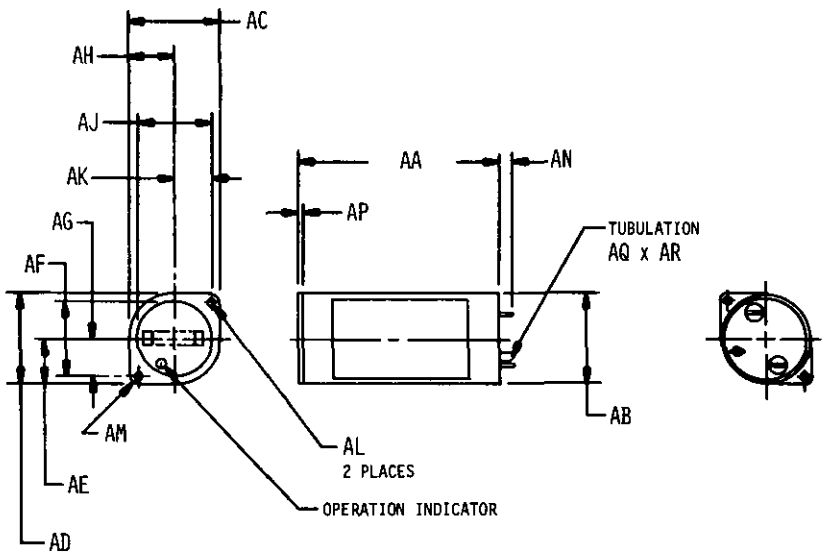

Ø31-26-12

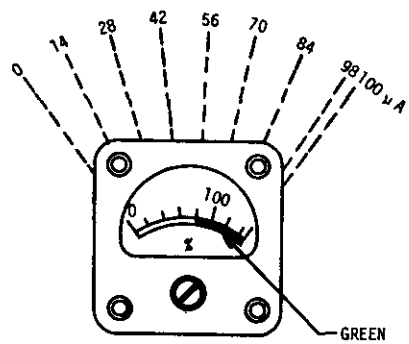

Ø31-27-1

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:54Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.