MIL-P-62210B(AR)
30 June 1981
SUPERSEDING
MIL-P-62210A(AR)
1 March 1976

MILITARY SPECIFICATION

PANEL, COMMANDERS CONTROL: 11743140

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Commanders Control Panel: 11743140, which is the A30 Component of the Receiver -Transmitter Control Unit, 11743121.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment; Acquisition, Maintenance and Disposition of
MIL-STD-45662	Calibration System Requirements

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods

FSC: 1240

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARRADCOM

11743140	Panel, Commanders Control

Inspection Equipment

11750202	Automatic Card and Unit, Test Set
11750436	Adapter, Commander's Control Panel
11821457	Fixture Shock, Vertical and Horizontal Plane
11821458	Shock Adapter, Plate Vib Horiz-Vert Plane/Shock-Z
11821520	Automatic Test Assembly Central Processor Unit
11821857	Bracket End - Cable Set - Computer Unit FAT
11821858	Cable Set, Computer Unit
11821864	Cable Assembly - Commander Panel/wi/
11823313	Fixture Test, PWB and Modules

Packaging Data Sheet

P11743140	Packaging of Panel, Commanders Control: 11743140

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:25Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The commanders control panel, herein referred to as the assembly, shall be manufactured in accordance with Drawing 11743140 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification. (See 4.5.1)

3.1.1 Function. The assembly shall provide the following functions:

	Designation	Nomenclature
a.	Open circuit, resistance and short-circuit	Switching continuity
b.	Less than 5.0 ohms	Circuit continuity
c.	Dimmer control, lamp driver	Indicator illumination
d.	Input signals	Range display readout
e.	Voltage and display	Lamp test control

3.1.2 General specifications. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	$73^{o} \pm 18^{o}F$
b.	Relative humidity	50 percent + 30 percent
c.	Atmospheric pressure	28.5 + 2.0 -3.0 in. Hg.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

3.3.1 Switching continuity. With no power or signals applied, an open circuit, a finite resistance, or a short-circuit condition shall exist between terminals as specified in table II for switch positions as listed therein. (See 4.6.2.1)

TABLE I - Load, power, and signals.

Item	Conditions	Characteristics	Connections
1.0	Load		
1.1	Resistor	270 ohms ±5 percent 1/4 watt	Connected between pins W1P1-42 and W1P1-27
2.0	Power		
2.1	14 Vdc	Tolerance: ±0.5 Vdc Ripple: 25 mV p-p max	Applied, unless otherwise specified, between pins W1P1-45 (+) and W1P1-44 (-)
2.2	Figure 1		Applied as specified
2.3	5 Vdc	Tolerance: ±0.2 Vdc Ripple: 25 mV p-p max	Applied, unless otherwise specified, between pins W1P1-27 (+) and W1P1-44 (-)
3.0	Signal		
3.1	Digital type-A	Logical one: 4.0 ±1.0 V Source impedence: 2 kilohms ±5 percent Logical zero: 0.2 ±0.2 V	Applied as specified

3.3.2 Circuit continuity. With no power or signals applied, direct continuity (resistance equal to or less than 5.0 ohms) shall exist between pins W1P1-46 and W1P1-44, and between pins W1P1-49 and W1P1-50. (See 4.6.2.2)

3.3.3 Indicator illumination.

3.3.3.1 Dimmer control. With the dimmer control knob turned clockwise (CW) up to, but not into the TEST position, the FEED and RESET indicator lamps shall change from dim to bright. With the knob turned in the counterclockwise (CCW) direction, the indicator lamps shall change from bright to dim.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Switching continuity. 1/

Switch	Switch position	Continuity between pin W1P1-44 and W1P1 pins								Continuity between pin W1P1-4 and W1P1 pins		
		18	20	1	11	13	15	16	9	33	32	31
1	Normal	O	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	Depressed	S	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
2	Normal	NA	O	NA	NA	NA	NA	NA	NA	NA	NA	NA
	Depressed	NA	S	NA	NA	NA	NA	NA	NA	NA	NA	NA
LAST	Normal	NA	NA	O	NA	NA	NA	NA	NA	NA	NA	NA
	Depressed	NA	NA	S	NA	NA	NA	NA	NA	NA	NA	NA
FEED	Normal	NA	NA	NA	O	NA	NA	NA	NA	NA	NA	NA
	Depressed	NA	NA	NA	S	NA	NA	NA	NA	NA	NA	NA
BATTLE RANGE	Normal	NA	NA	NA	NA	O	NA	NA	NA	NA	NA	NA
	Depressed	NA	NA	NA	NA	S	NA	NA	NA	NA	NA	NA
RANGE	Normal	NA	NA	NA	NA	NA	S	O	NA	NA	NA	NA
	Depressed	NA	NA	NA	NA	NA	O	S	NA	NA	NA	NA
RESET	Normal	NA	NA	NA	NA	NA	NA	NA	O	NA	NA	NA
	Depressed	NA	NA	NA	NA	NA	NA	NA	S	NA	NA	NA
MODE	TEST	NA	NA	NA	NA	NA	NA	NA	NA	S	R	R
	ON	NA	NA	NA	NA	NA	NA	NA	NA	R	S	R
	AUTO	NA	NA	NA	NA	NA	NA	NA	NA	R	R	S

1/ Continuity condition legend: O = open circuit - resistance 1 megohm. S = short circuit - resistance 5.0 ohm. R = 9.4 ±2.0 kilohms. NA = not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

3.3.1.3.2 Lamp driver. With pin W1P1-44 connected in turn to each of the W1P1 pins listed in table III and in the item number order of table III, the corresponding listed lamp shall illuminate. (See 4.6.2.3)

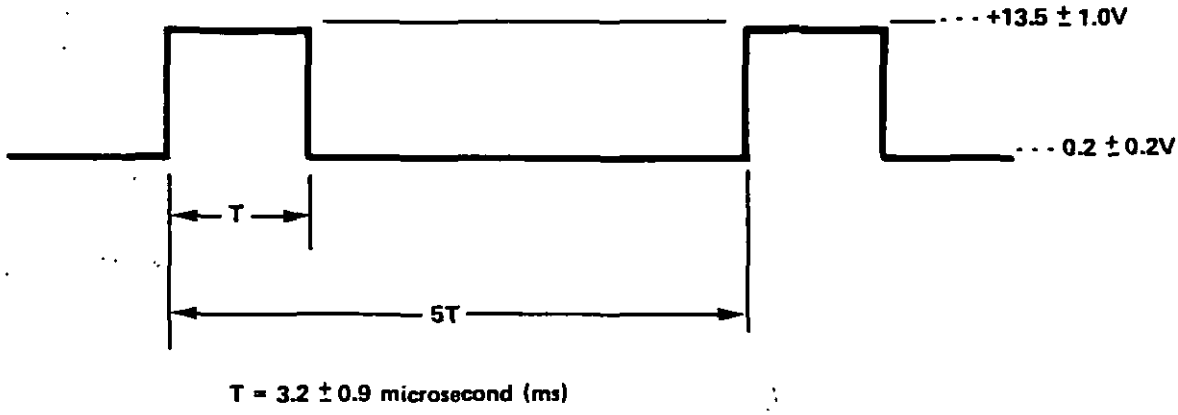


FIGURE 1. Anode waveform.

TABLE III. Lamp illumination.

Item	Pins of W1P1	Lamps
1	2	SELECT
2	3	MALF
3	5	TEST
4	6	ON
5	7	AUTO
6	12	BATTLE RANGE
7	14	RANGE
8	17	1
9	19	2
10	30	LAST
11	34	GO

3.3.4 Range display readout. With the voltage waveform of figure 1 and the digital type-A signals, item 3.1 of table I, applied to pins as specified in table IV, the corresponding range display readouts shall be as specified therein. (See 4.6.2.4)

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE IV. Range display readout.

Item	Input signal conditions at pins of W1P1 1/											Display readouts 2/				
	41	40	39	38	43	8	25	24	23	22	21	1000s	100s	10s	1s	Returns
1	1	0	0	0	0	1	NC	NC	NC	NC	+	NI	NI	NI	NI	8
2	1	0	0	0	0	1	NC	NC	NC	+	NC	NI	NI	NI	8	NI
3	1	0	0	0	0	1	NC	NC	+	NC	NC	NI	NI	8	NI	NI
4	1	0	0	0	0	1	NC	+	NC	NC	NC	NI	8	NI	NI	NI
5	1	0	0	0	0	1	+	NC	NC	NC	NC	8	NI	NI	NI	NI
6	1	0	0	0	1	1	+	NC	NC	NC	NC	NI	NI	NI	NI	NI
7	0	0	0	0	0	0	+	NC	NC	NC	NC	NI	NI	NI	NI	NI
8	0	1	1	0	0	1	+	NC	NC	NC	NC	6	NI	NI	NI	NI
9	1	0	0	1	0	1	+	NC	NC	NC	NC	9	NI	NI	NI	NI

1/ Input signal conditions legend: 1 = logical one digital type-A signal.
0 = logical zero digital type-A signal.
+ = item 2.2 of table I.
NC = no connection.

2/ Display readouts legend: NI = not illuminated.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T01:25Z
Check the source to verify that this is the current version before use.

3.3.5 Lamp test control. With the power sources of item 2.2, table I applied to pins W1P1-21, W1P1-22, W1P1-23, W1P1-24, and W1P1-25, with the return connected to W1P1-44, with a logical zero digital type-A signal (item 3.1, table I) applied to W1P1-41, W1P1-40, W1P1-39 and W1P1-38 and with rotation of the dimmer control fully clockwise into the TEST position, the digit 8 shall illuminate in the readouts and the voltage between pins W1P1-42 and W1P1-44 (rtn) shall be 0.2 ±0.2 Vdc. With the dimmer control knob turned counterclockwise to the out-of-test position, the readouts shall display zeros and the output voltage between pins W1P1-42 and W1P1-44 (rtn) shall be +4.2 ±1.0 Vdc. (See 4.6.2.5)

3.4 Environmental.

3.4.1 Shock. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 20 ± 3 gravity unit (g) for a duration of 18 ± 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three sawtooth shock pulses of 40 ± 4 g for duration of 9 ± 0.2 msec applied in each direction along three mutually perpendicular axes. (See 4.6.3.1)

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 2. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.3.2)

3.4.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +125°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.4.4 Storage temperature. The assembly shall be capable of operating as specified herein after exposure to storage temperatures ranging from -65°F to 160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:25Z
Check the source to verify that this is the current version before use.

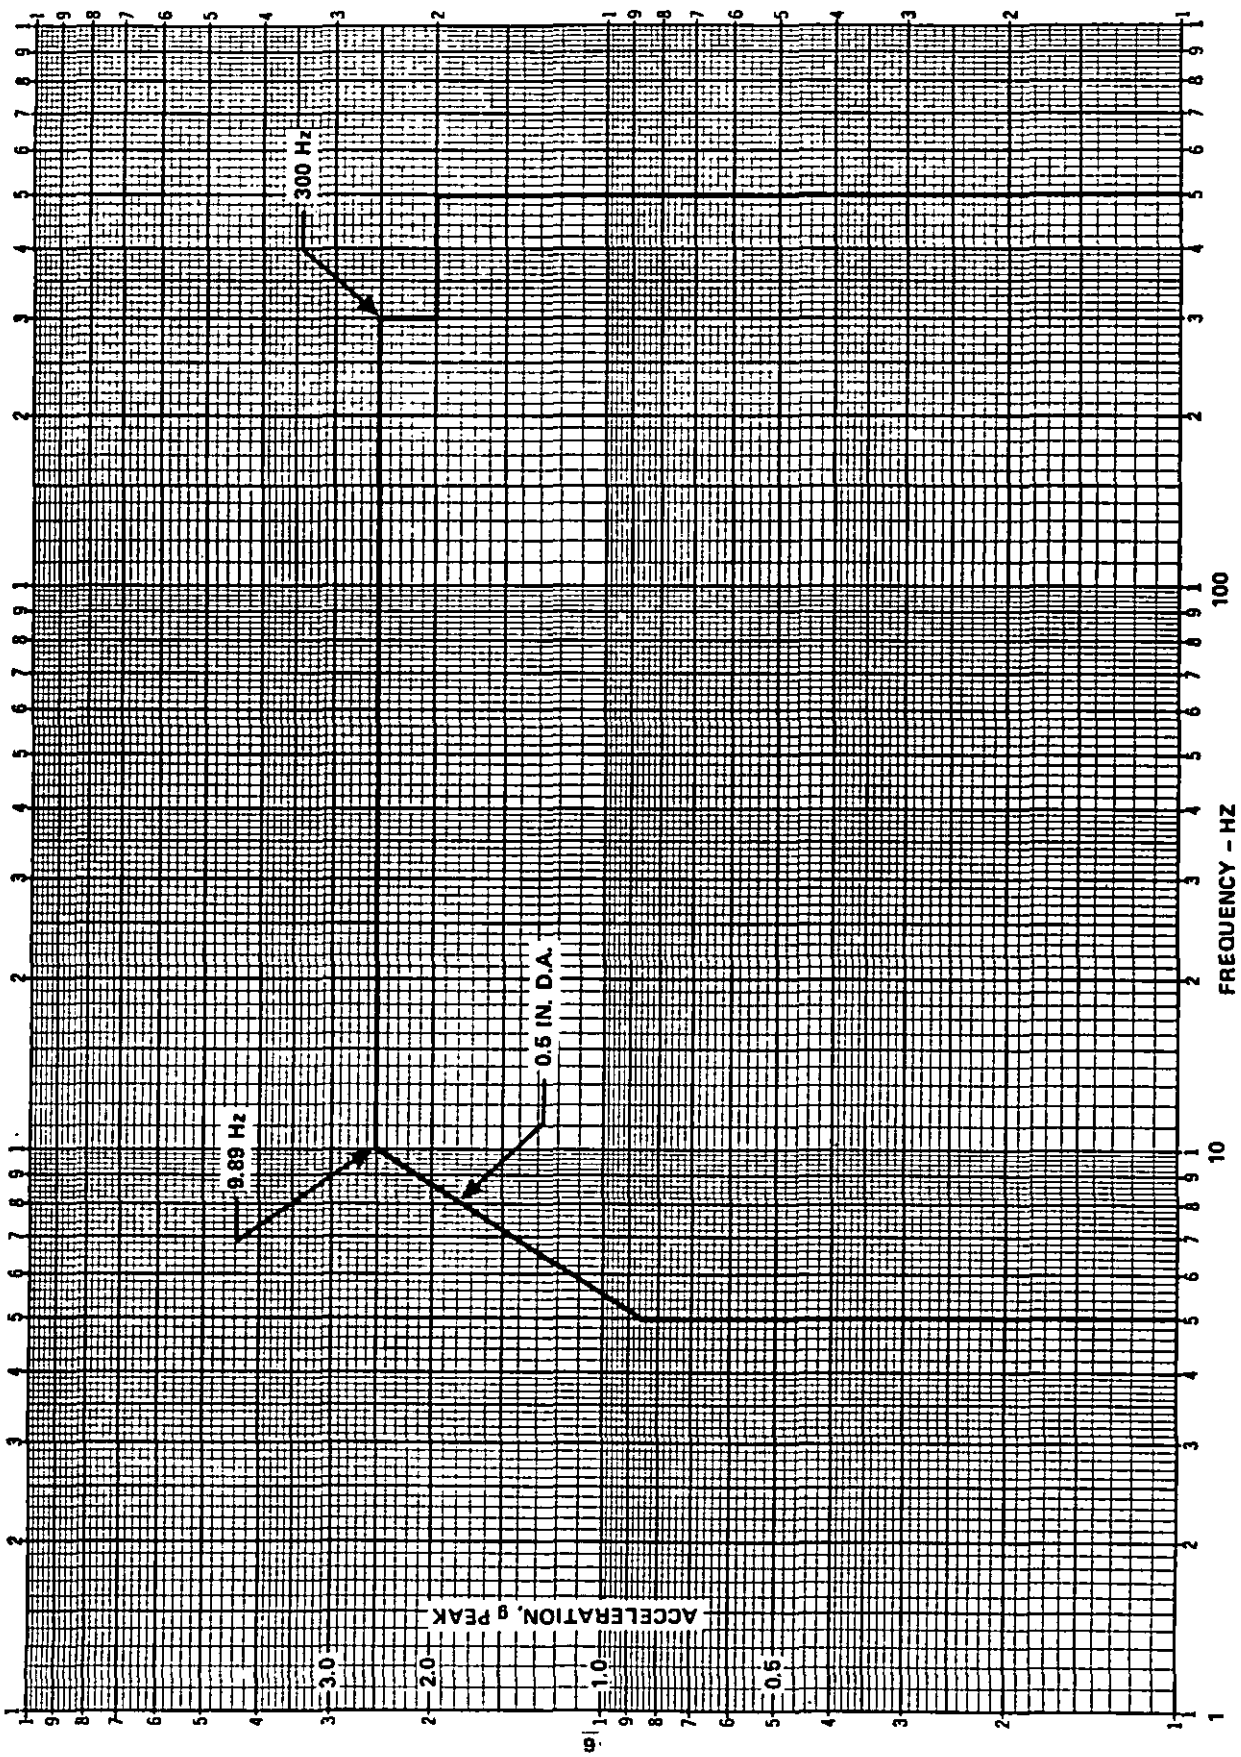


FIGURE 2. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.2 Classsification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract.

4.4.1 Sample. The first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in tables V, VI and VII.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

TABLE V. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Switching continuity	3.3.1	4.6.2.1
102	Circuit continuity	3.3.2	4.6.2.2
103	Indicator illumination	3.3.3	4.6.2.3
104	Range display readout	3.3.4	4.6.2.4
105	Lamp test control	3.3.5	4.6.2.5

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:25Z
Check the source to verify that this is the currentversion before use.

TABLE VI. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General specifications	3.1.2	MIL-F-13926 - Visual

TABLE VII. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.4.1	4.6.3.1
304	Vibration	3.4.2	4.6.3.2
305	High Temperature	3.4.3 and 3.4.4	4.6.3.3
306	Low Temperature	3.4.3 and 3.4.4	4.6.3.4
307	Temperature cycling	3.4.3 and 3.4.4	4.6.3.5

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

Use	Plan
a. Logistics spare assembly apart from the next higher assembly	A and C
b. Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in table VI.

4.5.2.2 Environmental sample and tests. Three assembies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table VII shall be applied separately to each assembly in the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table VI and only the test of item 307 in table VII shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table V and shall be examined visually for completeness, improper assembly and evidence of poor workmanship.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. The sampling and inspection of the preservation - packaging, packing and container marking shall be in accordance with the provisions of packaging data sheet P11743140.

4.6 Methods of inspection.

4.6.1 Test equipment. Unless the assembly is procured apart from the next higher assembly, the test equipment in table VIII shall be used where specified to perform the required test.

TABLE VIII. Test equipment.

Item	Part Number	Nomenclature
1	11750202	Automatic Card and Unit, Test Set
2	11750436	Adapter, Commander's Control Panel
3	11821457	Fixture Shock, Vertical and Horizontal Plane
4	11821458	Shock Adapter, Plate Vib Horiz-Vert Plane/Shock-Z

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE VIII. Test equipment. - Continued

Item	Part Number	Nomenclature
5	11821520	Automatic Test Assembly Central Processor Unit.
6	11821857	Bracket End - Cable Set - Computer Unit FAT
7	11821858	Cable Set, Computer Unit
8	11821864	Cable Assembly - Commander Panel/wi/
9	11823313	Fixture Test, PWB and Modules

4.6.2 Performance tests.

4.6.2.1 Switching continuity. Use items 1, 2 and 5 of table VIII or suitable equipment to determine compliance with 3.3.1.

4.6.2.2 Circuit continuity. Use items 1, 2 and 5 of table VIII or suitable equipment to determine compliance with 3.3.2.

4.6.2.3 Indicator illumination. Use items 1, 2 and 5 of table VIII or suitable equipment to determine compliance with 3.3.3.

4.6.2.4 Range display indication. Use items 1, 2 and 5 of table VIII or suitable equipment to determine compliance with 3.3.4.

4.6.2.5 Lamp test control. Use items 1, 2 and 5 of table VIII or suitable equipment to determine compliance with 3.3.5.

4.6.3 Environmental tests.

4.6.3.1 Shock.

4.6.3.1.1 Basic design. Use items 3, 4, 6 and 7 of table VIII or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure I, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 20 $\pm$ 3 g with a time duration of 18 $\pm$ 3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.6.3.1.2 High intensity. Use items 3, 4, 6 and 7 of table VIII or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure IV, figure 516.2-1. Apply three sawtooth shock pulses in each direction along the three axes. Peak amplitude shall be 40 ± 4 g with a time duration of 9 ± 0.2 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table V.

4.6.3.2 Vibration. Vibration A as specified in 4.6.3.2.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.3.2.2 shall be conducted only for quality conformance inspection.

4.6.3.2.1 Vibration A. Use item 4 of table VIII or mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810, method 514.2 procedure VIII, except that the test level shall be the vibration curve shown in figure 2 and duration of exposure shall be not less than 80 minutes per axis. At the conclusion of this test, subject the assembly to the performance tests of table V.

4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.3.3 High temperature. Use items 8 and 9 of table VIII or suitable equipment and subject the assembly to the high temperature test specified in MIL-STD-810, method 501.1, procedure I. The highest operating temperature shall be 125°F. The performance tests of table V shall be applied.

4.6.3.4 Low temperature. Use items 8 and 9 of table VIII or suitable equipment and subject the assembly to the low temperature test specified in MIL-STD-810,method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of table V shall be applied.

4.6.3.5 Temperature cycling. With power and loads of table I applied, subject the assembly to the temperature profile specified in figure 3. At the conclusion of this test, subject the assembly to the performance tests of table V.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P11743140. The level of protection shall be as specified in the procurement document. (See 4.5.6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

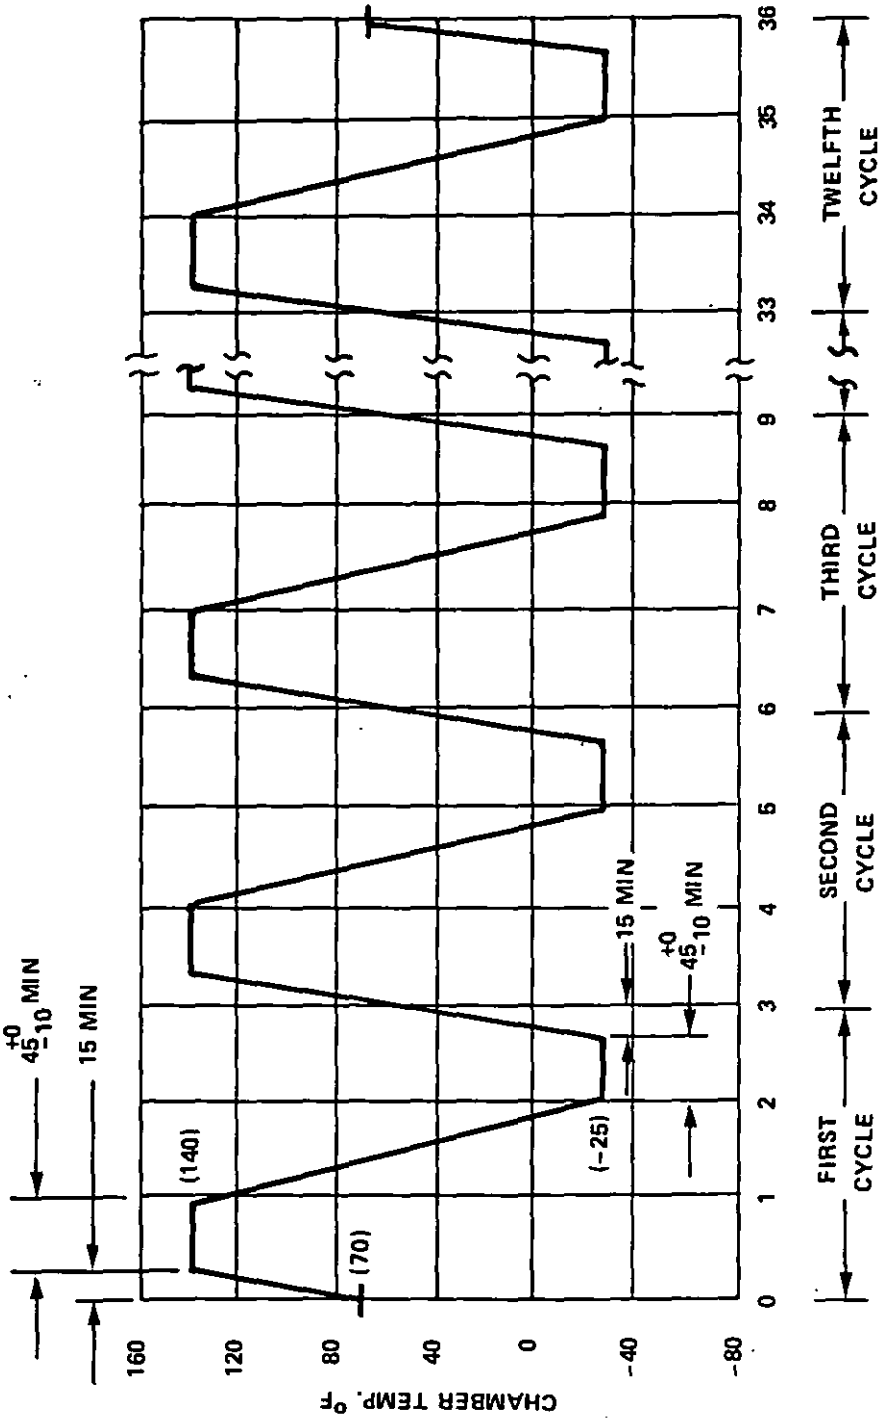


FIGURE 3. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The Commanders Control Panel is a functional assembly of the Laser Fire Control Rangefinder (AN/VVG-2). The Commanders Control Panel contains indicator lamps (indicating operating conditions), logic selection switches and logic circuitry.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Special tests and examination as required, the type of inspection required and the activity responsible for testing and its facility.

c. Applicable packaging data sheet number (see 5.1).

d. Selection of applicable levels of preservation, packaging and packing.

e. Applicable stock number.

f. First article inspection requirements.

6.3 Previous revisions of MIL-P-62210B was for the US Army Armament Research and Development Command's internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

Custodian:
Army-AR

Preparing Activity:
Army-AR
Project No. 1240-A771

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:25Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-P-62210B PANEL, COMMANDER'S CONTROL

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.