INCH-POUND

MIL-A-81905D(AS)
AMENDMENT 2
30 October 1999
SUPERSEDING
AMENDMENT 1
10 July 1987

MILITARY SPECIFICATION

ANTI-G GARMENT, CUTAWAY, ARAMID, CSU-15/P

This amendment forms a part of MIL-A-81905D(AS), dated 8 October 1986, and is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 8

3.5.3.3, line 3: Delete "1.32," and substitute "1/32."

PAGE 9

* 3.5.4, line 3: Delete line 3 and substitute "solvent so that the dusting material (talc) and any other."

3.5.5, line 9: Delete and substitute "The adhesive shall be applied in a straight line parallel to the edges of the patches and shall extend from just being visible to not greater than 1/2 inch beyond the patch edges."

PAGE 10

3.5.6.3, line 29: Delete "The removal of flattening" and substitute "The removal or flattening."

PAGE 11

3.7.1, item g: Delete "date of manufacturer (month and year)" and substitute "date of manufacture (month and year)."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:22Z
Check the source to verify that this is the current version before use.

PAGE 12

3.7.2, line 4: Delete “the size of the lable” and substitute “the size of the label.”

PAGE 16

4.5.1.3, line 5: Delete “sample size color code” and substitute “sample size code.”

4.5.1.3, line 29: Delete “Samples from a rejection of a previous lot, shall be borne by the manufacturer.”

PAGE 17

4.6.1, line 3: Delete “218 to 32 inches” and substitute “28 to 32 inches.”

PAGE 19

4.7.7: Delete in its entirety and substitute:

“4.7.7 Procedure for measuring. The garment to be measured shall be fully open. The garment shall be laid flat, without tension, on a smooth, flat surface so that creases and wrinkles shall not affect the measurement. The garment shall be measured as follows and as illustrated in figures 40 and 41.

a. Measure the total length of the leg slide fastener from the top scoop to the bottom of the retainer.

b. Measure the total length of the center waist stiffener from finished edge to finished edge on the front abdomen.

c. Measure horizontally from the inner edge of the hose vent opening to the tip of the quick disconnect (Type II garment only).

d. Measure horizontally from the outer edge of the chain to the outer edge of the chain at the bottom edge of the waistband. Elastic area of the lacing covers should be stretched so that the maximum waist measurement with the lacings fully open can be taken.

e. Measure horizontally from the outer edge of the chain to the outer edge of the chain at the top edge of the thigh area. Elastic area of the lacing cover should be stretched so that the maximum thigh measurement with the lacings fully open can be taken.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:22Z
Check the source to verify that this is the current version before use.

f. Measure horizontally from the outer edge of the chain to the outer edge of the chain at the bottom of the ankle area. Elastic area of the lacing should be stretched so that the maximum ankle measurement with the lacing fully open can be taken.

g. Measure horizontally from the outer edge of the chain to the outer edge of the chain at the top edge of the waistband. Elastic area of the lacing cover should be stretched so that the maximum waist measurement with the lacing fully open can be taken.

h. Measure vertically from the center of the external tube connection to a point even with the bottom edge of the waist section at center front. (Type I garment only)."

PAGE 27

Table IX: General a, line 3: Delete "abreaded" and substitute "abraded."

PAGE 28

Table IX: Metallic Components b: Delete "secure" and substitute "securely."

PAGE 32

Table IX: Seams and Stitching, g. Stitches per inch, 1.b(1): Delete "or" and substitute "to."

PAGE 48

Delete Section Y-Y and substitute Section Y-Y of this amendment.


PAGE 52

Delete Section GG-GG and substitute Section GG-GG of this amendment.

PAGE 67


Delete Section YYY-YYY and substitute Section YYY-YYY of this amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:22Z
Check the source to verify that this is the current version before use.

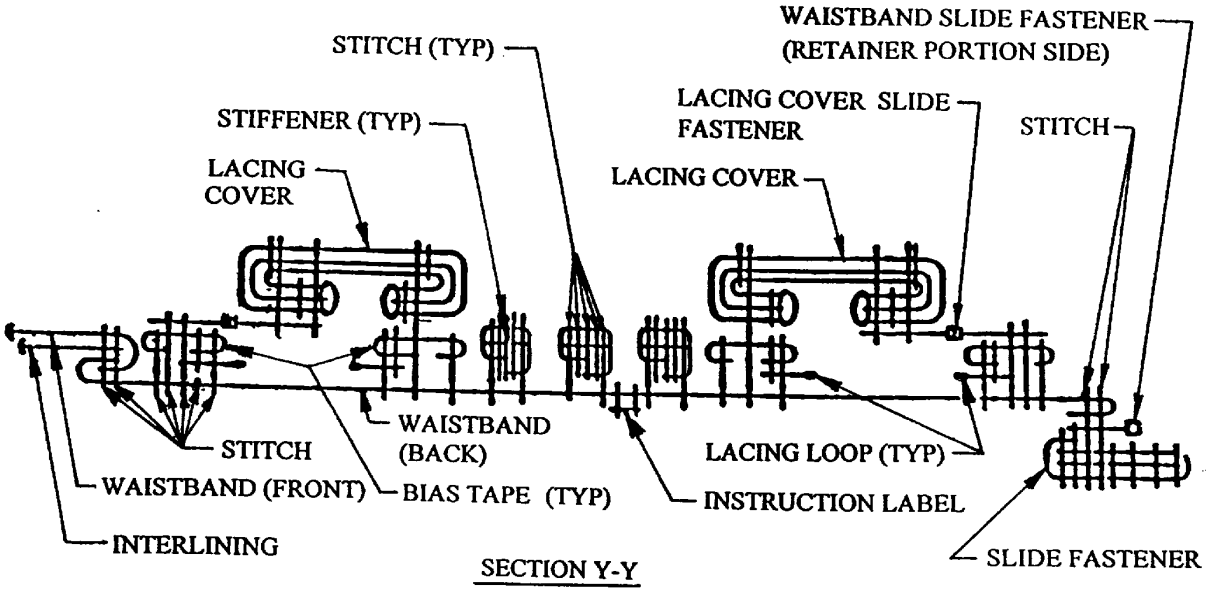


SECTION Y-Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:22Z
Check the source to verify that this is the current version before use.

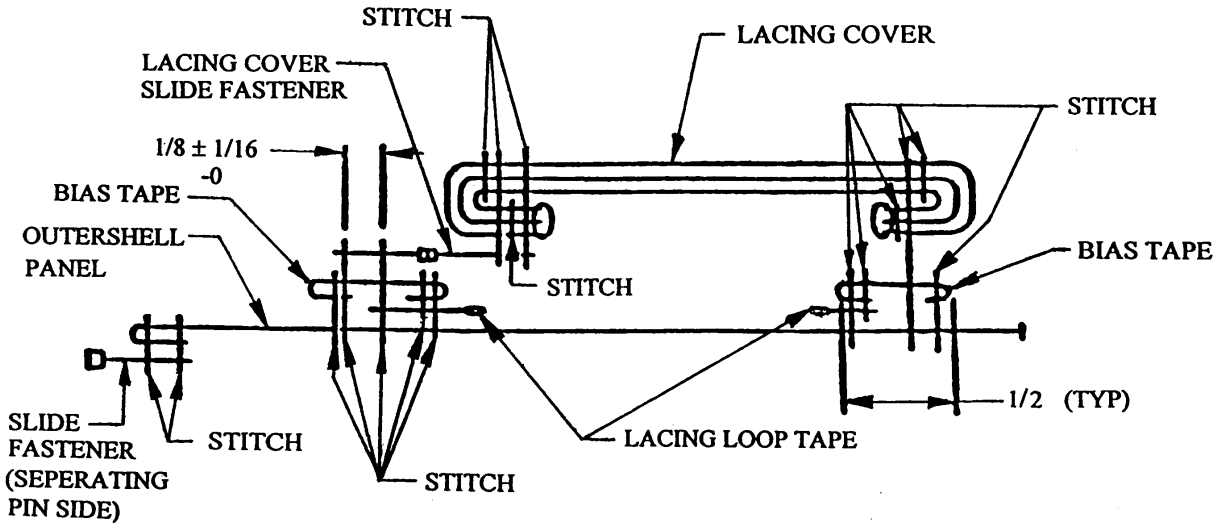

SECTION GG-GG

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:22Z
Check the source to verify that this is the current version before use.

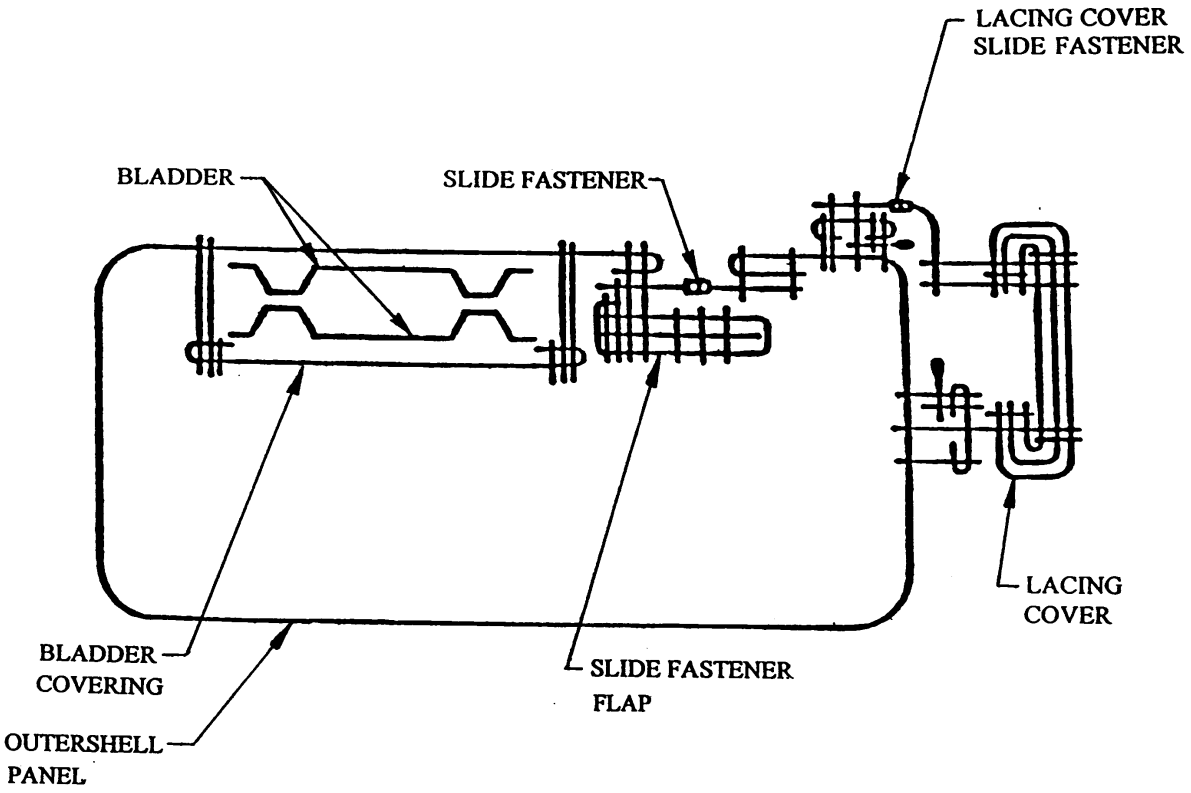

SECTION YYY-YYY

NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy – AS

(Project 8475-0009)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:22Z
Check the source to verify that this is the current version before use.