MILITARY SPECIFICATION

VEST, AMMUNITION CARRYING, FOR M79 AND M203 LAUNCHERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers the requirements for a vest for carrying grenades used with M79 and M203 launchers.

1.2 Classification. The vests shall be of one type in the following sizes, as specified (see 6.2):

Small (Chest 38 inches and under)
Medium (Chest 39 inches and up to 42 inches)
Large (Chest 43 inches and over)

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label; For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-5038	-	Tape, Textile and Webbing, Textile, Reinforcing, Nylon
MIL-C-7219	-	Cloth, Duck, Nylon
MIL-C-8061	-	Cloth, Nylon, Raschel Knit
MIL-F-10884	-	Fasteners, Snap
MIL-F-21840	-	Fastener Tapes, Hook and Pile, Synthetic
MIL-W-43668	-	Webbing, Textile, Bulked Nylon

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

DRAWINGS

US ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND

2-3-282	-	Vest, Ammunition Carrying, For M79 and M203 Launchers; Assembly Complete
2-3-283	-	Vest, Ammunition Carrying, For M79 and M203 Launchers; Patterns, Size Small
2-3-284	-	Vest, Ammunition Carrying, For M79 and M203 Launchers; Details and Sections
2-3-389	-	Vest, Ammunition Carrying, For M79 and M203 Launchers; Patterns, Size Medium
2-3-390	-	Vest, Ammunition Carrying, For M79 and M203 Launchers; Patterns, Size Large

(Figures 1 and 2 are miniature reproductions of Drawings 2-3-282 and 2-3-284 and are attached for information only.)

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide Sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.3 Materials.

* 3.3.1 Cloth, nylon, raschel knit. The nylon raschel knit cloth shall conform to MIL-C-8061, color Olive Green 106, except the shrinkage requirement in the wales direction shall be 4 percent and in the courses direction, 6 percent.

* 3.3.2 Cloth, duck, nylon. The nylon duck cloth shall conform to type III, class 3 of MIL-C-7219, color Olive Green 106.

3.3.3 Webbing, nylon, 1-1/2 inch wide. The 1-1/2 inch wide nylon webbing shall be dyed Olive Drab 7 and conform to type IV of MIL-T-5038.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

3.3.4 Webbing, nylon, 1-inch wide. The 1-inch wide nylon webbing shall conform to type III, Olive Drab 7 of MIL-W-43668.

3.3.5 Tape, nylon. The nylon tape shall be dyed Olive Drab 7 and conform to type III, 1/2-inch and 1-inch widths of MIL-T-5038.

3.3.6 Fastener tape, hook and pile, nylon. The nylon fastener tape shall conform to type II, class 1, 1-1/2 inch width of MIL-F-21840, color Olive Green 106.

3.3.7 Thread, polyester. The thread for all stitching shall conform to type I, class 1, subclass A, size E of V-T-285.

* 3.3.7.1 Color. The thread shall be dyed Olive Drab S-1 (C.A. 66022) and shall show fastness to weathering equal to or better than the standard sample (see 6.3).

3.3.8 Fasteners, snap. The snap fasteners shall conform to style 2, finish 2 of MIL-F-10884. The male component shall be the stud with size 1 eyelet and the female component shall be the socket with size 1 button.

3.3.9 Buckle, non-slip, 1-inch. The buckle shall be composed of a top and bottom section made of corrosion resistant steel, type 301-302, and a spring made of corrosion resistant steel, type 301-302, temper 3/4 hard, and shall conform to Waterbury Buckle Company No. 240 Waterbury, CT or equal. The buckle shall have a dull, black, oxide finish (see 4.4.1.1).

3.4 Construction. The construction shall conform to the drawings listed in 2.1 and as specified herein.

3.4.1 Stitching machine. Unless otherwise specified all stitching, except bartacking, shall conform to type 301 of FED-STD-751 with 8 to 10 stitches per inch.

3.4.1.1 Type 301 stitching. Ends of all stitching, except box and box-X on nylon webbing components, shall be backstitched or overstitched one inch minimum except where ends are turned under in a hem or held down by other stitching. On box and box-X stitching on nylon webbing components, all ends shall be backstitched or overstitched 1/2-inch minimum. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in materials sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

* 3.4.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of one inch back of the end of the stitching. 1/

b. Thread breaks, two or more consecutive skipped stitches or run-offs noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of one inch in back of the defective area, continue over the defective area and continue a minimum of one inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched and for box and box-X stitching substitute 1/2 inch for one inch wherever one inch appears.

3.4.1.2 Bartacking. Unless otherwise specified, bartacks shall be as specified on the applicable drawings and as follows:

Length	Width	Stitches per bartack
1/2 inch ± 1/16	1/8 inch ± 1/32	28
5/8 inch ± 1/16	1/8 inch ± 1/32	28
3/4 inch ± 1/16	1/8 inch ± 1/32	42
1-1/4 inches ± 1/16	1/8 inch ± 1/32	42

Bartacking shall be free from thread breaks and loose stitching.

3.4.1.3 Automatic stitching. Automatic machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three or more tying, overlapping or back stitches are used to secure the ends of the stitching.

3.4.1.4 Thread ends. All thread ends shall be trimmed to a length of not more than 1/4 inch.

3.4.2 Fusing of ends of nylon webbing. Unless otherwise specified, all ends of nylon webbing shall be fused. The apparatus used to fuse the webbing ends shall be capable of providing sufficient heat to provide a smooth edge with the yarn ends all fused together. Fusing of the webbing ends shall be accomplished prior to being assembled for stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

3.4.3 Location marks. Location and notice marks shall not be drilled, except for locating snap fasteners.

* 3.4.4 Setting of snap fasteners. A hole shall be prepunched to receive the button and eyelet components of the snap fasteners. The hole shall be smaller than the outside diameter of the button and eyelet barrels so that the barrel must be forced through the hole. The hole shall not be punched in the setting operation with the button or eyelet barrel. The fasteners shall be securely clinched without cutting the adjacent materials and no more than two splits shall occur in the button or eyelet barrels.

3.5 Marking. All marking shall conform to DDD-L-20.

* 3.5.1 Instruction and identification labels. Each vest shall have a combined instruction and identification label conforming to type II, classes 3 and 5 except the combined label shall be coated as specified for class 3 labels and the color shall be medium green (see 6.6). The combined label shall show colorfastness to laundering transference and accelerated laundering as specified for class 3 labels. The combined label shall be printed with the instruction label first and the identification label last. The size marking shall include the information as to the chest size the vest is intended to be used, for example: "Size Small (Chest 38 inches and under)". A space of 1/2 inch minimum shall be maintained between the instruction label and the identification label. In addition a solid line 1/32 inch minimum width shall extend across the entire label approximately midway between the 1/2 inch blank space. The combined label shall be attached to the inside of the vest as shown on Drawing 2-3-282. The contents of the instruction label shall be as follows:

INSTRUCTIONS FOR USE

This vest contains 20 pockets for carrying the 40 mm HE ammunition for the M79 and M203 Grenade Launchers and 4 longer pockets (at top of vest) for the 40 mm pyrotechnic cartridges.

Wear vest over outer garments.
Tighten back strap for snug fit.
To loosen back strap pinch buckle.

3.5.2 The letters "US" shall be applied in the size characters and location shown on the applicable drawing, and shall conform to type IV, class 9. Fastness of class 9 marking shall be as specified for class 5 marking.

3.6 Patterns. Standard patterns for the vest front and back panels are shown full scale on drawings and shall be used as a guide for cutting working patterns. The standard patterns shall not be altered in any way.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

3.7 Cutting of components. Components covered by a pattern shall be cut within ± 1/8 inch of the applicable pattern.

* 3.8 Repairs. Except as otherwise specified herein, repairs are not allowed to be made to the assembly and its components.

* 3.9 Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.3.1 shall be removed from production and replaced with non-defective and properly matched components.

3.10 Workmanship. The finished vest shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article. When required (see 6.2), the preproduction sample submitted in accordance with 3.2 shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship, dimensional, and assembly requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated hereinafter.

4.4.1 Component and material inspection. In accordance with 4.1, above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

4.4.1.1 Certification. The contractor shall furnish a certificate of compliance stating that the steel used for the buckle and the finish requirements conform to the requirements specified in 3.3.9.

* 4.4.2 In-process inspection. The front and back panel cut parts shall be inspected during the cutting process to determine if parts are cut correctly with respect to size, and location of components are marked in the required locations. In addition, inspection shall be made to determine if the holes for the snap fasteners are prepunched in accordance with 3.4.4. Whenever nonconformance is noted, corrections shall be made to the items affected and lot in process. Parts which cannot be corrected shall be removed from production.

4.4.3 Examination of the end item. The classification of defects found during examination shall be in accordance with the lists shown in 4.4.3.1 and 4.4.3.2. The sample unit for these examinations shall be one completely fabricated vest. The lot size shall be expressed in units of one vest. The inspection levels and acceptable quality levels (AQLs) shall be as specified in 4.4.3.3.

* 4.4.3.1 Visual examination.

Examine	Defect	Classification Major	Minor
Nylon raschel knit cloth	Any cut, tear, mend, or dropped stitch	X	
Nylon duck cloth	Any hole, cut, tear or abraded area	X	
	Broken or missing yarn, multiple floats, or smash; any mend, darn or patch	X	
	Needle chews:		
	-Up to 1/8 inch in length		X
	-Over 1/8 inch in length	X	
Webbing and tape	Any hole, cut or tear	X	
	Not firmly or tightly woven; edge frayed or scalloped		X
	Ends of webbing not fused correctly, i.e., yarn ends not fused together or not smooth		X
	Needle chews:		
	-Up to 1/8 inch in length		X
	-Over 1/8 inch in length	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Fastener tape	Any hole, cut, or tear	X	
	Hooks flattened, broken or missing, impairing function	X	
Snap fasteners	Any fastener not functioning properly, *i.e. fails to snap closed, provide a* secure closure or to open freely	X	
	Clinched excessively tight, cutting adjacent material	X	
	Clinched loosely, permitting either component to rotate freely	X	
	Incorrect style	X	
	Three or more splits in button or eyelet barrel		X
	NOTE: The fasteners shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure		
Buckle	Design and construction not as specified	X	
	Broken or malformed, failing to serve *intended purpose*	X	
	Protective finish omitted, corroded area, burr or sharp edge	X	
	Not attached as specified	X	
Open seams	Less than 1/2 inch		X
	1/2 inch or more	X	
	NOTE: A seam shall be classified as an open seam when one or more stitches joining a seam are broken, or when two or more consecutive skipped stitches or runoffs occur		
Raw edges (except where required)	More than 1/2 inch when securely caught in stitching		X
	NOTE: Raw edges *not securely caught in* stitching shall be classified as open seams		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Seam and stitch type	Wrong seam or stitch type	X	
	Seams pleated or badly puckered		X
Stitch tension	Tension loose, resulting in loose bobbin or top thread		X
	Tension excessively tight, resulting in puckering of material		X
Stitches per inch	One to two stitches less than minimum specified		X
	Three or more stitches less than minimum specified	X	
	One or more stitches in excess of maximum specified		X
	NOTE: Variation in the number of stitches per inch caused by operator speeding up the machine and pulling the material in order to sew over heavy places, or in turning corners shall be classified as follows: (a) Within the minor defect classification - No defect (b) Within the major defect classification - Minor defect		
Thread breaks, skipped stitches or runoffs (on type 301 stitching)	Not overstitched as specified		X
	NOTE: Thread breaks or two or more consecutive skipped stitches or runoffs not overstitched shall be classified as open seams		
Stitching ends (on type 301 stitching)	Ends of stitching not secured as specified (except when caught in other stitching or turned under in a hem)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Rows of stitching	Any row missing	X	
Bartacks	At top of pocket:		
	-One omitted on any pocket		X
	-More than one omitted on any pocket	X	
	At bottom of pocket one or both bartacks omitted on any pocket	X	
	Stitching loose, incomplete or broken		X
Components and assembly	Any component omitted, misplaced, or not as specified (unless otherwise classified herein)	X	
	Any operation omitted or not properly performed (unless otherwise classified herein)	X	
	Back strap not threaded through buckle as shown on drawing	X	
	Any component spliced		X
Binding tape	Improperly or loosely applied		X
	Ends not finished as specified		X
Facing tape	Omitted	X	
Identification and instruction label	Omitted, misplaced, data not as specified, not green, illegible		X
Marking (US)	Omitted, incorrect, illegible, misplaced		X
Cleanness	Dirt or stain clearly noticeable, thread ends not trimmed throughout as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

* 4.4.3.2 Dimensional examination.

Examine	Defect	Classification Major	Classification Minor
Spacing of bartacks at bottom of pockets	Any exceeding plus or minus tolerance but less than two times the tolerance		X
	Any exceeding plus or minus tolerance by two times the tolerance or more	X	
All dimensions other than listed above including stitch margins and gauge	Any not within specified tolerance		X

4.4.3.3 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

Examination	Inspection level	AQL
For defects applicable to 4.4.3.1	II	2.5 Major 10.0 Total (major and minor defects combined)
For defects applicable to 4.4.3.2	S-3	2.5 Major 10.0 Total (major and minor defects combined)

* 4.4.4 Packaging inspection. An examination shall be made to determine that preservation-packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components such as incomplete closure of container flap, loose strapping, improper taping or inadequate stapling. Bulged or distorted container.
Content	Number of bundles per container is more or less than required. Number of vests per bundle is more or less than required. 1/

1/ For this defect, one bundle shall be examined from each shipping container in the sample.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A. Each vest shall be laid out flat, front down, with all snap fasteners closed. The vest shall be folded in half the length with the top of the back brought down even with the bottom. The vest shall then be folded in half the width (pockets on the outside). Five folded vests of one size only shall be evenly stacked, alternately reversed, to form a bundle. Each bundle shall be securely cross-tied with cotton tape or twine.

5.1.2 Level C. Vests shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A packing. Forty vests of one size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each fiberboard container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed on edge two in length, two in width, and two in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of the container specification. Toward the end of the contract or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z.
Check the source to verify that this is the current version before use.

* 5.2.2 Level B packing. Forty vests of one size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A packages shall be packed on edge, two in length, two in width, and two in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636. Toward the end of the contract or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

5.2.3 Level C packing. Vests, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract interior packages, and shipping containers shall be marked in accordance with MIL-STD-129. Each interior package shall have attached a manila colored paper shipping tag for the identification information.

5.3.1 Labels, mixed sizes. Each shipping container, packed with vests of mixed sizes, shall have securely attached to the end and side, directly under the printing or stencilling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped with the correct quantity and sizes contained thereon.

6. NOTES

* 6.1 Intended use. The vest is intended for use by Military personnel as an outer garment for the purpose of carrying the 40 mm high explosive ammunition for the M79 and M203 (Adapter for M16 Rifle) Grenade Launchers for which twenty individual pockets are prepared. In addition four pockets are provided for carrying 40 mm pyrotechnic cartridges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) When a first article sample is required (see 3.2, 4.3, and 6.4).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 For access to samples, address the procuring office issuing the invitation for bids.

6.4 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample consisting of one complete vest. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.6 The following cable numbers of the Standard Color Card of America are furnished for information and guidance as to the intensity of the shade of medium green desired for the label specified in 3.5.1:

Cable No. - 70034
Cable No. - 70130
Cable No. - 70131

Custodians:

Army - GL
Navy - SA

Preparing activity:


Army - GL

Project No. 8415-0701


Review activities:

Army - MD
Navy - MC
DSA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

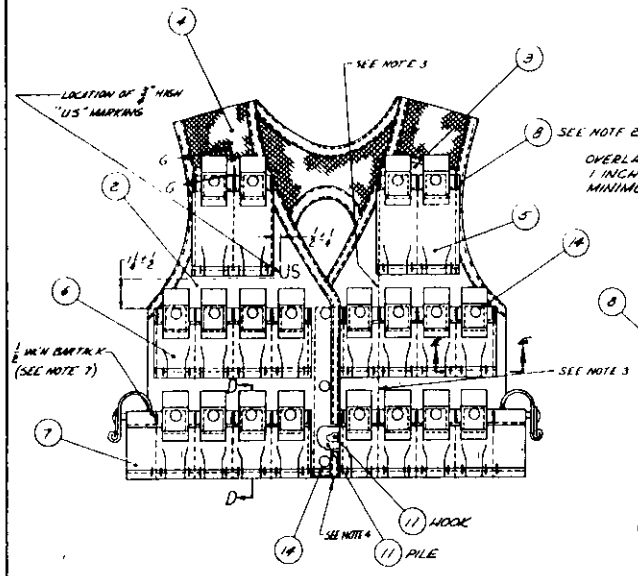

FRONT VIEW

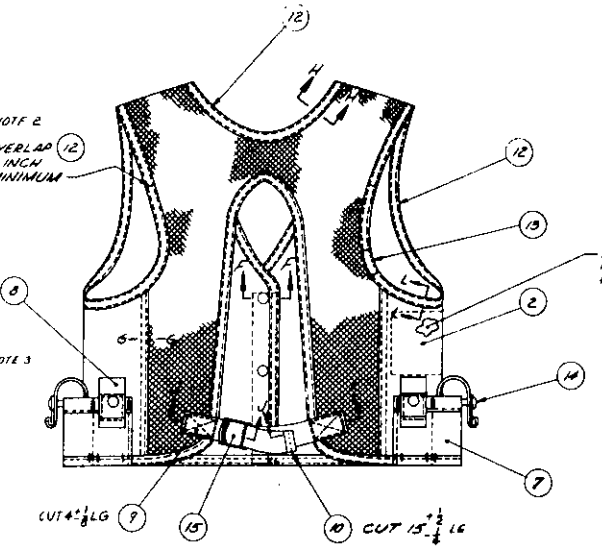

BACK VIEW
(STITCHING ON POCKETS ON INSIDE OF VEST NOT SHOWN)

FIG. 1 THIS FIGURE IS A MINIATURE COPY OF AN ARMY NATICK DEVELOPMENT CENTER DRAWING AND IS FOR INFORMATION ONLY. THE DRAWING REFERENCE IN PARAGRAPH 3.1 GOVERNS

* PATTERN PIECE, SIZE 15 APPLICABLE, SEE DWG 2-3-283 FOR SMALL, 2-3-289 FOR MEDIUM, AND 2-3-290 FOR LARGE

REVISIONS					
SYM	ECP NO.	DIR	CH	DESCRIPTION	DATE	APPR
A	D-172	PMR	4	ADDED 2 1/8 TO 15 DIM ON ITEM 10, TOL NOTE AND MATL SPEC TO ITEM 14, DELETED PUR SIZE NOTE	31 OCT 68	TRC
B	D-179	DT	1/8	DELETED SECT J-J ADDED L-L	5 MAY 69	TRC
C	D-190	DT	1/8	ADDED NOTES 6 & 7	19 JULY 69	TRC
D	D-1033	DT	1/8	PRINT VIEW, DELETE SECTD-D, BACK TOWEL, DELETE SECTK-K, ADDED TOL TO ITEMS 9 & 15, ADDED STITCHING NOTE, REVISED NOTE 3 & 4, ADDED NEW ITEMS LIST AND CHANGED TITLE	23 JAN 70	TRC
E	D-1048	RW	1/8	IN ITEM LIST, ITEM 3, 5, 6, AND 7 COLOR CODE 06-106 WAS 02-7	5 FEB 70	LPB
F	D-1049	RW	1/8	IN ITEM LIST, ITEM 14 MATL WAS PLASTIC, TYPE 2, SPEC WAS MIL-F-10536	4 JUNE 70	LPB
G	D-1099	DT	1/8	ADDED SNAP TO FRONT CLOSURE, NOTES 6 AND 7, "US" MARKING, AND NOTE REFERRING TO ARTWORK, CHANGED TITLE	27 MAY 71	TRC
H	D-2130	RW	1/8	IN ITEM LIST ON ITEM 2,3,5,6&7 CLASS 3 WAS 2.25 OZ.	5 MAR 73	LD
J	D-2543	RW	1/8	ON ITEM 9 & 10 MAT'L SPEC WAS MIL-W-12397	13 MAR 73	RW
K	D-2776	RW	1/8	ADD 2 1/2 LG TO ITEM 15	10 OCT 73	RW
L	D-3486	RW	1/8	IN TITLE BLOCK VEST, AMMUNITION WAS VEST GRENADE.	7 MAY 76	RW


ITEM NO	DESCRIPTION	NO. REQD	MATERIAL	MATL SPEC	NO.
15	BUCKLE	1	STEEL		
14	FASTENER, SNAP	27	STYLE 2, FINISH 2	MIL-F-10884	
13	FACING	AR	TAPE, NYLON, TYPE IV, 1" WIDE	MIL-T-5038	
12	BINDING	AR	TAPE, NYLON, TYPE III, 1" WIDE	MIL-T-5038	
11	TAPE, FASTENER (HOOK & PILE)	AR	NYLON, TYPE III, 1" WIDE	MIL-T-5038	
10	STRAP, BACK	1	WEBBING, NYLON, TYPE III, 1" WIDE, OD-7	MIL-W-4088	
9	CHAPE, BUCKLE	1	WEBBING, NYLON, TYPE III, 1" WIDE, OD-7	MIL-W-4088	C-3-282
8	FLAP, POCKET	2	WEBBING, NYLON, TYPE III, 1" WIDE	MIL-T-5038	
7	POCKET, PANEL	2	CLOTH, NYLON, OX-RIP, TYPE III, CLASS 3	MIL-C-7219	
6	POCKET, PANEL	2	CLOTH, NYLON, OX-RIP, TYPE III, CLASS 3	MIL-C-7219	
5	POCKET, PANEL	2	CLOTH, NYLON, OX-RIP, TYPE III, CLASS 3	MIL-C-7219	C-3-284
4	PANEL, BACK	1	CLOTH, NYLON, CASCADE, KNITTED, 40	MIL-C-8021	
3	PANEL, LEFT FRONT	1	CLOTH, NYLON, OX-RIP, TYPE III, CLASS 3	MIL-C-7219	
2	PANEL, RIGHT FRONT	1	CLOTH, NYLON, OX-RIP, TYPE III, CLASS 3	MIL-C-7219	
1	ASSEMBLY COMPLETE	1			C-3-282

ITEM LIST

NOTES:
1. UNLESS OTHERWISE SPECIFIED TOLERANCES SHALL BE AS FOLLOWS:
   - ± 1/16
   - MORE THAN 1/8 BUT LESS THAN 5 INCHES ± 1/8
   - 5 INCHES OR MORE BUT LESS THAN 10 INCHES ± 1/4
   - 10 INCHES OR MORE ± 3/8
2. AS AN OPTION, STITCHING FOR ATTACHING POCKET FLAPS, ITEM 8, TO FRONT PANELS MAY BE ACCOMPLISHED WITH THREE HORIZONTAL ROWS OF STITCHING RUNNING CONTINUOUSLY FROM FIRST FLAP IN ROW TO LAST FLAP IN ROW. STITCH MARGIN AND GAGE SHALL BE AS SHOWN ON DRAWING 2-3-284.
3. AS AN OPTION, VERTICAL STITCHING FOR ATTACHING POCKETS TO FRONT PANELS MAY RUN CONTINUOUSLY FROM ONE ROW TO NEXT ROW. LOCATION OF UPPER POCKETS ARE NOT SHOWN TO SCALE, THEREFORE, STITCHING FROM UPPER POCKETS TO LOWER POCKETS WILL NOT BE IN A STRAIGHT LINE AS SHOWN.
4. ENDS OF BINDING TAPE (12) AT BOTTOM FRONT ON BOTH SIDES SHALL BE TURNED UNDER AND 1/8 INCH MINIMUM COVERED WITH THE FASTENER TAPE (11).
5. FOR SECTIONS SEE DWG 2-3-284.
6. COMPONENTS AND STITCH LINES SHOWN IN LOCATION ON PATTERN DRAWINGS SHALL BE LOCATED WITHIN ± 1/8 INCH OF THE LOCATION INDICATED.
7. BARTACKS AT TOP EDGE OF POCKET PANELS SHALL BE CENTERED ON TOP OF 90° STITCHING AND LOCATED 1/8 ± 1/16 INCH FROM TOP EDGE OF POCKET.

DRAWN	A. GATTO	U. S. ARMY NATICK LABORATORIES, NATICK, MASS.
CHECKED	G. E. TRAVERS	
TITLE	G. E. TRAVERS	VEST, AMMUNITION CARRYING, FOR M 79 AND M 203 LAUNCHERS, ASSEMBLY COMPLETE
APPROVED	M. E. Russell	
2-3-283 NEXT ASSY	USED ON	
TC-2064		
DATE	14 FEB 1968	CODE 01337 SIZE D DWG NO. 2-3-282 SCALE NONE SHEET 1 OF SPEC NO. MIL-A-43707

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

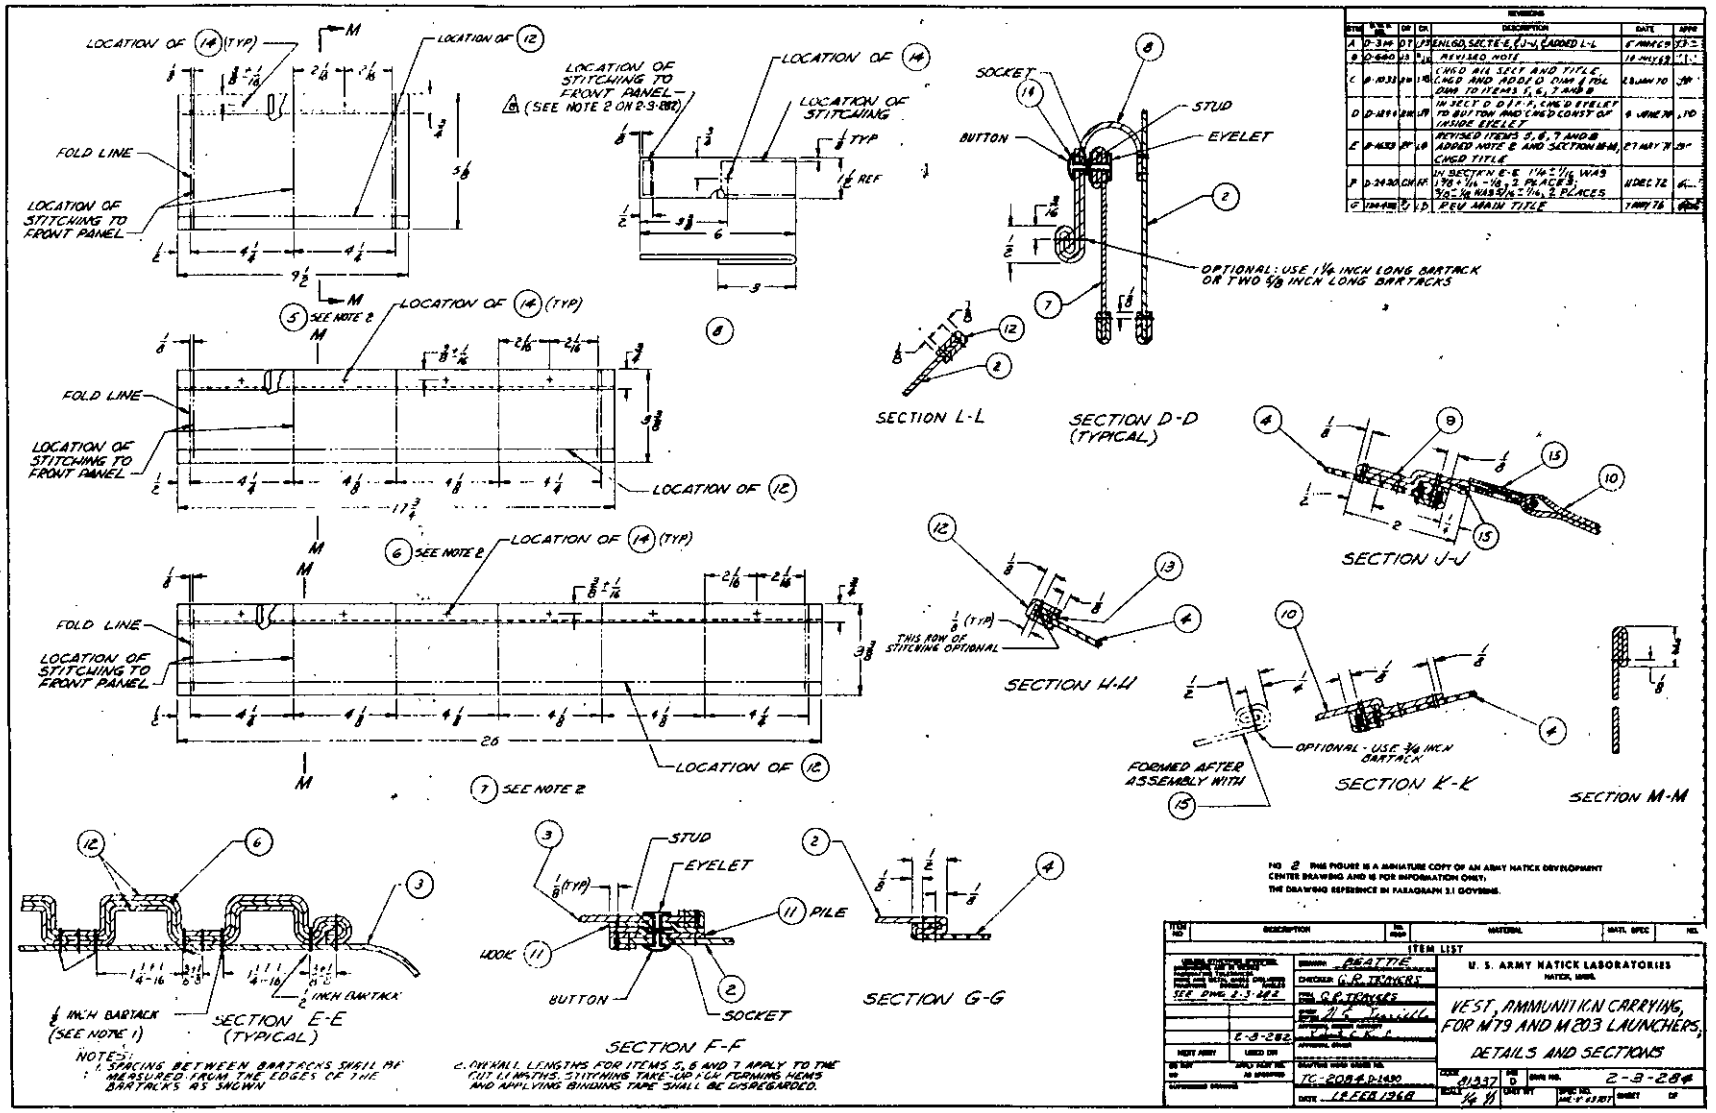

MIL-V-43707B

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-V-43707B -Vest, Ammunition Carrying, For M79 and M203 Launchers

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:05Z
Check the source to verify that this is the current version before use.